

SIEMENS



Catalog
HG 11.03 ·
Edition 2018

3AH3 Vacuum Circuit-Breakers

Medium-Voltage Equipment

[siemens.com/3AH3](https://www.siemens.com/3AH3)



3AH3 Vacuum Circuit-Breakers

Medium-Voltage Equipment Catalog HG 11.03 · 2018

Invalid:
Catalog HG 11.03 · 2010



The products and systems described in this catalog are manufactured and sold according to a certified management system (acc. to ISO 9001, ISO 14001 and BS OHSAS 18001).

Contents

Page

Description

5

General	6
Construction and mode of operation, standards, maintenance-free design	7
Ambient conditions, current carrying capacity, dielectric strength	9
Basic equipment and product range overview	10
The three-circuit-breaker-solution for "phase-segregated" design	12

1

Equipment Selection

13

Order number structure and configuration example	14
Selection of basic types, high-current circuit-breakers (circuit-breakers according to IEC 62271-100)	15
Selection of basic types, generator circuit-breakers according to IEC/IEEE 62271-37-013	18
Selection of secondary equipment	19
Selection of additional equipment	27
Accessories and spare parts	29

2

Technical Data

33

Electrical data, dimensions, weights and dimension drawings circuit-breakers according to IEC 62271-100	34
Electrical data, dimensions, weights and dimension drawings high-current and generator circuit-breakers according to IEC/IEEE 62271-37-013	46
Circuit diagrams	50
Operating times, short-circuit protection of motors, consumption data of releases	52

3

Annex

53

Inquiry form	54
Configuration instructions	55
Configuration aid	Foldout page

4



R-HGT 1-357.tif



Industrial application: Refinery

Contents	Page
Description	5
General	6
Construction and mode of operation	7
Switching medium	7
Pole assemblies	7
Operating mechanism box	7
Operating mechanism	7
Trip-free mechanism	7
Releases	8
Closing	8
Circuit-breaker tripping signal	8
Interlocking	8
Standards	8
Maintenance-free design	8
Ambient conditions, current carrying capacity and dielectric strength	9
Basic equipment and product range overview	10
The three-circuit-breaker-solution for "phase-segregated" design	12

3AH3 vacuum circuit-breaker from 7.2 kV to 36 kV – The Powerful

Circuit-breakers must make and break all currents within the scope of their ratings: From small inductive and capacitive load currents up to high short-circuit currents,

controlling all fault conditions in the power system at the same time.

3AH3 – maintenance-free for high switching capacities



R_HG11_204.tif

The 3AH3 vacuum circuit-breaker is maintenance-free throughout its entire service life. It is extremely powerful and controls up to 10,000 operating cycles. This circuit-breaker is used, for example in industrial applications with high load currents up to 6300 A and high short-circuit currents up to 72 kA, covering the usual medium-voltage range from 7.2 to 40.5 kV.

Due to its high performance, the circuit-breaker is also perfectly suitable for generator operation. For this purpose, these generator circuit-breakers are not only subjected to the basic type tests according to IEC 62271-100, but also to the additional tests according to IEC/IEEE 62271-37-013. This international standard takes into account the increased requirements to which equipment is subjected when switching generators. As a result, it has also become the leading standard for generator circuit-breakers in IEC-oriented professional circles.

3AH3 6/7/8 – especially developed for generator applications



R_HG11_218.tif

Standard IEC/IEEE 62271-37-013 includes in particular:

- For generator-supplied faults: High DC components and the resulting missing current zeros
- For system-supplied faults: Higher TRV rates of rise
- Higher test voltage levels.

For connection of larger generators, so-called "phase-segregated" generator switchgear is used, in which the single phases are accommodated in separate enclosures. For this application, generator circuit-breakers are equipped, tested and adjusted for parallel operation. In this way, even higher short-circuit currents up to 90 kA and normal currents up to 12,000 A can be switched.

The vacuum circuit-breaker consists of the pole assemblies (1) and the operating mechanism box (2). The pole assemblies are fixed to the operating mechanism box via post insulators (3). The switching movement is transferred by means of operating rods (4) and levers.

Switching medium

The vacuum switching technology, proven and fully developed for more than 40 years, serves as arc-quenching principle by using vacuum interrupters.

Pole assemblies

The pole assemblies consist of the vacuum interrupters (6) and the interrupter supports. The vacuum interrupters are air-insulated and freely accessible. This makes it possible to clean the insulating parts easily in adverse ambient conditions. The vacuum interrupter is mounted rigidly to the upper interrupter support (5). The lower part of the interrupter is guided in the lower interrupter support (7), allowing axial movement. The braces absorb the external forces resulting from switching operations and the contact pressure.

Operating mechanism box

The whole operating mechanism with releases, auxiliary switches, indicators and actuating devices is accommodated in the operating mechanism box. The extent of the secondary equipment depends on the case of application and offers a multiple variety of options in order to meet almost every requirement.


Operating mechanism

The operating mechanism is a stored-energy mechanism. The closing spring is charged either electrically or manually. It latches tight at the end of the charging process and serves as an energy store. The force is transmitted from the operating mechanism to the pole assemblies via operating rods.

To close the breaker, the closing spring can be unlatched either mechanically by means of the local "ON" pushbutton or electrically by remote control. The closing spring charges the opening or contact pressure springs as the breaker closes. The now discharged closing spring will be charged again automatically by the mechanism motor or manually. Then the operating sequence OPEN-CLOSE-OPEN is stored in the springs. The charging state of the closing spring can be checked electrically by means of a position switch.

Trip-free mechanism

3AH3 vacuum circuit-breakers have a trip-free mechanism according to IEC 62271-100. In the event of an opening command being given after a closing operation has been initiated, the moving contacts return to the open position and remain there even if the closing command is sustained. This means that the contacts of the vacuum circuit-breakers are momentarily in the closed position, which is permissible according to IEC 62271-100.

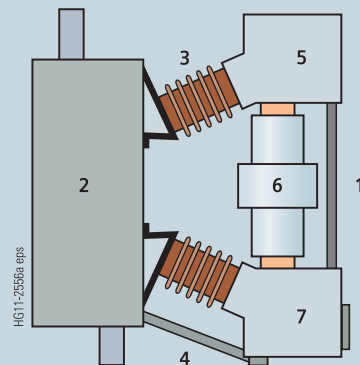


Circuit-breaker structure

- 1 Pole assembly
- 2 Operating mechanism box
- 3 Post insulator
- 4 Operating rod
- 5 Upper interrupter support
- 6 Vacuum interrupter
- 7 Lower interrupter support



Front view

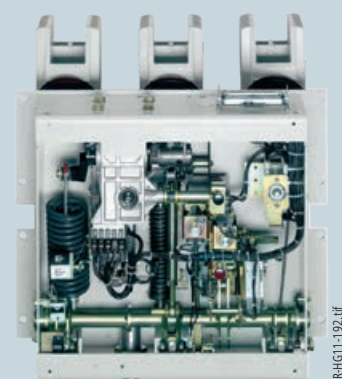

Open operating mechanism box

Description

Construction and mode of operation, standards, maintenance-free design

1

Releases

A release is a device which transfers electrical commands from an external source, such as a control room, to the latching mechanism of the vacuum circuit-breaker so that it can be opened or closed. Apart from the closing solenoid, the maximum possible equipment is one shunt release and two other releases. For release combinations, refer to page 19.

- The closing solenoid unlatches the charged closing spring of the vacuum circuit-breaker, closing it by electrical means. It is suitable for DC or AC voltage.
- Shunt releases are used for automatic tripping of vacuum circuit-breakers by suitable protection relays and for deliberate tripping by electrical means. They are intended for connection to an external power supply (DC or AC voltage) but, in special cases, may also be connected to a voltage transformer for manual operation.
- Current-transformer operated releases comprise a stored-energy mechanism, an unlatching mechanism and an electromagnetic system. They are used when there is no external source of auxiliary power (e.g. a battery). Tripping is effected by means of a protection relay (e.g. overcurrent-time protection) acting on the current-transformer operated release. When the tripping current is exceeded (= 90 % of the rated normal current of the c.t.-operated release), the latch of the energy store, and thus opening of the circuit-breaker, is released.
- Undervoltage releases comprise a stored-energy mechanism, an unlatching mechanism and an electromagnetic system which is permanently connected to the secondary or auxiliary voltage while the vacuum circuit-breaker is closed. If the voltage falls below a predetermined value, unlatching of the release is enabled and the circuit-breaker is opened via the stored-energy mechanism. The deliberate tripping of the undervoltage release generally takes place via an NC contact in the tripping circuit or via an NO contact by short-circuiting the magnet coil. With this type of tripping, the short-circuit current is limited by the built-in resistors. Undervoltage releases can also be connected to voltage transformers. When the operating voltage drops to impermissibly low levels, the circuit-breaker is tripped automatically. For delayed tripping, the undervoltage release can be combined with energy stores.

Closing

In the standard version, 3AH3 vacuum circuit-breakers can be remote-closed electrically. They can also be closed locally by mechanical unlatching of the closing spring via push-button. Instead of this "manual mechanical closing", "manual electrical closing" is also available. In this version, the closing circuit of the circuit-breaker is controlled electrically by a pushbutton instead of the mechanical button. In this way, switchgear-related interlocks can also be considered for local operation in order to prevent involuntary closing.

If constant CLOSE and OPEN commands are present at the circuit-breaker at the same time, the circuit-breaker will return to the open position after closing. It remains in this position until a new CLOSE command is given. In this manner, continuous closing and opening (= "pumping") is prevented.

Circuit-breaker tripping signal

The NO contact makes brief contact while the vacuum circuit-breaker is opening, and this is often used to operate a hazard-warning system which, however, is only allowed to respond to automatic tripping of the circuit-breaker. Therefore, the signal from the NO contact must be interrupted when the circuit-breaker is being opened intentionally. This is accomplished under local control with the cut-out switch that is connected in series with the NO contact.

Interlocking

Electrical interlocking

The circuit-breakers can be integrated in electromagnetic feeder or switchgear interlocks. In case of electrical interlocking, the disconnecter or its operating mechanism is equipped with a magnetic lock-out mechanism. This mechanism is controlled by an auxiliary contact of the circuit-breaker, so that the disconnecter can only be operated when the circuit-breaker is open. On the other hand, the circuit-breaker is also controlled by the disconnecter or its operating mechanism, so that it can only be closed when the disconnecter is in an end position. For this purpose, manual electrical closing must be provided in the circuit-breaker operating mechanism (see "Closing").

Mechanical interlocking

To interlock circuit-breaker trucks, withdrawable parts or disconnectors according to the switch position, the circuit-breakers can be equipped with a mechanical interlocking. A sensor at the switchgear checks the position of the circuit-breaker and prevents the open circuit-breaker in a reliable way from being closed mechanically and electrically.

Standards

3AH3 circuit-breakers conform to the following standards:

- IEC 62271-100
- IEC 62271-1
- VDE 0671
- IEC/IEEE 62271-37-013:2015 (only generator circuit-breaker).

All 3AH3 vacuum circuit-breakers fulfil the endurance classes E2, M2, C2 and S1 according to IEC 62271-100.

Maintenance-free design

The 3AH3 vacuum circuit-breakers are maintenance-free:

- Under normal ambient conditions according to IEC 62271-1
- Up to 10,000 operating cycles,
 - no relubrication, no readjustment required
 - and within their tolerances, the characteristics are independent of the switching rate or of standing times without switching operations.

Ambient conditions

The vacuum circuit-breakers are designed for the normal operating conditions defined in IEC 62271-100.

Condensation can occasionally occur under the ambient conditions shown opposite. 3AH3 vacuum circuit-breakers are suitable for use in the following climatic classes according to IEC 60721, Part 3-3:

Climatic ambient conditions:	Class 3K4 ¹⁾
Biological ambient conditions:	Class 3B1
Mechanical ambient conditions:	Class 3M2
Chemically-active substances:	Class 3C2 ²⁾
Mechanically-active substances:	Class 3S2 ³⁾

1) Low temperature limit: – 5 °C

2) Without icing and wind-driven precipitation

3) Restriction: Clean insulation parts

Current carrying capacity

The rated normal currents specified in the opposite diagram have been defined according to IEC 62271-100 for an ambient air temperature of + 40 °C and apply to open switchgear. For enclosed switchgear the data of the switchgear manufacturer applies. At ambient air temperatures below + 40 °C, higher normal currents can be carried (see diagram):

Characteristics curve 1 = Rated normal current 1250 A

Characteristics curve 2 = Rated normal current 2000 A

Characteristics curve 3 = Rated normal current 2500 A

Characteristics curve 4 = Rated normal current 3150 A

Characteristics curve 5 = Rated normal current 4000 A

Characteristics curve 6 = Rated normal current 5000 A

Characteristics curve 7 = Rated normal current 6300 A

Dielectric strength

The dielectric strength of air insulation decreases with increasing altitude due to low air density. According to IEC 62271-1, the values of the rated lightning impulse withstand voltage and the rated short-duration power-frequency withstand voltage specified in the chapter “Technical Data” apply to a site altitude of 1000 m above sea level. For an altitude above 1000 m, the insulation level must be corrected according to the opposite diagram.

The characteristic shown applies to both rated withstand voltages.

To select the devices, the following applies:

$$U \geq U_0 \times K_a$$

U Rated withstand voltage under reference atmosphere




U_0 Rated withstand voltage requested for the place of installation

K_a Altitude correction factor according to the opposite diagram

Example

For a requested rated lightning impulse withstand voltage of 75 kV at an altitude of 2500 m, an insulation level of 90 kV under reference atmosphere is required as a minimum:

$$90 \text{ kV} \geq 75 \text{ kV} \times 1.2$$

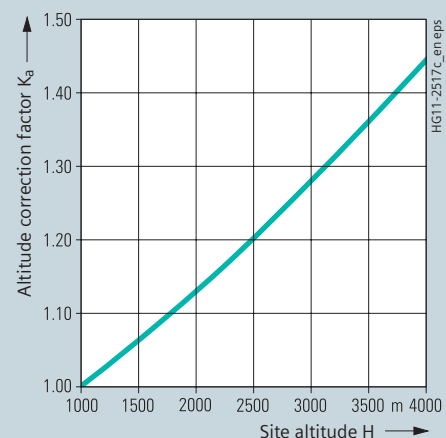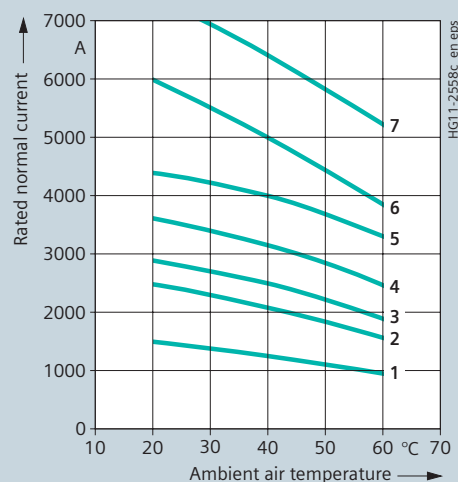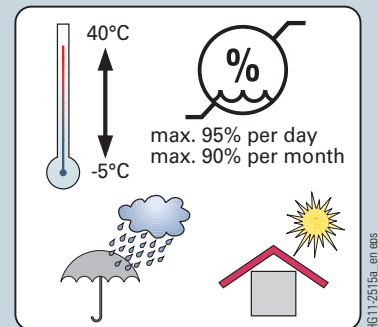

Description

Basic equipment and product range overview

1

Basic equipment

Features	Minimum equipment	Alternative equipment	Remarks
Operating mechanism	Electrical operating mechanism (hand crank not included in the scope of supply)	Manual operating mechanism (hand crank included in the scope of supply)	Hand crank available as accessory
Closing	Closing solenoid and manual mechanical closing	Manual electrical closing	–
1 st release	Shunt release	None	–
2 nd release	Without	Shunt release, undervoltage release, c.t.-operated release	Max. 3 releases can be combined (for possible combinations, refer to page 19)
3 rd release	Without	Shunt release, undervoltage release, c.t.-operated release	Max. 3 releases can be combined (for possible combinations, refer to page 19)
Varistor protection circuit	Generally installed for DC ≥ 60 V	None	For limiting switching overvoltages due to inductive loads
Auxiliary switch	6 NO + 6 NC	12 NO + 12 NC	–
Plug connector	24-pole terminal strip	24-pole plug, 64-pole plug	–
Anti-pumping	Available	None	–
Circuit-breaker tripping signal	Available	None	–
Operating cycle counter	Available	None	–
“Spring charged” signal and indication	Available	None	–
Interlocking	Without	Mechanical interlocking	–

For the endurance class C2, all circuit-breakers fulfil the following values according to IEC 62271-100

	Line	Cable	Single capacitor bank	Back-to-back capacitor bank ¹⁾	
Rated voltage	Rated line-charging breaking current	Rated cable-charging breaking current	Rated single capacitor bank breaking current ²⁾	Rated back-to-back capacitor bank breaking current	Frequency of the inrush current
U_r kV, r.m.s.	I_l A, r.m.s.	I_c A, r.m.s.	I_{sb} A, r.m.s.	I_{bb} A, r.m.s.	f_{bl} Hz
7.2	10	10	400	400	4250
12	10	25	400	400	4250
17.5	10	31.5	400	400	4250
24	10	31.5	400	400	4250
36	10	50	400	400	4250
40.5	10	50	400	400	4250

1) Rated back-to-back capacitor bank making current for a back-to-back capacitor bank – see chapter 3: Technical data

2) The capacitive switching capacity of the circuit-breaker is 0.7 x I_l above the standard specification

Product range overview for 3AH3 IEC high-current circuit-breakers

Rated voltage kV	Rated short-circuit breaking current kA	Rated normal current (A)														
		1250			2000		2500			3150			4000			
		Pole-centre distance (mm)														
		210	275	350	210	350	210	275	350	210	275	350	275	300	350	
7.2	50	■			■		■			■			■			
	63		■					■			■		■			
12	50	■			■		■			■			■			
	63		■					■			■		■			
17.5	50	■			■		■			■			■			
	63		■					■			■		■			
24	40							■			■					
	50										■			■		
36	31.5			■		■			■			■			■	
	40								■			■			■	
40.5	31.5			■		■			■			■			■	
	40								■			■			■	


■ Available design

Vacuum circuit-breaker for generator switching applications according to IEC/IEEE 62271-37-013

Type tests as specified in IEC 62271-100 are performed as a rule for all Siemens circuit-breakers. The generator circuit-breakers are additionally tested according to IEC/IEEE 62271-37-013.

Standard IEC/IEEE 62271-37-013 includes in particular:

- For generator-supplied faults: High DC components and the resulting missing current zeroes
- For system-supplied faults: Higher TRV rates of rise
- Higher test voltage levels.

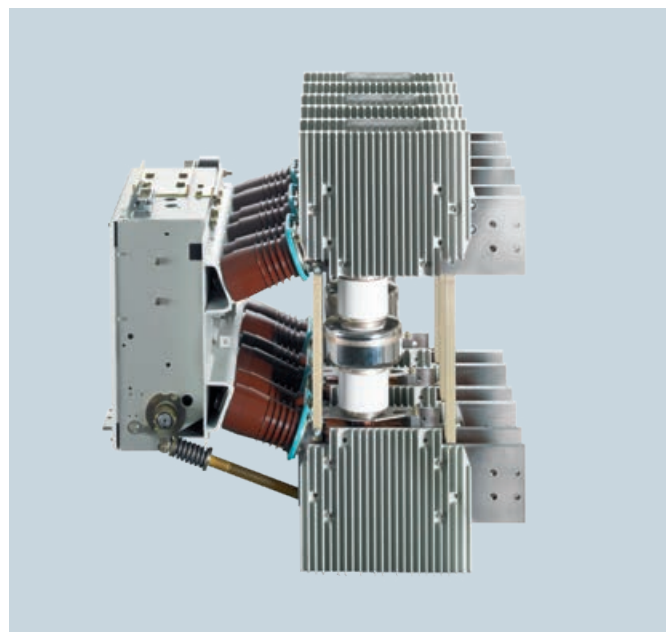

R_HG11_220.tif

3AH3 vacuum circuit-breaker

Product range overview for 3AH37/3AH38 high-current and generator circuit-breakers (acc. to IEC/IEEE 62271-37-013)

Rated voltage kV	Rated short-circuit breaking current kA	Rated normal current (A)				
		3150	4000	5000	6300	8000 forced cooling
17.5	50	■	■	○	○	○
	63	■	■	○	○	○
	72	■	■	○	○	○
24	50	○	○	○	○	○
	63	○	○	○	○	○
	72	○	○	○	○	○

■ PMA 275 mm

○ PMA 300 mm

Description


The three-circuit-breaker-solution for "phase-segregated" design

1


The three-circuit-breaker-solution for "phase-segregated" design

For generator switchgear with segregated phases, one switching device is used per phase.

The requirements for the simultaneity of poles are implemented according to IEC 62271-100.

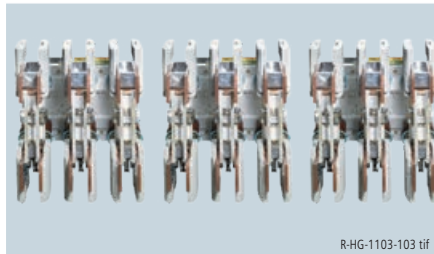

R-HG-1103-103.tif

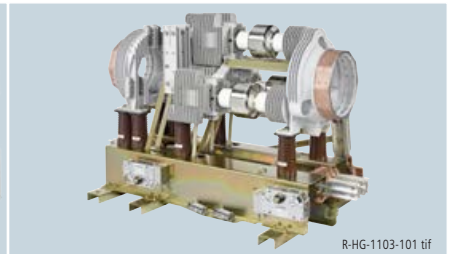


R-HG-1103-101.tif

Technical data for “phase-segregated” design		For the three-circuit-breaker-solution, three circuit-breakers are used which are optimized for interconnected operation.					Complete module with integrated disconnecter, earthing switch and start-up disconnecter for each phase	
Rated short-circuit breaking current I_{SC} (3s)	[kA]	50	63	72	80	90	80	100
DC component of the rated short-circuit breaking current	[%]	75	70	70	70	45	70	75
Asymmetrical breaking current	[kA]	73	89	101	113	107	113	146
Rated short-circuit making current	[kA]	137	173	197	219	247	219	274
Generator short-circuit breaking current $I_{SC\ gen}$	[kA]	25	31.5	36	40	45	40	63
DC component of the short-circuit breaking current	[%]	130	130	130	130	110	130	130
Asymmetrical breaking current	[kA]	52	66	75	84	83	84	132
Rated voltage								
17.5 kV (IEC/IEEE 62271-37-013) $U_p = 110$ kV, $U_d = 50$ kV		3AH3732	3AH3733	3AH3734	3AH3735	3AH3756	3AH3615	3AH3617
24 kV (IEC 62271, IEC/IEEE 62271-37-013) $U_p = 125$ kV, $U_d = 60$ kV		3AH3742	3AH3743	3AH3744	3AH3745		3AH3625	3AH3627
Rated normal currents	[A]	4000 to 12,500 (depending on version)						
Rated operating sequence								
– For short-circuit breaking current		CO – 30 min – CO, up to 30 short-circuit breaking operations						
– For normal current		O – 3 min – CO – 3 min – CO, up to 10,000 operating cycles						


U_p = Rated lightning impulse withstand voltage U_d = Rated short-duration power-frequency withstand voltage

For more detailed information on "Phase-segregated" design, we recommend the brochure "Vacuum Circuit-Breakers for Generator Switching Applications".

Please contact our Customer Support! Our experts will be pleased to assist you in finding the proper circuit-breaker for your generator switching application.



R-HG-1103-104.tif




R-HG-1103-105.tif



R-HG-1103-102.tif

The version with one switching device per phase is highly beneficial especially for flexible operation in retrofit or modernization projects. Example for retrofit installation: Replacement of compressed-air generator circuit-breakers (6 kV – 86.5 kA – 3500 A).

With the generator switching module 3AH36, the HB3 is the world's first generator switchgear using vacuum switching technology rated up to 12,500 A, with natural cooling and 100 kA switching capacity, type-tested according to IEC/IEEE 62271-37-013 standard.

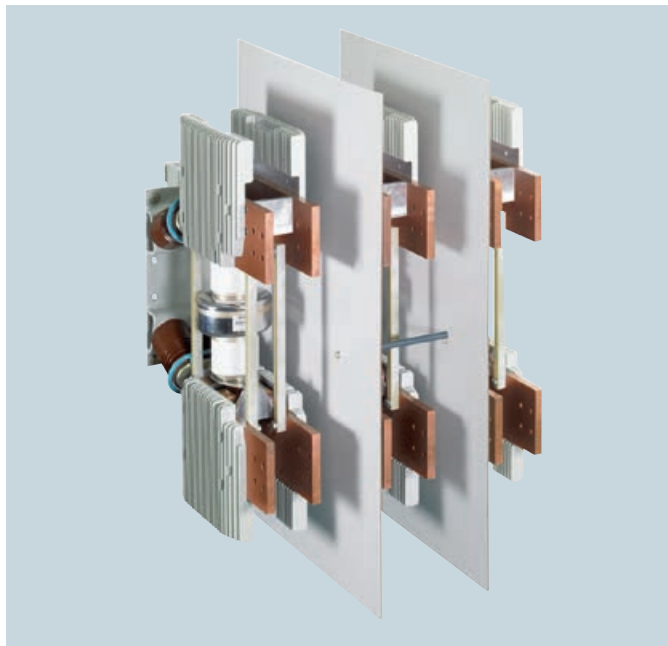

3AH37 generator circuit-breaker



3AH3 vacuum circuit-breaker (4000 A)

Contents

Page

Equipment Selection

13

Order number structure and configuration example

14

Selection of basic types, high-current circuit-breakers (circuit-breakers according to IEC 62271-100)

Voltage level 7.2 kV 15

Voltage level 12 kV 15

Voltage level 17.5 kV 16

Voltage level 24 kV 16

Voltage level 36 kV 17

Voltage level 40.5 kV 17

Selection of basic types, generator circuit-breakers according to IEC/IEEE 62271-37-013

Voltage level 17.5 kV Design Classic 18

Voltage level 24 kV Design Classic 18

Selection of secondary equipment

Release combination 19

Operating voltage of the closing solenoid 20

Operating voltage of the 1st shunt release 21

Operating voltage of the 2nd release 22

Operating voltage of the 3rd release 23

Operating voltage of the operating mechanism 24

Auxiliary switch, low-voltage interface, interlocking 25

Languages and frequency 26

Selection of additional equipment

27

Accessories and spare parts

29

Rating plate 29

Accessories catalog 30

Equipment Selection

Order number structure and configuration example

Order number structure

The 3AH3 vacuum circuit-breakers consist of a primary and a secondary part. The relevant data make up the 16-digit order number. The primary part covers the main electrical data of the circuit-breaker poles. The secondary part covers the auxiliary devices which are necessary for operating and controlling the vacuum circuit-breaker.

Order codes

Individual equipment versions, marked with "9" or "Z" in the 9th to 16th position, are explained more in detail by a 3-digit order code. Several order codes can be added to the order number in succession and in any sequence.

Special versions (★)

In case of special versions, "-Z" is added to the order number and a descriptive order code follows. If several special versions are required, the suffix "-Z" is listed only once. If a requested special version is not in the catalog and can therefore not be ordered via order code, it has to be identified with **Y 9 9** after consultation. The agreement hereto is made directly between your responsible sales partner and the order processing department at Siemens.

2

1 st position	Primary part Superior group Switching devices
2 nd position	Main group Circuit-breaker
3 rd position	Subgroup Circuit-breaker type series
4 th to 8 th position	Basic equipment Design and ratings primary part
9 th to 16 th position	Secondary part Secondary equipment Operating mechanism, releases, operating voltages and further auxiliary equipment
	Order codes Group of 3 after the Order No. Format: a n a
	Special versions (★) Initiated with "-Z" Group of 3 after the Order No. Format: a n n

	a: alphabetical n: numerical																						
Position:	1	2	3	4	5	6	7	-	8	9	10	11	12	-	13	14	15	16	Order codes				
Order No.:	3	A	H	3	n	n	n	-	n	a	a	n	n	-	n	a	a	n	-	★	■	■	■
	</																						

Configuration example

In order to simplify the selection of the correct order number for the requested circuit-breaker type, you will find a configuration example on each page of the chapter "Equipment Selection". For the selection of the secondary part, always the last example of the primary part was taken over and continued, so that at the end of the equipment selection (page 28) a completely configured circuit-breaker results as an example.

On the foldout page we offer a configuring aid. Here you can fill in the order number you have determined for your circuit-breaker.

Example for Order No.:
Order codes:

3	A	H	3	1	1	7	–	7	■	■	■	■	–	■	■	■	■	■	■	■	■	■	■



7.2 kV

50/60 Hz

Rated voltage U_r kV	Rated lightning impulse withstand voltage U_p kV	Rated short-duration power-frequency withstand voltage U_d kV	Rated short-circuit breaking current at 36 % DC component I_{SC} kA	Rated short-circuit making current (at 50/60 Hz) I_{ma} kA	Pole-centre distance mm	Rated normal current I_r A	Position:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Order codes		
							Order No.:	3	A	H	3	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
7.2	60	20	50	125/130	210	1250		3	A	H	3	0	5	7	-	2										
						2000		3	A	H	3	0	5	7	-	4										
						2500		3	A	H	3	0	5	7	-	6										
						3150		3	A	H	3	0	5	7	-	7										
					275	4000		3	A	H	3	0	7	7	-	8										
			63	160/164	275	1250		3	A	H	3	0	7	8	-	2										
						2500		3	A	H	3	0	7	8	-	6										
						3150		3	A	H	3	0	7	8	-	7										
						4000		3	A	H	3	0	7	8	-	8										
Special versions $U_d = 32$ kV																										

12 kV

50/60 Hz

U_r kV	U_p kV	U_d kV	I_{SC} kA	I_{ma} kA	mm	I_r A	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Order codes		
							3	A	H	3	1	1	7	-	2										
12	75	28	50	125/130	210	1250		3	A	H	3	1	1	7	-	4									
						2000		3	A	H	3	1	1	7	-	6									
						2500		3	A	H	3	1	1	7	-	7									
					275	4000		3	A	H	3	1	2	7	-	8									
			63	160/164	275	1250		3	A	H	3	1	2	8	-	2									
						2500		3	A	H	3	1	2	8	-	6									
						3150		3	A	H	3	1	2	8	-	7									
						4000		3	A	H	3	1	2	8	-	8									
Special versions $U_d = 42$ kV																									

Configuration example

3AH3 vacuum circuit-breaker

Rated voltage $U_r = 12$ kV, 50/60 Hz

Rated lightning impulse withstand voltage $U_p = 75$ kV

Rated short-circuit breaking current $I_{SC} = 50$ kA

Pole-centre distance = 210 mm

Rated normal current $I_r = 1250$ A

Example for Order No.:

Order codes:

3	A	H	3																						
3	A	H	3	1	1	7	-	2																	

Equipment Selection

Selection of basic types, high-current circuit-breakers (circuit-breakers according to IEC 62271-100)



17.5 kV

50/60 Hz

Rated voltage U_r kV	Rated lightning impulse withstand voltage U_p kV	Rated short-duration power-frequency withstand voltage U_d kV	Rated short-circuit breaking current at 36 % DC component I_{SC} kA	Rated short-circuit making current (at 50/60 Hz) I_{ma} kA	Pole-centre distance mm	Rated normal current I_r A	Position:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Order codes		
							Order No.:	3	A	H	3	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
17.5	95	38	50	125/130	210	1250		3	A	H	3	2	1	7	-	2										
						2000		3	A	H	3	2	1	7	-	4										
						2500		3	A	H	3	2	1	7	-	6										
						3150		3	A	H	3	2	1	7	-	7										
					275	4000		3	A	H	3	2	2	7	-	8										
		63	160/164	275		1250		3	A	H	3	2	2	8	-	2										
						2500		3	A	H	3	2	2	8	-	6										
						3150		3	A	H	3	2	2	8	-	7										
						4000		3	A	H	3	2	2	8	-	8										
Special versions $U_d = 42$ kV																										

24 kV

50/60 Hz

U_r kV	U_p kV	U_d kV	I_{SC} kA	I_{ma} kA	mm	I_r A																				
24	125	50	40	100/104	275	2500	3	A	H	3	2	6	6	-	6											
	125	50	40	100/104	275	3150	3	A	H	3	2	6	6	-	7											
	110 ¹⁾	50	50	125/130	275	3150	3	A	H	3	2	6	7	-	7											
	125	50	50	125/130	300	4000	3	A	H	3	3	6	7	-	8											

1) Deviation from standard value

Configuration example

3AH3 vacuum circuit-breaker

Rated voltage $U_r = 17.5$ kV, 50/60 Hz

Rated lightning impulse withstand voltage $U_p = 95$ kV

Rated short-circuit breaking current $I_{SC} = 63$ kA

Pole-centre distance = 275 mm

Rated normal current $I_r = 4000$ A

Example for Order No.:

Order codes:

3	A	H	3																							
2	2	8	-	8																						



36 kV

50/60 Hz

							Position:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Order codes		
							Order No.:	3	A	H	3	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Rated voltage	Rated lightning impulse withstand voltage	Rated short-duration power-frequency withstand voltage	Rated short-circuit breaking current at 36 % DC component	Rated short-circuit making current (at 50/60 Hz)	Pole-centre distance	Rated normal current																				
U_r kV	U_p kV	U_d kV	I_{SC} kA	I_{ma} kA	mm	I_r A																				
36	170	70	31.5	80/82	350	1250		3	A	H	3	3	0	5	-	2										
						2000		3	A	H	3	3	0	5	-	4										
						2500		3	A	H	3	3	0	5	-	6										
						3150		3	A	H	3	3	0	5	-	7										
						4000		3	A	H	3	3	0	5	-	8										
		40	100/104		350	2500		3	A	H	3	3	0	6	-	6										
						3150		3	A	H	3	3	0	6	-	7										
						4000		3	A	H	3	3	0	6	-	8										

Special versions

U_r kV	U_p kV	U_d kV																								
36	185	85																								
36	195	95	not for 8 th position 7 or 8																							

40.5 kV

50/60 Hz

Rated voltage	Rated lightning impulse withstand voltage	Rated short-duration power-frequency withstand voltage	Rated short-circuit breaking current	Rated short-circuit making current	Pole-centre distance	Rated normal current																				
U_r kV	U_p kV	U_d kV	I_{SC} kA	I_{ma} kA	mm	I_r A																				
40.5	185	85	31.5	80/82	350	1250		3	A	H	3	3	0	5	-	2										
						2000		3	A	H	3	3	0	5	-	4										
						2500		3	A	H	3	3	0	5	-	6										
						3150		3	A	H	3	3	0	5	-	7										
						4000		3	A	H	3	3	0	5	-	8										
		40	100/104		350	2500		3	A	H	3	3	0	6	-	6										
						3150		3	A	H	3	3	0	6	-	7										
						4000		3	A	H	3	3	0	6	-	8										

Special versions

U_r kV	U_p kV	U_d kV																								
40.5	195	95	not for 8 th position 7 or 8																							

Configuration example

3AH3 vacuum circuit-breaker

Rated voltage $U_r = 36$ kV, 50/60 Hz

Rated lightning impulse withstand voltage $U_p = 170$ kV

Rated short-circuit breaking current $I_{SC} = 40$ kA

Pole-centre distance = 350 mm

Rated normal current $I_r = 2500$ A

Example for Order No.:

Order codes:

3	A	H	3	3	0	6	-	6	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Equipment Selection

Selection of basic types, generator circuit-breakers according to IEC/IEEE 62271-37-013



17.5 kV Design Classic

50/60 Hz

17.5 kV Design Classic							Position:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Order codes							
50/60 Hz							Order No.:	3	A	H	3	8	1	7	-	7	See page 19	See page 20	See page 21	See page 22	-	See page 23	See page 24	See page 25	See page 26	-	★	■	■	■	
Rated voltage U_r kV	Rated lightning impulse withstand voltage U_p kV	Rated short-duration power-frequency withstand voltage U_d kV	Rated short-circuit breaking current at 36 % DC component I_{SC} kA	Rated short-circuit making current (at 50/60 Hz) I_{ma} kA	Pole-centre distance mm	Rated normal current I_r A																									
17.5	110	50	50	137	275	3150	3	A	H	3	8	1	7	-	7																
						4000	3	A	H	3	8	1	7	-	8																
					300	5000	3	A	H	3	7	1	2	-	4																
						6300	3	A	H	3	7	1	2	-	5																
						8000 ²⁾	3	A	H	3	7	1	2	-	6																
			63	173	275	3150	3	A	H	3	8	1	8	-	7																
						4000	3	A	H	3	8	1	8	-	8																
					300	5000	3	A	H	3	7	1	3	-	4																
						6300	3	A	H	3	7	1	3	-	5																
						8000 ²⁾	3	A	H	3	7	1	3	-	6																
			72	198	275	3150	3	A	H	3	8	1	9	-	7														G	1	A
						4000	3	A	H	3	8	1	9	-	8														G	1	A
					300	5000	3	A	H	3	7	1	4	-	4																
						6300	3	A	H	3	7	1	4	-	5																
						8000 ²⁾	3	A	H	3	7	1	4	-	6																
As of 5000 A, the 3AH37 must be ordered with supplement for horizontal installation ¹⁾																									-	Z	A	7	0		

24 kV Design Classic

50/60 Hz

U_r kV	U_p kV	U_d kV	I_{SC} kA	I_{ma} kA	mm	I_r A																	
24	125	60	50	137	300	3150	3	A	H	3	7	2	2	-	2								
						4000	3	A	H	3	7	2	2	-	3								
						5000	3	A	H	3	7	2	2	-	4								
						6300	3	A	H	3	7	2	2	-	5								
						8000 ²⁾	3	A	H	3	7	2	2	-	6								
			63	173	300	3150	3	A	H	3	7	2	3	-	2								
						4000	3	A	H	3	7	2	3	-	3								
						5000	3	A	H	3	7	2	3	-	4								
						6300	3	A	H	3	7	2	3	-	5								
						8000 ²⁾	3	A	H	3	7	2	3	-	6								
			72	198	300	3150	3	A	H	3	7	2	4	-	2								
						4000	3	A	H	3	7	2	4	-	3								
						5000	3	A	H	3	7	2	4	-	4								
						6300	3	A	H	3	7	2	4	-	5								
						8000 ²⁾	3	A	H	3	7	2	4	-	6								
As of 5000 A, the 3AH37 must be ordered with supplement for horizontal installation ¹⁾																		-	Z	A	7	0	

Configuration example

3AH3 vacuum circuit-breaker

Rated voltage U_r = 24 kV, 50/60 Hz

Rated lightning impulse withstand voltage U_p = 125 kV

Rated short-circuit breaking current I_{SC} = 72 kA

Pole-centre distance = 300 mm

Rated normal current I_r = 6300 A

Example for Order No.:

Order codes:

3 A H 3

3 A H 3 7 2 4 - 5

- 1) The 3AH38 can always be installed in vertical and horizontal position. The supplement A70 is only required for the 3AH37 as of 5000 A.
2) With forced cooling



9th position

Release combination ¹⁾

9 th position								Position:	1	2	3	4	5	6	7	–	8	9	10	11	12	13	14	15	16	Order codes					
Release combination ¹⁾								Order No.:	3	A	H	3	■	■	■	–	■	■	■	■	■	–	■	■	■	■	–	★	■	■	■
1 st shunt release	2 nd shunt release	3 rd shunt release	C.t.-operated release 0.5 A ²⁾	C.t.-operated release 1 A ²⁾	C.t.-operated release with tripping pulse ≥ 0.1Ws (10 Ω)	C.t.-operated release with tripping pulse ≥ 0.1Ws (20 Ω)	Undervoltage release												See page 20	See page 21	See page 22										
I																		M													
I	II																	N													
I	II	III																N							–	Z	F	1	5		
I	II		III															P													
I	II			III														P							–	Z	A	4	6		
I	II				III													P							–	Z	A	4	4		
I	II					III												P							–	Z	A	4	5		
I	II						III											T													
I			II															Q													
I							II											R													
I			II					III										S													
I				II				III										S							–	Z	A	4	6		
I					II			III										S							–	Z	A	4	4		
I						II	III											S							–	Z	A	4	5		
I			II															U													
I				II														U							–	Z	A	4	6		
I					II													V													
I						II												V							–	Z	A	4	5		

I = Position of first release II = Position of second release III = Position of third release

- 1) The operating voltage is selected at the 11th to 13th position
- 2) Combinations of two c.t.-operated releases on request

On request, a faster release is available, which can implement tripping times of approx. 20 ms in combination with a special capacitor device.

Configuration example

3AH3 vacuum circuit-breaker

($U_r = 36$ kV, 50/60 Hz, $U_p = 170$ kV, $I_{SC} = 40$ kA, $I_r = 2500$ A, pole-centre distance = 350 mm)

Closing solenoid, 1st shunt release, undervoltage release and c.t.-operated release with a rated normal current of 1 A

Example for Order No.:

Order codes:

3 A H 3

3 0 6 - 6

S

-

Z

A

4

6

3 A H 3

3

0

6

-

6

S

Selection of secondary equipment



Operating voltage of the closing solenoid

Position:

Order No.:

Standard voltages			Special voltages																See page 21	See page 22		See page 23	See page 24	See page 25	See page 26		See page 27				
Mechanical closing at the circuit-breaker																															
24 V DC																		B													
48 V DC																		C													
60 V DC																		D													
110 V DC																		E													
220 V DC																		F													
100 V AC	50/60 Hz ¹⁾																	H													
110 V AC	50/60 Hz ¹⁾																	J													
230 V AC	50/60 Hz ¹⁾																	K													
			30 V DC															Z									K	1	A		
			32 V DC															Z									K	1	B		
			120 V DC															Z									K	1	C		
			125 V DC															Z									K	1	D		
			127 V DC															Z									K	1	E		
			240 V DC															Z									K	1	F		
			120 V AC 50/60 Hz ¹⁾															Z									K	1	K		
			125 V AC 50/60 Hz ¹⁾															Z									K	1	L		
			240 V AC 50/60 Hz ¹⁾															Z									K	1	M		
Manual electrical closing at the circuit-breaker																															
24 V DC																		M													
48 V DC																		N													
60 V DC																		P													
110 V DC																		Q													
220 V DC																		R													
100 V AC	50/60 Hz ¹⁾																	T													
110 V AC	50/60 Hz ¹⁾																	U													
230 V AC	50/60 Hz ¹⁾																	V													
			30 V DC															Z									K	2	A		
			32 V DC															Z									K	2	B		
			120 V DC															Z									K	2	C		
			125 V DC															Z									K	2	D		
			127 V DC															Z									K	2	E		
			240 V DC															Z									K	2	F		
			120 V AC 50/60 Hz ¹⁾															Z									K	2	K		
			125 V AC 50/60 Hz ¹⁾															Z									K	2	L		
			240 V AC 50/60 Hz ¹⁾															Z									K	2	M		

1) The AC frequency 50 or 60 Hz is selected at the 16th position of the order number together with the language (see page 26)

Manual electrical closing at the circuit-breaker,
operating voltage of the closing solenoid **32 V DC**

Order codes:

[illegible]



11th position

Operating voltage of the 1st shunt release

Position:

Order No.:

Standard voltages		Special voltages																See page 22	See page 23	See page 24	See page 25	See page 26	See page 27			
24 V DC																		1								
48 V DC																		2								
60 V DC																		3								
110 V DC																		4								
220 V DC																		5								
100 V AC	50/60 Hz ¹⁾																	6								
110 V AC	50/60 Hz ¹⁾																	7								
230 V AC	50/60 Hz ¹⁾																	8								
		30 V DC																9						L	1	A
		32 V DC																9						L	1	B
		120 V DC																9						L	1	C
		125 V DC																9						L	1	D
		127 V DC																9						L	1	E
		240 V DC																9						L	1	F
		120 V AC	50/60 Hz ¹⁾															9						L	1	K
		125 V AC	50/60 Hz ¹⁾															9						L	1	L
		240 V AC	50/60 Hz ¹⁾															9						L	1	M

1) The AC frequency 50 or 60 Hz is selected at the 16th position of the order number together with the language (see page 26)

Configuration example

3AH3 vacuum circuit-breaker

($U_r = 36$ kV, 50/60 Hz, $U_p = 170$ kV, $I_{SC} = 40$ kA, $I_r = 2500$ A, pole-centre distance = 350 mm)

Operating voltage of the 1st shunt release **48 V DC**

Example for Order No.:

Order codes:

Equipment Selection

Selection of secondary equipment



12th position

Operating voltage of the 2nd release

Shunt release, undervoltage release or c.t.-operated release

		Position:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Order codes		
		Order No.:	3	A	H	3	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Standard voltages																					
Special voltages																					
Without or c.t.-operated release														0							
24 V DC														1							
48 V DC														2							
60 V DC														3							
110 V DC														4							
220 V DC														5							
100 V AC 50/60 Hz ¹⁾														6							
110 V AC 50/60 Hz ¹⁾														7							
230 V AC 50/60 Hz ¹⁾														8							
	30 V DC													9					M	1	A
	32 V DC													9					M	1	B
	120 V DC													9					M	1	C
	125 V DC													9					M	1	D
	127 V DC													9					M	1	E
	240 V DC													9					M	1	F
	120 V AC 50/60 Hz ¹⁾													9					M	1	K
	125 V AC 50/60 Hz ¹⁾													9					M	1	L
	240 V AC 50/60 Hz ¹⁾													9					M	1	M
Special versions																					
To operate the 2 nd release as an undervoltage release on an energy store type AN 1902- (for DC) or AN 1901-2 (for AC), both make Bender, the operating voltage must be defined – and whether the energy store will be provided by the customer or included in the scope of supply.																					
Energy store																					
	Type	In the scope of supply																			
60 V DC	AN 1902-	no												9					M	2	D
110 V DC	AN 1902-	no												9					M	2	E
220 V DC	AN 1902-	no												9					M	2	F
100 V/110 V/230 V AC	AN 1901-2	no												9					M	2	G
60 V DC	AN 1902-	yes												9					M	3	D
110 V DC	AN 1902-	yes												9					M	3	E
220 V DC	AN 1902-	yes												9					M	3	F
100 V/110 V/230 V AC	AN 1901-2	yes												9					M	3	G

1) The AC frequency 50 or 60 Hz is selected at the 16th position of the order number together with the language (see page 26)

Configuration example

3AH3 vacuum circuit-breaker

($U_r = 36 \text{ kV}$, $50/60 \text{ Hz}$, $U_p = 170 \text{ kV}$, $I_{SC} = 40 \text{ kA}$, $I_r = 2500 \text{ A}$, pole-centre distance = 350 mm)

2nd release as undervoltage release with operating voltage 32 V DC

Example for Order No.:

Order codes:

3 A H 3

3 0 6 - 6 S Z 2

9

M 1 B

3 A H 3 3 0 6 - 6 S Z 2 9 - ■ ■ ■ ■ - Z



13th position

Operating voltage of the 3rd release

Shunt release, undervoltage release or c.t.-operated release

[illegible]

1) The AC frequency 50 or 60 Hz is selected at the 16th position of the order number together with the language (see page 26)

Configuration example

3AH3 vacuum circuit-breaker

($U_r = 36 \text{ kV}$, $50/60 \text{ Hz}$, $U_p = 170 \text{ kV}$, $I_{SC} = 40 \text{ kA}$, $I_r = 2500 \text{ A}$,
pole-centre distance = **350 mm**)

3rd release as c.t.-operated release

[illegible]

Selection of secondary equipment



Operating voltage of the operating mechanism

1 2 3 4 5 6 7 - 8 9 10 11 12 - 13 14 15 16

Order No. :

Operating voltage or the operating mechanism			Order No.																																	
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	See page 25	See page 26	See page 27					
Standard voltages			Special voltages																																	
Manual operating mechanism (hand crank included in the scope of supply)																															A					
24 V DC																															B					
48 V DC																															C					
60 V DC																															D					
110 V DC																															E					
220 V DC																															F					
100 V AC 50/60 Hz ¹⁾																															H					
110 V AC 50/60 Hz ¹⁾																															J					
230 V AC 50/60 Hz ¹⁾																															K					
			30 V DC																												Z			P	1	A
			32 V DC																												Z			P	1	B
			120 V DC																												Z			P	1	C
			125 V DC																												Z			P	1	D
			127 V DC																												Z			P	1	E
			240 V DC																												Z			P	1	F
			120 V AC 50/60 Hz ¹⁾																												Z			P	1	K
			125 V AC 50/60 Hz ¹⁾																												Z			P	1	L
			240 V AC 50/60 Hz ¹⁾																												Z			P	1	M

K

Operating voltage of the operating mechanism **230 V AC, 50 Hz**

3 A H 3

3 0 6 - 6 S Z 2 9 - 0

K

3 A H 3 3 0 6 - 6 S Z 2 9 - 0 K ■ ■ - Z

A	4	6	+	K	2	B	+	M	1	B
---	---	---	---	---	---	---	---	---	---	---



15th position

Auxiliary switch, low-voltage interface, interlocking

						Position: 1 2 3 4 5 6 7 - 8 9 10 11 12 - 13 14 15 16														Order codes		
						Order No.:																
Mechanical interlocking	Auxiliary switch 6NO+6NC	Auxiliary switch 12NO+12NC	64-pole plug ¹⁾	24-pole plug ²⁾	24-pole terminal strip ²⁾																	
	■		■																			
	■			■																		
	■																					
		■	■																			
■	■		■																			
■	■			■																		
■	■				■																	
■		■	■																			
Special version																						
Auxiliary switch 12 NO + 12 NC and 24-pole plug (E or F) ²⁾																						
Special versions gold-plated contacts and pins																						
Auxiliary switch 6 NO + 6 NC and 24-pole terminal strip (G or H)																						
Auxiliary switch 12 NO + 12 NC and 24-pole terminal strip (M or N)																						
Auxiliary switch 6 NO + 6 NC and 64-pole plug (A or B)																						
Auxiliary switch 12 NO + 12 NC and 64-pole plug (C or D)																						

- 1) Depending on the equipment, some connections of the 64-pole plug connector remain free. These can be connected to free auxiliary switch contacts by the customer. Prefabricated wires are available as accessories.
- 2) Auxiliary switch contacts are not wired to the plug/terminal strip and must therefore be connected directly.

Configuration example

3AH3 vacuum circuit-breaker

($U_r = 36 \text{ kV}$, $50/60 \text{ Hz}$, $U_p = 170 \text{ kV}$, $I_{SC} = 40 \text{ kA}$, $I_r = 2500 \text{ A}$, pole-centre distance = 350 mm)

Auxiliary switch 6 NO + 6 NC, 64-pole plug and with mechanical interlocking

Auxiliary switch contacts and pins of the plug connector gold-plated

Example for Order No.:

Order codes:

3 A H 3

3 0 6 - 6 S Z 2 9 - 0 K

B

- Z

A

2

0

3 A H 3 3 0 6 - 6 S Z 2 9 - 0 K B ■ - Z

A 4 6 + K 2 B + M 1 B + A 2 0

Selection of secondary equipment



Languages of operating instructions and rating plate, as well as AC frequency of operating voltage ¹⁾

[illegible]

1) AC voltage refers to the secondary part and not to the primary part of the circuit-breaker

3AH3 vacuum circuit-breaker

($U_r = 36 \text{ kV}$, 50/60 Hz, $U_p = 170 \text{ kV}$, $I_{SC} = 40 \text{ kA}$, $I_r = 2500 \text{ A}$,
pole-centre distance = 350 mm)

Auxiliary switch 6 NO + 6 NC, 64-pole plug and with mechanical interlocking

Auxiliary switch contacts and pins of the plug connector gold-plated

Frequency 50 Hz or DC, operating instructions and rating plate in English

Example for Order No.:

Order codes:

Additional equipment

	Position:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		Order codes
Order No.:		3	A	H	3	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Options																			
Wire ends with marking at the plug																	-	Z	A 0 5
Wiring cable AWG14 SIS Gray (UL-listed)																	-	Z	A 0 6
Wiring cables, halogen-free and flame-retardant																	-	Z	A 1 0
Destination end marking at wire ends + wire end ferrules pulled out without plug (must be ordered with B01 to B08)																	-	Z	A 1 1
Wiring cables, tinned (and halogen-free and flame-retardant)																	-	Z	A 1 2
Gold-plated aux. switch 6 NO + 6 NC and 24-pole terminal strip (G or H)																	-	Z	A 1 7
Gold-plated aux. switch 12 NO + 12 NC and 24-pole terminal strip (M or N)																	-	Z	A 1 8
Gold-plated aux. switch 6 NO + 6 NC and 64-pole plug (A or B)																	-	Z	A 2 0
Gold-plated aux. switch 12 NO + 12 NC and 64-pole plug (C or D)																	-	Z	A 2 1
Auxiliary switch 12 NO + 12 NC and 24-pole plug (E or F)																	-	Z	A 2 6
Protection against condensed water, heating for 110 V AC, 50 W																	-	Z	A 2 9
Protection against condensed water, heating for 230 V AC, 50 W																	-	Z	A 3 0
Silicone-free design																	-	Z	A 3 1
Circuit-breaker for operation up to an ambient air temperature of -25 °C	On request																-	Z	A 4 0
Tripping pulse equal to or greater than 0.1 Ws (10 Ω)																	-	Z	A 4 4
Tripping pulse equal to or greater than 0.1 Ws (20 Ω)																	-	Z	A 4 5
C.t.-operated release 1.0 A																	-	Z	A 4 6
Electrical closing lockout without measuring element																	-	Z	A 4 7
Spring-dump (release of energy store when the plug is disconnected)																	-	Z	A 6 1
Prevalent trip (opening operation prevents closing)																	-	Z	A 6 2
Prevalent trip, spring-dump, and "closed breaker" interrogation *																	-	Z	A 6 4
Prevalent trip and spring-dump *																	-	Z	A 6 5
3AH37 vacuum circuit-breaker as of 5000 A for horizontal installation																	-	Z	A 7 0
Additional rating plate, loose delivery																	-	Z	B 0 0
Cable harness 800 mm, pulled out																	-	Z	B 0 1
Cable harness 500 mm, pulled out																	-	Z	B 0 2
Cable harness 2000 mm, pulled out																	-	Z	B 0 3
Cable harness 1200 mm, pulled out																	-	Z	B 0 4
Cable harness 1500 mm, pulled out																	-	Z	B 0 5
Cable harness 2500 mm, pulled out																	-	Z	B 0 6
Cable harness 3000 mm, pulled out																	-	Z	B 0 7
Cable harness 3500 mm, pulled out																	-	Z	B 0 8
Without cover																	-	Z	B 2 0
Without upper part of plug																	-	Z	B 2 3
30-pole terminal strip																	-	Z	B 4 2
Close-open solenoids with thermo switch (only valid for 60 V /110 V /220 V DC)																	-	Z	B 4 7
2 x 24-pole terminal strip																	-	Z	B 6 0
2 x 24-pole plug																	-	Z	B 6 5
Special circuit diagram																	-	Z	B 9 9
Silver-plated primary circuits for external connections and internal interconnection on both sides (standard for 4000 A circuit-breakers and IEC/IEEE 62271-37-013)																	-	Z	D 1 0
For use in environments containing H2S: Gold-plated contacts, tinned pole side	On request																-	Z	D 2 0
Rated short-duration power-frequency withstand voltage 42 kV (for 12 kV)																	-	Z	E 1 3
Rated lightning impulse withstand voltage 185 kV (as of 36 kV)																	-	Z	E 1 4
Rated short-duration power-frequency withstand voltage 85 kV (as of 36 kV)																	-	Z	E 1 5
Rated short-duration power-frequency withstand voltage 32 kV (for 7.2 kV)																	-	Z	E 1 6
Rated lightning impulse withstand voltage 195 kV (as of 36 kV)																	-	Z	E 2 4
Rated short-duration power-frequency withstand voltage 95 kV (as of 36 kV)																	-	Z	E 2 5
Seaworthy transport for Germany																	-	Z	F 0 2
With 3 rd shunt release (voltage according to 13 th position)																	-	Z	F 1 5
Routine test certificate enclosed with stamp and passport																	-	Z	F 1 9
Routine test certificate enclosed																	-	Z	F 2 0
Routine test certificate with stamp and signature																	-	Z	F 2 1
Routine test certificate (to orderer)																	-	Z	F 2 3

*) Functionalities of the mechanical interface for a solution with withdrawable part

"Closed breaker" interrogation: Through the mechanical interface, the circuit-breaker position can be inquired and racking of the closed circuit-breaker can be blocked.

Prevalent trip: When the mechanical interlocking device is operated, the circuit-breaker is opened and reclosing is prevented.

Spring-dump: The circuit-breaker's closing and opening springs can be discharged by operating the mechanical interface.

Continued on next page

Equipment Selection

Selection of additional equipment

Additional equipment

(continued)

Position:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Order codes
Order No.:	3	A	H	3													
Options																	
Rated operating sequence O – 3 min – CO – 3 min – CO (only for IEC)																– Z	F 2 7
Rated operating sequence O – 0.3 s – CO – 15 s – CO (only possible up to 31.5 kA)																– Z	F 2 8
Hand crank (also for motor operation) for manual charging of the closing spring																– Z	F 3 0
Mounted cover for CLOSING (lockable)																– Z	J 6 2
Warranty 24 months																– Z	W 7 0
Warranty 36 months																– Z	W 7 1
Warranty 60 months																– Z	W 7 2
Higher rated voltage 40.5 kV (instead of 36 kV) only in combination with E14/E15 as well as E24/E25																– Z	Y 0 9
Additional specifications on the rating plate (only after consultation with the order processing department at the Switchgear Factory Berlin). Specifications in clear text.																– Z	Y 1 2
Operating instructions and product designation for USA																– Z	Y 4 0
Adhesive label yellow/green – ON/OFF																– Z	Y 4 5
Other not listed special design (only after consultation with the order processing department at the Switchgear Factory Berlin). Specifications additionally in clear text.																– Z	Y 9 9

Configuration example

3AH3 vacuum circuit-breaker

Rated voltage $U_r = 36 \text{ kV}$ (50/60 Hz)

Rated lightning impulse withstand voltage $U_p = 170 \text{ kV}$

Rated short-circuit breaking current $I_{SC} = 40 \text{ kA}$

Pole-centre distance = 350 mm

Rated normal current $I_r = 2500 \text{ A}$

Closing solenoid, 1st shunt release, undervoltage release and

c.t.-operated release with a rated normal current of 1 A

Manual electrical closing at the circuit-breaker,

operating voltage of the closing solenoid 32 V DC

Operating voltage of the 1st shunt release 48 V DC

2nd release as undervoltage release with operating voltage 32 V DC

3rd release as c.t.-operated release

Operating voltage of the operating mechanism 230 V AC, 50 Hz

Auxiliary switch 6 NO + 6 NC, 64-pole plug and with mechanical interlocking

Auxiliary switch contacts and pins of the plug connector gold-plated

Frequency 50 Hz or DC, operating instructions and rating plate in English

Routine test certificate enclosed

3 A H 3

3 0 6 – 6

S

Z

2

9

–

0

K

B

–

Z

2

–

Z

F

2

0

Example for Order No.:

Order codes:

3 A H 3 3 0 6 – 6 S Z 2 9 – 0 K B 2 – Z
A 4 6 + K 2 B + M 1 B + A 2 0 + F 2 0

Remark for orders of accessories and spare parts

The order numbers in the spare part overviews are applicable to vacuum circuit-breakers of current manufacture. When mounting parts or spare parts are being ordered for an existing vacuum circuit-breaker, always quote the type designation, serial number and the year of manufacture of the circuit-breaker to be sure to get the correct delivery. This data is given on the rating plate.

Retrofitting

When releases/solenoids are retrofitted, the order numbers of the mounting parts must also be specified. For other additional equipment, the required mounting parts are included in the delivery.

Spare interrupters

As spare parts, the vacuum interrupters are supplied with adapter.

Vacuum interrupters and other spare parts must only be replaced by instructed personnel.

Accessories for the plug connector

Included in the scope of supply of the basic equipment for 3AH3 vacuum circuit-breakers:


For 24-pole plug connector

- Lower part of plug
- Crimp sockets according to number of contacts
- Upper part of plug with screwed contacts (no crimp sockets required)

For 64-pole plug connector

- Lower part of plug
- Upper part of plug
- Crimp sockets according to number of contacts

Data on the rating plate

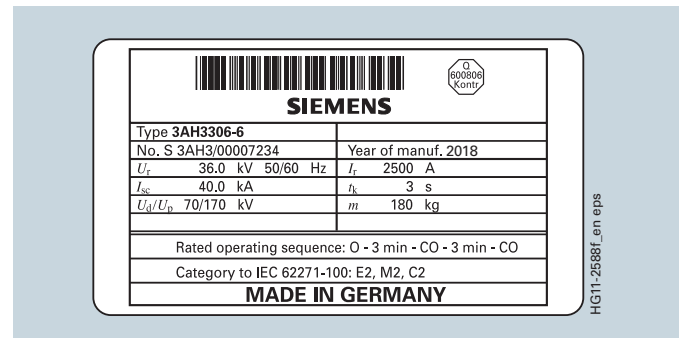

Note:

For any query regarding spare parts, subsequent deliveries, etc. the following three details are necessary:

- Type designation
- Serial No.
- Year of manufacture

Equipment Selection

Accessories and spare parts

Accessories and spare parts

Designation	Remarks	Operating voltage	Order No.
Hand crank	Short design		3AX15 30-4A
for charging	Standard design		3AX15 30-4B
the closing spring	Long design		3AX15 30-4C
	Bit for battery screwdriver		3AX15 30-3D
Lubricant	(for special application conditions)		
	180 g Klüber-Isoflex Topas L32N		3AX11 33-3H
	1 kg Klüber-Isoflex Topas L32N		3AX11 33-3E
	1 kg Shell Tellus oil 32 (special oil)		3AX11 33-2D
Wire bundle	With 10 wires for connection of auxiliary switch to		
	– 64-pole plug connector		3AX11 34-2D
	– 24-pole plug connector		3AX11 34-2B
	– 24-pole terminal strip		3AX11 34-2C
Plug connector and accessories	(for wire cross-section 1.5 mm²)		
	Crimp pins for lower part of plug	24-pole	3AX11 34-3A
		64-pole	3AX11 34-4B
	Crimp sockets for upper part of plug	64-pole	3AX11 34-4C
	Crimping pliers		3AX11 34-4D
	Disassembly tool		3AX11 34-4G
	Complete plug connector	24-pole	3AX11 34-7A
		64-pole	3AX11 34-6A
	Plug connector (lower part)	24-pole	3AX11 34-5D
	Plug connector (upper part)	24-pole	3AX11 34-5C
	Plug connector (lower part)	64-pole	3AX11 34-5B
	Plug connector (upper part)	64-pole	3AX11 34-5A
Operating solenoid	Used as closing solenoid or	24 V DC	3AY15 10-5K
	1 st shunt release	30/32 V DC	3AY15 10-5M
		48 V DC	3AY15 10-5C
		60 V DC	3AY15 10-5D
		110/120 V DC	3AY15 10-5E
		125/127 V DC	3AY15 10-5L
		220/240 V DC	3AY15 10-5F
	Including varistor and rectifier	100 – 125 V AC, 50/60 Hz	3AY15 10-5E
		230/240 V AC, 50/60 Hz	3AY15 10-5F
2nd shunt release		24 – 32 V DC	3AX11 01-2B
		48 – 60 V DC	3AX11 01-2C
		110 – 127 V DC	3AX11 01-2E
		220 – 240 V DC	3AX11 01-2F
		100 – 125 V AC, 50 Hz	3AX11 01-2G
		230 – 240 V AC, 50 Hz	3AX11 01-2J
		100 – 125 V AC, 60 Hz	3AX11 01-3G
		230 – 240 V AC, 60 Hz	3AX11 01-3J
Undervoltage release *)		24 V DC	3AX11 03-2B
		30/32 V DC	3AX11 03-2L
		48 V DC	3AX11 03-2C
		60 V DC	3AX11 03-2D
		110 V DC	3AX11 03-2E
		120 V – 127 V DC	3AX11 03-2N
		220 V DC	3AX11 03-2F
		240 V DC	3AX11 03-2P
		100 V AC, 50 Hz	3AX11 03-2G
		110 V – 125 V AC, 50 Hz	3AX11 03-2H
		230 V AC, 50 Hz	3AX11 03-2J
		240 V AC, 50 Hz	3AX11 03-2M
		100 V AC, 60 Hz	3AX11 03-3G
		110 V – 125 V AC, 60 Hz	3AX11 03-3H
		230 V AC, 60 Hz	3AX11 03-3J
		240 V AC, 60 Hz	3AX11 03-3M

*) With the readjustment to the auxiliary contactors 3RH1122, the resistor of the undervoltage release is mounted separately -> mounting kit 3AX1711-0W required
Continued on next page

Accessories and spare parts (continued)

Designation	Remarks	Operating voltage	Order No.
Mounting parts	For 2 nd shunt release or undervoltage release		
	For 1 existing shunt release (up to serial number 3AH3/00016907)		3AX17 11-3A
	For 2 existing releases (up to serial number 3AH3/00016907)		3AX17 11-3B
	For 1 existing shunt release (as of serial number 3AH3/00016908)		3AX17 11-4A
	For 2 existing releases (as of serial number 3AH3/00016908)		3AX17 11-4B
	Mounting kit for resistor of undervoltage release		3AX17 11-0W
Drive motor		24/30/32 V DC	3AY15 11-3B
		48 V DC	3AY15 11-3C
		60 V DC	3AY15 11-3D
		** 100/110/125/127 V DC/AC	3AY15 11-3E
		** 220 – 250 V DC/AC	3AY15 11-3F
Rectifier element	** For drive motor with AC operation	100 V – 250 V AC	3AX15 25-1F
Auxiliary contactor for anti-pumping	Type 3TH20 22-7 for all circuit-breakers up to serial number 3AH3/00015203, 3AH37/00000241 or 3AH38/00000633	24/30/32 V DC	SWB: 48683
	or with supplement S98	48 V DC	SWB: 48687
		60 V DC	SWB: 48684
		100/120 V DC	SWB: 48685
		125 V – 127 V DC	SWB: 47730
		220 V – 240 V DC	SWB: 48686
		100 – 125 V AC, 50 Hz	SWB: 48680
		230 – 240 V AC, 50 Hz	SWB: 55550
		100 – 125 V AC, 60 Hz	SWB: 48679
		230 – 240 V AC, 60 Hz	SWB: 55550
	Type 3RH1122-2 as of serial number:	24 V DC	SWB: 55656
	3AH3/00015204,	30/32 V DC	SWB: 55658
	3AH37/00000242 or	48 V DC	SWB: 55659
	3AH38/00000634	60 V DC	SWB: 55660
		110 V DC	SWB: 55661
		120/127 V DC	SWB: 55662
		220 V DC	SWB: 55663
		240/250 V DC	SWB: 55665
		110 V AC, 50/60 Hz	SWB: 55666
		120 V AC, 50/60 Hz	SWB: 55667
		125 V AC, 50/60 Hz	SWB: 55668
		230 V AC, 50/60 Hz	SWB: 55669
		240 V AC, 50/60 Hz	SWB: 55670
Position switch	Type 3SE4 (as spare part), without installation accessories		3AX42 06-0A
	Used for:	Number	
	– Electrical anti-pumping (-S3)	1	
	– Motor control (-S21, -S22)	2	
	– Closing spring charged (-S4)	1	
	– Circuit-breaker tripping signal (-S6, -S7)	2	
	– Electrical closing lockout (-S5)	1	
Auxiliary switch (-S1)	6 NO + 6 NC		3SV92 73-2AA0
	12 NO + 12 NC		3SV92 74-2AA0
Mechanical interlocking			3AX15 20-4C
Retaining elements and cotters	For circuit-breaker revisions	Set for one circuit-breaker	3AY15 50-1A
Spare vacuum interrupters	3AH3 high-current circuit-breaker (IEC)		
	3AH3057-2/6		3AY17 15-3H
	3AH3057-7		3AY17 15-2J
	3AH3077-8		3AY17 15-4J
	3AH3078-2/6/7		3AY17 15-2J
	3AH3078-8		3AY17 15-4J
	3AH3117-2/6		3AY17 15-3H

** For AC operation a DC motor with an upstream rectifier element must be used

Continued on next page


Equipment Selection

Accessories and spare parts

Accessories and spare parts (continued)


Designation	Remarks	Operating voltage	Order No.
Spare vacuum interrupters	3AH3117-7		3AY17 15-2J
	3AH3127-8		3AY17 15-4J
	3AH3128-2/6/7		3AY17 15-2J
	3AH3128-8		3AY17 15-4J
	3AH3217-2/6		3AY17 15-3H
	3AH3217-7		3AY17 15-2J
	3AH3228-2/6/7		3AY17 15-2J
	3AH3227-8		3AY17 15-4J
	3AH3228-8		3AY17 15-4J
	3AH3266-6		3AY17 15-2M
	3AH3266-7		3AY17 15-6M
	3AH3267-7		3AY17 15-2J
	3AH3305-2/4/6		3AY17 15-1L
	3AH3305-2/4/6 Z D10		3AY17 15-2L
	3AH3305-2/4/6 Z H35		3AY17 15-1M
	3AH3305-7		3AY17 15-5M ¹⁾
	3AH3305-8		3AY17 15-5M ¹⁾
	3AH3306-6		3AY17 15-1M
	3AH3306-7		3AY17 15-5M ¹⁾
	3AH3306-8		3AY17 15-5M ¹⁾
	3AH3367-8		3AY17 15-4J
	3AH37/38 high-current and generator circuit-breaker (IEEE)		
	3AH3712-4/5/6, 3AH3713-4/5/6, 3AH3714-4/5/6		¹⁾
	3AH3722-2/3		3AY17 15-3J
	3AH3722-4/5/6		¹⁾
	3AH3723-2/3		3AY17 15-2P
	3AH3723-4/5/6		¹⁾
	3AH3724-2/3		3AY17 15-2P
	3AH3724-4/5/6		¹⁾
	3AH3817-7		3AY17 15-1E
	3AH3817-8		3AY17 15-2E
	3AH3818-7 (valid as of ser. no. 3AH3/00004897)		3AY17 15-1P
	3AH3818-7 (valid up to ser. no. 3AH38/00004322)		3AY17 15-1N
	3AH3818-8 (valid as of ser. no. 3AH3/00004326)		3AY17 15-2P
	3AH3818-8 (valid up to ser. no. 3AH38/00004317)		3AY17 15-4E
	3AH3819-7		3AY17 15-1P
	3AH3819-8		3AY17 15-2P
	3AH3837-7		3AY17 15-1E
	3AH3837-8		3AY17 15-2E
	3AH3838-7 (as of ser. no. 3AH38/00000507)		3AY17 15-1P
	3AH3838-7 (centre pole up to ser. no. 3AH38/00000003)		3AY17 15-1N
	3AH3838-7 (outer pole up to ser. no. 3AH38/00000003)		3AY17 15-1E
	3AH3838-8		3AY17 15-2P
	3AH3839-7		3AY17 15-1P
	3AH3839-8		3AY17 15-2P

¹⁾ Interrupters must be exchanged at the Siemens factory

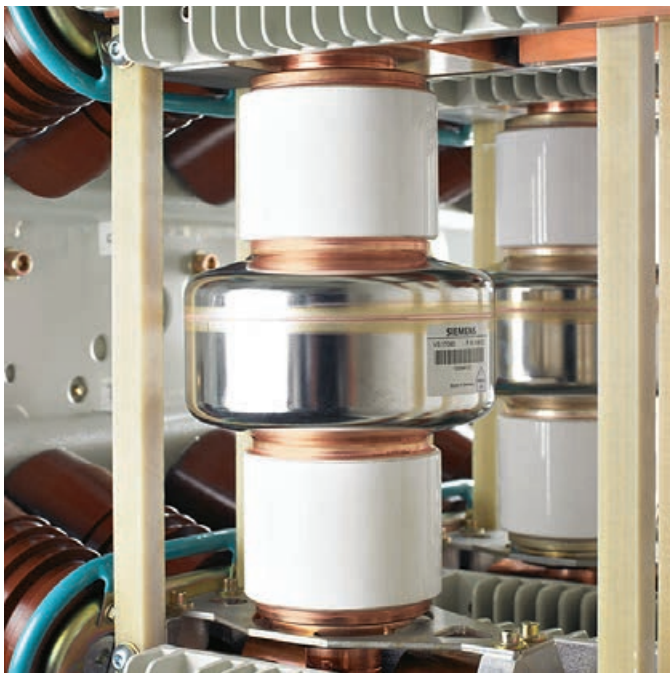

Vacuum interrupter

R-HG11-196.tif

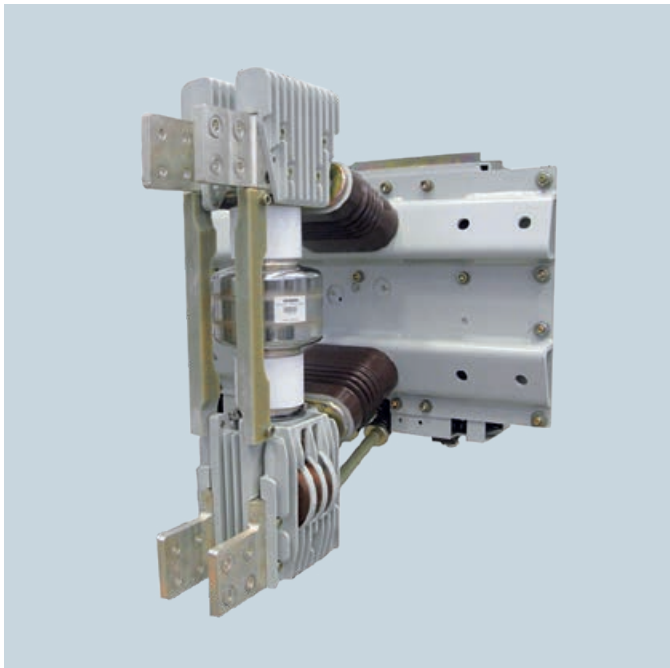

90 kA generator circuit-breaker (one phase shown)

R-HG11-218.tif

Contents	Page
----------	------


Technical Data	33
-----------------------	-----------

Electrical data, dimensions, weights and dimension drawings circuit-breakers according to IEC 62271-100	
Voltage level 7.2 kV	34
Voltage level 12 kV	36
Voltage level 17.5 kV	38
Voltage level 24 kV	40
Voltage level 36 kV	42
Voltage level 40.5 kV	44
Electrical data, dimensions, weights and dimension drawings high-current and generator circuit-breakers according to IEC/IEEE 62271-37-013	
Voltage level 17.5 kV	46
Voltage level 24 kV	48
Circuit diagrams	50
Operating times, short-circuit protection of motors, consumption data of releases	52

Electrical data, dimensions, weights and dimension drawings
circuit-breakers according to IEC 62271-100


- Standard data on the rating plate
- △ Rated operating sequence possible up to $I_{SC} = 31.5 \text{ kA}$

Operating cycle diagram for 7.2 kV

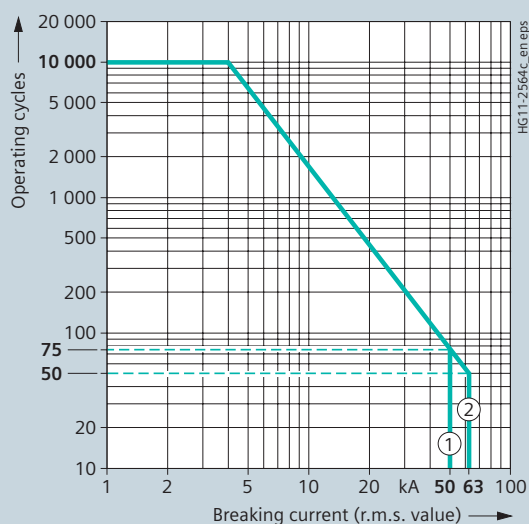


The permissible number of electrical operating cycles is shown as a function of the breaking current (r.m.s. value). All vacuum circuit-breakers fulfil the endurance classes E2, M2 and C2 according to IEC 62271-100. The curve shape beyond the parameters defined in IEC 62271-100 is based on average experience data. The number of operating cycles that can actually be reached can be different depending on the respective application.


Dimension drawings for 7.2 kV

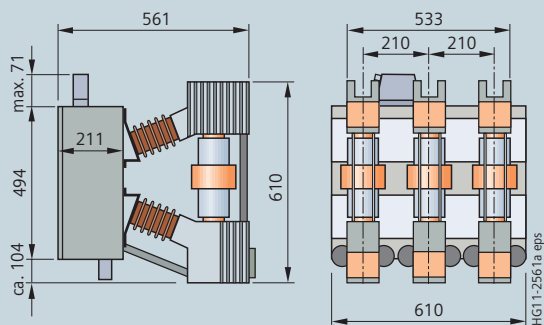


Dimension drawing 1

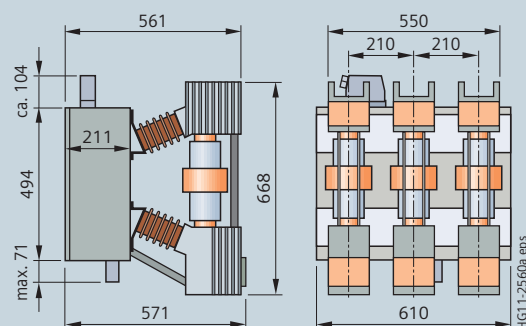

Dimension drawing 2

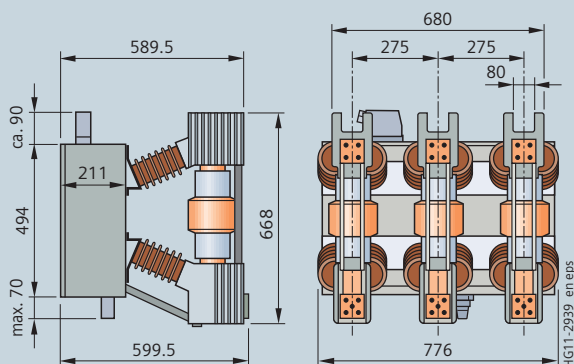

Dimension drawing 3

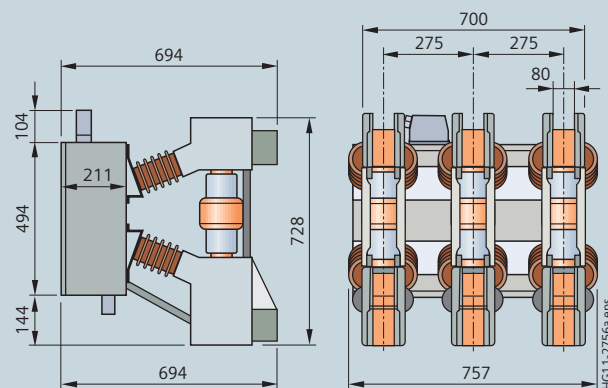


Dimension drawing 4

Electrical data, dimensions, weights and dimension drawings
circuit-breakers according to IEC 62271-100


- Standard data on the rating plate
- △ Rated operating sequence possible up to $I_{SC} = 31.5 \text{ kA}$

Operating cycle diagram for 12 kV

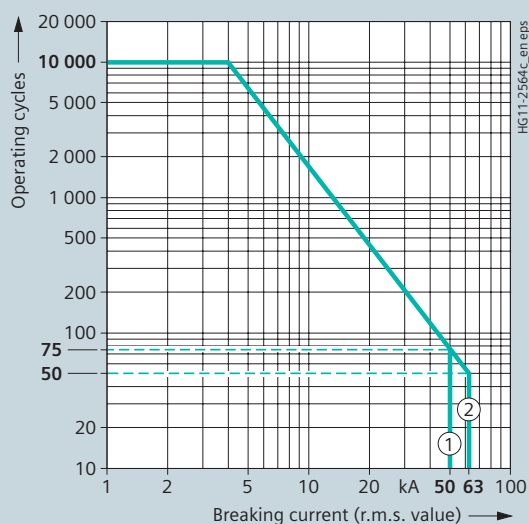


The permissible number of electrical operating cycles is shown as a function of the breaking current (r.m.s. value). All vacuum circuit-breakers fulfil the endurance classes E2, M2 and C2 according to IEC 62271-100. The curve shape beyond the parameters defined in IEC 62271-100 is based on average experience data. The number of operating cycles that can actually be reached can be different depending on the respective application.


Dimension drawings for 12 kV

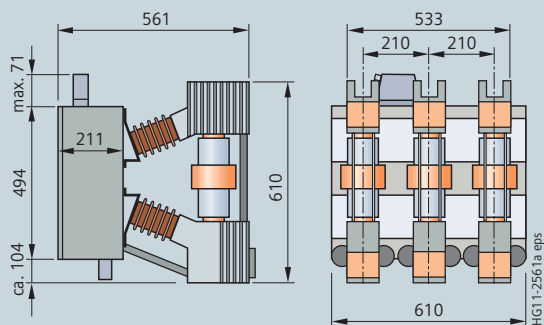


Dimension drawing 1

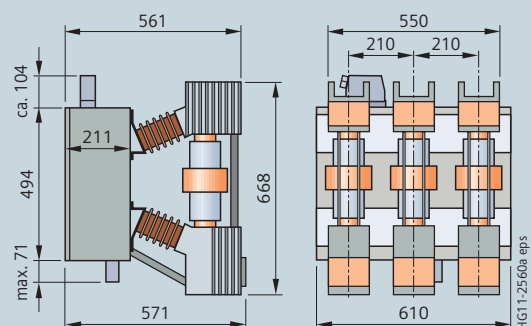

Dimension drawing 2

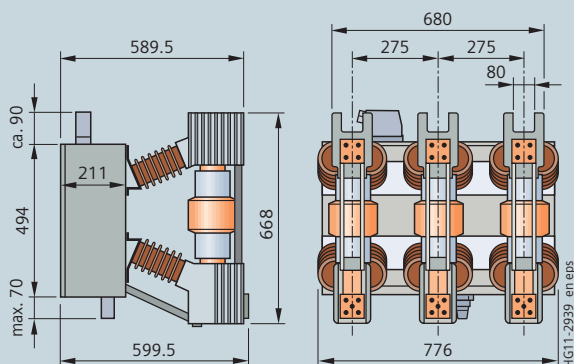

Dimension drawing 3

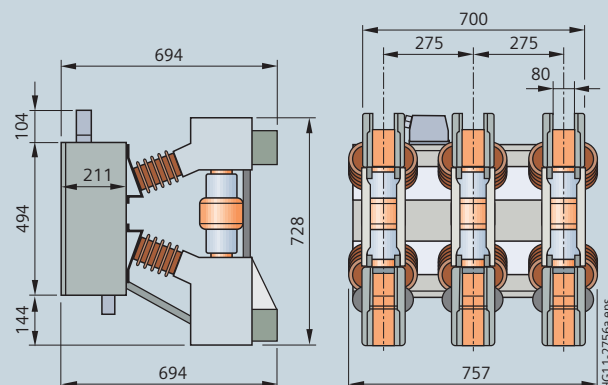


Dimension drawing 4

Electrical data, dimensions, weights and dimension drawings
circuit-breakers according to IEC 62271-100


- Standard data on the rating plate
- △ Rated operating sequence possible up to $I_{SC} = 31.5 \text{ kA}$

Operating cycle diagram for 17.5 kV

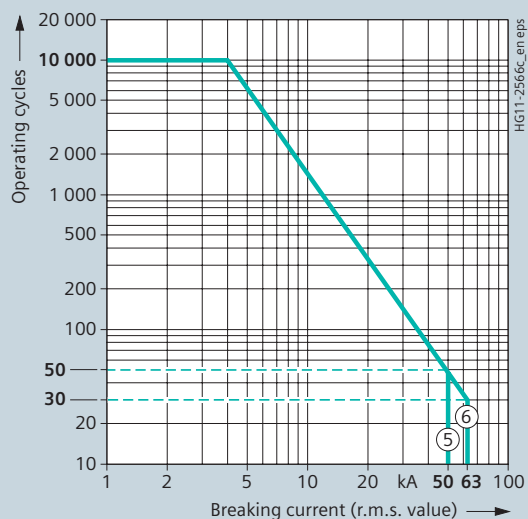


The permissible number of electrical operating cycles is shown as a function of the breaking current (r.m.s. value). All vacuum circuit-breakers fulfil the endurance classes E2, M2 and C2 according to IEC 62271-100. The curve shape beyond the parameters defined in IEC 62271-100 is based on average experience data. The number of operating cycles that can actually be reached can be different depending on the respective application.


Dimension drawings for 17.5 kV

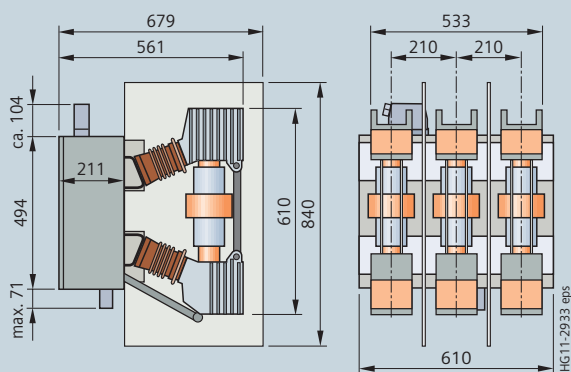


Dimension drawing 5

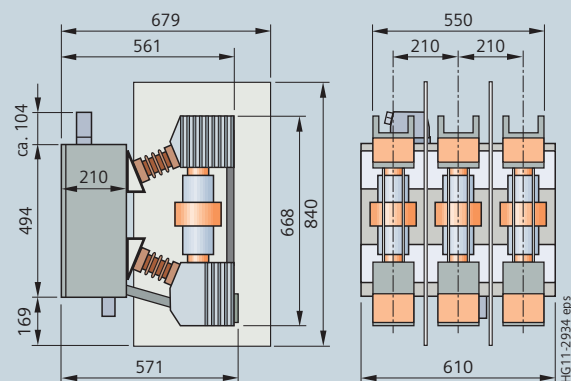

Dimension drawing 6

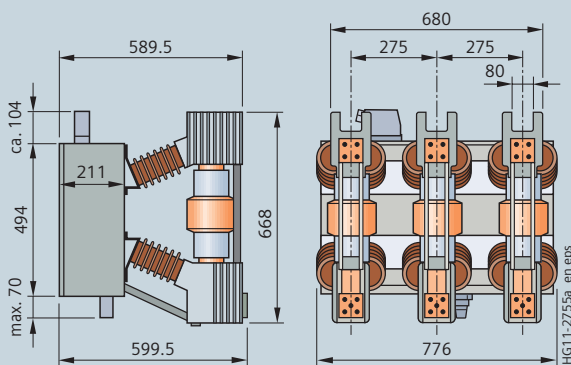

Dimension drawing 7

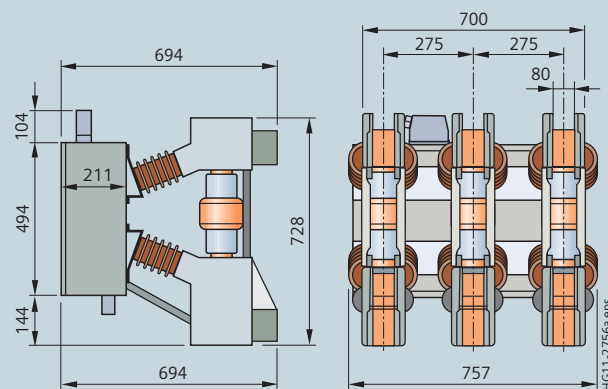


Dimension drawing 8

Electrical data, dimensions, weights and dimension drawings
circuit-breakers according to IEC 62271-100

- Standard data on the rating plate
- △ Rated operating sequence possible up to $I_{SC} = 31.5 \text{ kA}$



1) Deviating from standard value

Operating cycle diagram for 24 kV

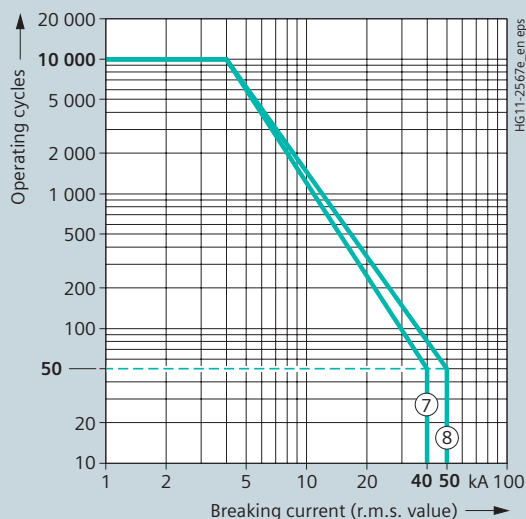


The permissible number of electrical operating cycles is shown as a function of the breaking current (r.m.s. value). All vacuum circuit-breakers fulfil the endurance classes E2, M2 and C2 according to IEC 62271-100. The curve shape beyond the parameters defined in IEC 62271-100 is based on average experience data. The number of operating cycles that can actually be reached can be different depending on the respective application.

Dimension drawings for 24 kV

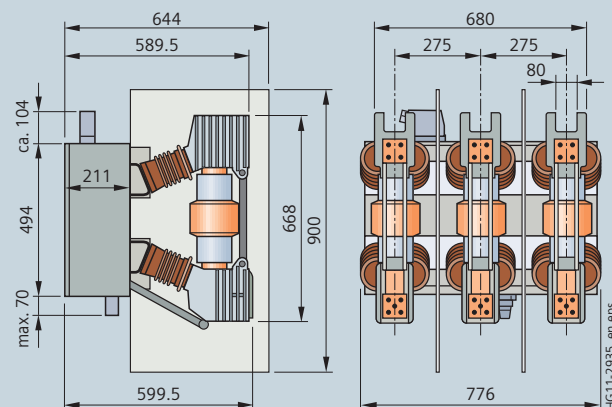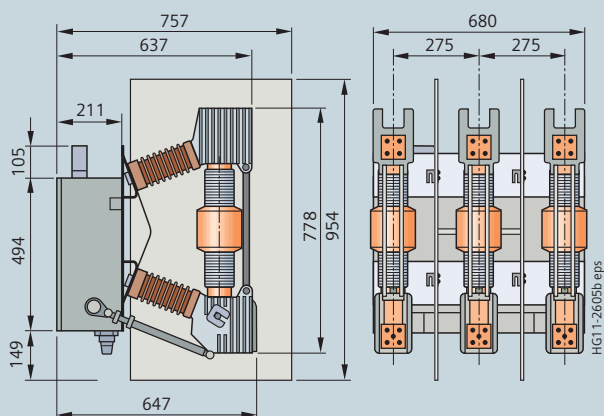

Dimension drawing 9

Dimension drawing 10

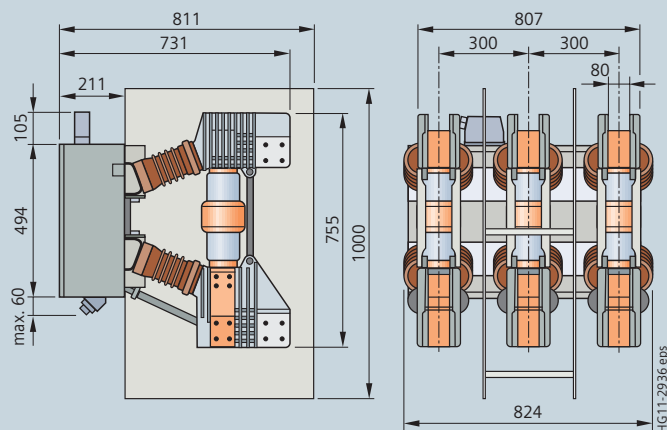

Dimension drawing 11


Technical Data

Electrical data, dimensions, weights and dimension drawings
circuit-breakers according to IEC 62271-100

Order No.	36 kV 50/60 Hz																																											
	Rated normal current		Pole-centre distance		Rated operating sequence: O – 3 min – CO – 3 min – CO O – 0.3 s – CO – 3 min – CO O – 0.3 s – CO – 15 s – CO			Rated duration of short-circuit		Rated short-circuit breaking current		DC component in % of the rated short-circuit breaking current		Asymmetrical breaking current		Rated short-circuit making current (at 50/60 Hz)		Rated back-to-back capacitor bank making current		Rated lightning impulse withstand voltage		Rated short-duration power-frequency withstand voltage		Voltage drop ΔU between connections (according to IEC 62271-1 at DC 100 A)		Minimum creepage distance, interrupter		Minimum creepage distance, phase-to-earth		Minimum clearance, phase-to-phase		Minimum clearance, phase-to-earth		Weights		Detailed dimension drawing (can be ordered)			Operating cycle diagram no. (see page 43)			Catalog dimension drawing no. (see page 43 and 45)		
	I_r	A	mm					t_k	s	I_{sc}	kA	%	kA	I_{ma}	kA	I_{bi}	kA Peak	U_p	kV	U_d	kV	mV	mm	mm	mm	mm	mm	mm	mm	kg														
3AH3 305-2...	1250	350		□	■	○	3	31.5	36	35.4			80/82	10	170	70	2.3	360	420	317	256	170	A7E32500008	10	12																			
3AH3 305-4...	2000	350		□	■	○	3	31.5	36	35.4			80/82	10	170	70	2.3	360	330	317	256	175	A7E32500008	10	12																			
3AH3 305-6...	2500	350		□	■	○	3	31.5	36	35.4			80/82	10	170	70	2.3	360	330	317	264	175	A7E32500009	10	13																			
3AH3 305-7...	3150	350		□	■	○	3	31.5	36	35.4			80/82	10	170	70	1.9	360	365	294	260	350	A7E32500058	10	14																			
3AH3 305-8...	4000	350		□	■	○	3	31.5	36	35.4			80/82	20	170	70	1.9	360	365	294	260	350	A7E32500058	10	14																			
3AH3 306-6...	2500	350		■	△	△	3	40	36	44.9			100/104	20	170	70	2.0	360	330	317	256	175	A7E32500009	9	13																			
3AH3 306-7...	3150	350		■	△	△	3	40	36	44.9			100/104	20	170	70	1.9	360	365	294	260	350	A7E32500058	9	14																			
3AH3 306-8...	4000	350		■	△	△	3	40	36	44.9			100/104	20	170	70	1.9	360	365	294	260	350	A7E32500058	9	14																			
3AH3 305-2...-Z E14+E15	1250	350		□	■	○	3	31.5	36	35.4			80/82	10	185	85	2.3	360	420	317	257	170	A7E32500008	10	12																			
3AH3 305-4...-Z E14+E15	2000	350		□	■	○	3	31.5	36	35.4			80/82	10	185	85	2.3	360	420	317	257	175	A7E32500008	10	12																			
3AH3 305-6...-Z E14+E15	2500	350		□	■	○	3	31.5	36	35.4			80/82	10	185	85	2.3	360	420	317	257	180	A7E32500009	10	13																			
3AH3 305-7...-Z E14+E15	3150	350		□	■	○	3	31.5	36	35.4			80/82	10	185	85	1.9	360	365	304	259	380	A7E32500058	10	14																			
3AH3 305-8...-Z E14+E15	4000	350		□	■	○	3	31.5	36	35.4			80/82	20	185	85	1.9	360	365	304	259	380	A7E32500058	10	14																			
3AH3 306-6...-Z E14+E15	2500	350		■	△	△	3	40	36	44.9			100/104	20	185	85	2.3	360	420	317	257	180	A7E32500009	9	13																			
3AH3 306-7...-Z E14+E15	3150	350		■	△	△	3	40	36	44.9			100/104	20	185	85	1.9	360	365	304	259	380	A7E32500058	9	14																			
3AH3 306-8...-Z E14+E15	4000	350		■	△	△	3	40	36	44.9			100/104	20	185	85	1.9	360	365	304	259	380	A7E32500058	9	14																			
3AH3 305-2...-Z E24+E25	1250	350		□	■	○	3	31.5	36	35.4			80/82	20	195	95	2.3	360	420	311	264	170	A7E32500554	10	15																			
3AH3 305-4...-Z E24+E25	2000	350		□	■	○	3	31.5	36	35.4			80/82	20	195	95	2.3	360	420	309	272	175	A7E32500554	10	15																			
3AH3 305-6...-Z E24+E25	2500	350		□	■	○	3	31.5	36	35.4			80/82	20	195	95	2.3	360	420	304	273	180	A7E32500553	10	16																			
3AH3 306-6...-Z E24+E25	2500	350		■	△	△	3	40	36	44.9			100/104	20	195	95	2.3	360	420	304	273	180	A7E32500553	10	16																			


- Standard data on the rating plate
- Possible with order number suffix Z and order code F27
- Possible with order number suffix Z and order code F28
- △ Rated operating sequence possible up to $I_{sc} = 31.5$ kA

Operating cycle diagram for 36 kV

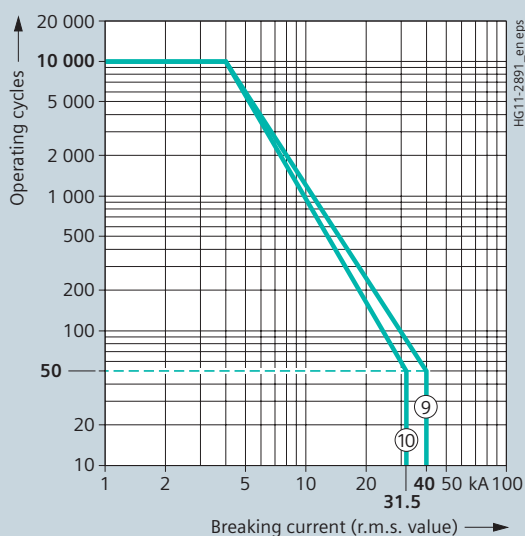


The permissible number of electrical operating cycles is shown as a function of the breaking current (r.m.s. value). All vacuum circuit-breakers fulfil the endurance classes E2, M2 and C2 according to IEC 62271-100. The curve shape beyond the parameters defined in IEC 62271-100 is based on average experience data. The number of operating cycles that can actually be reached can be different depending on the respective application.


Dimension drawings for 36 kV and 40.5 kV

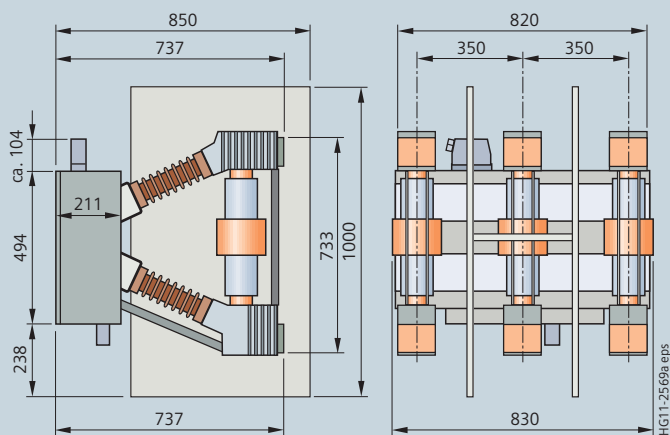

Dimension drawing 12

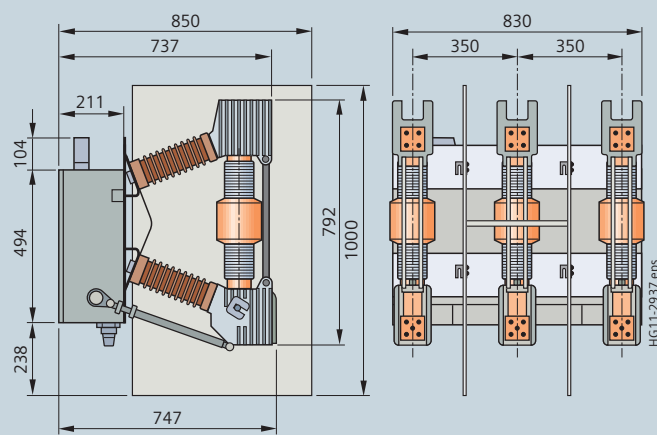

Dimension drawing 13

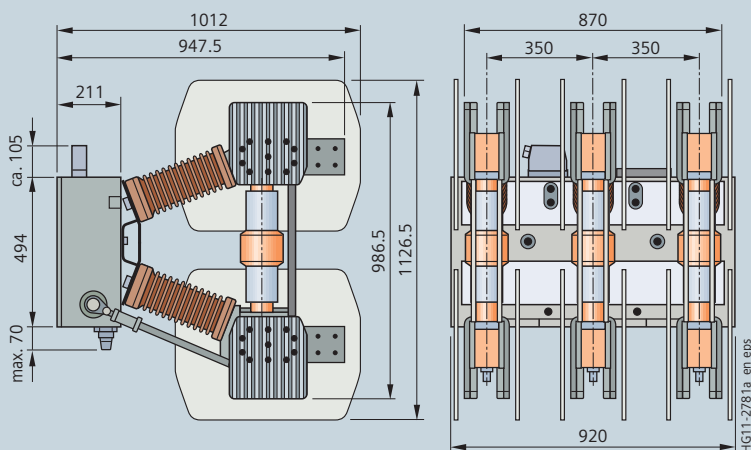


Dimension drawing 14

Electrical data, dimensions, weights and dimension drawings
circuit-breakers according to IEC 62271-100

3


- Standard data on the rating plate
- Possible with order number suffix Z and order code F27
- Possible with order number suffix Z and order code F28
- △ Rated operating sequence possible up to $I_{sc} = 31.5$ kA

Operating cycle diagram for 40.5 kV

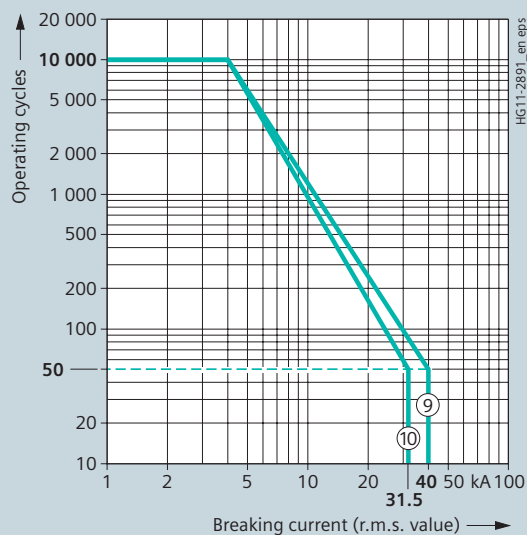


The permissible number of electrical operating cycles is shown as a function of the breaking current (r.m.s. value). All vacuum circuit-breakers fulfil the endurance classes E2, M2 and C2 according to IEC 62271-100. The curve shape beyond the parameters defined in IEC 62271-100 is based on average experience data. The number of operating cycles that can actually be reached can be different depending on the respective application.

Dimension drawings for 36 kV and 40.5 kV

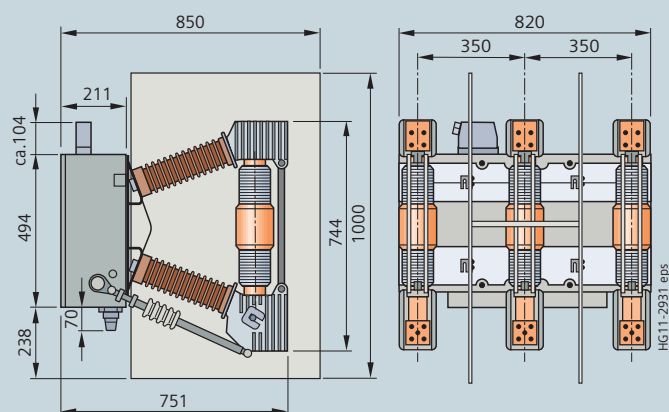

Dimension drawing 15

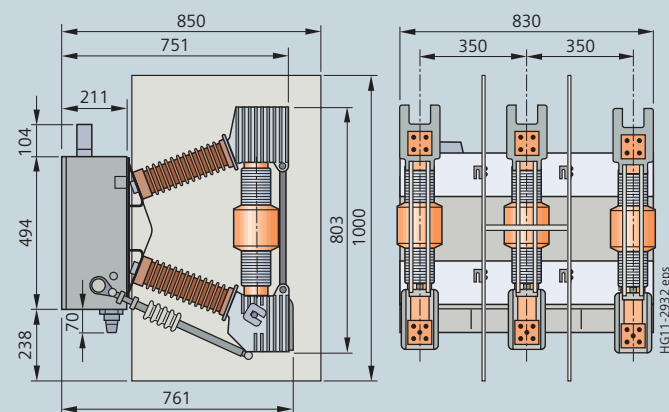

Dimension drawing 16

Technical Data

Electrical data, dimensions, weights and dimension drawings

high-current and generator circuit-breakers according to IEC/IEEE 62271-37-013

Order No.	17.5 kV 50/60 Hz																								
	Rated normal current	Pole-centre distance	Rated operating sequence: ²⁾ O – 3 min – CO – 3 min – CO O – 30 min – CO			System side			Generator side															Detailed dimension drawing (can be ordered)	Catalog dimension drawing no. (see page 47)
	I_r	mm				t_k	I_{SC}	DC component in % of the rated short-circuit breaking current	Asymmetrical breaking current	$I_{SC\ gen}$	DC component in % of the rated short-circuit breaking current	Asymmetrical breaking current	Rated short-circuit making current (at 50/60 Hz)	Rated lightning impulse withstand voltage	Rated short-duration power-frequency withstand voltage	Voltage drop ΔU between connections (according to IEC 62271-1 at DC 100 A)	Minimum creepage distance, interrupter	Minimum creepage distance, phase-to-earth	Minimum clearance, phase-to-phase	Minimum clearance, phase-to-earth	Weights				
A	mm				s	kA	%	kA	kA	%	kA	kA	kV	kV	mV	mm	mm	mm	mm	kg					
3AH3 817-7...	3150	275	□	■	3	50	75	73	25	130	52	137	110	50	1.4	160	170	194	154	230	A7E32500592	17			
3AH3 817-8...	4000	275	□	■	3	50	75	73	25	130	52	137	110	50	1.4	160	170	217	116	320	A7E32500593	18			
3AH3 712-4...	5000	300	□	■	3	50	75	73	25	130	52	137	110	50	1.4	160	210	230	157	470	A7E32500587	19			
3AH3 712-5...	6300	300	□	■	3	50	75	73	25	130	52	137	110	50	1.4	160	210	230	157	500	A7E32500587	19			
3AH3 712-6...	8000 ¹⁾	300	□	■	3	50	75	73	25	130	52	137	110	50	1.4	160	210	230	230	500	A7E32500587	19			
3AH3 818-7...	3150	275	□	■	3	63	70	89	31.5	130	66	173	110	50	1.4	160	170	194	115	230	A7E32500019	17			
3AH3 818-8...	4000	275	□	■	3	63	70	89	31.5	130	66	173	110	50	1.4	160	170	217	116	320	A7E32500030	18			
3AH3 713-4...	5000	300	□	■	3	63	70	89	31.5	130	66	173	110	50	1.4	160	210	230	157	470	A7E32500588	19			
3AH3 713-5...	6300	300	□	■	3	63	70	89	31.5	130	66	173	110	50	1.4	160	210	230	157	500	A7E32500588	19			
3AH3 713-6...	8000 ¹⁾	300	□	■	3	63	70	89	31.5	130	66	173	110	50	1.4	160	230	230	230	500	A7E32500588	19			
3AH3 819-7...	3150	275	□ ³⁾	■	3	72	70	101	36	130	75	197	110	50	1.4	160	170	194	115	250	A7E32500019	17			
3AH3 819-8...	4000	275	□ ³⁾	■	3	72	70	101	36	130	75	197	110	50	1.4	160	170	217	116	320	A7E32500030	18			
3AH3 714-4...	5000	300	□ ³⁾	■	3	72	70	101	36	130	75	197	110	50	1.4	160	210	230	157	470	A7E32500589	19			
3AH3 714-5...	6300	300	□ ³⁾	■	3	72	70	101	36	130	75	197	110	50	1.4	160	210	230	157	500	A7E32500589	19			
3AH3 714-6...	8000 ¹⁾	300	□ ³⁾	■	3	72	70	101	36	130	75	197	110	50	1.4	160	230	230	230	500	A7E32500589	19			

- Standard data on the rating plate (other operating sequences on request)
- Possible with order number suffix Z and order code F27

1) With forced cooling

2) Rated operating sequence, short-circuit: CO – 30 min – CO
Rated operating sequence, normal current: CO – 3 min – CO
Rated operating sequence, mechanical (de-energized): CO – 1 min – CO


3) On request

For three-circuit-breaker-solution for "phase-segregated" design, see page 12


Number of operating cycles

The maximum permissible number of mechanical operating cycles is 10,000. Short-circuit breaking operations have been tested and proved under various conditions according to IEC/IEEE 62271-37-013. As regards the electrical endurance, values ranging beyond this depend on the specific case of application.


Dimension drawings for high-current and generator circuit-breakers 17.5 kV

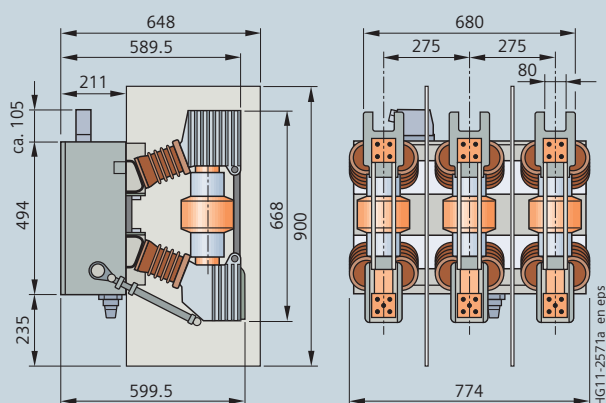

Dimension drawing 17

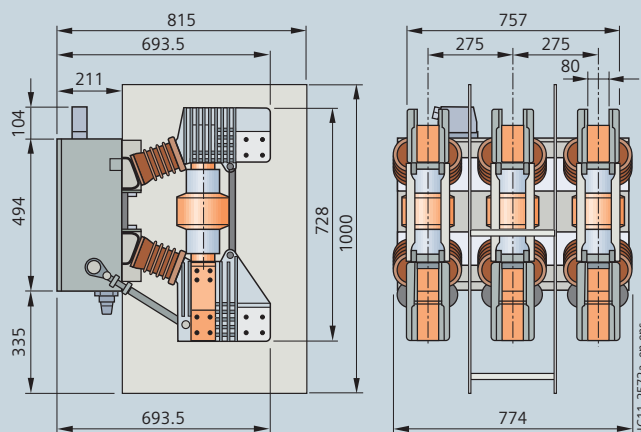

Dimension drawing 18

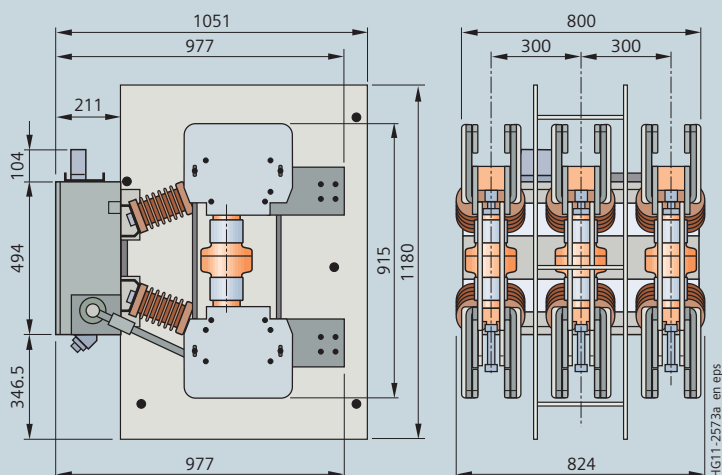

Dimension drawing 19

Technical Data

Electrical data, dimensions, weights and dimension drawings

high-current and generator circuit-breakers according to IEC/IEEE 62271-37-013

Order No.	24 kV 50/60 Hz																					
	Rated normal current	Pole-centre distance	Rated operating sequence: 2)		Rated duration of short-circuit	System side			Generator side			Rated short-circuit making current (at 50/60 Hz)	Rated lightning impulse withstand voltage	Rated short-duration power-frequency withstand voltage	Voltage drop ΔU between connections (according to IEC 62271-1 at DC 100 A)	Minimum creepage distance, interrupter	Minimum creepage distance, phase-to-earth	Minimum clearance, phase-to-phase	Minimum clearance, phase-to-earth	Weights	Detailed dimension drawing (can be ordered)	Catalog dimension drawing no. (see page 49)
	I_r		O – 3 min – CO – 3 min – CO	O – 30 min – CO		Rated short-circuit breaking current	DC component in % of the rated short-circuit breaking current	Asymmetrical breaking current	Rated short-circuit breaking current	DC component in % of the rated short-circuit breaking current	Asymmetrical breaking current											
	A	mm		s		kA	%	kA	kA	%	kA											
3AH3 722-2...	3150	300	□ ■	3	50	75	73	25	130	52	137	125	60	1.6	160	210	211	160	350	A7E32500913	20	
3AH3 722-3...	4000	300	□ ■	3	50	75	73	25	130	52	137	125	60	1.6	160	210	211	160	350	A7E32500597	20	
3AH3 722-4...	5000	300	□ ■	3	50	75	73	25	130	52	137	125	60	1.6	160	210	231	157	470	A7E32500914	21	
3AH3 722-5...	6300	300	□ ■	3	50	75	73	25	130	52	137	125	60	1.6	160	210	231	157	500	A7E32500910	21	
3AH3 722-6...	8000 ¹⁾	300	□ ■	3	50	75	73	25	130	52	137	125	60	1.6	160	207	293	170	500	A7E32500910	21	
3AH3 723-2...	3150	300	□ ■	3	63	70	89	31.5	130	66	173	125	60	1.6	160	210	212	156	350	A7E32500915	20	
3AH3 723-3...	4000	300	□ ■	3	63	70	89	31.5	130	66	173	125	60	1.6	160	210	212	156	350	A7E32500909	20	
3AH3 723-4...	5000	300	□ ■	3	63	70	89	31.5	130	66	173	125	60	1.6	160	210	231	157	470	A7E32500916	21	
3AH3 723-5...	6300	300	□ ■	3	63	70	89	31.5	130	66	173	125	60	1.6	160	210	231	157	500	A7E32500911	21	
3AH3 723-6...	8000 ¹⁾	300	□ ■	3	63	70	89	31.5	130	66	173	125	60	1.6	160	207	293	170	500	A7E32500911	21	
3AH3 724-2...	3150	300	□ ³⁾ ■	3	72	70	101	36	130	75	197	125	60	1.6	160	210	212	156	350	A7E32500917	20	
3AH3 724-3...	4000	300	□ ³⁾ ■	3	72	70	101	36	130	75	197	125	60	1.6	160	210	212	156	350	A7E32500918	20	
3AH3 724-4...	5000	300	□ ³⁾ ■	3	72	70	101	36	130	75	197	125	60	1.6	160	210	231	157	470	A7E32500919	21	
3AH3 724-5...	6300	300	□ ³⁾ ■	3	72	70	101	36	130	75	197	125	60	1.6	160	210	231	157	500	A7E32500920	21	
3AH3 724-6...	8000 ¹⁾	300	□ ³⁾ ■	3	72	70	101	36	130	75	197	125	60	1.6	160	207	293	170	500	A7E32500920	21	

■ Standard data on the rating plate (other operating sequences on request)

□ Possible with order number suffix Z and order code F27

1) With forced cooling

2) Rated operating sequence, short-circuit: CO – 30 min – CO

Rated operating sequence, normal current: CO – 3 min – CO


Rated operating sequence, mechanical (de-energized): CO – 1 min – CO

3) On request


Number of operating cycles

The maximum permissible number of mechanical operating cycles is 10,000. Short-circuit breaking operations have been tested and proved under various conditions according to IEC/IEEE 62271-37-013. As regards the electrical endurance, values ranging beyond this depend on the specific case of application.

Dimension drawings for high-current and generator circuit-breakers 24 kV

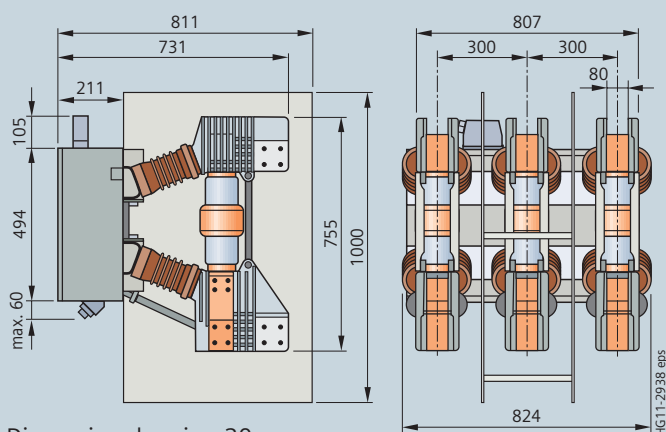


Dimension drawing 20

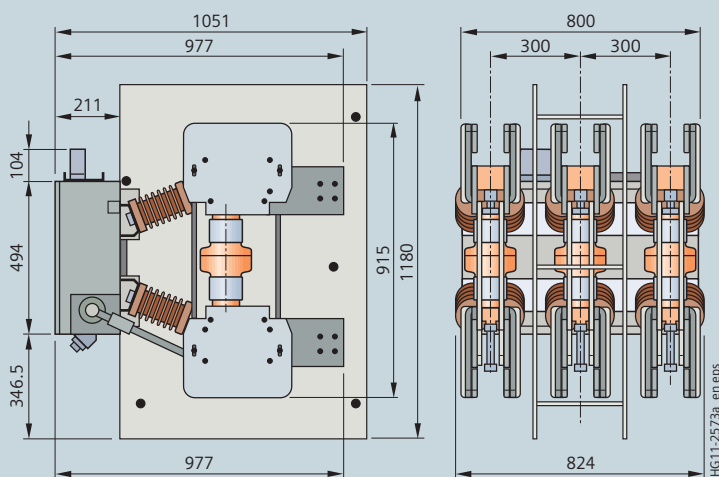


Dimension drawing 21

Circuit diagrams


The circuit diagrams shown here are examples from the manifold possibilities of circuit-breaker wiring.

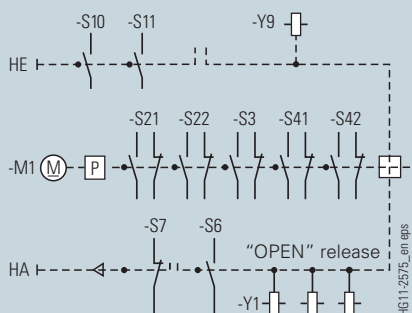


Manual closing – manual opening with auxiliary switch 6 NO + 6 NC

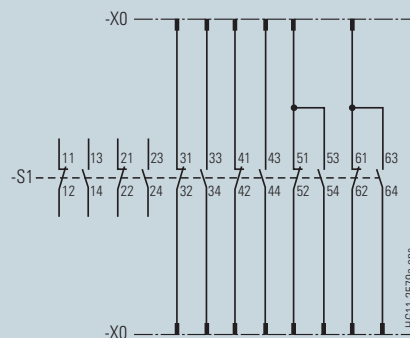

Contacts available for customer with basic circuit-breaker equipment and auxiliary switch 6 NO + 6 NC

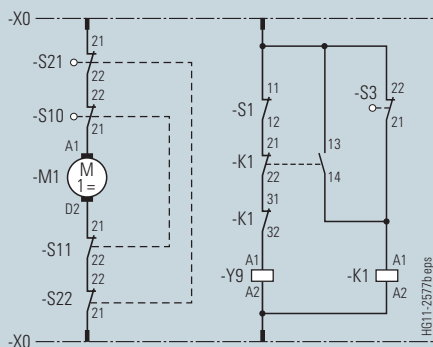


Motor operating mechanism with manual mechanical closing

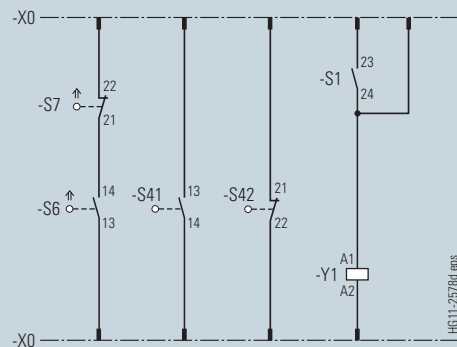


Circuit-breaker tripping signal Signal "closing spring charged" 1st shunt release

Additional equipment: Motor operating mechanism with manual electrical closing

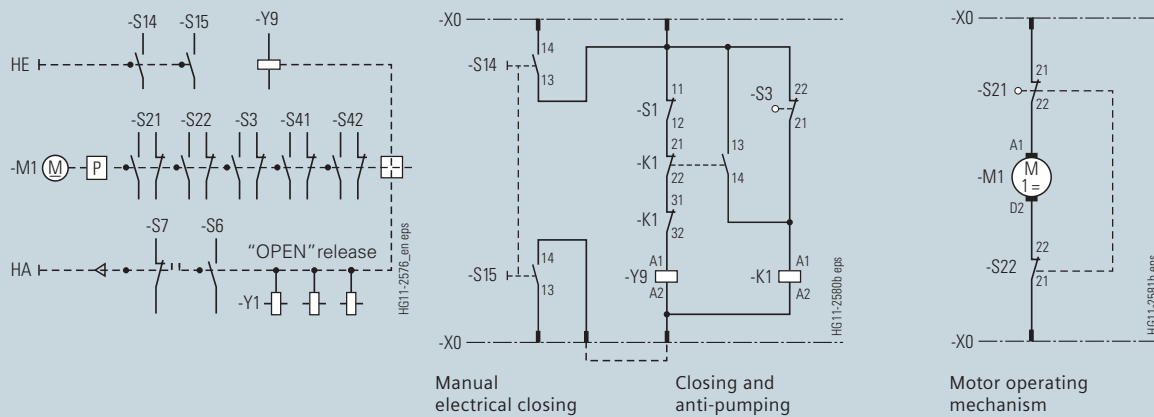


Additional equipment: Auxiliary switch

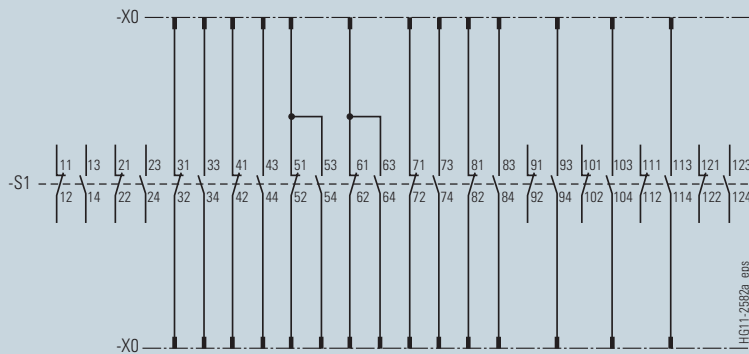

Contacts available for customer with basic circuit-breaker equipment
Auxiliary switch –S1 (12 NO + 12 NC) instead of auxiliary switch 6 NO + 6 NC

Additional equipment: Releases

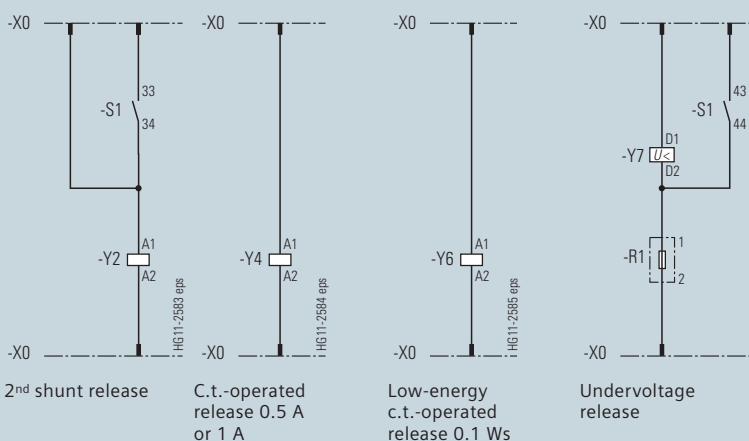

Legend (valid for pages 50 and 51)

HA	Manual opening	S1	Auxiliary switch	S14,	Manual electrical	X0	Lower part of plug/terminal strip
HE	Manual closing	S3	Position switch (opens when closing spring is charged)	S15	closing	Y1	1 st shunt release
K1	Contactor (anti-pumping)	S6	Circuit-breaker tripping signal	S21,	Position switches	Y2	2 nd shunt release
M1	Motor operating mechanism	S7	Cutout switch for circuit-breaker tripping signal	S22	(to de-energize the motor operating mechanism after charging)	Y4	Current-transformer operated release
P	Energy store	S10,	Anti-pumping for manual closing	S41,	Position switches	Y6	Low-energy current-transformer operated release
R1	Resistance	S11		S42	(to indicate the charging state)	Y7	Undervoltage release
						Y9	Closing solenoid

Technical Data

Operating times, short-circuit protection of motors, consumption data of releases

Operating times

Operating times at rated voltage of the secondary circuit	Equipment of circuit-breaker	Operating time of circuit-breaker
Closing time	–	< 75 ms ¹⁾
Opening time	1 st shunt release	< 60 ms ¹⁾
	2 nd and 3 rd release	< 55 ms
Arcing time	–	< 15 ms
Break time	1 st shunt release	< 75 ms
	2 nd and 3 rd release	< 70 ms
Dead time	–	300 ms
CLOSE/OPEN contact time	1 st shunt release	< 90 ms
	2 nd and 3 rd release	< 70 ms
Minimum command duration	Closing solenoid	45 ms
	1 st shunt release	100 ms
	2 nd and 3 rd release	20 ms
Pulse time for circuit-breaker tripping signal	1 st shunt release	> 15 ms
	2 nd and 3 rd release	> 10 ms
Charging time for electrical operation	–	< 15 s
Synchronism error between the poles	–	≤ 2 ms

1) Shorter operating times on request.

Short-circuit protection of motors (fuse protection of drive motors)

Rated voltage of the motor V	Operating voltage		Power consumption of the motor		Smallest possible rated current ²⁾ of the m.c.b. (miniature circuit-breaker) with C-characteristic A
	max. V	min. V	W (at DC)	VA (at AC)	
24 DC	26	20	750	–	16
48 DC	53	41	750	–	10
60 DC	66	51	750	–	6
110 DC	121	93	1000	–	4
220 DC	242	187	1000	–	2
110 AC	121	93	–	1000	6
230 AC	244	187	–	1000	3

2) The current inrush in the drive motor can be neglected due to its very short presence.

Consumption data of releases

Release	Power consumption		Operating ranges for IEC 62271-100 circuit-breaker ⁴⁾	
	Operation at		Tripping voltage	Tripping voltage or tripping current
	DC approx. W	AC 50/60 Hz approx. VA	at DC	at AC 50/60 Hz
Closing solenoid 3AY15 10	140	140	85 to 110 % U	85 to 110 % U
1 st shunt release (without energy store) 3AY15 10	140	140	70 to 110 % U	85 to 110 % U
2 nd shunt release (with energy store) 3AX11 01	60	60	70 to 110 % U	85 to 110 % U
Undervoltage release 3AY11 03	20	20	35 to 0 % U	35 to 0 % U
Current-transformer operated release 3AX11 02 (rated normal current 0.5 or 1 A)	–	10 ³⁾	–	90 to 110 % I _a
Current-transformer operated release 3AX11 04 (tripping pulse ≥ 0.1 Ws)	–	–	–	–

3) Consumption at pickup current (90 % of the rated normal current) and open armature.

4) The operating ranges for generator circuit-breakers according to IEC/IEEE 62271-37-013 (3AH36, 37, 38) follow the the standard specification:

Table – Preferred values of supply voltages and their ranges for closing and opening devices and of auxiliary and control circuits of generator circuit-breakers

Direct current voltage ranges			Alternating current voltage ranges	
Preferred supply voltage U _a	Closing and auxiliary functions	Tripping functions	Preferred supply voltage U _a	Closing and auxiliary functions
V	V	V	V	V
48	36 – 56	28 – 56	120	104 – 127
110 – 125	90 – 140	70 – 140	240	208 – 254
220 – 250	180 – 280	140 – 280		



Brandenburg Gate, Berlin, Germany

R-HG11-181.tif



Switchgear Factory in Berlin, Germany

R-HG11-180.qps

Contents	Page
Annex	53
Inquiry form	54
Configuration instructions	55
Configuration aid	Foldout page

Annex

Inquiry form

Please copy, fill in and return to your Siemens partner.

Inquiry concerning

- ☐ 3AH3 high-current circuit-breaker
- ☐ 3AH37/38 generator circuit-breaker

Please

- ☐ Submit an offer
- ☐ Call us
- ☐ Visit us

Your address

Company

Dept.

Name

Street

Postal code/city

Phone

Fax

E-mail

Siemens AG

Dept.

Name

Street

Postal code/city

Country

Fax

Technical data

	Other values			
Rated voltage	<input type="checkbox"/> 7.2 kV <input type="checkbox"/> 24 kV	<input type="checkbox"/> 12 kV <input type="checkbox"/> 36 kV	<input type="checkbox"/> 17.5 kV <input type="checkbox"/> 40.5 kV	<input type="checkbox"/> ___ kV
Rated lightning impulse withstand voltage	<input type="checkbox"/> 60 kV <input type="checkbox"/> 125 kV	<input type="checkbox"/> 75 kV <input type="checkbox"/> 170 kV	<input type="checkbox"/> 95 kV <input type="checkbox"/> 195 kV	<input type="checkbox"/> 110 kV <input type="checkbox"/> ___ kV
Rated short-duration power-frequency withstand voltage	<input type="checkbox"/> 20 kV <input type="checkbox"/> 50 kV	<input type="checkbox"/> 32 kV <input type="checkbox"/> 70 kV	<input type="checkbox"/> 36 kV <input type="checkbox"/> 95 kV	<input type="checkbox"/> 38 kV <input type="checkbox"/> ___ kV
Rated short-circuit breaking current	<input type="checkbox"/> 31.5 kA <input type="checkbox"/> 63 kA	<input type="checkbox"/> 40 kA <input type="checkbox"/> 72 kA	<input type="checkbox"/> 50 kA <input type="checkbox"/> 80 kA	<input type="checkbox"/> 90 kA <input type="checkbox"/> ___ kA
Rated normal current	<input type="checkbox"/> 1250 A <input type="checkbox"/> 4000 A <input type="checkbox"/> 10000 A	<input type="checkbox"/> 2000 A <input type="checkbox"/> 5000 A <input type="checkbox"/> 12000 A	<input type="checkbox"/> 2500 A <input type="checkbox"/> 6300 A	<input type="checkbox"/> 3150 A <input type="checkbox"/> 8000 A <input type="checkbox"/> ___ A
Pole-centre distance	<input type="checkbox"/> 210 mm	<input type="checkbox"/> 275 mm	<input type="checkbox"/> 300 mm	<input type="checkbox"/> 350 mm

Secondary equipment

For possible combinations see pages 19 to 26

Circuit-breaker equipment	<input type="checkbox"/> Manual mechanical closing <input type="checkbox"/> Manual electrical closing <input type="checkbox"/> Manual operating mechanism			
Motor operating mechanism	<input type="checkbox"/> ___ V DC		<input type="checkbox"/> ___ V AC, ___ Hz	
Closing solenoid	<input type="checkbox"/> ___ V DC		<input type="checkbox"/> ___ V AC, ___ Hz	
1 st shunt release	<input type="checkbox"/> ___ V DC		<input type="checkbox"/> ___ V AC, ___ Hz	
2 nd shunt release	<input type="checkbox"/> ___ V DC		<input type="checkbox"/> ___ V AC, ___ Hz	
3 rd shunt release	<input type="checkbox"/> ___ V DC		<input type="checkbox"/> ___ V AC, ___ Hz	
Current-transformer operated release	<input type="checkbox"/> 0.5 A	<input type="checkbox"/> 1 A	<input type="checkbox"/> ≥ 0.1 Ws (10 Ω)	<input type="checkbox"/> ≥ 0.1 Ws (20 Ω)
Undervoltage release	<input type="checkbox"/> ___ V DC		<input type="checkbox"/> ___ V AC, ___ Hz	
	<input type="checkbox"/> Without energy store		<input type="checkbox"/> With energy store	
Auxiliary switch	<input type="checkbox"/> 6 NO + 6 NC		<input type="checkbox"/> 12 NO + 12 NC	
Low-voltage connection	<input type="checkbox"/> 24-pole terminal strip	<input type="checkbox"/> 24-pole plug	<input type="checkbox"/> 64-pole plug	
<input type="checkbox"/> Mechanical interlocking				
Operating instructions	<input type="checkbox"/> English	<input type="checkbox"/> German	<input type="checkbox"/> French	<input type="checkbox"/> Spanish

Application and other requirements

☐ Please check off

___ Please fill in

You prefer to configure your 3AH3 vacuum circuit-breaker on your own?

Follow the steps to the configuration and enter the order number in the configuration aid.

Or you may also use our online configuration tool on our homepage:

<https://mall.industry.siemens.com/mall/en/de/Catalog/Configurators>

Instruction for configuration of the 3AH3 vacuum circuit-breaker

1st step: Definition of the primary part (see pages 15 to 18)

Please specify the following ratings:	Possible options:
Rated voltage (U_r)	U_r : 7.2 kV to 40.5 kV
Rated lightning impulse withstand voltage (U_p)	U_p : 60 kV to 195 kV
Rated short-duration power-frequency withstand voltage (U_d)	U_d : 20 kV to 95 kV
Rated short-circuit breaking current (I_{sc})	I_{sc} : 31.5 kA to 90 kA
Rated normal current (I_r)	I_r : 1250 A to 12000 A
Pole-centre distance	210 mm to 350 mm

These ratings define the positions 4 to 8 of the order number.

2nd step: Definition of the secondary equipment (see pages 19 to 26)

Please specify the following equipment features:	Possible options:
Release combination (position 9)	Shunt release, current-transformer operated release and undervoltage release
Closing solenoid (position 10)	Operating voltages from 24 V DC to 240 V AC
Operating voltage of the releases (positions 11/12)	Operating voltages from 24 V DC to 240 V AC
Type of local closing (position 10)	Mechanical closing, manual electrical closing
Type of operating mechanism and operating voltage of a motor, if available (position 14)	Motor operating stored-energy mechanism with operating voltages from 24 V DC to 240 V AC
Number of auxiliary contacts (position 15)	6 NO + 6 NC, 12 NO + 12 NC
Design of the secondary connection (position 15)	24-pole terminal strip, 24-pole plug connector, 64-pole plug connector
Language of the documentation (position 16)	English, German, French, Spanish, other languages on request
Frequency of the operating voltage of the secondary equipment at AC (position 16)	50 Hz/60 Hz

These equipment features define the positions 9 to 16 of the order number.

3rd step: Do you have any further requirements concerning the equipment? (Please refer to page 27)

Your Siemens sales partner will be pleased to support you.

1	2	3	4	5	6	7	-	8	9	10	11	12	-	13	14	15	16	
3	A	H	3	■	■	■	-	■	■	■	■	■	-	■	■	■	Z	
				See page 15 to page 18					See page 19	See page 20	See page 21	See page 22		See page 23	See page 24	See page 25	See page 26	See page 27

3	A	H	3				-						-				
---	---	---	---	--	--	--	---	--	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

3	A	H	3				-						-				
---	---	---	---	--	--	--	---	--	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

3	A	H	3				-						-				
---	---	---	---	--	--	--	---	--	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

3	A	H	3				-						-				
---	---	---	---	--	--	--	---	--	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

3	A	H	3				-						-				
---	---	---	---	--	--	--	---	--	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

3	A	H	3				-						-				
---	---	---	---	--	--	--	---	--	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

3	A	H	3				-						-				
---	---	---	---	--	--	--	---	--	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

3	A	H	3				-						-				
---	---	---	---	--	--	--	---	--	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--

				+				+					+				
--	--	--	--	---	--	--	--	---	--	--	--	--	---	--	--	--	--



Published by
Siemens AG 2018

Energy Management Division
Medium Voltage & Systems
Nonnendammallee 104
13623 Berlin, Germany

For further information please contact
our Customer Support Center
Phone: +49 180 524 70 00
Fax: +49 180 524 24 71
E-mail: support.energy@siemens.com

Article No. EMMS-K1511-A031-A6-7600
Printed in Germany
Dispo 18301
PU 184/364 KG 09.18 0.4

Subject to changes and errors. The information
given in this document only contains general
descriptions and/or performance features which
may not always specifically reflect those described,
or which may undergo modification in the course
of further development of the products.

The requested performance features are binding
only when they are expressly agreed upon in the
concluded contract.

2018

