

A smiling couple in a field. The woman is wearing a red sari and the man is wearing a striped kurta and an orange turban. They are standing next to a large pipe that is spraying water. The background is a clear blue sky and a green field.

SIEMENS

Ingenuity for life

Agriculture Starter complying to latest standards

Automatic Star Delta Starters IEC 60947-4-1:
2012 Compliant

Direct-on-Line Starters ISI Marked-BIS Approved

www.siemens.co.in

Tried, Tested and Trusted Start with Siemens Agriculture Starters

For more than 125 years, Siemens has been developing and manufacturing world-class, control products. Siemens offers a wide range of starters to cater to diversified demands from Agriculture Sector .These products are specially designed to provide smart, easy and reliable motor starting solution.

They employ tried and tested Siemens contactors and relay and this ensures the right start for motors requiring direct online starting or star delta starting.



Direct on line Starter (DOL) RAJA+


3TW7291-1A...

Range: 0.25kW to 7.5kW

0.33HP to 10HP

Method of starting

A. DOL starting method:

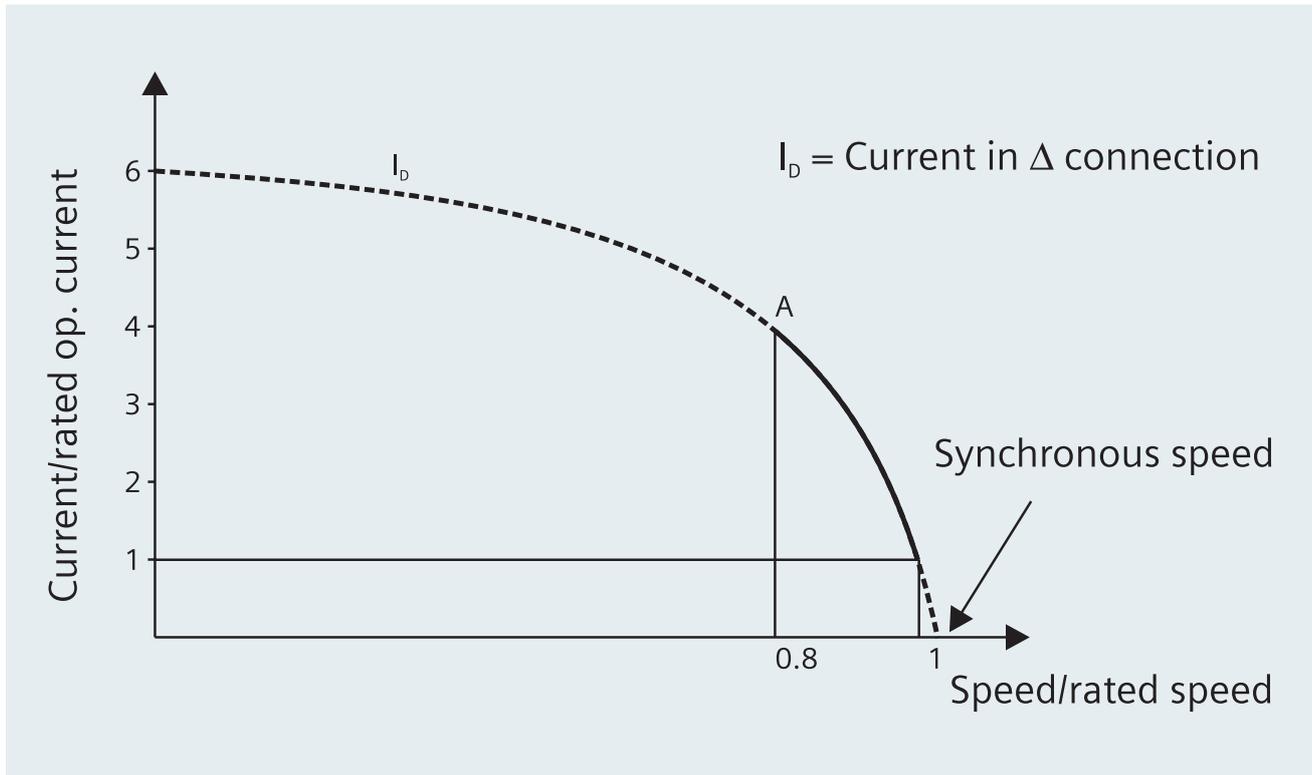

The most economical and popular method of starting squirrel cage induction motors, is direct-on-line, where the starter is connected directly across the supply. However, the starting current at the moment of switching Direct-on-line can be as high as 6-8 times the rated current.

Advantages:

High starting torque, shorter starting time, simple construction and wiring, space saving etc.

Disadvantages:

High starting current

Applications:

DOL: As we know, A direct on line starter can be used if the high inrush current of the motor does not cause excessive voltage drop in the supply circuit. It can be used to start small agriculture water pumps, compressors, fans and conveyer belts.etc.

Construction



Contactor:

The DOL starter up to 10 HP is fitted with 3TS3 Contactor. This contactor is specially designed by Siemens considering the requirements of industry as well as agriculture. Considering the specific need of the agricultural pump set applications, Siemens has designed a special wide band coil (200-400V). This coil operates reliably even when there is wide voltage fluctuation.

The Starters will now come with 3TS Contactors which will in turn make the starter more reliable with enhanced electrical and mechanical life.

Bimetal Overload Relay:

The RAJA direct-on-line starter is fitted with 3UW5 relay. These relays are computer calibrated and therefore, offer accurate protection. The main benefit of this bimetal relay is the built-in single phasing protection in addition to the overload protection. Relay has Automatic reset function after cooling time of 4 sec approx, completely reduce Manual dependency.

Push buttons

Push buttons are used for switching 'ON' and 'OFF' the starter. Twin push button comes with 'Locked Off' feature which helps in avoiding nuisance switching ON of pump.

Operation:

In DOL starting, the 'ON' push button is pressed, which energizes the contactor coil, thus switching on the circuit. When the OFF' push button is pressed, the contactor is de-energized, switching off the circuit. The bimetal relay under normal functioning of motor plays no active part in the starter. But under overload, single phasing or locked rotor conditions of Motor, the bimetal relay cuts-off the supply to the contactor coil, tripping the circuit. The contactor itself provides the necessary 'no-voltage' protection in so far as it will drop out in the case of a supply failure, and for restarting on resumption of supply, the 'ON' push button will have to be pressed again.

Reliability:

- 3TW72 range of DOL starters are having option of 200-400 V Coil voltage which takes care of wide fluctuations in supply.
- Accurate protection under single phasing & overload.
- With ISI marking, it ensures more safety for the end user.
- With 3TS contactors fitted into it, ensures more electrical and mechanical life of the Starter.
- With Locked off feature, ensures that undesirable switching on of the Starter is prohibited.
- No Auto start only Auto reset of Bimetal relay and it needs Manual Acknowledgement to again ON the Starter.

Key Highlights



Latched OFF feature available



RAJA Starter with ISI mark



Fitted with 3TS Contactors and 3US over load relays

Technical Details of the Starter

Table A:

Motor Rating At 415V 3ph 50Hz		Starter Type	Relay 3UW51		Back-up Fuse Rating		Cu Cable (mm ²) size	Max. Full Load Current (Amp)		
HP	kW		Range	Code ##	HRC type 3NA 7	Rewirable		3Ph, 415V, 4P Squirrel Cage IS 8789:1996 Table 4	3Ph, 415V, 2P Submersible motor IS 9283:1995 Table 2	1Ph, 240V, CSIR or Split-Phase IS 996-1979 Table 9
0.33	0.25	3TW7291-1A* 64	0.63-1	0J	2A	36 SWG	1	–	–	3.8
0.75	0.55	3TW7291-1A* 66	1-1.6	1A	6A	34 SWG	1	1.7	–	7
1	0.75	3TW7291-1A* 68	1.6-2.5	1C	6A	27 SWG	1	2.2	–	7
1.5	1.1	3TW7291-1A* 69	2-3.2	1D	10A	26 SWG	1	2.9	3.25	13
2	1.5	3TW7291-1A* 71	3.2-5	1F	16A	25 SWG	1	3.8	4.5	18
3	2.2	3TW7291-1A* 72	4-6.3	1G	16A	24 SWG	1.5	5.1	6.5	–
5	3.7	3TW7291-1A* 74	6.3-10	1J	16A	21 SWG	1.5	8.1	10	–
7.5	5.5	3TW7291-1A* 75	8-12.5	1K	25A	19 SWG	1.5	11.4	14.5	–
7.5	5.5	3TW7291-1A* 77	10-16	2A	25A	18 SWG	2.5	–	–	–
10	7.5	3TW7291-1A* 78	12.5-20	2B	32A	18 SWG	4	15.4	19.5	–


* Code for operating coil voltage, 50 Hz (B for 200-400V without tolerance W for 415V)

Spare list

Sr. No.	Description	Order No.
1	Contactors for 200-400V	3TS30-10-0AZ608K
2	Contactors for 200-400V	3TS32-10-0AZ608K
3	Contactors for 415V	3TS30-10-0AR008K
4	Contactors for 415V	3TS32-10-0AR008K
5	Relay	3UW51 02-##
6	Coil for 200-400V	3TY7 403-0AZ6
7	Coil for 415V	3TY7 403-0AR0
8	1NO Contact Block	3SB54200B
9	'ON' & 'OFF' Push Button	#

– contact sales

Raja+ Direct-on-line Starter (For Single Phase connection)

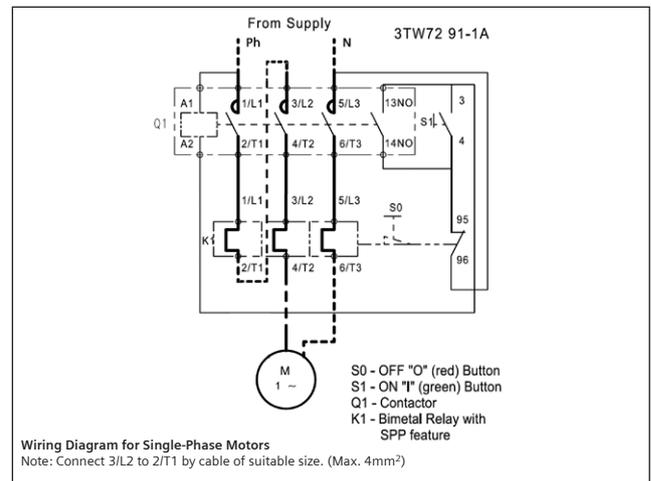


Automatic Star Delta Starter 3TE7291-0A

ASD-11 Starter (Self reset)

Range: 7.5kW to 18.5kW

10HP to 25HP

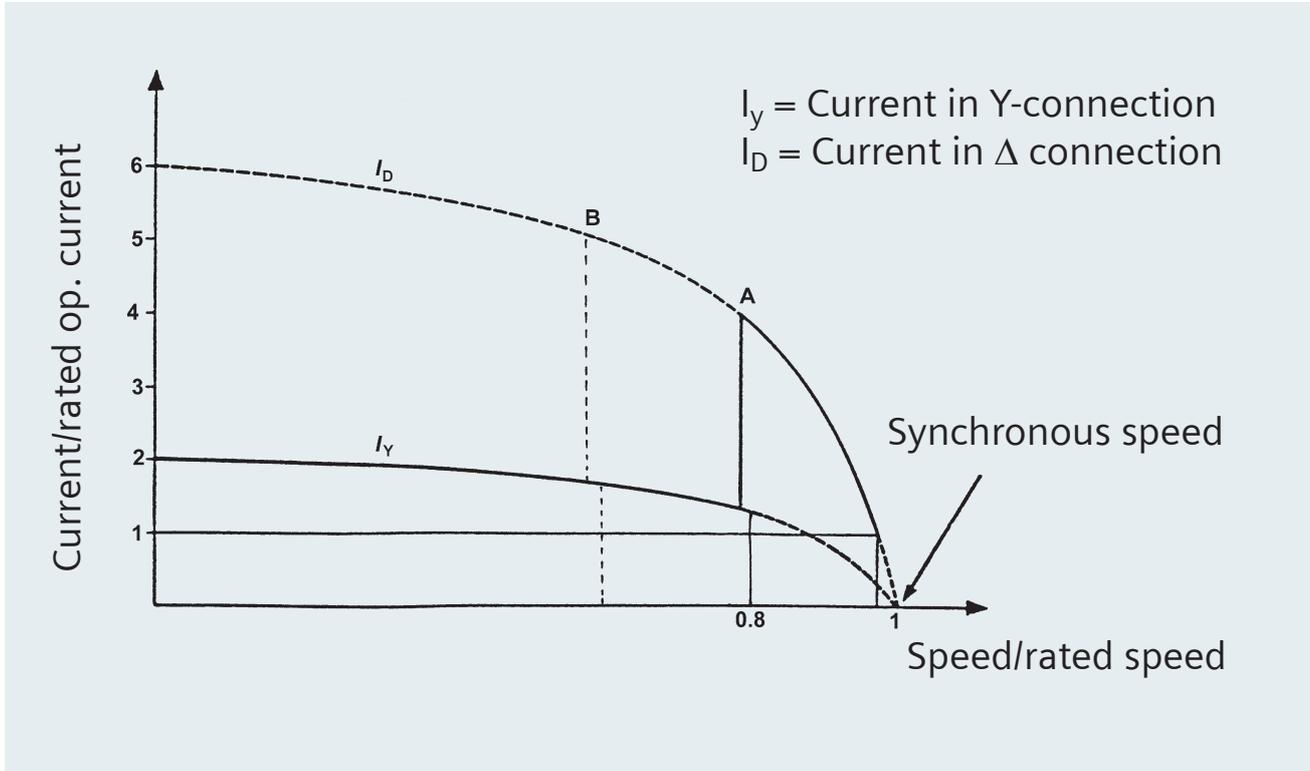

In star delta starting, initially the motor windings are connected in star. This reduces the starting current by 1/3rd of the full load current also the voltage by $(1/\sqrt{3})$ of the rated value. As the torque is proportional to the square of the voltage, the starting torque also get reduced to 1/3rd of it's full load value. Once the motor attains approximately 80% of the rated speed, the windings get connected in the delta formation.

Thus by star delta starting, the starting current is reduced to 2 to 2.5 times the rated current unlike DOL starting, where it is 7 to 8.


Advantages:

low starting current

Disadvantages:

Low / medium starting torque, longer starting time, less simpler construction and wiring, requires more space etc.

construction

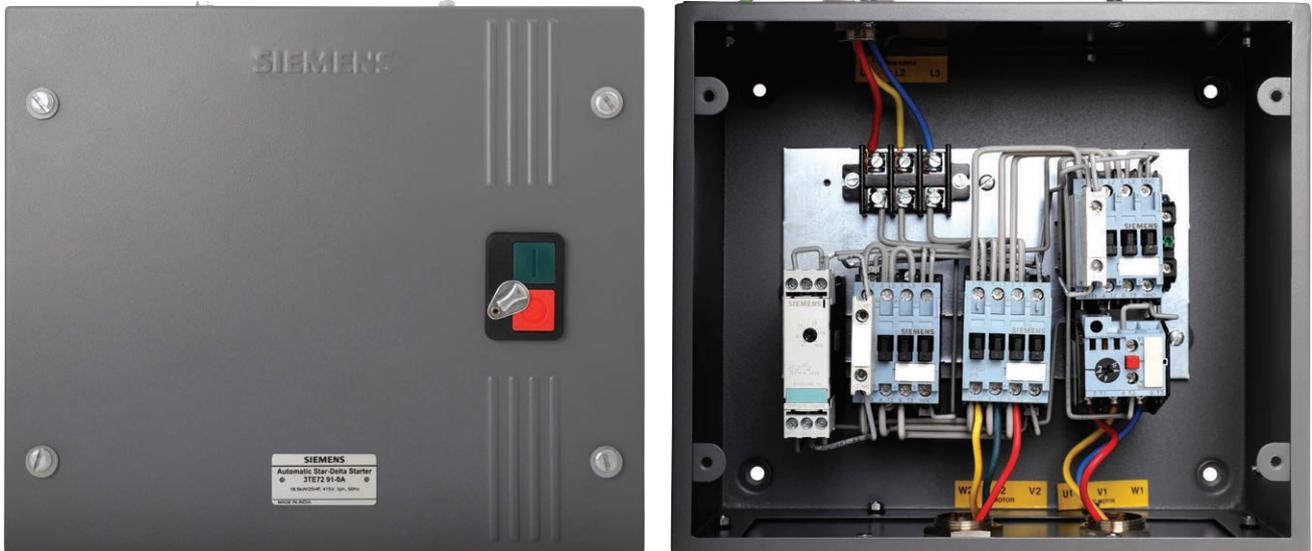

Automatic Star Delta Starters fitted with 3TS contactors

Construction:

It consists of a star-delta timer (3RP), contactor (3TS3), and overload relay (3UW51),

Operation:

In this starter, the changeover from 'star' to 'delta' is done automatically after a preset time by using a timer.

Key Highlights of Star Delta Starter



Latched OFF feature available



Compact Size



Fitted with 3TS Contactors

Technical Details of Automatic Star Delta Starter

Table A: Automatic Star - Delta Starter Type Ref: 3TE7291-0A

Motor Output at 415V (kW/HP)	I(fl) 4 Pole Squirrel cage motor		Contactor Line	Contactor Delta	Contactor Star	Recommended Overload relay at 50°C		Recommended Fuse Switch		Recommended Cu Cable size (mm ²)	
	Line current (A)	Phase current (A)	Type Reference			Type - Code	Relay Range (A)	Type	Back up HRC fuse rating(A)	Incoming (from supply)	Outgoing (tomotor)
7.5/10	16	9.2	3TS32 10-0A*08K	3TS32 01-0A*08K	3TS32 10-0A*08K	3UW51 02-1J	6.3-10	3KL812	20	2.5	1.5
9.3/12.5	19.5	11.2	3TS32 10-0A*08K	3TS32 01-0A*08K	3TS32 10-0A*08K	3UW51 02-1K	8-12.5	3KL812	25	4	2.5
11/15	23	13.2	3TS32 10-0A*08K	3TS32 01-0A*08K	3TS32 10-0A*08K	3UW51 02-2A	10-16	3KL812	25	4	2.5
15/20	32	18.4	3TS33 00-0A*08K	3TS33 00-0A*08K	3TS32 10-0A*08K	3UW52 02-2B	12.5-20	3KL812	50	10	4
18.5/25	38.5	22.2	3TS33 00-0A*08K	3TS33 00-0A*08K	3TS32 10-0A*08K	3UW52 02-2C	16-25	3KL812	50	10	4

* Code for operating coil voltage 50 Hz (Z6 for 200-400V, R0 for 415V)


Other Tables:

Star-Delta Timer:	
AC Input Voltage	MLFB
230V-400V	3RP15 76-1NP20 8K
380V-440V	3RP15 76-1NM20 8K


Spares:		
Sr. No.	Description	Order No.
1	Contactor for 200-400V	3TS30-10-0AZ608K
2	Contactor for 200-400V	3TS32-10-0AZ608K
3	Contactor for 415V	3TS30-10-0AR008K
4	Contactor for 415V	3TS32-10-0AR008K
5	Relay	3UW51 02 Refer Table A
6	Relay	3UW52 02 Refer Table A
7	Coil for 200-400V	3TY7 403-0AZ6
8	Coil for 415V	3TY7 403-0ARO
9	1NO Contact Block	3SB54200B
10	'ON' & 'OFF' Push Button	#
# – contact sales		

Single line diagrams:

DOL (Direct online starters)

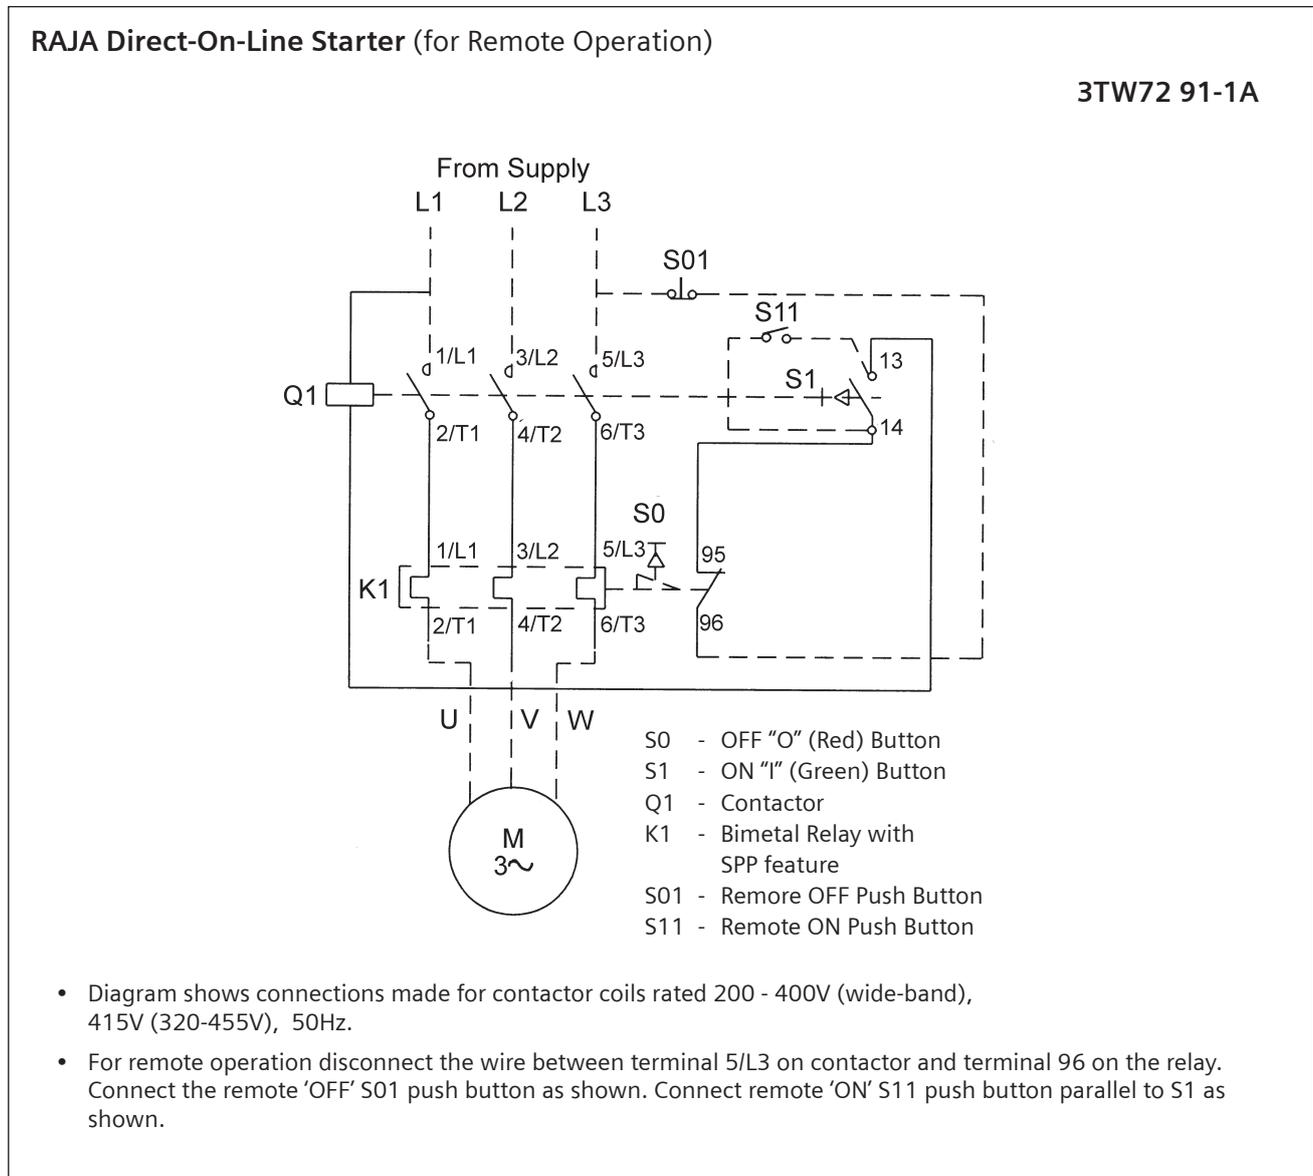

ASD (Fully automatic start delta starters)

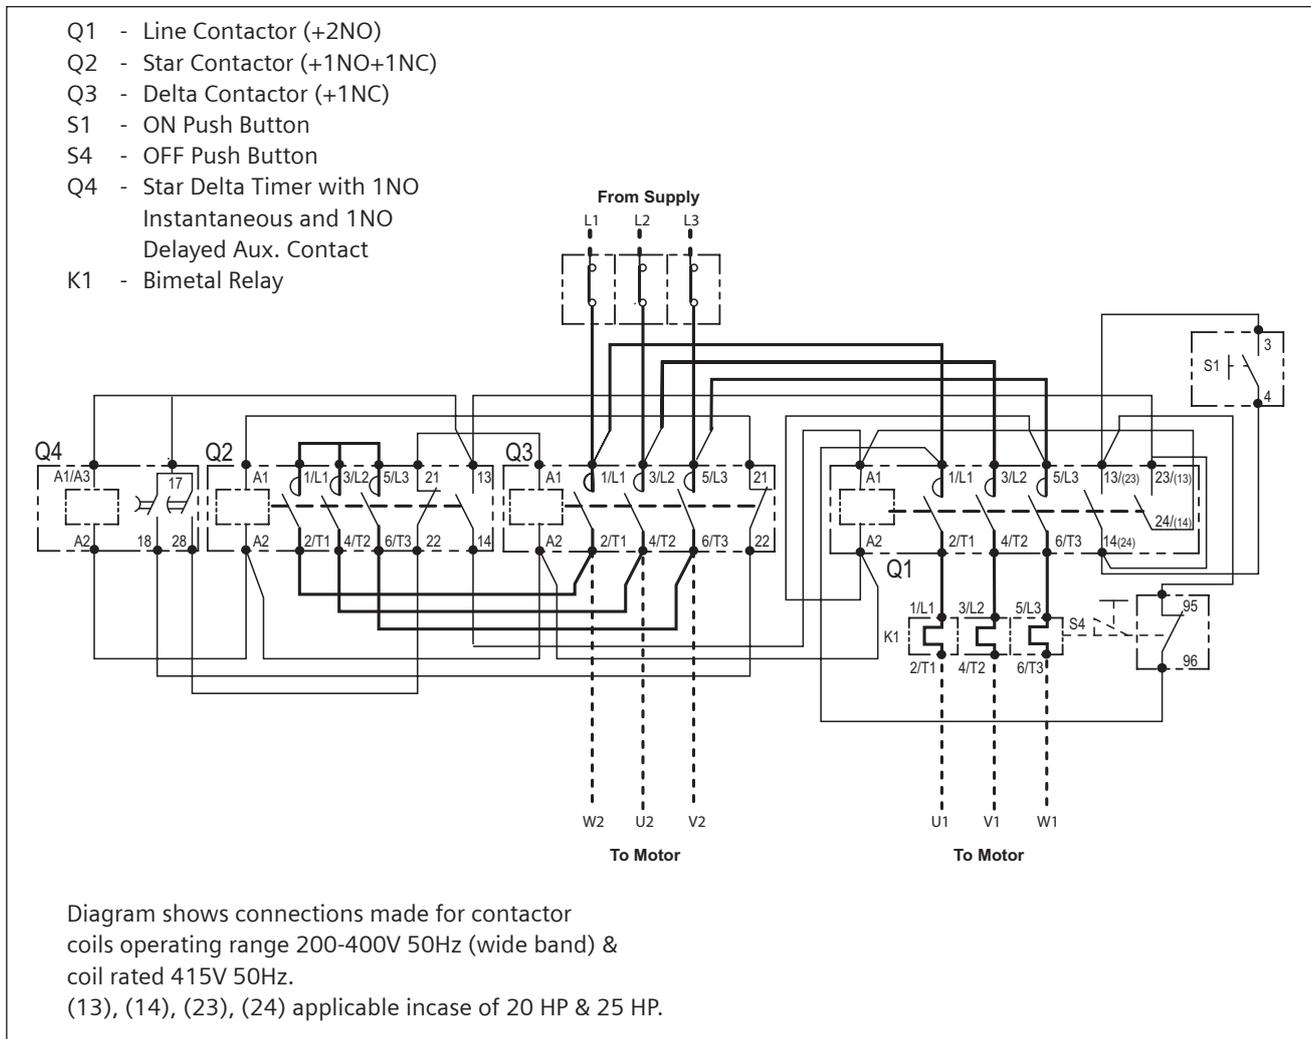


3TE72 91-0A / Automatic Star-Delta Starter Coil Voltage / Coil Operating Range = V 50Hz

Motor Output at 415V (kW/HP)	Relay Range 3UW51/52 (A)	Recommended Backup Fuse type 3NA3(A)	Recommended Cu Cable (mm sq.)	
			Incoming	Outgoing
7.5 / 10	6.3 - 10	20	2.5	1.5
9.3 / 12.5	8 - 12.5	25	4	2.5
11 / 15	10 - 16	25	4	2.5
15 / 20	12.5 - 20	50	10	4
18.5 / 25	16 - 25	50	10	4

DOL Dimensional Drawing

Raja Direct On-Line Starter

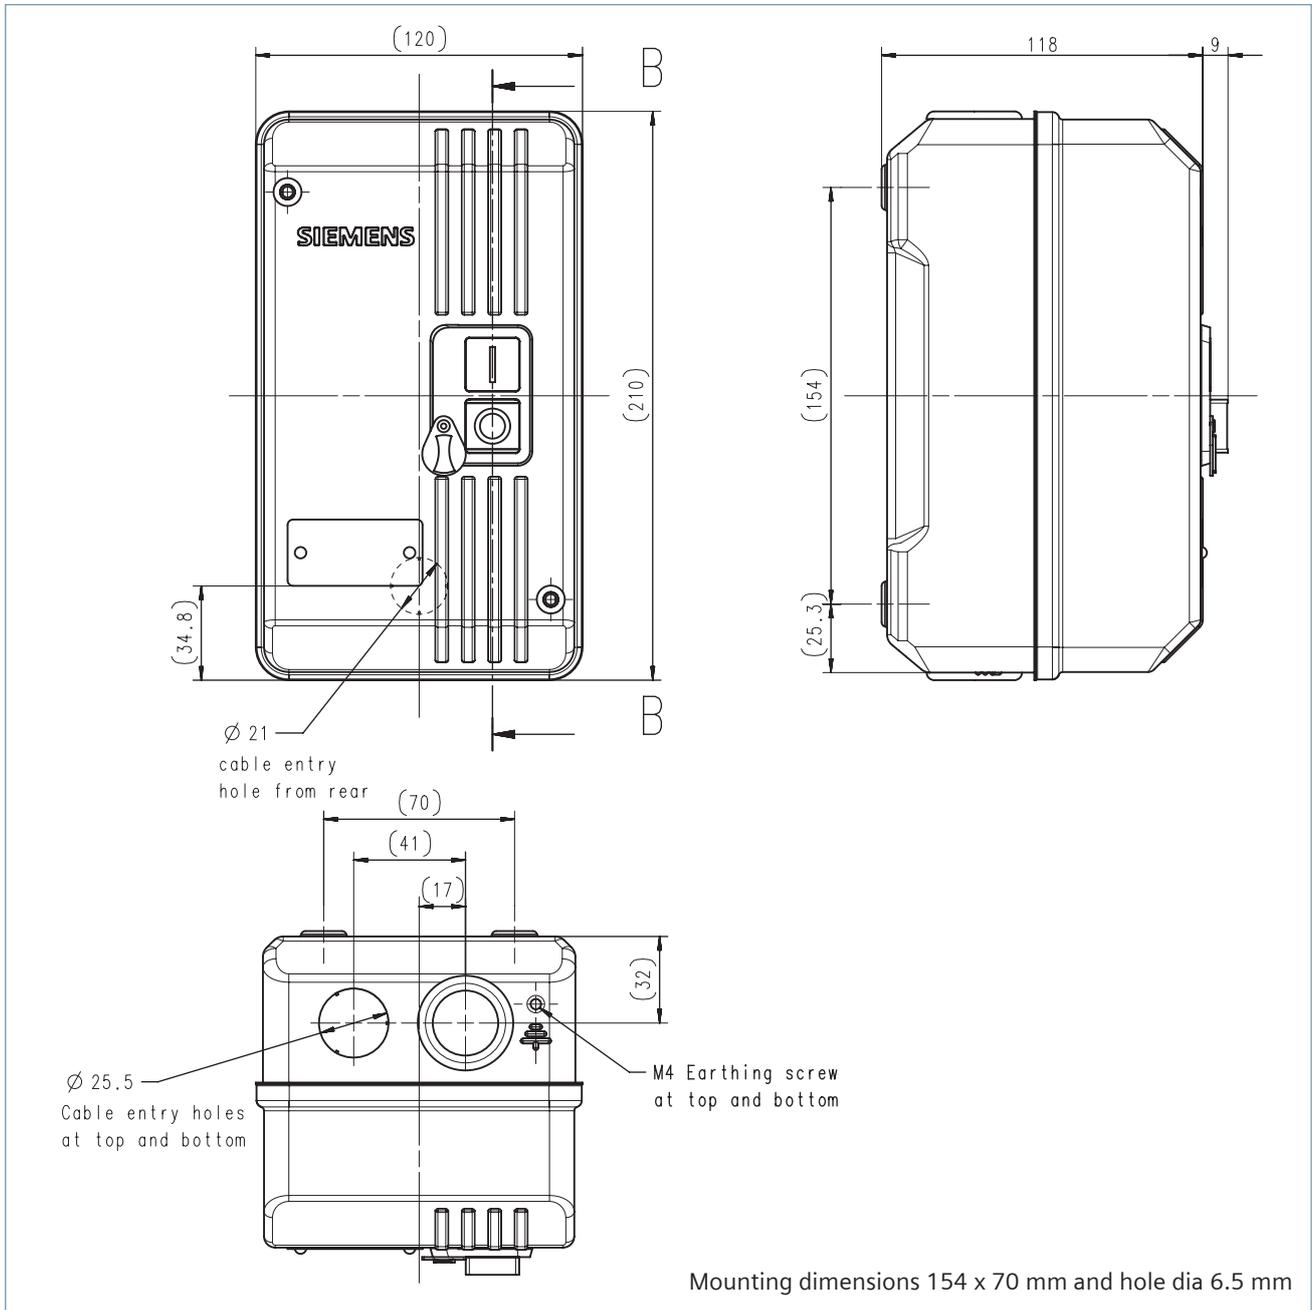

ASD Dimensional Drawing

Automatic Star Delta Starter

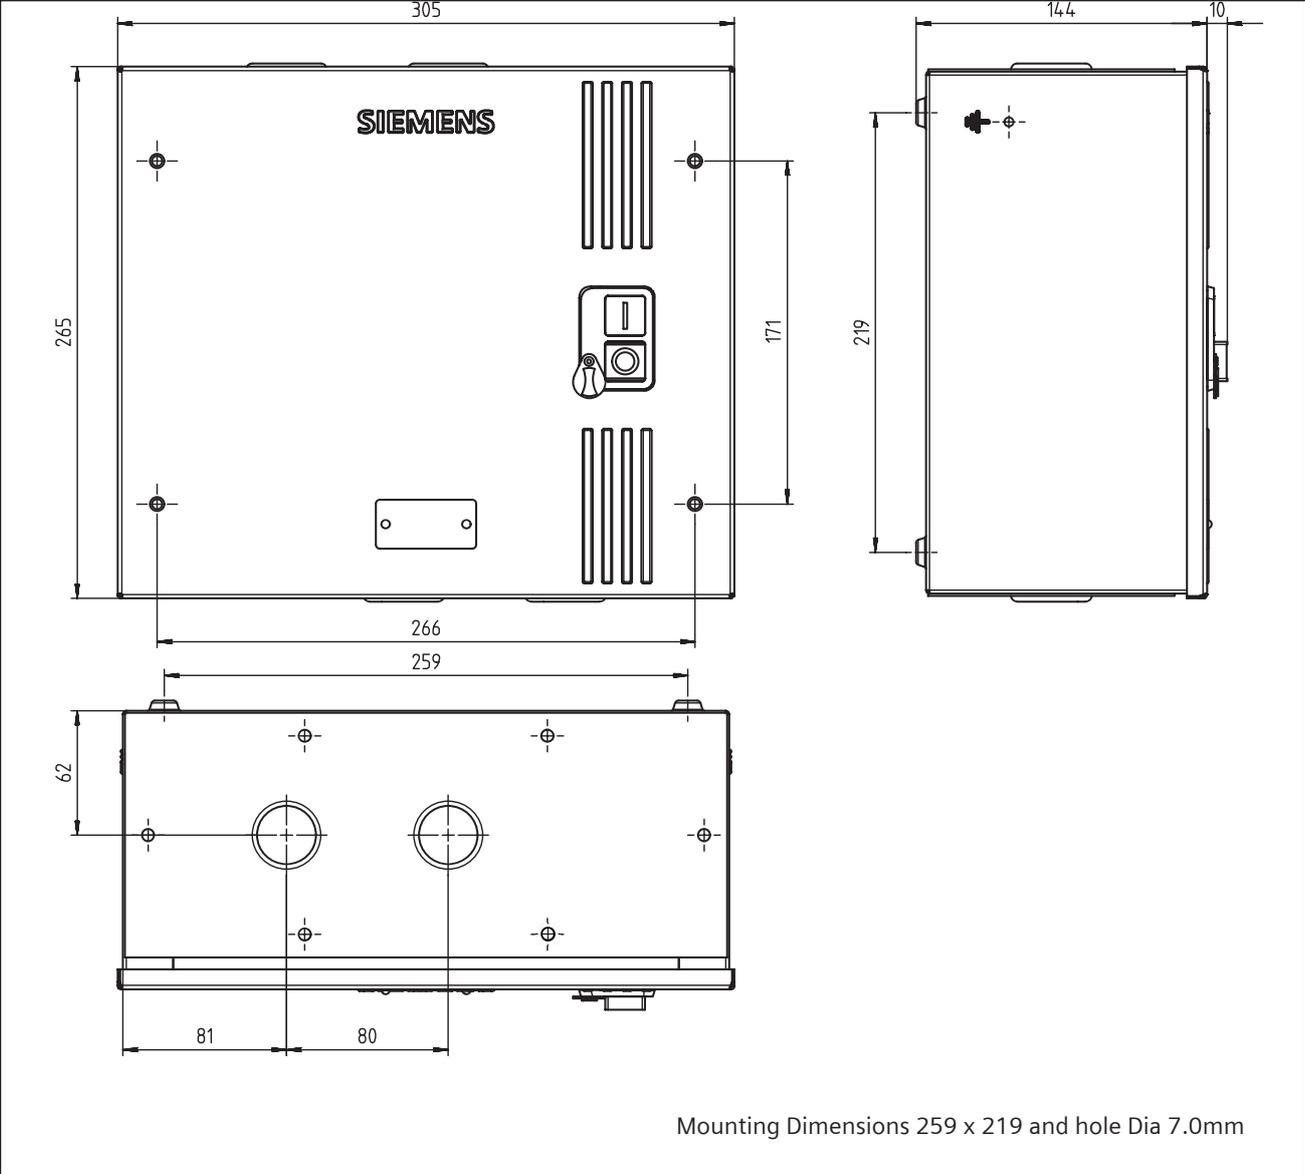


Fig. 8: Dimensional Details for 3TE72 91-0A**

Your partners

Sales offices:

Mumbai
Business Centre-1
Thane Belapur Road
Thane - 400 601
☎ : +91 22 39663000
Fax: +91 22 39663721
Mr. Satish Herlekar
☎ : 022-39677403
Mobile: +91 9820002421
Email: satish.herlekar@siemens.com

Ahmedabad
3rd Floor, Prerna Arbour
Girish Coldrinks Cross Roads
Navrangpura
Ahmedabad - 380 009
☎ : +91 79 30927600
Fax: +91 79 30927699

Mr. Pradeep Ajadia
Mobile: +91 9099052797
Email: pradeep.ajadia@siemens.com

Pune
Tower B/701-705, ICC Trade Tower
403A, Senapati Bapat Road
Pune - 411016
☎ : +91 20 30466000
Fax: +91 20 30466060

Mr. Kailas Kulkarni
☎ : 020-30466078
Mobile: +91 9921216399
Email: kailas.kulkarni@siemens.com

Gurgaon
Plot No -78, Tower -B
Jagatjit Industries Building (JIL)
Opposite SBI Academy, Sector-18
Gurgaon - 122015
☎ : +91 124 2842000, 3810200

Mr. Brijendra Yadav
☎ : 0124-3846022
Mobile: +91 9910598050
Email: brijendra.yadav@siemens.com

User Support

Pune
Tower B/701-705
ICC Trade Tower
403, A, Senapati Bapat Road
Pune - 411016

Mr. Sandip Pachapurkar
☎ : 020-30466122
Mobile: +91 9594947303
Email: sandip.pachapurkar@siemens.com

Jaipur
6, Park Street
Opp. Pink City Petrol Pump
M.I. Road
Jaipur - 302 006, Rajasthan
☎ : +91 141 5152108
Fax: +91 141 2370482

Kolkata
3rd Floor, 43, Shanti Pally
Rash Behari Connector
E.M. ByPass
Kolkata 700042, India

Mr. Avijit Paik
☎ : 033-30172022
Mobile: +91 9830258141
Email: avijit.paik@siemens.com

Jamshedpur
"Roshan Tower"
Main Road, Bistupur (2nd Floor)
Jamshedpur - 831001
☎ : +91 657 6682201
Mr. Sanjoy Kumar Dey
☎ : 0657-6682213
Mobile: +91 9051044110
Email: sanjoy.dey@siemens.com

Bengaluru
1st Floor, Jyoti Mahal
No. 49, St. Marks Road
Bengaluru - 560 001
☎ : +91 80 33422000
Fax: +91 80 33424131

Mr. Manish Pillai
☎ : 080-33422097
Mobile: +91 9880575897
Email: manish.pillai@siemens.com

Bengaluru
Shed No. 1 & 2
SY No. 26 & 27, Plot No 1 A
Systems Campus
Peenya Industrial area, Phase 2
Chokkasandara Village
Yeshwantpur Hobli
Bangalore - 560058

Mr. Shankar Narayanan
☎ : 080-33422529
Mobile: +91 9945188837
Email: narayanan.shankar@siemens.com

Hyderabad
5-9-19, 4th & 5th Floor
Laxmi Narasinh Estate
Opp. Secretariat Road
Saifabad
Hyderabad - 500 004
☎ : +91 40 30922500
Fax: +91 40 30923145

Mr. Durga Prasad
☎ : 040-30922638
Mobile: +91 8008552075
Email: goriparthi.durgaprasad@siemens.com

Chennai
4th Floor, ETA Mount Central
Seethakathi Business Centre, Mount Road
Chennai - 600006
☎ : +91 44 30474000
Fax: +91 44 30474080
Mr. Pradeep Indulkar
☎ : 080-33422116
Mobile: +91 9900134714
Email: pradeep.indulkar@siemens.com

Coimbatore
1st Floor, "Senthil Towers"
1078, Avinashi Road
Coimbatore - 641018
☎ : +91 422 3076300
Fax: +91 422 3076310

Mr. Sivakumar A.
☎ : 0422-3076300
Mobile: +91 9361281643
Email: a.sivakumar@siemens.com

Siemens Ltd.
Digital Factory
Motion Control
R&D Technology Centre
Thane Belapur Road, Airoli Node
Navi Mumbai - 400 708

www.siemens.co.in

XX-XX-XXX-XXX-XXXX

For more information call us on 1800 209 1800
For Life Cycle Support of Products, Systems and
Solutions call us on 1800 209 0987

Product upgradation is a continuous process. Hence, data
in this catalog is subject to change without prior notice.
For the latest information, please get in touch with our
Sales Offices.