



contents

3RM1 Compact - Hybrid Starters

| | |
|-----------------------------|------------|
| Overview | 6/2 |
| General Data | 6/3 |
| Selection and ordering data | 6/4 |
| Accessories | 6/5 - 6/9 |
| Technical Data | 6/9 - 6/10 |



SIRIUS 3RM1 Motor Starters

Overview

Overview



3RM12 motor starter with reversing functionality and electronic overload protection

SIRIUS 3RM1 motor starters are compact devices with a width of 22.5 mm, combining a large number of functions in a single enclosure. They consist of combinations of relay contacts, power semiconductors (hybrid technology), and a solid-state overload relay for operational switching of three-phase motors up to 3 HP (at 380-400 V AC)

| Feature | Value |
|--|---|
| Rated current (wide setting range of the electronic overload release) | 0.1 ... 0.5 A 0.4 ... 2.0 A 1.6 ... 7.0 A (UL/CSA 6.1A max rated) |
| Rated operational voltage | 48 ... 400 V |
| Rated frequency | 50/60 Hz |
| Rated control supply voltage | 24 V DC, 110 V DC, 110 ... 230 V AC |
| Trip class | CLASS 10A |

The 3RM1 motor starters with overload protection with wide setting range are offered as 3RM10 direct-on-line starters and 3RM12 reversing starters and as versions with safety-related shutdown.

| Characteristic | 3RM10 | 3RM11 | 3RM12 | 3RM13 |
|---|-------|-------|-------|-------|
| Direct-on-line starters | ✓ | ✓ | -- | -- |
| Reversing starters | -- | -- | ✓ | ✓ |
| Overload protection with wide setting range | ✓ | ✓ | ✓ | ✓ |
| ATEX certification overload protection | -- | ✓ | -- | ✓ |
| Safety-related shutdown up to SIL 3 / PL _e | -- | ✓ | -- | ✓ |

Hybrid technology

The 3RM1 motor starters combine the benefits of semiconductor technology and relay technology. This combination is also known as hybrid technology. The hybrid technology in the motor starter is characterized by the following features:

- The inrush current is conducted briefly via the semiconductors.
Advantage: protection of relay contacts, long service life due to low wear
- The continuous current is conducted via relay contacts.
Advantage: lower heat losses compared with the semiconductor.
- Shutdown is implemented again via the semiconductor.
Advantage: the contacts are only slightly exposed to arcs, and this results in a longer service life.

Functional density/space savings

The 3RM1 motor starters combine the functions direct/reversing starting and overload protection and safety-related shutdown in a single device, without changing the 22.5mm width.

For simple applications (such as starting and reversing three-phase loads with overload protection), motor starter combinations of power contactors and a solid-state overload relay, for example, can be replaced by a single 3RM1 starter. The more functions are required, the more devices can be replaced. The footprint area required for each motor starter in the control cabinet is reduced by values of 64 to 82%.

In the case of assemblies and grouped starter units there are further advantages.

Wiring overhead

By combining various functions in a single device, wiring overhead is reduced. The greater the number of starters, the greater the saving in wiring. Savings can be made in:

- mains wiring and space reduction with the use of the 3RM19 three phase infeed system
- wiring of the reversing contactor assembly thanks to the integrated design
- reduction of control cables for the coils in group applications with the 3ZY12 device connectors

These savings reduce the time required for the wiring itself, while at the same time reducing both the risk of wiring errors and the amount of testing required after control cabinets have been completed.

Configuration and inventory

The wide setting range of the electronic overload release (up to 1:5) reduces the cost of inventory and the considerations involved in configuration where the actual motor current to be expected is concerned. Compared with protection equipment with thermal overload protection, only 3 versions are now required to cover a current range of 0.1 to 7 A with 3RM1, instead of 17 versions.

Connection methods

The 3RM1 is available with screw terminal, push-in terminals or a combination of both..

Push-in terminals are a form of spring-type connection allowing fast wiring without tools for rigid conductors or conductors equipped with end sleeves.

Fine-stranded or stranded conductors with no end finishing are wired using a screwdriver (with a 3.0 x 0.5 mm blade).

As with other spring-type terminals, a screwdriver is also required to release the conductor. The same tool as above can be used for this purpose.

The advantages of the push-in terminals are found, as with all spring-type terminals, in speed of assembly and disassembly and vibration-proof connection. There is no need for the checking and tightening required with screw terminals.

 Screw terminals

 Spring-type terminals


The terminals are indicated in the corresponding tables by the symbols shown on blue backgrounds.

SIRIUS 3RM1 Motor Starters

General Data

Safety-related shutdown/safety integration

Thanks to the redundant design of the main circuit and internal monitoring, safety-related shutdown in accordance with SIL 3 / PLe is possible by shutting down the control supply voltage with 3RM11 Failsafe and 3RM13 Failsafe motor starters. Additional safety relays are not required in the main circuit.

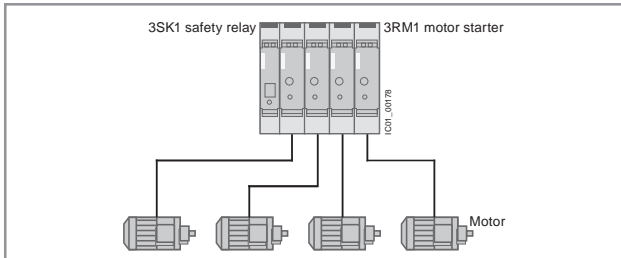

Combination of four SIRIUS 3RM1 Failsafe motor starters with SIRIUS 3SK1 safety relay to allow safety-related collective disconnection of connected motors

3RM1 motor starters are ideal for combining with the 3SK1 safety relay (see Chapter 13 "Safety Technology" → "SIRIUS 3SK1 Safety Relays"). They can be combined by means of:

- conventional wiring
- a special device connector

This makes it very simple to shut down connected motors collectively. The wiring, and ultimately the shutting down of the control supply voltage in Emergency Stop situations, is performed via the device connector. There is no further need for complex looping of the connecting cables.

Feedback to the control system


The electronic output in the 24 V DC control voltage version of the 3RM10 and 3RM12 motor starters allows the status of the connected motor to be reported to the higher-level control system. If the motor starter is controlled via inputs IN1 to 2, once the motor has been switched on and has started up correctly the output "OUT" is set.

Infeed system for the main circuit

The 3RM19 infeed system available as an accessory for the main circuit with three-phase busbars allows fast, virtually error-free wiring of motor starters on the mains connection side and may reduce the number of short-circuit protective devices.

Benefits

Advantages through energy efficiency

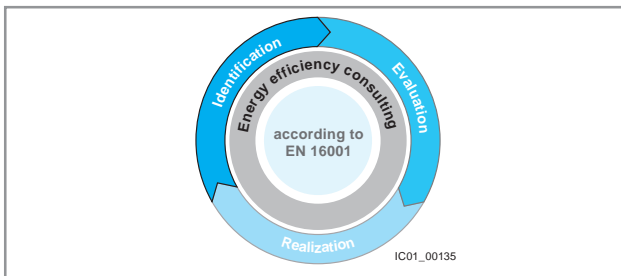

Overview of the energy management process

We offer you a unique portfolio for efficient industrial energy management, using an energy management system that helps to optimally define your energy needs. We split up our industrial energy management into three phases – identify, evaluate, and realize – and we support you with the appropriate hardware and software solutions in every process phase.

The innovative products of the SIRIUS Industrial Controls portfolio can also make a substantial contribution to a plant's energy efficiency (see www.siemens.com/sirius/energysaving).

With 3RM1 motor starters, control cabinets warm up less because power losses have been reduced by operation:

- Lower intrinsic power loss (than comparable motor starters with thermal overload trips) thanks to electronic current analysis
- Lower control circuit power losses (compared with conventional switching devices) as a result of electronic control of switching points
- Thanks to the above advantages, additional energy savings are possible because less cooling is required and a more compact design is possible

Product advantages

The SIRIUS 3RM1 motor starters offer a number of benefits:

- Greater endurance and reduced heat losses thanks to hybrid technology
- Less space required in the control cabinet (64 to 82%) as a result of higher functional density
- Less wiring and testing required as a result of integrating several functions into a single device
- Lower costs for stock keeping and configuration as a result of the wide setting range of the electronic overload release (up to 1:5)
- Fast wiring without tools for rigid conductors or conductors equipped with end sleeves thanks to push-in spring-type connections
- Motor status feedback to the higher-level control system in the case of 3RM10 and 3RM12 motor starters in the 24 V DC version
- Virtually error-free wiring on the mains connection side and reduction in short-circuit protective devices by means of 3RM19 comb busbar and infeed system

Hybrid Starters

3RM1 up to 3HP

Selection and ordering data

- Direct and reversing starters in 22.5mm width
- Electronic overload protection — class 10
- Coil voltages 24VDC, 110-230VAC and 110VDC
- Screw Terminals or Spring Loaded Terminals
- Group Installation possible with fuse or UL489 breaker
- SCCR up to 100kA with J fuses
- Comb busbar accessories for easy group assembly
- Removeable terminals



3RM10 motor starter for direct-on-line starting with electronic overload protection

with

| UL ratings at 480VAC | | Amp ratings | | Single-phase HP ratings ^① | | | Three-phase HP ratings ^① | | | Signaling contacts | | All Screw Terminals | All Spring Loaded Terminals | Mixed ^② Spring Loaded & Screw Terminals |
|---|-----|-------------|------|--------------------------------------|------|------|-------------------------------------|-------|------|--------------------|----|---------------------|-----------------------------|--|
| FLA | LRA | AC53 | AC51 | 115V | 200V | 230V | 200V | 230V | 380V | NO | NC | Order No. | Order No. | Order No. |
| Rated control supply voltage $U_s = 24$ VDC | | | | | | | | | | | | | | |
| 0.5 | 3.5 | 0.5 | — | — | — | — | — | — | — | 1 | 1 | 3RM1□01-1AA04 | 3RM1□01-2AA04 | 3RM1□01-3AA04 |
| 2 | 14 | 2 | — | — | — | 1/8 | 1/3 | 1/3 | 3/4 | 1 | 1 | 3RM1□02-1AA04 | 3RM1□02-2AA04 | 3RM1□02-3AA04 |
| 6.1 | 43 | 7 | 10 | 1/4 | 1/2 | 1/2 | 1 | 1 1/2 | 3 | 1 | 1 | 3RM1□07-1AA04 | 3RM1□07-2AA04 | 3RM1□07-3AA04 |
| Rated control supply voltage $U_s = 110-230$ VAC 50/60 Hz and 110 VDC | | | | | | | | | | | | | | |
| 0.5 | 3.5 | 0.5 | — | — | — | — | — | — | — | 1 | 1 | 3RM1□01-1AA14 | 3RM1□01-2AA14 | 3RM1□01-3AA14 |
| 2 | 14 | 2 | — | — | — | 1/8 | 1/3 | 1/3 | 3/4 | 1 | 1 | 3RM1□02-1AA14 | 3RM1□02-2AA14 | 3RM1□02-3AA14 |
| 6.1 | 43 | 7 | 10 | 1/4 | 1/2 | 1/2 | 1 | 1 1/2 | 3 | 1 | 1 | 3RM1□07-1AA14 | 3RM1□07-2AA14 | 3RM1□07-3AA14 |
| | | | | | | | | | | | | 0 | 0 | 0 |
| Standard DOL Starter | | | | | | | | | | | | 1 | 1 | 1 |
| Safety DOL Starter | | | | | | | | | | | | | | |

3RM12 motor starter for reversing with electronic overload protection

with

| UL ratings at 480VAC | | Amp ratings | | Single-phase HP ratings ^① | | | Three-phase HP ratings ^① | | | Signaling contacts | | All Screw Terminals | All Spring Loaded Terminals | Mixed ^② Spring Loaded & Screw Terminals |
|---|-----|-------------|------|--------------------------------------|------|------|-------------------------------------|-------|------|--------------------|----|---------------------|-----------------------------|--|
| FLA | LRA | AC53 | AC51 | 115V | 200V | 230V | 200V | 230V | 380V | NO | NC | Order No. | Order No. | Order No. |
| Rated control supply voltage $U_s = 24$ VDC | | | | | | | | | | | | | | |
| 0.5 | 3.5 | 0.5 | — | — | — | — | — | — | — | 1 | 1 | 3RM1□01-1AA04 | 3RM1□01-2AA04 | 3RM1□01-3AA04 |
| 2 | 14 | 2 | — | — | — | 1/8 | 1/3 | 1/3 | 3/4 | 1 | 1 | 3RM1□02-1AA04 | 3RM1□02-2AA04 | 3RM1□02-3AA04 |
| 6.1 | 43 | 7 | 10 | 1/4 | 1/2 | 1/2 | 1 | 1 1/2 | 3 | 1 | 1 | 3RM1□07-1AA04 | 3RM1□07-2AA04 | 3RM1□07-3AA04 |
| Rated control supply voltage $U_s = 110-230$ VAC 50/60 Hz and 110 VDC | | | | | | | | | | | | | | |
| 0.5 | 3.5 | 0.5 | — | — | — | — | — | — | — | 1 | 1 | 3RM1□01-1AA14 | 3RM1□01-2AA14 | 3RM1□01-3AA14 |
| 2 | 14 | 2 | — | — | — | 1/8 | 1/3 | 1/3 | 3/4 | 1 | 1 | 3RM1□02-1AA14 | 3RM1□02-2AA14 | 3RM1□02-3AA14 |
| 6.1 | 43 | 7 | 10 | 1/4 | 1/2 | 1/2 | 1 | 1 1/2 | 3 | 1 | 1 | 3RM1□07-1AA14 | 3RM1□07-2AA14 | 3RM1□07-3AA14 |
| | | | | | | | | | | | | 2 | 2 | 2 |
| Standard Reversing Starter | | | | | | | | | | | | 3 | 3 | 3 |
| Safety Reversing Starter | | | | | | | | | | | | | | |

For detail product manuals, schematics and CAD files:
<http://www.usa.siemens.com/3RM1>

① Selection depends on motor full load amps.
 Horsepower ratings are for reference only.

② Mixed terminal versions have spring loaded terminals for the control wiring and screw terminals on the mains.

This offers faster control wiring while still being able to use the 3RM19 comb busbar system on the mains.

For accessories, see page 6/6 and 6/8

For technical data, see page 6/9 and 6/10

For additional Compact Starters up to 25HP at 480V, see the 3RA6 series located in section 4

SIRIUS 3RM1 Motor Starters

Accessories

Overview

Accessories for 3RM1 motor starters

The following accessories are available for the 3RM1 motor starter:

- 3-phase infeed system for the main circuit
- Device connectors for the control circuit
- Spare terminals for main and control circuits
 - With screw terminals
 - With push-in spring-type terminals
- Push-in lugs for wall mounting the motor starters
- Sealable cover as protection against unauthorized access

Three-phase infeed system (3RM19 three-phase busbar system)


Special three-phase busbar systems can be used to provide an easy, time-saving and safe means of feeding two or more 3RM1 motor starters with screw terminals.

These busbars are available in three lengths, thus allowing 2, 3 or 5 motor starters (arranged side-by-side) to be connected at the same time. More than 5 devices can be connected by clamping the connection tags of an additional busbar rotated by 180° (e.g. 6 devices using one 5-pole busbar and one 2-pole busbar).

A single motor starter can be removed from the assembly without loosening the terminal screws of neighboring motor starters.

The maximum summation current must not exceed 25 A. Primary infeed is connected via a three-phase infeed terminal.

The three-phase busbars are finger-safe but empty connection tags must be fitted with covers.

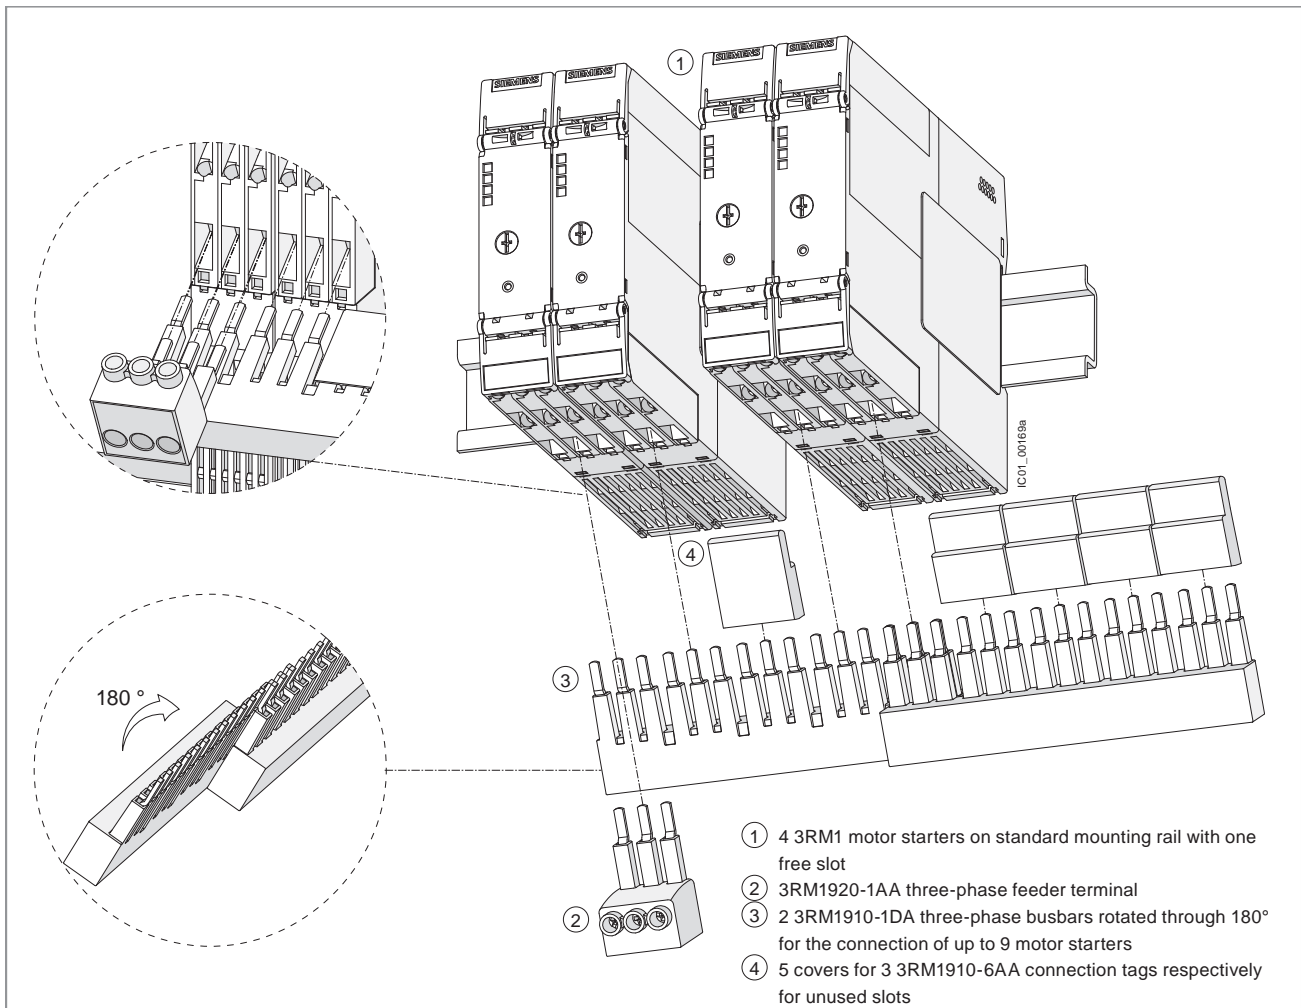

3RM19 infeed system with three-phase infeed terminal: In the above example, two three-phase busbars (5-pole busbars) rotated through 180° allow up to 9 3RM1 motor starters to be connected. Contact with the unused connection tags in unoccupied positions is prevented safely by the covers.

SIRIUS 3RM1 Motor Starters

Accessories

Device connectors for the control circuit

The outlay for cabling between the devices is reduced using device connectors snapped onto a mounting rail, or screwed onto a level mounting panel (one device connector per motor starter).

Using the device connectors only for feeding in the control supply voltage

By using device connectors, several motor starters can be jointly supplied with a control supply voltage of 24 V DC. This requires the control supply voltage to be applied to the A1 and A2 terminals of only one motor starter.

Up to ten motor starters can be connected with device connectors. The 24 V DC control supply voltage must be within the operating range of 0.9 to 1.1 for this purpose. If the full operating range of 0.8 to 1.25 is to be used, no more than five motor starters can be used.

If the motor starters are not to be interconnected side-by-side, device daisy chain connectors must be used for the gaps.

When removing a motor starter, the corresponding device connector must be replaced by a device daisy chain connector if the control voltage is not to be interrupted for motor starters on the right.

The last motor starter in a row can be placed on a device termination connector. Flush termination of the configuration is thus possible.

Using device connectors in conjunction with 3SK1 safety relays

Interconnection of several Standard or Failsafe version motor starters into a group can also be used for joint disconnection by a 3SK1 safety relay.


To provide for the simultaneous and safe shutdown of several motor starters via a SIRIUS 3SK1 Safety Relay, you can simply interconnect the devices without additional wiring using a device connector.

The motors can then also be shut down safely according to SIL 3 / PLe with the motor starters.

Up to five motor starters can be operated on one safety relay with device connectors. If the motor starters are not to be interconnected side-by-side, device loop through connectors must be used for the gaps.

The last motor starter in a row must be placed on a device termination connector. This closes the circuits that were built up with the connectors.

For 3SK1 safety relays and associated device connectors see Chapter 13 "Safety Technology" → "SIRIUS 3SK1 Safety Relays"

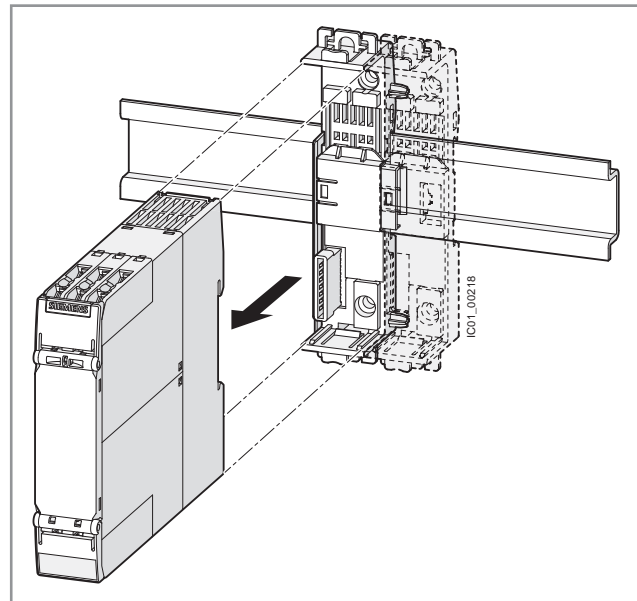

Device connectors snapped onto a standard mounting rail to allow the joint connection of the control supply voltage for 3RM1 motor starters or connection to the 3SK1 safety relays

Usage restrictions for accessories

- The 3RM19 3-phase infeed system for the main circuit can only be used with 3RM1 motor starters with screw terminals.
- The device connectors are only suitable for 3RM1 motor starters with a control supply voltage of 24 V DC.

3RM1 Hybrid Starters

3RM1 Accessories

Selection and ordering data









| | | Order No. | Pack Units |
|--|--|---------------|------------|
| Device connectors for busing the control supply connection to 3RM1 Starters | | | |
| | Device connector type 2, 7-pole, 22.5mm Use for: <ul style="list-style-type: none"> • Beginning left hand connector • Subsequent positions where a starter is present • Maximum of five starters per system | 3ZY1212-2EA00 | 1 |
| | Device loop through connector type 2, 7-pole, 22.5mm Use for: <ul style="list-style-type: none"> • When 22.5mm spacing is required and no starter is present | 3ZY1212-2AB00 | 1 |
| | Device termination connector type 2, 7-pole, 22.5mm Use for: <ul style="list-style-type: none"> • Terminating connector for the right hand position • Terminating cover is assembled to 3ZY1212-2EA00 | 3ZY1212-2FA00 | 1 |

| | | Screw Terminals | Spring Terminals | Pack Units |
|--|---|------------------------|-------------------------|------------|
| | | Order No. | Order No. | |
| Removable terminals for 3RM1 Starters | | | | |
| | Power Terminals (Line and Load) 2-pole, 12-20 AWG | 3ZY1122-1BA00 | 3ZY1122-2BA00 | 6 |
| | Control Terminals 3-pole, 14-20 AWG (Screw) 3-pole, 14-16 AWG (Spring) | 3ZY1131-1BA00 | 3ZY1131-2BA00 | 6 |

| Further accessories | | Order No. | Pack Units |
|----------------------------|---|---------------|------------|
| | Push-in lugs for wall mounting 2 lugs per starter are required. Standard pack quantity is sufficient for 5 starters | 3ZY1311-0AA00 | 10 |
| | Seal covers for 3RM1 starters Protection of current setting dial. - lockable | 3ZY1321-2AA00 | 5 |
| | Cooling pins for removable terminals For mechanical coding of removable terminals | 3ZY1440-1AA00 | |

For detail product manuals, schematics and CAD files:
<http://www.usa.siemens.com/3RM1>

3RM1 Accessories

| Product designation | SD | Article No. | Price per PU | PU (UNIT, SET, M) | PS* |
|--|----|----------------------|--------------|-------------------|----------|
| Three-phase infeed system for 3RM1 with screw terminals | | | | | |
|  3RM1920-1AA | 2 | 3RM1920-1AA | | 1 | 1 unit |
| Three-phase infeed terminals • For three-phase busbars | | | | | |
|  3RM1910-1AA | 2 | 3RM1910-1AA | | 1 | 1 unit |
| Three-phase busbars • For 2 motor starters | | | | | |
|  3RM1910-1BA | 2 | 3RM1910-1BA | | 1 | 1 unit |
| • For 3 motor starters | | | | | |
|  3RM1910-1DA | 2 | 3RM1910-1DA | | 1 | 1 unit |
| • For 5 motor starters | | | | | |
|  3RM1910-6AA | 2 | 3RM1910-6AA | | 1 | 10 units |
| Covers For 3 connection tags of the three-phase busbars | | | | | |
| Fuse modules for 3RM1 for use on busbars or mounting rails | | | | | |
|  3RM1932-1AB | 2 | 3RM1932-1AB | | 1 | 1 unit |
| | 2 | 3RM1930-1AA | | 1 | 1 unit |
| Fuse module with 3NW6007-1 fuse Fuse module without fuse¹⁾ | | | | | |
| Adapters | | | | | |
|  8US1216-0AS00 | 5 | 8US1216-0AS00 | | 1 | 1 unit |
| Adapters for busbar systems 22.5 mm x 200 mm x 41.5 mm | | | | | |
|  8US1616-0AK02 | 5 | 8US1616-0AK02 | | 1 | 1 unit |
| Adapters for compact busbar systems 22.5 mm x 160 mm x 41.5 mm | | | | | |

¹⁾ For details of alternative fuses, see Manual
<https://support.industry.siemens.com/cs/ww/en/view/66295730>.

SIRIUS 3RM1 Motor Starters

Technical Data

Application

3RM1 motor starters are designed for applications in which small motors have to be connected in the most confined spaces.

Main areas of use



- Conveyor systems
- Logistics systems
- Production machines
- Machine tools
- Small elevators

Standards and approvals

The motor starter complies with the following standards:

- IEC/EN 60947-4-2
- UL 508
- ATEX (available soon)
- IEC 61508-1: SIL 3 (available soon)
- ISO 13849: PLe (available soon)

Technical specifications

| Type | 3RM1 | | |
|--|---|-------------|---|
| Mechanical components and environment | | | |
| Dimensions (W x H x D) | | | |
| • Width |  | mm | 22.5 |
| • Height | | mm | 100 |
| • Depth | | mm | 136.5 (from the standard mounting rail) 141.6 (entire enclosure depth) |
| Ambient temperature | | °C | -25 ... +60 |
| • During operation | | °C | -40 ... +70 |
| • During storage | | °C | -40 ... +70 |
| • During transport | | °C | -40 ... +70 |
| Installation altitude at height above sea level maximum | | m | 4 000 |
| Shock resistance | | | 6g/11 ms |
| Vibration resistance | | | 1 ... 6 Hz, 15 mm; 20 m/s ² , 500 Hz |
| IP degree of protection | | | IP20 |
| Mounting position |  | | |
| Electromagnetic compatibility (EMC) | | | |
| Emitted interference | | | |
| • Conducted RF interference emission according to CISPR11 | | | Class A for Industrial applications. Class B for residential, business and commercial applications. |
| • Non-conducted RF interference emission according to CISPR11 | | | Class A for industrial applications. Class B for residential, business and commercial applications. |
| Interference immunity | | | |
| • Electrostatic discharge according to IEC 61000-4-2 | | | 4 kV contact discharge / 8 kV air discharge |
| • Conducted interference injection as high frequency interference according to IEC 61000-4-6 | | | 10 V |
| • Conducted interference BURST according to IEC 61000-4-4 | | | 2 kV / 5 kHz |
| • Conducted interference - phase-to-ground SURGE according to IEC 61000-4-5 | | | 2 kV |
| • Conducted interference - phase-to-phase SURGE according to IEC 61000-4-5 | | | 1 kV |
| Main circuit | | | |
| Rated operational voltage maximum | V | 400 | |
| Operating frequency | Hz | 50 | |
| • 1 rated value | Hz | 60 | |
| • 2 rated value | | | |
| Rated insulation voltage | V | 600 | |
| Rated impulse withstand voltage | kV | 6 | |
| Rated operational current at 400 V at AC | A | 0.5 | 2 |
| | | | 6.1 |
| Active power loss, typical | W | 0.02 | 0.3 |
| | | | 3.3 |
| Minimum load in % of I_M | % | 20 | |
| Adjustable current response value | | | |
| • of the inverse-time delayed overload release | A | 0.1 ... 0.5 | 0.4 ... 2 |
| | | | 1.6 ... 7 ¹⁾ |

¹⁾ CSA rating is 6.1A max rating at 380-400 V



SIRIUS 3RM1 Motor Starters

Technical data

| Type | | 3RM1 ...-AA04 | 3RM1 ...-AA14 |
|---|----|---------------|---------------|
| Control circuits | | | |
| Type of voltage of the control supply voltage | | DC | AC/DC |
| Control supply voltage 1 | | | |
| • At DC | V | 24 | 110 |
| • At 50 Hz | | | |
| - At AC | V | — | 110 ... 230 |
| Frequency of the control supply voltage | | | |
| • 1 rated value | Hz | — | 50 |
| • 2 rated value | Hz | — | 60 |
| Operating range factor of the control supply voltage rated value | | | |
| • At DC | | 0.8 ... 1.25 | 0.85 ... 1.1 |
| • At 50 Hz | | | |
| - At AC | | — | 0.85 ... 1.1 |
| Control current | | A | 0.08 |
| Input voltage at the digital input | | | |
| • At DC | V | 24 | 110 |
| • At AC | V | — | 110 ... 230 |
| - Rated value | | | |
| Input voltage at the digital input with signal <1> | | | |
| • At DC | V | 19.2 ... 30 | 93 ... 121 |
| • At AC | V | — | 93 ... 253 |
| Input current at the digital input with signal <1> typical | | A | 0.01 |

| Type | | 3RM1...-14 | 3RM1...-24 |
|---|-----------------|-------------|-------------|
| Connection methods | | | |
| Connectable conductor cross-section for main contacts | | | |
| • Solid | mm ² | 0.5 ... 4 | |
| • Finely stranded | | | |
| - With end sleeves | mm ² | 0.5 ... 2.5 | |
| - Without end sleeves | mm ² | — | 0.5 ... 4 |
| Connectable conductor cross-section for auxiliary contacts | | | |
| • Solid | mm ² | 0.5 ... 2.5 | 0.5 ... 1.5 |
| • Finely stranded | | | |
| - With end sleeves | mm ² | 0.5 ... 2.5 | 0.5 ... 1 |
| - Without end sleeves | mm ² | — | 0.5 ... 1.5 |
| AWG number as coded connectable conductor cross-section | | | |
| • For main contacts | | 20 ... 12 | |
| • For auxiliary contacts | | 20 ... 14 | 20 ... 16 |

Note:

All the above technical specifications are relevant for selecting the motor starters. Details about installation conditions and the use of the motor starters, and particularly about the derating of the rated current, can be found in the manual and the data sheets located at www.usa.siemens.com/3RM1.