

**Price groups**

PG 4N1, 41B, 41H, 41L, 42B, 42C, 42F, 42J

11/2 **Introduction****Safety relays**

SIRIUS 3SK safety relays

11/12 **General data**

Basic units

11/19 - SIRIUS 3SK1 Standard basic units

11/20 - SIRIUS 3SK1 Advanced basic units

11/21 - SIRIUS 3SK2 basic units

Expansion units

11/22 - Output expansions

11/23 - Input expansions

11/24 **Accessories NEW**

SIRIUS 3TK28 safety relays

11/27 With special functions

11/29 Accessories

SIRIUS 3RK3 Modular Safety System

11/30 General data

11/38 3RK31 central units

11/39 3RK32, 3RK33 expansion modules

11/39 3RK35 interface modules

11/40 **Accessories NEW**

Notes:

More 3TK28 safety relays can be found

- in the [Catalog Add-On IC 10 AO · 2016](#)
in the [Information and Download Center](#)
- in the [Interactive Catalog CA 01](#)
- in the [Industry Mall](#)

Conversion tool

e.g. from 3TK28 to 3SK, see www.siemens.com/sirius/conversion-tool

NEW

Click on the Article No. in the catalog PDF to access it in the Industry Mall and get all related information.

Article No.

3RA1943-2C
3RA1943-2B
3RA1953-2B
3RA1953-2N



IC10_019433

Or directly in the Internet, e. g.
www.siemens.com/product?3RA1943-2C

Safety Technology

Introduction

Overview


Functional safety of machines and plants – Basic safety requirements in the manufacturing industry

In order to protect people and the environment in many industrial applications in the manufacturing and process industries, machines and plants must meet the fundamental safety requirements of the EU Directives, particularly the Machinery Directive. In addition to design solutions, automation systems and components are also expected to perform safety-related tasks. This means that the life and health of people and the physical integrity of capital goods and the environment depend on the proper operation of these systems and components, on "functional safety".

With the introduction of the uniform European Single Market, national standards and regulations affecting the technical realization of machines were consistently harmonized. This involved defining basic safety requirements which address, on the one hand, machine manufacturers in terms of the free movement of goods (Article 95) and, on the other hand, machine operators in terms of industrial safety (Article 137).

The EU directives:

- Define requirements which must be met by plants and their operating companies in order to protect the health of people and the quality of the environment
- Include standards for health & safety at work (minimum requirements)
- Define product requirements (e.g. for machines) to protect the health and safety of consumers
- Differentiate between the requirements which must be met by the implementation of products in order to ensure the free movement of goods and the requirements which must be met for the use of products

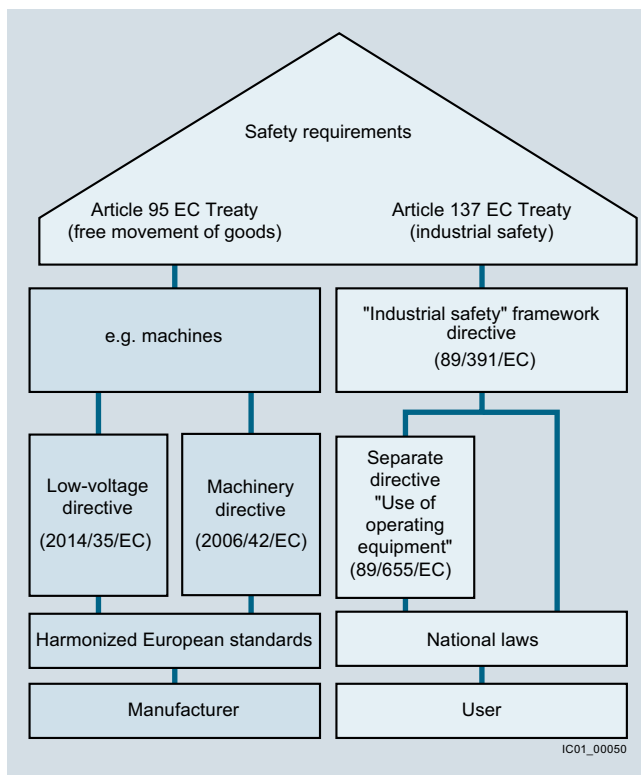

Safety requirements imposed on machines and plants

Objective of the standards

It is the objective of safety technology to minimize as far as possible the hazards from technical facilities for people and the environment while restricting no more than absolutely necessary the scope of industrial production, the use of machines or the production of chemical products.

Production automation is governed in particular by the following standards:

- IEC 61508 or IEC 62061 and
- EN ISO 13849-1

The IEC 62061 standard

The IEC 62061 standard "Safety of machines – Functional safety of electrical, electronic and programmable electronic control systems" defines comprehensive requirements. It includes recommendations for the development, integration and validation of safety-related electrical, electronic and programmable electronic control systems (SRECS) for machines. With the implementation of EN 62061, for the first time, one standard covers the entire safety chain, from the sensor to the actuator. The Safety Integrity Level, or SIL for short, is defined as the application parameter for this standard.

Requirements placed on the capacity of non-electrical – e.g. hydraulic, pneumatic, or electromechanical – safety-related control elements for machines are not specified by the standard.



Safety of machines

The EN ISO 13849-1 standard

EN ISO 13849-1 "Safety of machines – Safety-related components of controls, Part 1: General principles" replaced EN 954-1 at the end of 2011. It considers the complete range of safety functions with all the devices which are involved in their performance. EN ISO 13849-1 also makes a quantitative analysis of the safety functions. The standard describes how to determine the performance level (PL) for safety-relevant parts of control systems on the basis of architectures specified for the intended service life.

When combining several safety-related parts to form a complete system, the standard explains how to determine the resulting PL. It can be applied to safety-related parts of control systems (SRP/CS) and all types of machines, regardless of the technology and energy used, e.g. electrical, hydraulic, pneumatic or mechanical.

Safety Integrated – Integrated safety technology from a single source



Safety Integrated

The following applies equally for machine manufacturers and the companies which operate their machines: Maximum possible safety for personnel and machines. The solution: our Safety Integrated concept based on Totally Integrated Automation. Whether for simple safety functions or highly complex tasks – our portfolio offers you maximum safety.


Safety Integrated is a unique, complete and consistent range of safety products covering all safety-related tasks – from detecting, evaluating and reacting, from switches and control systems to operating mechanisms (see graphic on page 11/4). Our products meet the safety requirements in force in industry, including IEC, ISO, NFPA and UL, and are certified in accordance with the latest safety standards.

All Safety Integrated products or systems can be seamlessly integrated in the standard automation environment. They are therefore particularly flexible and economical, reduce engineering time, increase plant availability and enable practice-related machine operation.

Designing a safety function

A safety chain normally comprises the following functions: detect, evaluate and react. In detail this means:

- Detect = the detection of a safety requirement, e.g. when an EMERGENCY-STOP is actuated or someone enters a hazardous area which is protected by sensors such as light arrays or laser scanners.
- Evaluate = the detection of a safety requirement and the reliable initiation of a reaction, e.g. shutting down the enabling circuits.
- React = reacting to a hazard, e.g. shutting down a power supply via the downstream contactors.

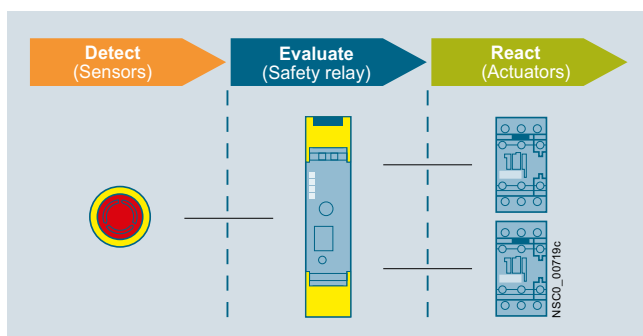

Designing of a safety function

Our offering

As a partner for all safety requirements, we not only support you with the respective safety-related products and systems, but also consistently provide you with the most current know-how on international standards and regulations. Machine manufacturers and plant managers are offered a comprehensive training portfolio as well as services for the entire lifecycle of safety-related systems and machines.

- A uniform, certified product range
- Courses on CE marking, risk assessment and standards, see www.siemens.com/sitrain-safetyintegrated
- Worldwide service and support, see <http://support.industry.siemens.com>
- More information, see www.siemens.com/safety-integrated

Safety evaluation tool



Safety Evaluation Tool

The Safety Evaluation Tool for the IEC 62061 and EN ISO 13849-1 standards guides you quickly and safely through all the calculation steps involved in implementing safety functions on a machine, from definition of the safety system structure through to selection of the components, all the way through to determination of the achieved safety integrity level (SIL/PL). You receive the results as a standards-compliant report that can be integrated in the documentation as proof of safety.


Benefits of the Safety Evaluation Tool to you:

- Less time needed to evaluate the safety functions
- Calculation in accordance with current standards
- User-friendly archiving: Projects can be saved and called up again as required
- Fast and easy handling: comprehensive, predefined libraries of examples
- Fast access to product data
- Import function for the safety parameters of products from other manufacturers in XML format according to VDMA Specification 66413
- Selection aids for determining variables and specifying the system design
- Helpful documents which can be downloaded as PDFs
- The online tool can be used free of charge – you pay only the usual costs for accessing the Internet.

For more information, see www.siemens.com/safety-evaluation-tool.

Safety Technology

Introduction

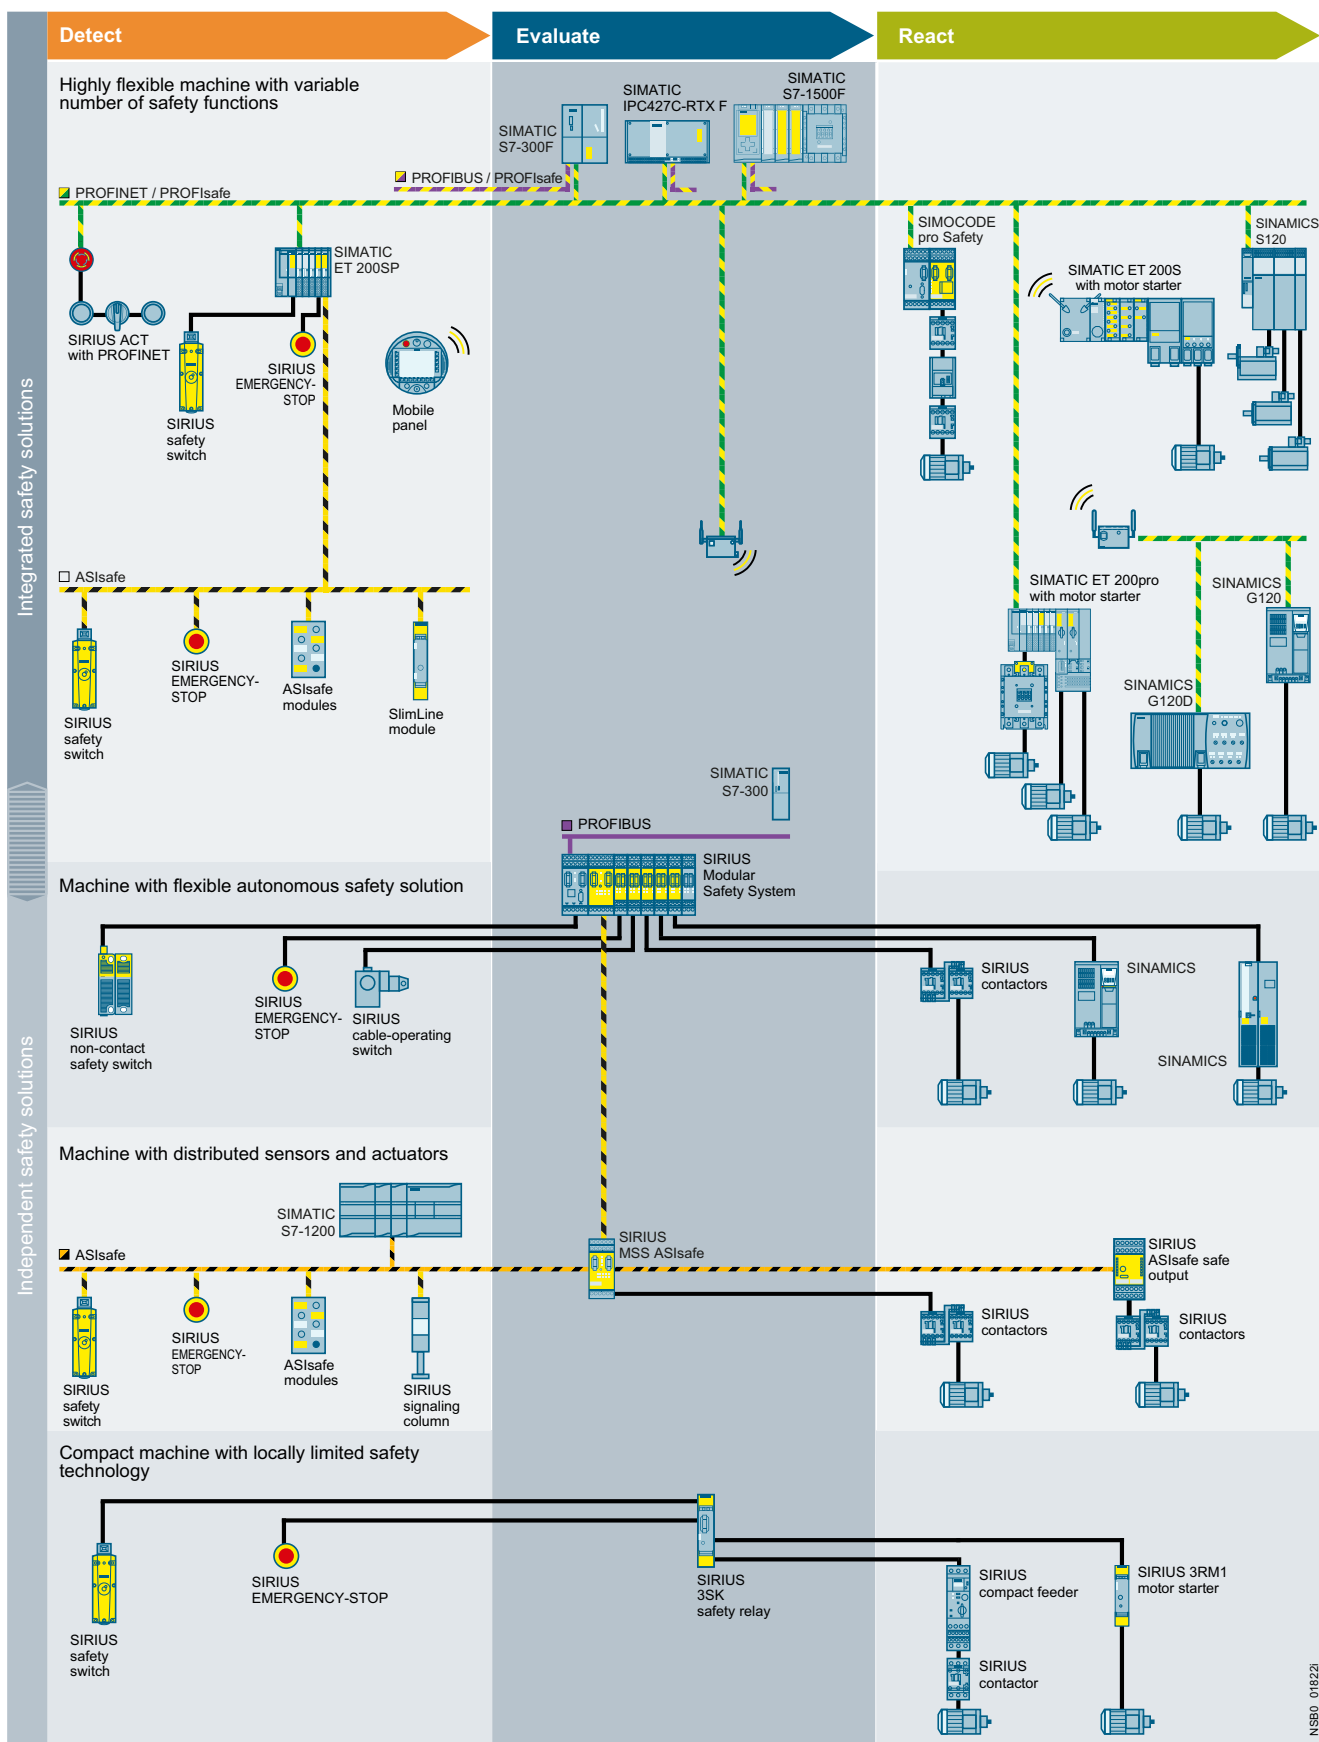


11

Safety Integrated

SIRIUS Safety Integrated

Our SIRIUS Safety Integrated controls are a central element of the Siemens Safety Integrated concept. Whether for fail-safe detecting, commanding and signaling, monitoring and evaluating or starting and reliable shutting down – our SIRIUS Safety Integrated controls are experts at performing safety tasks in your plant.

SIRIUS Safety Integrated uses fail-safe communication, using standard fieldbus systems, e.g. ASIsafe via AS-Interface and PROFIsafe via PROFIBUS and PROFINET, to solve even networked safety tasks of greater complexity. This opens the door for flexible safety solutions for compact machines or large-scale plants.

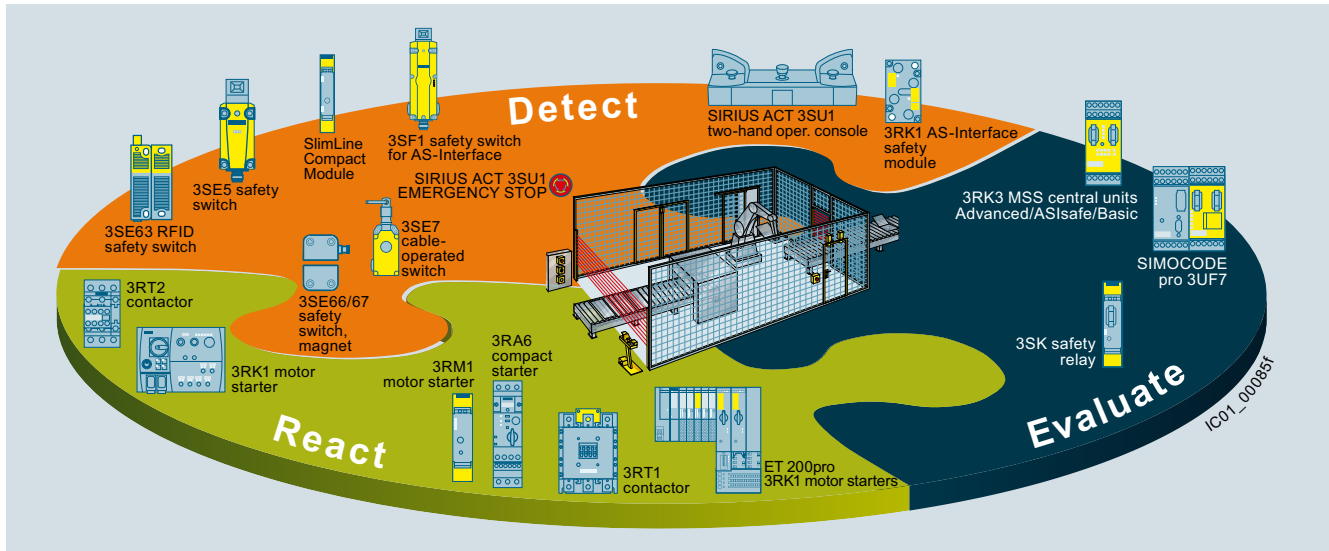

SIRIUS Safety Integrated

Monitoring with fail-safe evaluation units from the 3SK and 3RK3 series

Position monitoring with non-contact safety switches:

Safe protective door tumbler with safety switches and separate actuator, in accordance with EN ISO 14119:

Safe evaluation units	Maximum achievable safety level according to type of switch
<p>Magnetically operated switch RFID safety switches</p> <p>2 NC/2 NC + 1 NC (signaling contact) 3SE66/3SE67</p> <p>3SE63</p>	<p>SIL 3/PL e</p>
<p>3SK1, 3SK2</p>	
<p>3RK3</p>	

Safe evaluation units	Maximum achievable safety level according to type of switch
<p>Safety switches with tumbler</p> <p>3SE53 3SE53</p>	<p>SIL 2/PL d SIL 3/PL e</p>
<p>3SK2</p>	
Empty cell for alignment	

Note:

For more information, see <http://support.automation.siemens.com/WW/view/en/35443942>.

For information on safety switches, see page 12/1.

Safety Technology

Introduction










Using SIRIUS 3RT contactors with fail-safe controllers and safety relays

Safety relays and fail-safe controllers work perfectly with SIRIUS contactors optimized for safety application regardless of their size:

- For sizes S00 and S0 we recommend 3RT2 contactors with DC operating mechanism
- 3RT2 coupling contactors with electronic operating mechanisms are available in sizes S2 and S3
- The innovative 3RT1 versions with electronic operating mechanism and fail-safe control input are ideal for higher power ranges, such as sizes S6 to S12

They offer the following advantages:

- Reduced current load on the controller outputs
- Minimization of wear for mechanical relays on controllers or safety relays
- Coupling elements between controllers and contactors are no longer required

SIRIUS safety relays				SIMATIC controllers		
						
Perfect combination						
						
3RT2 contactors				3RT1 contactors		

Combination von SIRIUS 3RT contacts with fail-safe controllers and safety relays



IC01_00634

SIRIUS Safety Integrated		Type	Page
	3SK safety relays		
3SK111.	<ul style="list-style-type: none"> • Key modules of a consistent and cost-effective safety chain • Can be used for all safety applications thanks to compliance with the highest safety requirements (PL e according to EN ISO 13849-1 or SIL 3 according to IEC 61508) • Suitable for use all over the world through compliance with all globally established certifications 		
	<u>SIRIUS 3SK1 Standard basic units</u>	3SK111	11/19
	<ul style="list-style-type: none"> • Simple, compact devices for all important requirements for monitoring safety sensors and actuators 		
	<u>SIRIUS 3SK1 Advanced basic units</u>	3SK112	11/20
3SK112.	<ul style="list-style-type: none"> • Multifunctional series of safety relays with safe relay outputs, semiconductor outputs or time-delayed outputs for: <ul style="list-style-type: none"> - EMERGENCY-STOP monitoring - Protective door monitoring - Monitoring of non-floating sensors such as light arrays, laser scanners, etc. - Monitoring of two-hand operation consoles - Monitoring of equivalent (NC/NC) and antivalent (NO/NC) sensors • Setting by means of DIP switch 		
	<u>SIRIUS 3SK2 basic units</u>	3SK2	11/21
3SK2	<ul style="list-style-type: none"> • Series of safety relays that can be parameterized by software, with semiconductor outputs and independent output functions for: <ul style="list-style-type: none"> - EMERGENCY-STOP monitoring - Protective door monitoring - Protective door monitoring with tumbler - Monitoring of non-floating sensors such as light arrays, laser scanners, etc. - Monitoring of two-hand operation consoles - Monitoring of equivalent (NC/NC) and antivalent (NO/NC) sensors - Muting 		
	<u>Expansion units</u>	3SK121, 3SK122, 3SK123	11/22, 11/23
3SK121.	<ul style="list-style-type: none"> • 3RO and 4RO output expansions for SIRIUS 3SK1 Standard basic units, SIRIUS 3SK1 Advanced basic units and SIRIUS 3SK2 basic units • Input expansion for SIRIUS 3SK1 Advanced basic units • Power supply for SIRIUS 3SK1 Advanced basic units • Integration of 3RM1 motor starters possible and simple integration of a main circuit component in a system configuration of the safety relays. There is no need for complex wiring between the safety evaluation unit and the actuator. • Expansion of the Standard device series by means of wiring • Expansion of the SIRIUS 3SK1 and SIRIUS 3SK2 Advanced device series by means of wiring or without wiring outlay by means of 3ZY12 device connectors 		
	3TK2810 safety relays		
3TK2810-1BA41	<ul style="list-style-type: none"> • Further modules of a consistent and cost-effective safety chain • Can be used for all safety applications thanks to compliance with the highest safety requirements (PL e according to EN ISO 13849-1 or SIL 3 according to IEC 61508) • Suitable for use all over the world through compliance with all globally established certifications 		
	<u>Safe standstill monitoring with 3TK2810-0</u>	3TK2810	11/27
	<ul style="list-style-type: none"> • Monitoring without external sensors • Universal use in applications possible 		
	<u>Safe speed monitoring with 3TK2810-1</u>		
	<ul style="list-style-type: none"> • Monitoring of speed with encoders and proximity switches possible • Easy diagnostics options via display • Integrated monitoring of a spring-type locking protective door 		

		Type	Page
SIRIUS Safety Integrated (continued)			
 <p>3RK3</p>	<p>3RK3 Modular Safety System (MSS)</p> <ul style="list-style-type: none"> • Freely configurable modular safety relays • Safety-related applications up to PL e according to EN ISO 13849-1 or SIL 3 according to IEC 62061 can be implemented • High flexibility and planning reliability thanks to a modular design • More space in the control cabinet and lower costs thanks to highly modular project data • More functionality and time savings thanks to a software-configurable system • Comprehensive on-site diagnostics with the SIRIUS Safety ES software and diagnostics display • Improved plant diagnostics and higher plant availability thanks to exchange of data using PROFIBUS • Automatic creation of plant documentation with regard to MSS and software parameterization • Up to 9 expansion modules can be plugged in for standard I/Os and fail-safe I/Os – optionally solid-state or relay-based fail-safe outputs • Graphic parameterization of the logic, online diagnostics, and automatic creation of documentation using SIRIUS Safety ES • Consistent further development of the safety monitors with the Advanced and ASIsafe central units of the SIRIUS 3RK3 Modular Safety System (MSS) <p><u>Additionally with AS-Interface (ASIsafe):</u></p> <ul style="list-style-type: none"> • Modularly expandable and freely configurable safety monitor • With MSS Advanced/ASIsafe up to 50 two-channel, fail-safe outputs (38 central outputs and 12 outputs via AS-i) • Safety-related and standard communication between multiple MSS devices and/or safety monitors • Distributed detection of sensors and disconnection of actuators through AS-Interface • Much more space is available without wiring outlay using AS-Interface • Ready-to-use function blocks (e.g. muting or protective door with tumbler) can also be used on AS-i 	3RK3	11/30
 <p>3RK3 MSS ASIsafe</p>	<p>AS-Interface safety modules</p> <ul style="list-style-type: none"> • Complete portfolio of ASIsafe modules • For connection of safety switches with contacts (e.g. position switches) as well as solid-state safety sensors (ESPE) • Degree of protection IP65/IP67 or IP20 • Particularly compact dimensions, from 17.5 mm width • Up to four safe inputs per module • Up to one safe output per module • Standard outputs are available on the module in addition • Up to Category 4, PL e, SIL 3 <p>Advantage: Easy integration of safe signals both in the control cabinet or in the field</p>	3RK1	2/29
 <p>K45F</p>	 <p>SC17.5F</p>		
 <p>CM AS-i Master ST and F-CM AS-i Safety ST</p>	<p>AS-i Master and AS-i Safety module for ET 200SP</p> <p>The CM AS-i Master ST and F-CM AS-i Safety ST modules are plugged into an ET 200SP configuration and connect an AS-i network, including safety-related inputs and outputs, with the controller.</p> <ul style="list-style-type: none"> • Single, double and multiple masters possible • Per CM AS-i Master ST up to 496 DI/496 DQ/124 AI/124 AQ possible • Up to 31 safe input signals (2-channel)/16 safe output channels possible per F-CM AS-i Safety ST module • Configuration from STEP 7 V5.5 or from V13 (TIA Portal) and higher • Plant-wide safety programming of the F-CPU via SIMATIC Distributed Safety/Safety Advanced • Integrated diagnostics • No other programming tools required <p>Advantage: Modular connection of fail-safe AS-i networks with system-wide programming in SIMATIC and SINUMERIK controllers.</p>	6ES7	2/36, 2/40
 <p>3RT1...-S.36</p>	<p>SIRIUS 3RT contactors, 3-pole, 55 to 250 kW</p> <ul style="list-style-type: none"> • Solid-state operating mechanism with fail-safe control input for safety-related applications to SIL 2 with a contactor or SIL 3 with two contactors • 3RT10 for motor loads or 3RT14 for resistive loads • Version with removable lateral auxiliary switches or permanently mounted auxiliary switches and additional approval according to SUVA on request 	3RT10, 3RT14	3/67, 4/14

		Type	Page
SIRIUS Safety Integrated (continued)			
	3RM1 motor starters	3RM1	8/85
3RM1	<ul style="list-style-type: none"> • Motor starters for safety-related shutdown as 3RM11 direct-on-line starters or 3RM13 reversing starters • Compact devices with 22.5 mm width comprising combinations of relay contacts and power semiconductors (hybrid technology) and an electronic overload relay • For switching three-phase motors up to 3 kW (at 400 V) and resistive loads up to 10 A at AC voltages up to 500 V under normal operating conditions • Safety-related shutdown according to PL e or SIL 3 by shutting down the control supply voltage possible without additional devices in the main circuit • Combination with 3SK safety relay through conventional wiring or 3ZY12 device connectors • Simple wiring and collective shutdown with device connectors in assemblies; there is no further need for complex looping of the connecting cables 		
	ET 200SP fail-safe motor starters	3RK1	8/95
3RK1308-OCB00-0CP0	<ul style="list-style-type: none"> • Fully integrated into the ET 200SP I/O system (including TIA Selection Tool and TIA Portal) • Fully pre-wired motor starters for switching and protecting any AC loads up to 5.5 kW from 48 V AC to 500 V AC • Less space required in the control cabinet (20 to 80%) as a result of greater functional density (direct-on-line and reversing starters in same width) • Longer service life and reduced heat losses thanks to hybrid technology • Self-assembling 32 A power bus, i.e. the load voltage is only fed in once for a group of motor starters • High degree of flexibility when it comes to safety applications via SIMATIC F-CPU or SIRIUS 3SK safety relays up to SIL 3 and PL e Category 4 • Diagnostics capability for active monitoring of the switching and protection functions • Digital inputs can optionally be used via a 3DI/LC module 		
	ET 200pro Safety Motor Starter Solutions	3RK1	9/11
ET 200pro Safety	<p>The ET 200pro Safety Motor Starter Solutions comprise:</p> <ul style="list-style-type: none"> • PROFIsafe modules • Safety repair switch modules • Disconnecting modules • Standard motor starters • High-Feature motor starters <p><u>ET 200pro Safety Motor Starter Solutions local</u></p> <p>Safety Motor Starter Solutions local are preferred from the safety technology point of view for locally restricted safety applications. These motor starters are not dependent on a safe control system.</p> <p><u>ET 200pro Safety Motor Starter Solutions PROFIsafe</u></p> <p>Safety Motor Starter Solutions PROFIsafe are often found by contrast in safety applications of the more complex type that are interlinked. In this case a safe control system is used with the PROFINET or PROFIBUS bus systems with the PROFIsafe profile.</p>		
	SIMOCODE pro motor management and control devices	3UF7	10/5
SIMOCODE pro V	<ul style="list-style-type: none"> • Flexible, modular motor management system for motors with constant speeds in the low-voltage range • Provides an intelligent interface between the higher-level automation system and the motor feeder • Multi-functional, electronic full motor protection which is independent of the automation system • Integrated control functions for the motor control • Detailed operating, service and diagnostics data • Open communication via PROFIBUS DP, PROFINET/OPC UA, Modbus RTU or EtherNet/IP • Safety relay function for the fail-safe disconnection of motors up to SIL 3 (IEC 61508/IEC 62061) or PL e with Category 4 (EN ISO 13849-1) 		
	Fail-safe digital modules		
SIMOCODE pro S	<ul style="list-style-type: none"> • DM-F Local for direct assignment between a fail-safe hardware shutdown signal and a motor feeder • DM-F PROFIsafe for when a fail-safe controller (F-CPU) creates the fail-safe signal for the disconnection 		

		Type	Page
SIRIUS Safety Integrated (continued)			
 <p>3SE51</p>	<p>Mechanical position switches</p> <ul style="list-style-type: none"> • Easy assembly thanks to modular design • Solid, rugged design • Special versions are easily generated and quickly available, also in combination with standard modules • With a 3SE51/3SE52 position switch it is possible to achieve Category 2 according to EN ISO 13849-1 or SIL 1 according to IEC 61508 • Categories 3 and 4 can be achieved by using a second 3SE51/3SE53 position switch 	3SE51, 3SE52	12/5
 <p>3SE53</p>	<p>Mechanical safety switches</p> <ul style="list-style-type: none"> • With separate actuator, hinge switch, or separate actuator and tumbler • With a position switch it is possible to achieve Category 3 according to EN ISO 13849-1 or SIL 2 according to IEC 61508 • Category 4 according to EN ISO 13849-1 or SIL 3 according to IEC 61508 can be achieved by using a second 3SE51 or 3SE52 position switch • Version in various sizes made of metal or plastic • In the case of safety switches with tumbler, versions in the high IP69(K) degree of protection • Integrated ASIsafe electronics for all enclosure designs 	3SE51, 3SE52, 3SE53	12/51
 <p>3SE66, 3SE67</p>	<p>Non-contact magnetically operated safety switches</p> <ul style="list-style-type: none"> • Small, compact, safe • Simple installation even in restricted spaces thanks to connector versions • Two safety contacts and one signaling contact enable simple diagnostics at the maximum safety level 	3SE66, 3SE67	12/109
 <p>3SE63</p>	<p>Non-contact RFID safety switches</p> <ul style="list-style-type: none"> • Long service life due to non-contact switching • Only one switch required for the maximum safety level PL e or SIL 3 according to EN ISO 13849-1 and IEC 61508 • Tamper protection better than with mechanical safety switches thanks to switches and actuators with individual coding • LED status indication including threshold indication for door displacement • Degree of protection up to IP69 K and resistance to cleaning products • Larger switching displacement than mechanical switches; offers better mounting tolerance and sagging tolerance of the protective door 	3SE63	12/115
 <p>3SU1400</p>	<p>Command devices</p> <ul style="list-style-type: none"> • Using a special F adapter, EMERGENCY-STOP devices according to ISO 13850 can be directly connected through the standard AS-Interface or PROFIsafe with safety-related communication. This F adapter/fail-safe interface module is snapped from the rear onto the EMERGENCY-STOP device, enabling the achievement of maximum performance level "e" according to EN ISO 13849-1, or SIL 3 according to IEC 62061. • Thanks to SIRIUS ACT with PROFINET, pushbuttons and indicator lights can be connected directly via PROFINET to the controller and HMI devices – including with safety functions. Engineering and commissioning are simplified no end by the TIA Portal. • EMERGENCY-STOP devices for disconnecting plants in an emergency situation • With positive latching function according to EN ISO 13850 and performance level "e" according to EN ISO 13849-1 or SIL 3 according to IEC 62061 • Various mushroom diameters (also illuminated), with lock, in plastic/metal, as individual or complete units, and in combination with 3SU1 enclosure or two-hand operation console. The 3SU1 enclosures are also optionally available with ASIsafe interface 	3SU1	13/5
 <p>3SU1 with PROFINET</p>			
 <p>3SU10001</p>			

SIRIUS Safety Integrated (continued)		Type	Page
 <p>3SE7</p>	<p>Cable-operated switches</p> <ul style="list-style-type: none"> • Control functions and EMERGENCY-STOP always within reach • More safety over long distances of up to 2 x 75 m length • Easy release • Fail-safe applications with SIRIUS Safety Integrated • Status display directly on the switch • Signal display for long distances in innovative LED technology with visibility over 50 m • Cable-operated switches with latching according to ISO 13850 (EN 418) and full EMERGENCY-STOP function with positive-opening contacts • Quick and safe mounting using uniform mounting accessories • Versions with 1 NO/2 NC with yellow lid 	3SE7	13/155
 <p>3SE2924-3AA20</p>	<p>Safety foot switches</p> <ul style="list-style-type: none"> • Are used wherever manual operation is not possible • With hood, IP65 metal enclosure • With interlock function according to ISO 13850, manual release by pushbutton switch • With 2 NO + 2 NC, NO contacts close by momentary contact, NC contacts positively driven with independent latching (safety function) 	3SE2924-3AA20	13/159

Connection methods

The 3SK safety relays are available with screw or spring-type terminals (push-in).

The 3TK2810 safety relays and the 3RK3 Modular Safety System are available with screw or spring-type terminals.



Screw terminals



Spring-type terminals (push-in)

The terminals are indicated in the corresponding tables by the symbols shown on orange backgrounds.

3SK safety relays: Spring-type terminals (push-in)

Push-in connections are a form of spring-type terminals allowing fast wiring without tools for rigid conductors or conductors equipped with end sleeves.

As with other spring-type terminals, a screwdriver (with 3.0 x 0.5 mm blade) is required to disconnect the conductor. The same tool can also be used to wire fine-stranded or stranded conductors with no end finishing.

The advantages of the push-in terminals are found, as with all spring-type terminals, in speed of assembly and disassembly and vibration-proof connection. There is no need for the checking and tightening required with screw terminals.

Safety Relays

SIRIUS 3SK Safety Relays

General data

Overview



SIRIUS 3SK safety relays

More information

Homepage, see www.siemens.com/safety-relays

Industry Mall, see www.siemens.com/product?3SK

Conversion tool e.g. from 3TK28 to 3SK, see www.siemens.com/sirius/conversion-tool

SIRIUS 3SK safety relays are the key elements of a consistent, cost-effective safety chain. Whether you need EMERGENCY-STOP functionality, protective door monitoring, light arrays, laser scanners or the protection of presses or punches – slimline SIRIUS safety relays enable all safety applications to be implemented in the best possible way in terms of engineering and price.

The following safety-related functions are available:

- Monitoring the safety functions of sensors
- Monitoring the sensor leads
- Monitoring the correct device function of the safety relay
- Monitoring the actuators in the shutdown circuit
- Safety-related disconnection when dangers arise

SIRIUS 3SK safety relays are approved for applications up to SIL 3 (IEC 61508/IEC 62061) or PL e (EN ISO 13849-1).

Device series

SIRIUS 3SK safety relays stand out due to their flexibility for both parameterization and system designs with several evaluation units. Optimized solutions when selecting components are facilitated by a clearly structured component range:

- 3SK1 Standard basic units
- 3SK1 Advanced basic units
- 3SK2 basic units
- 3SK1 output expansions
- 3SK1 input expansions
- Accessories

3SK1 Standard basic units

The 3SK1 Standard basic units are characterized by the following features:

- Compact design
- Simple operation
- Relay and semiconductor outputs
- Economical solution

3SK1 Advanced basic units

The 3SK1 Advanced basic units also offer:


- Universal application possibilities thanks to multifunctionality
- Time-delayed outputs
- Expansion of inputs and outputs

3SK2 basic units

The 3SK2 basic units also offer:

- Up to six fail-safe, independent shutdown functions
- Flexible in use thanks to software parameterization
- Powerful semiconductor outputs
- User-friendly diagnostics using diagnostics display and configuring software

In the case of 3SK1 Advanced basic units or 3SK2 basic units, the 3ZY12 device connector allows safety functions involving several sensors and actuators to be constructed very quickly.

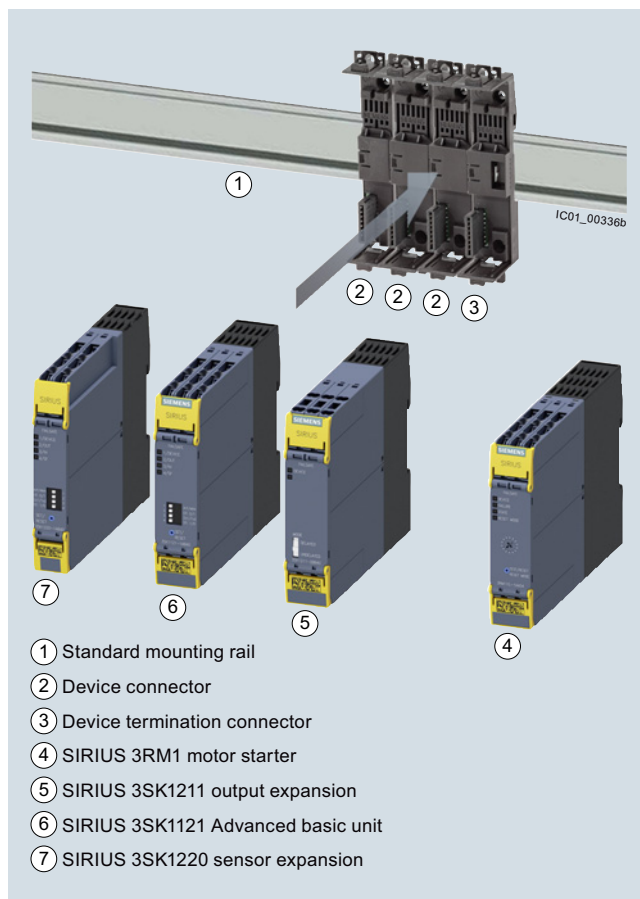

System configuration example

The 3SK1 Standard and Advanced and the 3SK2 series are a high-quality replacement for the 3TK28 safety relays. In their narrower design, and equipped with greater functionality, they can replace every 3TK28 device. The only exception to this are the 3TK2810 devices.

Overview of functions of the 3SK series

Type	3SK1 Standard basic units		3SK1 Advanced basic units		3SK2 basic units	
	Safe relay outputs	Safe semiconductor outputs	Safe relay outputs	Safe semiconductor outputs	22.5 mm Safe semiconductor outputs	45 mm Safe semiconductor outputs
Sensors						
• Mechanical	✓	✓	✓	✓	✓	✓
• Non-floating	✓ ¹⁾	✓	✓	✓	✓	✓
• Antivalent	--	--	✓	✓	✓	✓
• Expandable	--	✓ by means of cascading	✓	✓	--	--
Inputs						
• Freely parameterizable	--	--	--	--	10 single-channel, 5 two-channel	20 single-channel, 10 two-channel
Parameters						
• Start (auto/monitored)	✓	✓	✓	✓	A variety of functions can be set for each input/output by means of software parameterization.	
• Sensor connection, 2 x 1-channel/ 1 x 2-channel	✓ by means of wiring	✓	✓	✓		
• Cross-circuit detection	✓ by means of wiring	✓	✓	✓		
• Start test ON/OFF	--	✓	✓	✓		
• Monitoring of two-hand operation consoles according to EN 574	--	--	✓	✓		
• Pressure-sensitive mat	--	--	✓	✓		
Safe outputs						
• Instantaneous	✓	✓	✓	✓	Parameterizable	Parameterizable
• Time-delayed	--	--	✓	✓	Parameterizable	Parameterizable
• Expandable with safe relay outputs	✓ by means of wiring	✓ by means of wiring	✓	✓	✓	✓
• Independent	--	--	--	--	✓ ⁴⁾	✓ ⁵⁾
• Device connectors	--	--	✓	✓	✓	✓
Options						
• External memory module	--	--	--	--	--	✓
• Display on the device	--	--	--	--	--	✓
• External diagnostics module can be connected	--	--	--	--	✓	✓
Control supply voltage						
• 24 V DC	✓ ²⁾	✓	✓	✓	✓	✓
• 110 ... 240 V AC/DC	✓	✓ ⁶⁾	✓ ³⁾	✓ ³⁾	--	--

✓ Available

-- Not available

1) 24 V basic units only.

2) 24 V AC/DC.

3) Possible using 3SK1230 power supply via device connector.

4) Up to 4 independent safe outputs, two of which via device connectors.

5) Up to 6 independent safe outputs, two of which via device connectors.

6) Possible using 3SK1230 power supply by means of wiring.

Safety Relays

SIRIUS 3SK Safety Relays

General data

Parameter assignment

3SK112 and 3SK1112 with DIP switch

The 3SK112 and 3SK1112 safety relays are configurable safety relays. They are used as evaluation units for typical safety chains (detect, evaluate, react). A number of functions can be set using the DIP switches on the front. 3SK112 and 3SK1112 are therefore universally applicable.

DIP switch No.	OFF	ON	Schematic
1	Sensor input Autostart	Sensor input Monitored start	
2	Without crossover monitoring	With crossover monitoring	
3	2 x single-channel sensor connection	1 x 2-channel sensor connection	
4	With start test	Without start test	


3SK2 with software

The 3SK2 safety relays are configured with the SIRIUS Safety ES software. The behavior of a 3SK2 device as well as the functioning of the individual safe outputs can thus be parameterized simply and conveniently in the logic diagram. In addition, the configuration can be printed out for documentation purposes. The software also supports users in commissioning and troubleshooting by means of online diagnostics and the option of "forcing" signals in the logic diagram. The 3SK2 safety relays thus offer maximum flexibility and universal application options.

Note:

SIRIUS Safety ES, [see page 14/26](#).

Enclosure concept

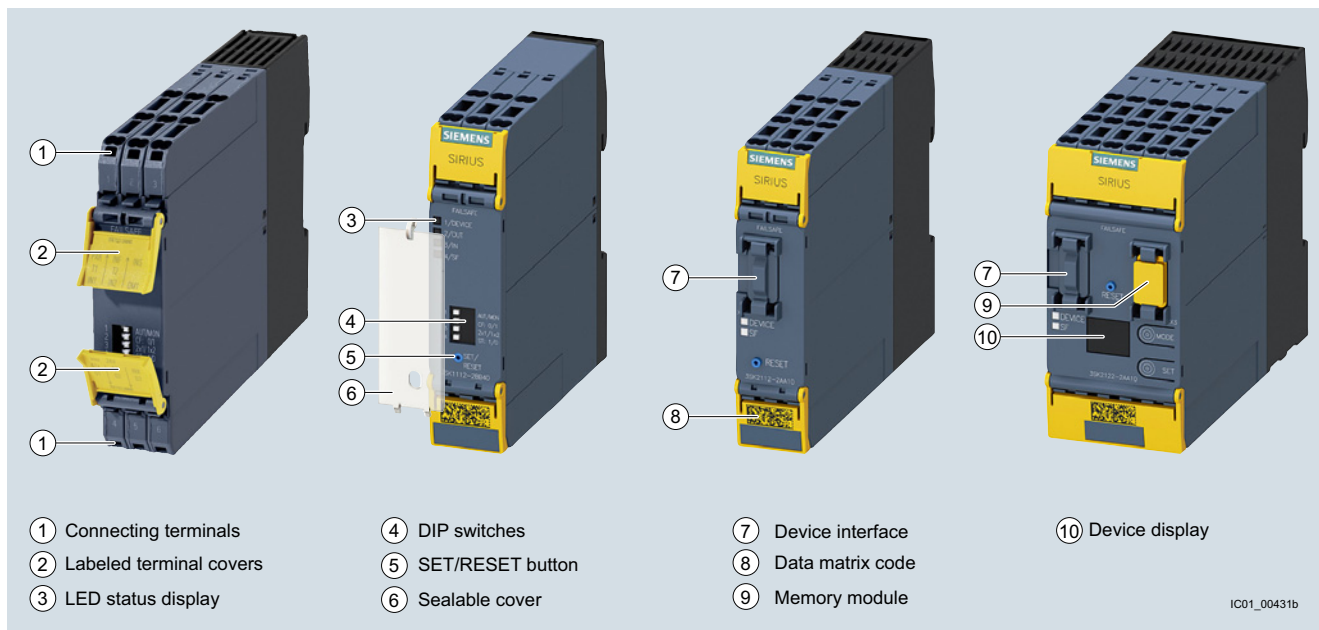

Innovative enclosure concept for SIRIUS 3SK safety relays

Connection methods

The 3SK safety relays are available with screw or spring-type terminals (push-in).


Spring-type terminals (push-in)

Push-in connections are a form of spring-type terminals allowing fast wiring without tools for rigid conductors or conductors equipped with end sleeves.

As with other spring-type terminals, a screwdriver (with 3.0 x 0.5 mm blade) is required to disconnect the conductor. The same tool can also be used to wire finely-stranded or stranded conductors with no end finishing.

The advantages of the push-in terminals are found, as with all spring-type terminals, in speed of assembly and disassembly and vibration-proof connection. There is no need for the checking and tightening required with screw terminals.

Seamlessly integrated safety right through to the main circuit

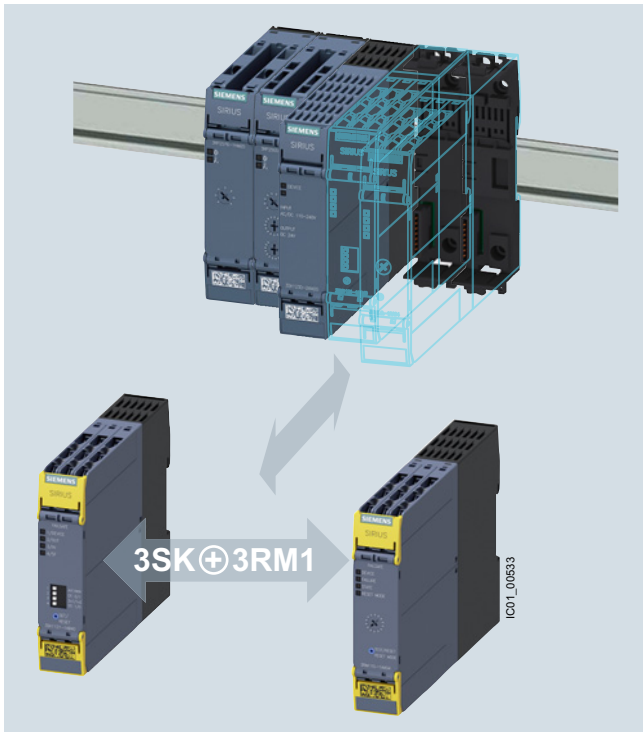

Problem-free integration of functional safety into the main circuit through the simple combination of 3RM1 and 3SK1 devices

Functional safety in the main circuit needs to be both simple and flexible

The unique compatibility of hybrid 3RM1 fail-safe motor starters and 3SK safety relays means that integrated functional safety right through to the main circuit is no longer a problem.

Their compact design allows the motor starters to be installed to the right of the safety relay in a simple manner, just like an output expansion. The wiring of the safety-related signals to the relay can be performed simply, quickly and in an error-free manner using the device connector.

The ergonomically designed enclosure with removable terminals and terminal labeling in the hinged cover allows for the cables to be conveniently diagonally mounted from the front. Either screw-type or spring-loaded terminals with push-in technology are available.

Highlights

- Fail-safe disconnection of motors up to 3 kW
- Problem-free combination of fail-safe motor starters and safety relays
- End-to-end system, simple setup using device connectors
- Ergonomic enclosure

Note:

SIRIUS 3RM1 motor starters, [see page 8/85](#).

Article No. scheme

Product versions		Article number	
3SK1 safety relays		3SK1	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Device version	Basic unit	1	
	Expansion unit	2	
Device variants	3SK11: Standard; 3SK12: Output expansion	1	
	3SK11: Advanced; 3SK12: Input expansion	2	
Type of outputs	Relay outputs	1	
	Semiconductor outputs	2	
	Power outputs	3	
Connection type	Screw terminals		1
	Spring-type terminals (push-in)		2
Control circuit/actuation	3SK11: 3 enabling circuits		A
	3SK11: 2 enabling circuits		B
	3SK11: 4 enabling circuits		C
Type of control supply voltage	3SK1213: 24 V AC, 50/60 Hz		B 0
	3SK1: 24 V AC/DC, 50/60 Hz		B 3
	3SK1: 24 V DC		B 4
	3SK1213: 115 V AC, 50/60 Hz		J 2
	3SK1213: 230 V AC, 50/60 Hz		L 2
	3SK1: 110 ... 240 AC/DC; 50/60 Hz		W 2
Time delay	None		0
	0.05 ... 3 s		1
	0.5 ... 30 s		2
	5 ... 300 s		4
Example		3SK1	1 1 1 - 1 A B 3 0

Safety Relays

SIRIUS 3SK Safety Relays

General data

Product versions		Article number									
3SK2 safety relays		3SK2	1	<input type="checkbox"/>	2	-	<input type="checkbox"/>	A	A	1	0
Device variants	10 F-DI, 2 F-DQ, width 22.5 mm		1								
	20 F-DI, 4 F-DQ, width 45 mm		2								
Connection type	Screw terminals								1		
	Spring-type terminals (push-in)								2		
Example		3SK2	1	1	2	-	1	A	A	1	0

Note:

The Article No. scheme shows an overview of product versions for better understanding of the logic behind the article numbers.

For your orders please use the article numbers quoted in the selection and ordering data.

Benefits

General

- Approved for all safety applications because of its compliance with the highest safety requirements (SIL 3 and PL e)
- Universally usable thanks to adjustable parameters
- Usable worldwide thanks to globally valid certificates
- Compact SIRIUS design
- Device connectors with standard rail mounting for flexible connectability and expandability
- Removable terminals for greater plant availability
- Yellow terminal covers clearly identify the device as a safety component
- Sensor cable up to 2 000 m long allows it to be used in extensive plants

Relay outputs

- Different voltages can be switched through the floating contacts
- The power relay contacts allow currents of up to 5 A at AC-15/DC-13 to be connected

Semiconductor outputs

- Wear-free
- Suitable for operation in frequently switching applications
- Insensitive to vibrations and dirt
- Good electrical endurance

Power outputs (3SK1213 output expansion)

- Different voltages can be switched through the floating contacts
- With the power relay contacts currents up to 10 A AC-15/6 A DC-13 can be switched
- High mechanical and electrical endurance
- Protective separation between safe outputs and electronics

Expansion option by adding the 3RM1 motor starter

SIRIUS 3SK safety relays are ideal for combining with the SIRIUS 3RM1 motor starters.

Combinations are made by means of

- SIRIUS 3ZY12 device connectors (in combination with 3SK1 Advanced/3SK2) or
- Conventional wiring (for all 3SK1 and 3SK2 basic units)

This makes collective shutdown very easy in assemblies. The wiring, and ultimately the shutting down of the control supply voltage for the expansion components in EMERGENCY-STOP situations, is performed via the device connector. There is no further need for complex looping of the connecting cables between the safety relay and the motor starters.

The 3RM1 motor starter combines the benefits of semiconductor technology and relay technology. This combination is also known as hybrid technology.

The hybrid technology in the motor starter is characterized by the following features:

- The inrush current in the case of motorized loads is conducted briefly via the semiconductors. Advantages include protection of the relay contacts and a long service life due to low wear.
- The uninterrupted current is conducted via relay contacts. Advantages include lower heat losses compared with the semiconductor.
- Shutdown is implemented again via the semiconductor. The contacts are only slightly exposed to arcs, and this results in a longer service life.
- Integrated overload protection

Note:

SIRIUS 3RM1 motor starters, [see page 8/85](#).

3ZY12 device connectors

Using 3ZY12 device connectors to combine devices reduces the time required to configure and wire the components. At the same time errors are avoided during wiring, and this considerably reduces the testing required for the fully-assembled application.

Configuration and stock keeping

Variable setting options by means of DIP switches or software, a wide voltage range (3SK1111) and a special power supply unit (3SK1 only) reduce the cost of keeping stocks and the considerations involved in configuration where the evaluation units to be selected are concerned.

Application

3SK1 safety relays

SIRIUS 3SK1 safety relays are used mainly in autonomous safety applications which are not connected to a safety-related bus system. Their function here is to evaluate the sensors and the safety-related shutdown of hazards. Also they check and monitor the sensors, actuators and safety-related functions of the safety relay.

3SK2 safety relays

SIRIUS 3SK2 safety relays are used primarily in autonomous, more complex safety applications for which the functional scope of the 3SK1 devices is no longer sufficient, such as in the implementation of independent shutdown functions. Their function here is to evaluate the sensors and the safety-related shutdown of hazards. Also they check and monitor the sensors, actuators and safety-related functions of the safety relay.


Technical specifications

More information

Manual 3SK1, see
<https://support.industry.siemens.com/cs/ww/en/view/67585885>
 Technical specifications 3SK1230, see
<https://support.industry.siemens.com/cs/ww/en/ps/16389/td>

Manual 3SK2, see
<https://support.industry.siemens.com/cs/ww/en/view/109444336>
 FAQs, see
<https://support.industry.siemens.com/cs/ww/en/ps/16382/faq>

SIRIUS 3SK1 safety relays

Article number	3SK1111- .AB30, 3SK1211- .BB00, 3SK1211- .BB40	3SK1111- .AW20, 3SK1121, 3SK1211- .BW20	3SK1112	3SK1120	3SK1122	3SK1213	3SK1220	
General data								
Width x height x depth	 mm		22.5 x 100 x 121.6	22.5 x 100 x 91.6	17.5 x 100 x 121.6	22.5 x 100 x 121.6	90 x 100 x 121.6	17.5 x 100 x 121.6
Ambient temperature								
• During operation	°C	-25 ... +60						
• During storage	°C	-40 ... +80						
Installation altitude at height above sea level maximum	m	2 000						
Air pressure acc. to SN 31205	kPa	90 ... 106						
Shock resistance	10 g/11 ms					5 g/10 ms	10 g/11 ms	
Vibration resistance acc. to IEC 60068-2-6	5 ... 500 Hz: 0.75 mm							
Degree of protection of the enclosure	IP20							
Touch protection against electric shock	Finger-safe							
Insulation voltage, rated value	V	300	50			300	50	
Impulse withstand voltage, rated value	V	4 000	800			4 000	800	
Safety integrity level (SIL) acc. to IEC 61508	SIL 3							
Performance level (PL) acc. to EN ISO 13849-1	e							
T1 value for proof test interval or service duration acc. to IEC 61508	y	20						
EMC emitted interference	IEC 60947-5-1, class B		IEC 60947-5-1, class A		IEC 60947-5-1, class B		IEC 60947-5-1, class A	
Certificate of suitability								
• UL certification	Yes							
• TÜV approval	Yes							

Safety Relays

SIRIUS 3SK Safety Relays


General data

Article number	3SK1111, 3SK1121-.AB40, 3SK1211	3SK1112, 3SK1122	3SK1120	3SK1121-.CB4.	3SK1213
Switching capacity current of the NO contacts of the relay outputs					
• At AC-15 at 230 V	A 5	--		3	10
• At DC-13 at 24 V	A 5	--		3	6
Switching capacity current of the semiconductor outputs at DC-13 at 24 V	A --	2	0.5	--	

Article number	3SK1111- .AB30, 3SK1211	3SK1111- .AW20	3SK1112, 3SK1220	3SK1120, 3SK1122- .AB40	3SK1121- .AB40	3SK1121- .CB4.	3SK1122- .CB4.	3SK1213
PFHD with high demand rate according to EN 62061	1/h 1.7×10^{-9}	1.5×10^{-9}	1.0×10^{-9}	1.3×10^{-9}	2.5×10^{-9}	3.7×10^{-9}	1.5×10^{-9}	1.0×10^{-9}
PFDavg at low demand rate according to IEC 61508	1.0×10^{-6}		7.0×10^{-6}					1.0×10^{-6}

SIRIUS 3SK2 safety relays

Article number	3SK2112- .AA10	3SK2122- .AA10
----------------	-------------------	-------------------

General data			
Width x height x depth	mm	22.5 x 100 x 124.5	45 x 100 x 124.5
			
Ambient temperature	°C	-25 ... +60	
• During operation	°C	-40 ... +80	
• During storage			
Installation altitude at height above sea level maximum	m	2 000	
Air pressure acc. to SN 31205	kPa	90 ... 106	
Shock resistance		15 g / 11 ms	
Vibration resistance acc. to IEC 60068-2-6		5 ... 500 Hz: 0.75 mm	
Degree of protection of the enclosure		IP20	
Touch protection against electric shock		Finger-safe	
Insulation voltage, rated value	V	50	
Impulse withstand voltage, rated value	V	800	
Safety integrity level (SIL) according to IEC 61508		SIL 3	
Performance level (PL) according to EN ISO 13849-1		e	
T1 value for proof test interval or service duration according to IEC 61508	y	20	
EMC emitted interference according to IEC 60947-1		Class A	
Certificate of suitability		Yes	
• UL certification		Yes	
• TÜV approval			
Switching capacity current of the semiconductor outputs at DC-13 at 24 V		4	
PFHD with high demand rate according to EN 62061	1/h	1.0×10^{-8}	1.2×10^{-8}
PFDavg at low demand rate according to IEC 61508		1.5×10^{-5}	1.8×10^{-5}

Overview



3SK111 Standard basic units

The 3SK111 Standard basic units are characterized by simple, variable functionality. These devices are recommended for safety functions requiring only a few sensors and a small number of outputs on the safety relay.

Note:

Use of device connectors not possible.

Selection and ordering data



3SK1111-1AB30



3SK1111-1AW20



3SK1112-1BB40

Control supply voltage		Number of outputs as contacting contact block			as contactless semiconductor contact block			SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
at AC at 50 Hz	at DC	as NO contact, instantaneous switching	as NO contact, delayed switching	for signaling function, instantaneous switching	instantaneous switching	delayed switching	for signaling function, instantaneous switching						
V	V							d					
Standard basic units													
24	24	3	0	1	0	0	0	▶	3SK1111-□AB30		1	1 unit	41L
110 ... 240	110 ... 240	3	0	1	0	0	0	1	3SK1111-□AW20		1	1 unit	41L
--	24	0	0	0	2	0	1	2	3SK1112-□BB40		1	1 unit	41L

Type of electrical connection

- Screw terminals
- Spring-type terminals (push-in)

1
2

Safety Relays

SIRIUS 3SK Safety Relays

Basic Units

SIRIUS 3SK1 Advanced basic units

Overview



3SK112 Advanced basic units

The 3SK112 Advanced basic units form an innovative system landscape that allows even complex safety functions with large numbers of sensors and outputs to be built up using the device connectors. It is possible to increase both the number of inputs for sensors and the number of safe outputs of the basic unit without the need for wiring outlay between the devices.

Note:

Use of device connectors possible.

Selection and ordering data



3SK1121-1AB40



3SK1120-1AB40



3SK1122-1AB40



3SK1122-1CB41

Control supply voltage at DC	Number of outputs as contacting contact block			as contactless semiconductor contact block			Adjustable OFF-delay time	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG					
	as NO contact, instantaneous switching	as NO contact, delayed switching	as NC contact for signaling function, instantaneous switching	instantaneous switching	delayed switching	for signaling function, instantaneous switching												
V							s	d										
Advanced basic units																		
24	3	0	1	0	0	0	--	▶	3SK1121-□AB40		1	1 unit	41L					
	2	2	0	0	0	0	0.05 ... 3	2	3SK1121-□CB41		1	1 unit	41L					
									3SK1121-□CB42		1	1 unit	41L					
24	0	0	0	1	0	0	--	2	3SK1121-□CB44		1	1 unit	41L					
									3SK1120-□AB40		1	1 unit	41L					
									3	0	1	--	2	3SK1122-□AB40		1	1 unit	41L
														3SK1122-□CB41		1	1 unit	41L
									0.5 ... 30	2	3SK1122-□CB42		1	1 unit	41L			
5 ... 300	5	3SK1122-□CB44		1	1 unit	41L												

Type of electrical connection

- Screw terminals
- Spring-type terminals (push-in)



Overview



3SK2 basic units

The 3SK2 basic units have a large number of inputs and outputs within a narrow width. In addition, demanding safety applications can be implemented simply with several independent safety functions. Flexible application options are enabled by powerful semiconductor outputs, as well as by expandability with additional 3SK output expansions and 3RM1 Failsafe motor starters. Flexible time functions and diagnostics options are available.



Starter Kit

Starter Kit

The Starter Kit is a favorably-priced complete package for the simple creation of complex safety applications and comprises:

- 3SK2112-2AA10 basic unit, 22.5 mm wide, with spring-loaded terminal (push-in)
- SIRIUS Safety ES Standard software for configuring, commissioning, operating and diagnosing
- USB PC cable for easy transmission of the configuration to the device by means of USB

Selection and ordering data



3SK2112



3SK2122

Control supply voltage at DC	Number of outputs as contactless semiconductor contact block, safety-related, 2-channel	Number of outputs as contactless semiconductor contact block, safety-related, 2-channel	Number of outputs to the device connector, safety-related	Width	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
V				mm	d					
3SK2 basic units										
24	2	1	2	22.5	2	3SK2112-□AA10		1	1 unit	41L
	4	2	2	45	2	3SK2122-□AA10		1	1 unit	41L

Type of electrical connection

- Screw terminals
- Spring-type terminals (push-in)



Control supply voltage at DC	Number of outputs as contactless semiconductor contact block, safety-related, 2-channel	Number of outputs as contactless semiconductor contact block, safety-related, 2-channel	Number of outputs to the device connector, safety-related	Width	SD	Spring-type terminals (push-in)	Price per PU	PU (UNIT, SET, M)	PS*	PG
V				mm	d	Article No.				
3SK2 starter kit										
Contains 3SK2112-2AA10 basic unit, SIRIUS Safety ES Standard and 3UF7941-0AA00-0 USB PC cable										
24	2	1	2	22.5	2	3SK2941-2AA10		1	1 unit	4N1

* You can order this quantity or a multiple thereof. Illustrations are approximate

Safety Relays

SIRIUS 3SK Safety Relays

Expansion Units

Output expansions

Overview



3SK121 output expansion

The 3SK121 output expansions can be used to expand all 3SK basic units.

3SK1211 output expansion

The 3SK1211 output expansion is used to expand the safe outputs of a basic unit by adding another four safe outputs. These outputs have a switching capacity of AC-15 5 A at a switching voltage of 230 V. The devices can be connected to any 3SK basic unit by means of wiring. In addition, the devices with a 24 V DC control supply voltage can also be connected to 3SK1 Advanced basic units and 3SK2 basic units by means of the 3ZY12 device connectors.

3SK1213 output expansion

The 3SK1213 output expansion is used to expand the safe outputs of a basic unit by adding three safe outputs with high switching capacity. These outputs have a switching capacity of AC-15 10 A at a switching voltage of 230 V. The devices can be connected to any 3SK basic unit by means of wiring. As with the 3SK1211, the devices with a 24 V DC control supply voltage can also be connected to 3SK1 Advanced and 3SK2 basic units by means of the 3ZY12 device connectors.

Note:

It is only possible to expand the Standard basic units by means of wiring. Advanced basic units and 3SK2 basic units can be expanded using the 3ZY12 device connector.

Benefits

- Perfect adaptation of the number of inputs
- Simple expansion of instantaneous and time-delayed safe outputs of the Advanced basic units using device connectors
- When using the device connector the outputs on the terminals of the basic device can still be used
- Another two freely parameterizable shutdown functions on 3SK2 basic units when using device connectors
- Expansion with power contacts for high AC-15/DC-13 currents in the control circuit
- No wiring of the feedback circuit to the basic units is required when using device connectors
- Shorter installation times
- Less configuring and testing required

Selection and ordering data



3SK1211-1BB40



3SK1213-1AB40

Control supply voltage		Number of outputs as contacting contact block			3ZY12 device connectors	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
at AC at 50 Hz	at DC	as NO contact, instantaneous switching	as NO contact, delayed switching	as NC contact instantaneous switching for feedback circuit							
V	V				d						
24	--	4	0	1	No	5	3SK1211-□BB00		1	1 unit	41L
--	24	4	0	1	Yes	1	3SK1211-□BB40		1	1 unit	41L
110 ... 240	110 ... 240	4	0	1	No	2	3SK1211-□BW20		1	1 unit	41L
--	24	3	0	1	Yes	5	3SK1213-□AB40		1	1 unit	41L
115	--	3	0	1	No	5	3SK1213-□AJ20		1	1 unit	41L
230	--	3	0	1	No	5	3SK1213-□AL20		1	1 unit	41L

Type of electrical connection

- Screw terminals
- Spring-type terminals (push-in)

1
2

Overview



3SK1220 sensor expansion

With the input expansions

- 3SK1220 sensor expansion
- 3SK1230 power supply

the 3SK1 Advanced basic units can be made more flexible.

3SK1220 sensor expansion

The 3SK1220 input expansion allows additional sensors to be integrated easily and flexibly. The device monitors two 1-channel sensors or one 2-channel sensor, whatever their output technology (floating/single-ended).

Note:

The 3SK1220 sensor expansion can only be connected to the 3SK1 Advanced basic units by means of the 3ZY12 device connector, see page 11/24.

3SK1230 power supply

The 3SK1230 power supply makes the 3SK1 devices universally usable, whatever control supply voltage is to be used.

Note:

Alongside the 3ZY12 device connector, the 3SK1230 power supply can also be wired to act as a power supply for 3SK1 devices.

Benefits

- A wide voltage range of 110 ... 240 V AC/DC allows the devices to be used worldwide
- Low stock keeping due to little variance
- Flexible expansion of the number of sensors without the need for additional wiring between the devices
- Perfect adaptation of the number of inputs to suit the application
- Universal use thanks to the wide range of adjustable parameters for sensor expansion (parameters as for 3SK1 Advanced basic units)

Selection and ordering data



3SK1220-1AB40



3SK1230-1AW20

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Sensor expansions						
For safety-related expansion of the 3SK1 Advanced basic units by adding a further 2-channel sensor or two 1-channel sensors	2	3SK1220-□AB40		1	1 unit	41L
Power supply						
For supplying 3SK1 Advanced basic units via 3ZY12 device connectors at voltages of 110 ... 240 V AC/DC	2	3SK1230-□AW20		1	1 unit	41L

Type of electrical connection

- Screw terminals
- Spring-type terminals (push-in)

1
2

Safety Relays

SIRIUS 3SK Safety Relays

Accessories

Overview

Numerous accessories are available for 3SK, such as device connectors, terminals, cables, adapters, covers, memory and diagnostics modules or software.

Device connectors for 3SK112., 3SK12.. and 3SK2

The device connector can be used to connect devices of the 3SK/3RM1 system together, with the last device in a system configuration being placed on a device termination connector. Use of device connectors not possible with 3SK1 standard.

Device connectors are available in various versions specifically for the 3SK safety relays:

For type	Device connectors				Device termination connectors	
	3ZY1212-1BA00 (for 3SK1, width 17.5 mm)	3ZY1212-2BA00 (for 3SK1, width 22.5 mm)	3ZY1212-2GA00 (for 3SK2, width 22.5 mm)	3ZY1212-4GA01 (for 3SK2, width 45 mm)	3ZY1212-2DA00 (for 3SK1, width 22.5 mm)	3ZY1212-0FA01 (for 3SK1, set for enclosures ≥ 45 mm)
3SK1 Advanced basic units						
3SK1120	✓	--	--	--	--	--
3SK1121	--	✓	--	--	✓	--
3SK1122	--	✓	--	--	✓	--
3SK2 basic units						
3SK2112	--	--	✓	--	--	--
3SK2122	--	--	--	✓	--	--
Output expansions						
3SK1211	--	✓	--	--	✓	--
3SK1213	--	--	--	--	--	✓
Input expansions						
3SK1220	✓	--	--	--	--	--
3SK1230	--	✓	--	--	--	--

✓ Available

-- Not available

Removable terminals for 3SK

The following removable terminals are available for the 3SK safety relays for pre-wiring of the terminals in the control cabinet, or for replacing terminals:

For type	Removable terminals			
	Screw terminals		Spring-type terminals (push-in)	
	2-pole 3ZY1121-1BA00	3-pole 3ZY1131-1BA00	2-pole 3ZY1121-2BA00	3-pole 3ZY1131-2BA00
3SK1 basic units				
3SK1111	--	✓	--	✓
3SK1112	✓	--	✓	--
3SK1120	--	✓	--	✓
3SK1121	--	✓	--	✓
3SK1122	✓ bottom	✓ top	✓ bottom	✓ top
3SK2 basic units				
3SK2112	--	✓	--	✓
3SK2122	--	✓ ¹⁾	--	✓ ¹⁾
Output expansions				
3SK1211	✓	--	✓	--
3SK1213	--	--	--	--
Input expansions				
3SK1220	--	✓ top	--	✓ top
3SK1230	✓ bottom	--	✓ bottom	--

✓ Available

-- Not available

¹⁾ Two sets of terminals are required for 3SK2122.

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d						

Device connectors for the electrical connection of SIRIUS devices in the industrial standard mounting rail enclosure



3ZY1212-1BA00

3ZY1212-2DA00

Device connector for 3SK1

- Width 17.5 mm
- Width 22.5 mm

Device connector for 3SK2

- Width 22.5 mm
- Width 45 mm

Device termination connectors

For 3SK1, width 22.5 mm

Note:

Observe positions of the slide switch, see Manual "3SK1 Safety Relays", <https://support.industry.siemens.com/cs/ww/en/view/67585885>

Device daisy chain connectors

For 3RM1 and 3SK, 24 V DC, 22.5 mm, for implementation of distances between devices according to the installation guidelines












Device connectors

For height adjustment for devices without electrical connection via device connector, with a width of 22.5 mm or greater

Device termination connector set

For 3SK1213, width > 45 mm, comprising 3ZY1212-2FA00 and 3ZY1210-2AA00

2	3ZY1212-1BA00	1	1 unit	41L
2	3ZY1212-2BA00	1	1 unit	41L
2	3ZY1212-2GA00	1	1 unit	41L
2	3ZY1212-4GA01	1	1 unit	41L
2	3ZY1212-2DA00	1	1 unit	41L
2	3ZY1212-2AB00	1	1 unit	41L
2	3ZY1210-2AA00	1	1 unit	41L
2	3ZY1212-0FA01	1	1 unit	41L






Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Terminals for SIRIUS devices in the industrial standard mounting rail enclosure						
 3ZY1121-1BA00	Removable terminals					
	• 2-pole, up to 2 x 1.5 mm ² or 1 x 2.5 mm ²	2				
	• 3-pole, up to 2 x 1.5 mm ² or 1 x 2.5 mm ² ¹⁾	2				
	• 2-pole, up to 2 x 1.5 mm ²	2				
• 3-pole, up to 2 x 1.5 mm ² ¹⁾	2					
			Screw terminals 			
			3ZY1121-1BA00 1 6 units 41L			
			3ZY1131-1BA00 1 6 units 41L			
			Spring-type terminals (push-in) 			
			3ZY1121-2BA00 1 6 units 41L			
			3ZY1131-2BA00 1 6 units 41L			
PC cables and adapters for 3SK2 (essential accessories)						
 3UF7941-0AA00-0	USB PC cables		▶ 3UF7941-0AA00-0 1 1 unit 42J			
	For connecting to the USB interface of a PC/PG, for communication with 3SK2 through the system interface, recommended for use in connection with 3SK2					
			USB/serial adapters 5 3UF7946-0AA00-0 1 1 unit 42J			
			For connecting a RS 232 PC cable to the USB interface of a PC			
Connecting cables for 3SK2 (essential accessory for diagnostics module)						
 3UF7932-0AA00-0	For connecting diagnostics module to 3SK2 basic unit					
	• Length 0.1 m (flat)	▶	3UF7931-0AA00-0 1 1 unit 42J			
	• Length 0.3 m (flat)	▶	3UF7935-0AA00-0 1 1 unit 42J			
	• Length 0.5 m (flat)	▶	3UF7932-0AA00-0 1 1 unit 42J			
	• Length 0.5 m (round)	▶	3UF7932-0BA00-0 1 1 unit 42J			
	• Length 1.0 m (round)	▶	3UF7937-0BA00-0 1 1 unit 42J			
	• Length 2.5 m (round)	▶	3UF7933-0BA00-0 1 1 unit 42J			
Operating and monitoring modules for 3SK2						
 3SK2611-3AA00	Diagnostics modules		2 3SK2611-3AA00 1 1 unit 41L			
	For direct display of errors, e.g. of cross-circuits					
<u>Note:</u>						
The 3RK3611-3AA00 MSS diagnostics module cannot be operated on the 3SK2 devices.						
Door adapters for 3SK2						
 3UF7920-0AA00-0	For external connection of the system interface, e.g. outside a control cabinet		▶ 3UF7920-0AA00-0 1 1 unit 42J			
Interface covers for 3SK2						
 3RA6936-0B	For system interface		10 3RA6936-0B 1 5 units 42F			
	• Titanium gray NEW					
 3UF7950-0AA00-0	• Light gray		▶ 3UF7950-0AA00-0 1 5 units 42J			
Memory modules for 3SK2						
 3RK3931-0AA00	For backing up the complete parameterization of the 3SK2 safety system without a PC/PG through the system interface		2 3RK3931-0AA00 1 1 unit 42C			
Software for 3SK2						
 3ZS1316-.C.10-0Y.5	SIRIUS Safety ES					
	Software for configuring, commissioning, operating and diagnosing of 3SK2 and 3RK3, see page 14/26.					

¹⁾ For 3SK2122 two terminal sets are required.

Safety Relays

SIRIUS 3SK Safety Relays

Accessories

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Accessories for enclosures						
 3ZY1321-2AA00	Sealing covers					
	• 17.5 mm (for 3SK1120 and 3SK1220)	2	3ZY1321-1AA00	1	5 units	41L
	• 22.5 mm (for all 3SK1 devices except 3SK1120 and 3SK1220)	2	3ZY1321-2AA00	1	5 units	41L
 3ZY1311-0AA00	Push-in lugs	2	3ZY1311-0AA00	1	10 units	41L
	For wall mounting					
 3ZY1440-1AA00	Coding pins	2	3ZY1440-1AA00	1	12 units	41L
	For removable terminals of SIRIUS devices in the industrial standard mounting rail enclosure. They enable the mechanical coding of terminals, see Manual "3SK1 Safety Relays", https://support.industry.siemens.com/cs/ww/en/view/67585885					
Blank labels						
 3RT2900-1SB20	Unit labeling plates	20	3RT2900-1SB20	100	340 units	41B
	For SIRIUS devices 20 mm x 7 mm, titanium gray ¹⁾					
Tools for opening spring-type terminals						
 3RA2908-1A	Screwdrivers	2	3RA2908-1A	1	1 unit	41B
	For all SIRIUS devices with spring-type terminals; 3.0 mm x 0.5 mm; length approx. 200 mm, titanium gray/black, partially insulated					
			Spring-type terminals (push-in)			

¹⁾ PC labeling system for individual inscription of unit labeling plates available from: murrplastik Systemtechnik GmbH, see page 16/15.

Overview



SIRIUS 3TK2810 safety relays

More information

Homepage, see www.siemens.com/safety-relays

Industry Mall, see www.siemens.com/product?3TK28

Article No. scheme

Product versions		Article number					
Safety relays with special functions		3TK2810	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Device version	Standstill monitor	0					
	Overspeed monitor for NPN/PNP proximity switches and encoders	1					
Type of control supply voltage	24 V DC		B				
	230 V AC, 50/60 Hz		G				
	400 V AC, 50/60 Hz		J				
	120 ... 240 V AC/DC; 50/60 Hz		K				
Time delay	0.2 ... 6 s (standstill)			0			
	0 ... 999 s (release delay)			4			
Connection type	Screw terminals					1	
	Spring-type terminals (push-in)					2	
Version	Overspeed monitor for NAMUR proximity switches and encoders						- 0 A A 0
Example		3TK2810	-	0	B	A	0 1

Note:

The Article No. scheme shows an overview of product versions for better understanding of the logic behind the article numbers.

For your orders please use the article numbers quoted in the selection and ordering data.

Benefits

3TK2810-0 standstill monitors

- No additional sensors required
- Signaling of faults with diagnostics display
- Standstill time can be set
- Unit can be used with frequency converters

3TK2810-1 speed monitors

- Menu-prompted, easy parameterization
- Direct diagnosis on the display means shorter downtimes thanks to early fault detection
- Integrated protective door monitoring means greater safety because access to the plant is allowed only in the safe state
- Suitable for all standard sensors, i.e. high flexibility

Safety Relays

SIRIUS 3TK28 Safety Relays

With special functions

Technical specifications

More information

Operating instructions 3TK2810-0, [see](https://support.industry.siemens.com/cs/de/en/view/25437254)
<https://support.industry.siemens.com/cs/de/en/view/25437254>
 Manual 3TK2810-1, [see](https://support.industry.siemens.com/cs/ww/en/view/43707376)
<https://support.industry.siemens.com/cs/ww/en/view/43707376>

Technical specifications 3TK2810, [see](https://support.industry.siemens.com/cs/de/en/ps/16391/td)
<https://support.industry.siemens.com/cs/de/en/ps/16391/td>
 FAQs, [see](https://support.industry.siemens.com/cs/ww/en/ps/16391/faq)
<https://support.industry.siemens.com/cs/ww/en/ps/16391/faq>

Type	3TK2810-0 standstill monitors	3TK2810-1 speed monitors
Sensors		
• Inputs	3	4
• Electronic	--	3
• With contacts	--	1
• Without sensors (measuring inputs)	3	--
• Magnetically operated switch (Reed contacts)	--	--
Safety mats	--	--
Start		
• Auto	✓	✓
• Monitored	--	✓
Cascading input 24 V DC	--	--
Key-operated switch	--	--
Enabling circuit, floating		
• Stop category 0	3 NO + 1 NC	2
• Stop category 1	--	--
Enabling circuit, electronic		
• Stop category 0	--	--
• Stop category 1	--	--

Type	3TK2810-0 standstill monitors	3TK2810-1 speed monitors
Signaling outputs		
• Floating	1 CO	--
• Electronic	2	2
Standards	IEC 60204-1, EN ISO 12100, EN ISO 13849-1, IEC 61508	IEC 60947-5-1, EN ISO 13849-1, IEC 60204-1, IEC 61508
Test certificates	TÜV, UL, CSA	TÜV, UL, CSA
SIL level max. according to IEC 61508	3	3
Performance level PL according to EN ISO 13849-1	e	e
Probability of a dangerous failure per hour (PFH_d)	1.5 x 10 ⁻⁸ 1/h	3.38 x 10 ⁻⁹ 1/h
Rated control supply voltage		
• 24 V DC	✓	✓
• 230 V AC	✓	--
• 400 V AC	✓	--
• 120 ... 240 V AC/DC	--	✓

✓ Available
 -- Not available

Selection and ordering data

PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 41L



3TK2810-0BA01










3TK2810-0GA02



3TK2810-1BA41

Rated control supply voltage U_s	Times	SD	Screw terminals	SD	Spring-type terminals	
V	s	d	Article No.	Price per PU	Article No.	Price per PU
Standstill monitors						
3TK2810-0						
• 24 DC	0.2 ... 6 (standstill)	5	3TK2810-0BA01	15	3TK2810-0BA02	
• 230 AC	0.2 ... 6 (standstill)	15	3TK2810-0GA01	15	3TK2810-0GA02	
• 400 AC	0.2 ... 6 (standstill)	15	3TK2810-0JA01	15	3TK2810-0JA02	
Speed monitors						
3TK2810-1 for NPN/PNP proximity switches and encoders						
• 24 DC	0 ... 999 (release delay)	2	3TK2810-1BA41	2	3TK2810-1BA42	
• 120 ... 240 AC/DC	0 ... 999 (release delay)	5	3TK2810-1KA41	5	3TK2810-1KA42	
3TK2810-1 for NAMUR proximity switches and encoders						
• 24 DC	0 ... 999 (release delay)	5	3TK2810-1BA41-0AA0	5	3TK2810-1BA42-0AA0	
• 120 ... 240 AC/DC	0 ... 999 (release delay)	5	3TK2810-1KA41-0AA0	5	3TK2810-1KA42-0AA0	

Selection and ordering data

Use	Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	
Blank labels								
 NSB0...01429b 3RT1900-1SB20	For 3TK28							
		Unit labeling plates For SIRIUS devices 20 mm x 7 mm, pastel turquoise ¹⁾	20	3RT1900-1SB20		100	340 units	41B
	For 3TK28	Adhesive labels For SIRIUS devices						
		• 19 mm x 6 mm, pastel turquoise	15	3RT1900-1SB60		100	3 060 units	41B
		• 19 mm x 6 mm, zinc yellow	15	3RT1900-1SD60		100	3 060 units	41B
Push-in lugs and covers								
 3RP1903	For 3TK28	Push-in lugs For screw fixing, 2 units are required for each device	5	3RP1903		1	10 units	41H
	For 3TK28	Sealing foil For securing against unauthorized adjustment of setting knobs	▶	3TK2820-0AA00		1	1 unit	41L
Adapters and connection cables for speed monitors								
 3TK2810-1A  3TK2810-1B  3TK2810-0A	For 3TK2810-1	Adapters For connecting encoders of type Siemens/Heidenhain						
		• 15-pole	2	3TK2810-1A		1	1 unit	41L
		• 25-pole	2	3TK2810-1B		1	1 unit	41L
	For 3TK2810-1	Connection cables For connecting the speed monitor to the 3TK2810-1A or 3TK2810-1B adapter	15	3TK2810-0A		1	1 unit	41L
Tools for opening spring-type terminals								
 3RA2908-1A	For auxiliary circuit connections	Screwdrivers For all SIRIUS devices with spring-type terminals; 3.0 mm x 0.5 mm; length approx. 200 mm, titanium gray/black, partially insulated	2	3RA2908-1A		1	1 unit	41B
				Spring-type terminals				

¹⁾ PC labeling system for individual inscription of unit labeling plates available from: murrplastik Systemtechnik GmbH, see page 16/15.

SIRIUS 3RK3 Modular Safety System

General data

Overview



SIRIUS 3RK3 Modular Safety System

More information

Homepage, see www.siemens.com/sirius-mss

Industry Mall, see www.siemens.com/product?3RK3

The 3RK3 Modular Safety System (MSS) is a freely parameterizable modular safety relay. Depending on the external circuit version, safety-related applications up to Performance Level e according to EN ISO 13849-1 or SIL 3 according to IEC 62061 can be realized.

The modular safety relay enables the interconnection of several safety applications.

The comprehensive error and status diagnostics provides the possibility of finding errors in the system and localizing signals from sensors. Plant downtimes can be reduced as the result.

The MSS comprises the following system components:

- Central units
- Expansion modules
- Interface modules
- Diagnostics modules
- Parameterization software
- Accessories

Central units

MSS Basic

The 3RK3 Basic central unit is used wherever several safety functions need to be evaluated and the wiring parameterization of safety relays would involve significant cost and effort. It reads in inputs, controls outputs and communicates through an interface module with higher-level control systems. An application's entire safety program is processed in the central unit. The 3RK3 Basic central unit is the lowest expansion level and fully functional on its own, without the optional expansion modules.

MSS Advanced

The 3RK3 Advanced central unit is the logical expansion of the Basic central unit with the functionality of an AS-i safety monitor. In addition to having a larger volume of project data and scope of functionality it can be integrated in AS-Interface and therefore make use of the many different possibilities offered by this bus system. The function can be optionally activated in the central unit.

The service-proven insulation piercing method of AS-Interface enables not only the distributed expansion of the project data volume using safe AS-i outputs, safe AS-i sensors and other MSS Advanced or safety monitors (F cross traffic) but also a highly flexible adaptation of the application, e.g. very fast connection of AS-i outputs, EMERGENCY-STOP command devices, position switches with and without tumbler, or light curtains.

Safety-related disconnection using MSS or by distributed means using safe AS-i outputs and the formation of switch-off groups can be realized very easily. The same applies for any subsequent modifications. They are now possible by simply read-dressing, meaning that rewiring is no longer necessary.

The AS-i bus is connected directly to the central unit.

MSS ASIsafe

The MSS ASIsafe basic and MSS ASIsafe extended central units are a logical development of the AS-i safety monitors based on the 3RK3 Modular Safety System.

Like MSS Advanced, MSS ASIsafe detects – in a comparable way to the safety monitors – safe sensor technology on the AS-i bus and switches actuators off in a safety-related manner via a configurable safety logic. It stands out by virtue of its greater project data volume, wider range of functions and the possibility of increasing the integrated I/O project data volume by means of expansion modules from the MSS system family. In this case the range of functions, such as the number and type of the logic elements that can be interconnected, is equivalent to that of MSS Advanced.

Expansion modules

With the optional expansion modules, both safety-related and standard, the system is flexibly adapted to the required safety applications.

Interface modules

The DP interface module is used for transferring diagnostics data and device status data to a higher-level PROFIBUS network, e.g. for purposes of visualization using HMI. When using the Basic central unit, 32-bit cyclic data can be exchanged with the control system. If an Advanced/ASIsafe central unit is used, the number is doubled to 64-bit cycle data. In acyclic mode, both central units can call up diagnostic data.


Diagnostics modules

Actuated sensors or faults, e.g. cross-circuit, are indicated directly on the diagnostics display. The fault is diagnosed directly in plain text by the detailed alarm message. The device is fully functional upon delivery. No programming is required.


Parameterization software

Using the SIRIUS Safety ES graphical parameterization tool, it is very easy to create the safety functions as well as their logical links on the PC. You can define disconnection ranges, ON-delays, OFF-delays and other dependencies for example.


SIRIUS Safety ES also offers comprehensive functions for diagnostics and commissioning. Documentation of the MSS hardware configuration and the parameterized logic is created automatically.

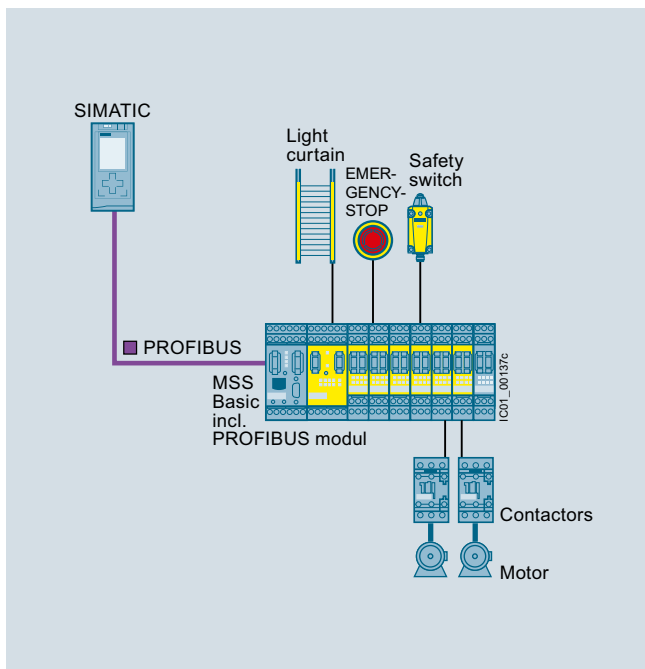

System design of MSS with Basic central module

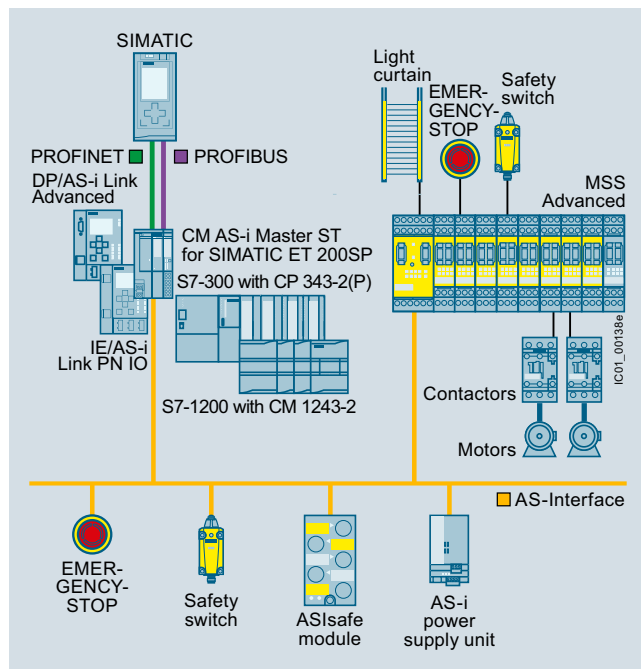

System design of MSS with Advanced central unit

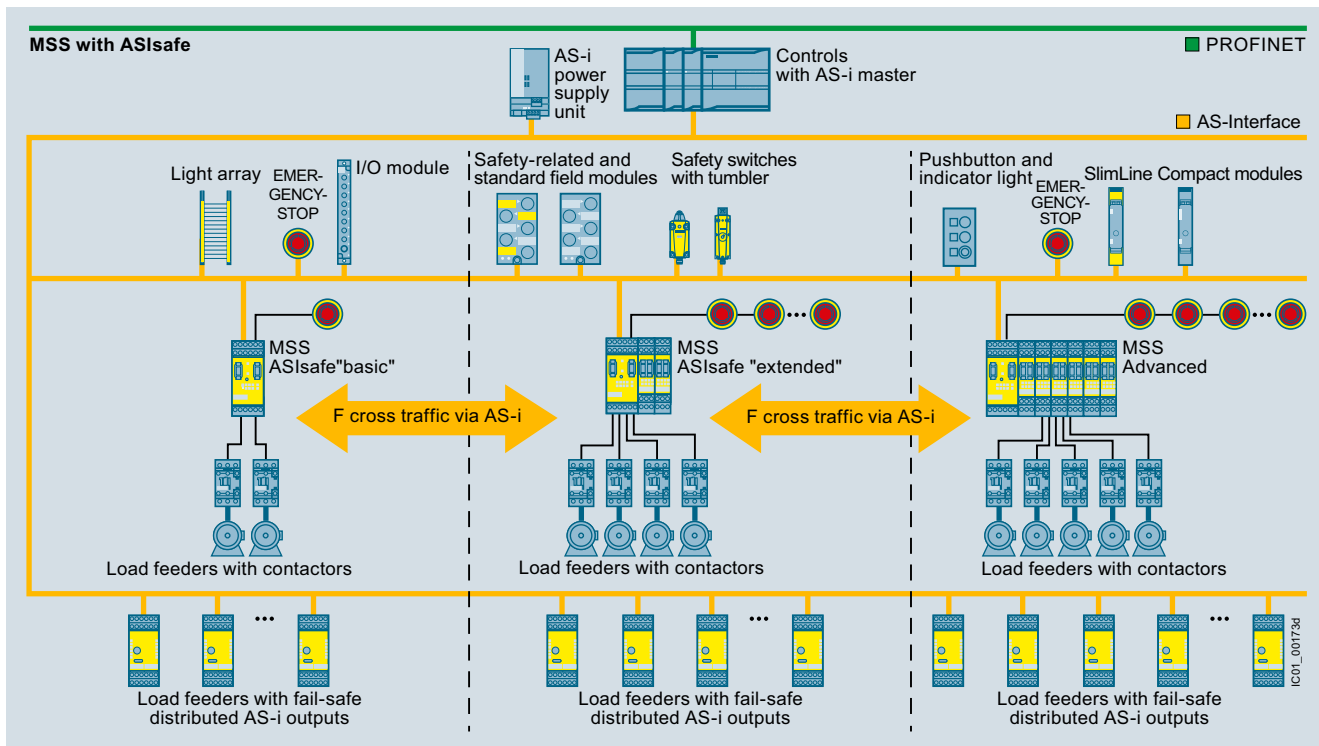

System design of MSS as a combination of various central units with AS-Interface

SIRIUS 3RK3 Modular Safety System

General data

Article No. scheme

Product versions		Article number					
Basic units		3RK3 1 <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> A <input type="checkbox"/> <input type="checkbox"/> 0					
Device variants	3RK3 Basic	1	1				
	3RK3 ASIsafe "basic" variant	2	1				
	3RK3 ASIsafe "extended" variant	2	2				
	3RK3 Advanced	3	1				
Connection type	Screw terminals			1			
	Spring-type terminals			2			
Communication 1	None					A	
	AS-Interface without master					C	
Communication 2	3RK3122: max. 2 expansion modules can be connected						0
	3RK3131: max. 9 expansion modules can be connected						1
Example		3RK3 1 1 1 - 1 A A 1 0					

Product versions		Article number					
Expansion modules with safe inputs/outputs		3RK3 2 <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> A A 1 0					
Device variants	4/8 F-DI	1	1				
	2/4 F-DI 1/2 F-RO	2	1				
	2/4 F-DI 2 F-DO	3	1				
	4 F-DO	4	2				
	4/8 F-RO	5	1				
Connection type	Screw terminals			1			
	Spring-type terminals			2			
Example		3RK3 2 1 1 - 1 A A 1 0					

Product versions		Article number					
Expansion modules with standard inputs/outputs		3RK3 3 <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> A A 1 0					
Device variants	8 DO	1	1				
	8 DI	2	1				
Connection type	Screw terminals			1			
	Spring-type terminals			2			
Example		3RK3 3 1 1 - 1 A A 1 0					

Product versions		Article number					
Interface modules		3RK3 5 1 1 - <input type="checkbox"/> B A 1 0					
Connection type	Screw terminals			1			
	Spring-type terminals			2			
Example		3RK3 5 1 1 - 1 B A 1 0					

Note:

The Article No. scheme shows an overview of product versions for better understanding of the logic behind the article numbers.

For your orders please use the article numbers quoted in the selection and ordering data.

Benefits

- More functionality and flexibility through freely configurable safety logic
- Suitable for all safety applications thanks to compliance with the highest safety standards in production automation
- For use all over the world through compliance with all product-relevant, globally established certifications
- Modular hardware configuration
- Parameterization by means of software instead of wiring
- Removable terminals for greater plant availability
- Distributed detection of sensors and disconnection of actuators through AS-Interface
- All logic functions can also be used for AS-Interface, e.g. muting, protective door with tumbler
- Up to 12 independent safe switch-off groups on the AS-i bus
- Volume of project data can be greatly increased by means of AS-Interface
- Up to 50 two-channel enabling circuits per system

Communication via PROFIBUS

The 3RK3 Modular Safety System can be connected to PROFIBUS through the DP interface and exchange data with higher-level control systems.


The MSS supports among other things:

- Baud rates up to 12 Mbps
- Automatic baud rate detection
- Cyclic services (DPV0) and acyclic services (DPV1)
- Exchange of 32-bit cyclic data with MSS Basic or 64-bit cyclic data with MSS Advanced/MSS ASIsafe
- Diagnostics using data record invocations

AS-Interface communication

Using the Advanced and ASIsafe "basic" and "extended" central units, the 3RK3 Modular Safety System can be integrated in AS-Interface.

- MSS can read and evaluate the I/O data of up to 31 AS-i modules
- Up to 12 safe output signals per MSS can be placed on the AS-i bus for switching safe AS-i output modules or for fail-safe cross traffic between multiple MSS stations
- Safe cross traffic between multiple MSS stations or between one MSS and AS-i safety monitors
- Standard signals, e.g. for acknowledgment, can also be output on the AS-i bus

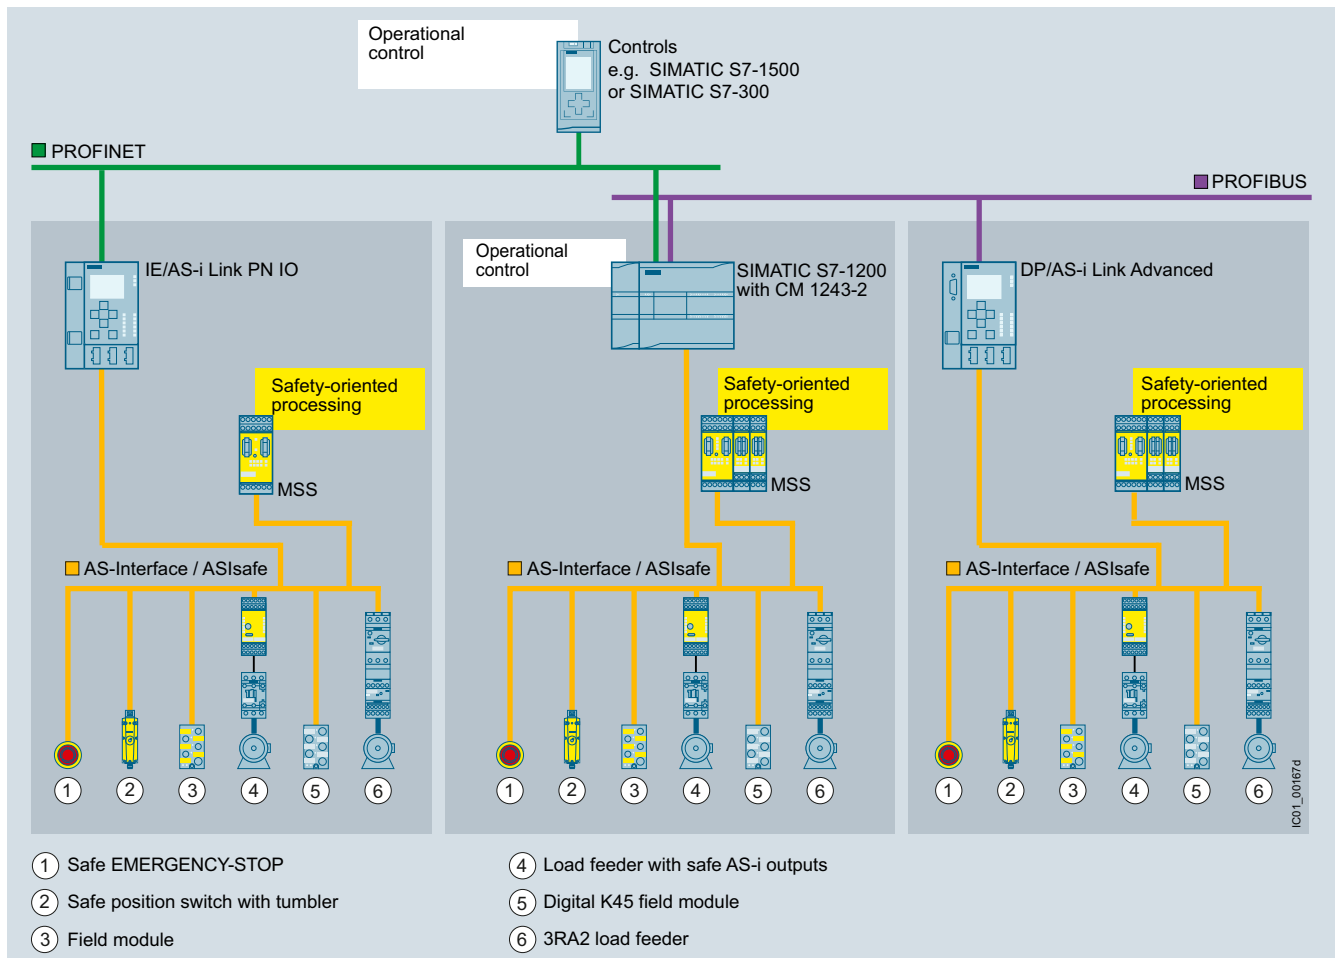

Integration of the MSS into AS-Interface

Notes:

MSS with communication function, [see from page 11/38 onwards](#).

Accessories, [see page 11/40](#).

SIRIUS Safety ES, [see page 14/26](#).












For more information on AS-Interface with ASIsafe, [see also page 2/18](#).

SIRIUS 3RK3 Modular Safety System

General data





















Application

The 3RK3 Modular Safety System can be used for all safety-related requirements in the manufacturing industry and offers the following safety functions:

	Symbol	MSS Basic	MSS Advanced, MSS ASIsafe
Monitoring functions			
Universal monitoring Evaluation of any binary signals from single-channel and two-channel sensors		--	✓
EMERGENCY-STOP Evaluation of EMERGENCY-STOP devices with positive-opening contacts		✓	✓
Safety shutdown mat Evaluation of switching mats with NC contacts and/or crossover detection		✓	✓
Protective door monitoring Evaluation of protective door signals and/or protective flap signals		✓	✓
Protective door tumbler mechanism Evaluation of protective doors with tumbler and of the actuation/release of this tumbler		--	✓
Approval switches Evaluation of OK buttons with NO contact		✓	✓
Two-hand operator controls Evaluation of two-hand operator controls		✓	✓
ESPE monitoring Evaluation of non-contact protective devices, e.g. light curtains and laser scanners		✓	✓
Muting Temporary bridging of non-contact protective devices, 2/4 sensors in parallel, 4 sensors in sequence		--	✓
Mode selector switches Evaluation of operating mode selector switches with NO contacts		✓	✓
Monitoring AS-i (AS-i 2F-DI) Logic element for monitoring of AS-i input slaves		--	✓

✓ Available

-- Not available

	Symbol	MSS Basic	MSS Advanced, MSS ASIsafe
Logic operation functions			
AND		✓	✓
OR		✓	✓
XOR		✓	✓
NAND		✓	✓
NOR		✓	✓
Negation		✓	✓
Flip-flop		✓	✓
Counting functions			
Counter 0 -> 1		✓	✓
Counter 1 -> 0		✓	✓
Counter 0 -> 1/1 -> 0		✓	✓
Timer functions			
With ON-delay		✓	✓
Passing make contact		✓	✓
With OFF-delay		✓	✓
Clock-pulsing		✓	✓
Start functions			
Monitored start		✓	✓
Manual start		✓	✓
Output functions			
Standard output		✓	✓
F output		✓	✓
AS-i output function		--	✓
Status functions			
Element status		--	✓


Technical specifications

More information

Manual, see
<https://support.industry.siemens.com/cs/ww/en/view/26493228>
 Technical specifications, see
<https://support.industry.siemens.com/cs/ww/en/ps/16392/td>

FAQs, see
<https://support.industry.siemens.com/cs/ww/en/ps/16392/faq>

Central units and expansion modules

Type	Central units				Expansion modules						
	Basic	Advanced	ASIsafe basic	ASIsafe extended	4/8F-DI	2/4 F-DI 1/2 F-RO	2/4 F-DI 2F-DO	4/8 F-RO	4 F-DO	8 DI	8 DO
Dimensions (W x H x D)											
											
• Screw terminals	mm	45 x 111 x 124			22.5 x 111 x 124			45 x 111 x 124	22.5 x 111 x 124		
• Spring-type terminals	mm	45 x 113 x 124			22.5 x 113 x 124			45 x 113 x 124	22.5 x 113 x 124		
Device data											
Shock resistance (sine pulse)	g/ms	15/11									
Touch protection Acc. to IEC 60529		IP20									
Permissible mounting position		Vertical mounting surface (+10°/-10°), deviating mounting positions are permitted for reduced ambient temperature									
Minimum distances		For heat dissipation through convection from the devices 25 mm to the ventilation openings (top and bottom)									
Permissible ambient temperature											
• During operation	°C	-20 ... +60									
• During storage and transport	°C	-40 ... +85									
Number of sensor inputs (1-channel)											
• Fail-safe		8	8	2	4	8	4	4	--	--	--
• Not fail-safe		--	--	6	4	--	--	--	--	8	--
Number of test outputs		2									
Number of outputs											
• Relay outputs											
- Single-channel		--	--	--	--	--	2	--	8	--	--
- Two-channel		1	1	1	1	--	--	--	--	--	--
• Electronic outputs											
- Single-channel		--	--	--	--	--	--	--	--	--	8
- Two-channel		1	1	1	1	--	2	--	4	--	--
Weight	g	300			160			400	135	125	160
Installation altitude above sea level	m	2 000									
Environmental data											
EMC interference immunity		IEC 60947-5-1									
Vibrations											
• Frequency	Hz	5 ... 500									
• Amplitude	mm	0.75									
Climatic withstand capability		IEC 60068-2-78									


SIRIUS 3RK3 Modular Safety System

General data

Type	Central units				Expansion modules						
	Basic	Advanced	ASIsafe basic	ASIsafe extended	4/8 F-DI	2/4 F-DI 1/2 F-RO	2/4 F-DI 2 F-DO	4/8 F-RO	4 F-DO	8 DI	8 DO
Electrical specifications											
Rated control supply voltage U_s Acc. to IEC 61131-2	V	24 DC $\pm 15\%$ ¹⁾									
Operating range		0.85 ... 1.15 x U_s									
Rated insulation voltage U_i	V	300			50	300	50	300	50		
Rated impulse voltage U_{imp}	kV	4			0.5	4	0.5	4	0.5		
Total current input	mA	185			60	85		140	8	78	60
Rated power at U_s	W	4.5			1.5	2		3	4.8	1.9	1.5
Utilization category Acc. to IEC 60947-5-1											
Relay outputs											
• AC-15 at 230 V	A	2			--	2	--	2	--	--	--
• DC-13 at 24 V	A	1			--	1	--	1	--	--	--
Semiconductor outputs											
• DC-13 at 24 V	A	1.5			--	--	1.2	--	2	--	0.5
Mechanical endurance During rated operation	Operating cycles (relay)	10 x 10 ⁶			--	10 x 10 ⁶	--	10 x 10 ⁶	--		
Switching frequency z At rated operational current	1/h	1 000			--	1 000		360	1 000	--	1 000
Conventional thermal current I_{th}	A	2/1.5			--	1	1.2	3	2	--	0.5
Protection for output contacts											
Fuse links LV HRC type 3NA, DIAZED type 5SB, NEOZED type 5SE											
• Operational class gG	A	4			--	4	--	4	--		
• Operational class quick	A	6			--	6	--	6	--		
Safety specifications											
Probability of a dangerous failure											
• Per hour (PFH _d)	1/h	5.14 x 10 ⁻⁹	3.8 x 10 ⁻⁹ with AS-i, 2.8 x 10 ⁻⁹ without AS-i		1.89 x 10 ⁻⁹	3.79 x 10 ⁻⁹	2.7 x 10 ⁻⁹	7.15 x 10 ⁻⁹	3.18 x 10 ⁻⁹	--	
• On demand (PFD)		1.28 x 10 ⁻⁵	1.7 x 10 ⁻⁴		4.29 x 10 ⁻⁶	5.85 x 10 ⁻⁶	8.34 x 10 ⁻⁶	4.36 x 10 ⁻⁵	2.2 x 10 ⁻⁵	--	
Parameters for cables											
Line resistance	Ω	100						--		100	--
Cable length from terminal to terminal With Cu 1.5 mm ² and 150 nF/km	m	1 000						--		1 000	--
Conductor capacity	nF	330						--		330	--

¹⁾ Device current supply through a power supply unit according to IEC 60536 protection class III (SELV or PELV).

Interface and diagnostics modules

Type		Interface modules	Diagnostics modules
Dimensions (W x H x D)			
• Screw terminals	mm	45 x 111 x 124	96 x 60 x 44
• Spring-type terminals	mm	45 x 113 x 124	--
Device data			
Shock resistance (sine pulse)	g/ms	15/11	
Touch protection acc. to IEC 60529		IP20	
Permissible mounting position		Vertical mounting surface (+10°/-10°), deviating mounting positions are permitted for reduced ambient temperature	
Minimum distances		For heat dissipation through convection from the devices 25 mm to the ventilation openings (top and bottom)	
Permissible ambient temperature			
• During operation	°C	-20 ... +60	
• During storage and transport	°C	-40 ... +85	
Weight	g	270	90
Installation altitude above sea level	m	2 000	
Environmental data			
EMC interference immunity		IEC 60947-5-1	
Vibrations			
• Frequency	Hz	5 ... 500	
• Amplitude	mm	0.75	
Climatic withstand capability		IEC 60068-2-78	
Electrical specifications			
Rated control supply voltage U_s Acc. to IEC 61131-2	V	24 DC ± 15%	24 DC ± 15% via connecting cable to the central unit
Operating range		0.85 ... 1.15 x U_s	
Rated insulation voltage U_i	V	50	
Rated impulse voltage U_{imp}	kV	0.5	
Total current input	mA	--	24
Rated power at U_s	W	--	0.6

SIRIUS 3RK3 Modular Safety System

3RK31 central units

Selection and ordering data



3RK3111-1AA10


 3RK3121-1AC00
 3RK3122-1AC00
 3RK3131-1AC10

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d						
3RK31 central units						
3RK3 Basic Central unit with safety-related inputs and outputs <ul style="list-style-type: none"> • 8 fail-safe inputs • 1 two-channel relay output • 1 two-channel electronic output Max. 7 expansion modules can be connected <u>Note:</u> Memory module 3RK3931-0AA00 is included in the scope of supply.	2	3RK3111-□AA10		1	1 unit	42B
3RK3 Advanced Central units for connecting to AS-Interface with safety-related inputs and outputs and extended functional scope <ul style="list-style-type: none"> • 8 fail-safe inputs • 1 two-channel relay output • 1 two-channel electronic output Max. 9 expansion modules can be connected <u>Note:</u> Memory module 3RK3931-0AA00 is included in the scope of supply.	2	3RK3131-□AC10		1	1 unit	42B
3RK3 ASIsafe Central units for connecting to AS-Interface with safety-related inputs and outputs and extended functional scope <ul style="list-style-type: none"> • 1 two-channel relay output • 1 two-channel electronic output "Basic" version <ul style="list-style-type: none"> • 2 fail-safe inputs • 6 non-fail-safe inputs No expansion modules can be connected "Extended" version <ul style="list-style-type: none"> • 4 fail-safe inputs • 4 non-fail-safe inputs Max. 2 expansion modules can be connected <u>Note:</u> Memory module 3RK3931-0AA00 is included in the scope of supply.	2	3RK3121-□AC00		1	1 unit	42B
	2	3RK3122-□AC00		1	1 unit	42B
Type of electrical connection <ul style="list-style-type: none"> • Screw terminals • Spring-type terminals (push-in) 						

 1
 2

Selection and ordering data



3RK3211-1AA10
3RK3221-1AA10
3RK3231-1AA10
3RK3242-1AA10



3RK3251-1AA10



3RK3311-1AA10
3RK3321-1AA10



3RK3511-1BA10

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
3RK32, 3RK33 expansion modules						
4/8 F-DI Safety-related input module • 8 inputs	2	3RK3211-□AA10		1	1 unit	42B
2/4 F-DI 1/2 F-RO Safety-related input/output module • 4 inputs • 2 single-channel relay outputs	2	3RK3221-□AA10		1	1 unit	42B
2/4 F-DI 2F-DO Safety-related input/output module • 4 inputs • 2 two-channel electronic outputs	2	3RK3231-□AA10		1	1 unit	42B
4/8 F-RO Safety-related output module • 8 single-channel relay outputs	2	3RK3251-□AA10		1	1 unit	42B
4 F-DO Safety-related output module • 4 two-channel solid-state outputs	2	3RK3242-□AA10		1	1 unit	42B
8 DI Standard input module • 8 inputs	2	3RK3321-□AA10		1	1 unit	42B
8 DO Standard output module • 8 solid-state outputs	2	3RK3311-□AA10		1	1 unit	42B
3RK35 interface modules						
DP interface PROFIBUS DP interface, 12 Mbps, RS 485, 32-bit cyclic data exchange with Basic central unit or 64-bit with Advanced and ASIsafe central unit, acyclic exchange of diagnostics data	2	3RK3511-□BA10		1	1 unit	42B
Type of electrical connection • Screw terminals • Spring-type terminals (push-in)						

1
2

Notes:

For the required connection cable, see page 11/40.

SIRIUS 3RK3 Modular Safety System

Accessories

Selection and ordering data

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	
Connection cables (essential accessory)							
 3UF7932-0AA00-0	For connection of						
	Central units with expansion modules or interface module	Diagnostics modules with central unit or interface module					
	✓	✓	• Length 0.025 m (flat) ▶	3UF7930-0AA00-0	1	1 unit	42J
	--	✓	• Length 0.1 m (flat) ▶	3UF7931-0AA00-0	1	1 unit	42J
	--	✓	• Length 0.3 m (flat) ▶	3UF7935-0AA00-0	1	1 unit	42J
	--	✓	• Length 0.5 m (flat) ▶	3UF7932-0AA00-0	1	1 unit	42J
	--	✓	• Length 0.5 m (round) ▶	3UF7932-0BA00-0	1	1 unit	42J
	--	✓	• Length 1.0 m (round) ▶	3UF7937-0BA00-0	1	1 unit	42J
--	✓	• Length 2.5 m (round) ▶	3UF7933-0BA00-0	1	1 unit	42J	
Operating and monitoring modules for 3RK3 NEW							
 3SK2611-3AA00	Diagnostics module	2	3SK2611-3AA00	1	1 unit	41L	
	For direct display of errors, e.g. of cross-circuits						
PC cables and adapters							
 3UF7941-0AA00-0	USB PC cables	▶	3UF7941-0AA00-0	1	1 unit	42J	
	For connecting to the USB interface of a PC/PG, for communication with 3RK3 through the system interface, recommended for use in connection with 3RK3						
	USB/serial adapters	5	3UF7946-0AA00-0	1	1 unit	42J	
For connecting a RS 232 PC cable to the USB interface of a PC							
Door adapter							
 3UF7920-0AA00-0		▶	3UF7920-0AA00-0	1	1 unit	42J	
	For external connection of the system interface, e.g. outside a control cabinet						
Interface covers							
 3UF7950-0AA00-0		▶	3UF7950-0AA00-0	1	5 units	42J	
	For system interface						
Memory modules							
 3RK3931-0AA00		2	3RK3931-0AA00	1	1 unit	42C	
	For backing up the complete parameterization of the 3RK3 Modular Safety System without a PC/PG through the system interface						
Push-in lugs							
 3RP1903		5	3RP1903	1	10 units	41H	
	For screw fixing e.g. on mounting plate, 2 units required per device Can be used for 3RK3						
Software for 3RK3							
 3ZS1316-C.10-0Y.5	SIRIUS Safety ES						
	Software for configuring, commissioning, operating and diagnosing of 3SK2 and 3RK3, see page 14/26.						

✓ Available
-- Not available

Note:

For more accessories and components that can be combined with MSS, see page 2/31.

* You can order this quantity or a multiple thereof. Illustrations are approximate