

contents

Self Protected Motor Starters per UL 508 Type E 3RA6



3RA61 / 3RA62 up to 32 A
for mounting rail, surface,
comb busbar, infeed system Page

Selection and ordering data


- Direct start, Reversing duty 4/7
- Accessories 4/9-4/13



3RA64 / 3RA65 up to 32 A
for mounting rail, surface,
comb busbar, infeed system Page

Selection and ordering data

- Direct start, Reversing duty 4/8
- Accessories 4/9-4/13



3RA68 up to 100 A
for 3RA6 direct and
reversing starters Page

Selection and ordering data

- Infeed Components 4/16-4/19
- Accessories 4/20-4/21

Combination starters & starters for group installation 3RA2




3RA21 up to 100 A
for mounting rail and Fast Bus
busbar systems Page

Selection and ordering data

- Direct start 4/36-4/39
- Accessories 4/44-4/52

Technical data 4/53-4/58
Installation guidelines 4/59-4/68
Circuit diagrams 4/68
Dimension drawings 4/69-4/72

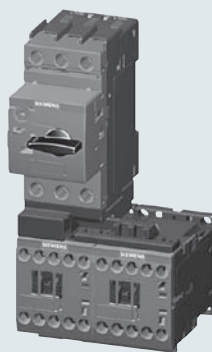

3RA22 up to 100 A
for mounting rail and Fast Bus
busbar systems Page


Selection and ordering data

- Reversing duty 4/40-4/43
- Accessories 4/44-4/52

Technical data 4/53-4/58
Installation guidelines 4/59-4/68
Circuit diagrams 4/68
Dimension drawings 4/69-4/72

Enclosed controllers 3RE4

NEW



3RE4 up to 50Hp @ 460V
for non-reversing and reversing
applications Page

Selection and ordering data

- Enclosed starters 4/75-4/77
- Enclosed contactors 4/78-4/79

Overload Relay 4/80
Accessories 4/84-4/85
Circuit diagrams 4/87-4/89
Dimension drawings 4/86

Overview


3RA6 fuseless compact starters and infeed system for 3RA6



3RA62 reversing starter

Integrated functionality

The SIRIUS 3RA6 compact starters are a generation of innovative load feeders with the integrated functionality of a motor starter protector, contactor and electronic overload relay. In addition, various functions of optional mountable accessories (e.g. auxiliary switches, surge suppressors) are already integrated in the SIRIUS compact starter.

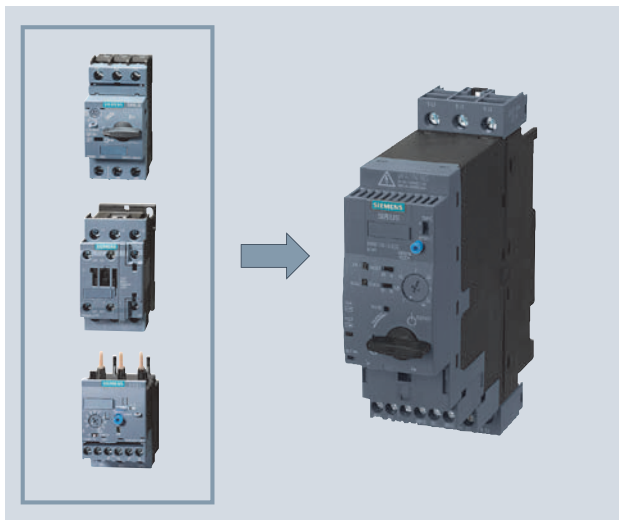

3RA6 compact starters with the integrated functionality of a motor starter protector, contactor and electronic overload relay.

Applications

The SIRIUS compact starters can be used wherever standard three-phase motors up to 32 A (20 HP/460 V) are directly started.

The compact starters are not suitable for the protection of DC loads.

Approvals according to IEC, UL, CSA and CCC standards have been issued for the compact starters.

Low variance of devices

Thanks to wide setting ranges for the rated current and wide voltage ranges, the equipment variance is greatly reduced compared to conventional load feeders.

Very high operational reliability

The high short-circuit breaking capacity and defined shut-down when the end of service life is reached means that the SIRIUS compact starter achieves a very high level of operational reliability that would otherwise have only been possible with considerable additional outlay. This sets it apart from devices with similar functionality.

Safe disconnection

The auxiliary switches (NC contacts) of the 3RA6 compact starters are designed as mirror contacts. This enables their use for safe disconnection - e.g. EMERGENCY STOP up to SIL 1 (IEC 62061) or PL c (ISO 13849-1) or, if used in conjunction with an additional infeed contactor, up to SIL 3 (IEC 62061) or PL e (ISO 13849-1).

Communications integration through AS-Interface

To enable communications integration through AS-Interface there is an AS-i add-on module available in several versions for mounting instead of the control circuit terminals on the SIRIUS compact starter.

The design of the AS-i add-on module permits a group of up to 62 feeders with a total of four cables to be connected to the control system. This reduces wiring work considerably compared to the parallel wiring method.

Communications integration using IO-Link

Up to 4 compact starters in IO-Link version (reversing and direct-on-line starters) can be connected together and conveniently linked to the IO-Link master through a standardized IO-Link connection. The SIRIUS 4SI electronic modules are used e.g. as IO-Link masters for connection to the SIMATIC ET 200S distributed I/O system.

The IO-Link connection enables a high density of information in the local range.

Details of the communications integration using IO-Link, see [Chapter 14 Communications](#).

The diagnostics data of the process collected by the 3RA6 compact starter, e.g. short circuit, end of service life, limit position etc., are not only indicated on the compact starter itself but also transmitted to the higher-level control system through IO-Link.

Thanks to the optionally available operator panel, which can be installed in the control cabinet door, it is easy to control the 3RA6 compact starters with IO-Link from the control cabinet door.

Permanent wiring / easy replacement

Using the SIRIUS infeed system for 3RA6 (see page 4/16) it is possible to carry out the wiring in advance without a compact starter needing to be connected.

A compact starter is very easily replaced simply by pulling it out of the device without disconnecting the wiring.

Even with screw connections or mounting on a standard mounting rail there is no need to disconnect any wiring (on account of the removable main and control circuit terminals) in order to replace a compact starter.

Consistent solution from the infeed to the motor feeder

The SIRIUS infeed system for 3RA6 with integrated PE bar is offered as a user-friendly possibility of feeding in summation currents up to 100 A with a maximum conductor cross-section of 2/0 AWG and connecting the motor cable directly without additional intermediate terminals.

Screw and spring-type terminals

The SIRIUS compact starters and the infeed system for 3RA6 are available with screw and spring-type terminals.

To comply with the clearance and creepage distances demanded according to UL 508 there are the following infeed possibilities:

Type of infeed	Feeder terminal (according to UL 508, type E)	Type
Conventional wiring	Terminal block for "Self-Protected Combination Motor Controller (Type E)"	3RV29 28-1H
Three-phase busbars	Three-phase infeed terminal for constructing "Type E Starters", UL 508	3RV29 25-5EB
Infeed systems for 3RA6	Infeed on left, 50/70 mm ² , screw terminal with 3 sockets, outgoing terminal with screw/spring-type connections, including PE bar	3RA68 13-8AB (screw terminals), 3RA68 13-8AC (spring-type terminals)

SIRIUS 3RA6 compact starters

The SIRIUS 3RA6 compact starters are universal motor starters according to IEC/EN 60947-6-2. As control and protective switching devices (CPS) they can connect, convey and disconnect the thermal, dynamic and electrical loads from short-circuit currents up to $I_n = 53$ kA, i.e. they are essentially weld-free. They combine the functions of a motor starter protectors, a contactor and a solid-state overload relay in a single enclosure and can be used wherever standard induction motors up to 32 A (up to approx. 20 HP at 480 V AC) are started directly. Available versions are the direct-on-line starters with 45 mm width and the reversing starters with 90 mm width.

The reversing starter version comes with not only an internal electrical interlock but also with a mechanical interlock to prevent simultaneous actuation of both directions of rotation.

3RA6 compact starters are supplied in 5 current setting ranges. The 3RA61 and 3RA62 have 2 control voltage ranges (AC/DC), the 3RA64 and 3RA65 have one control voltage range (DC):

Current setting range	At 460 V AC for induction motors Standard output P	Rated control supply voltage for	
	HP	3RA61, 3RA62 compact starters	3RA64, 3RA65 compact starters for IO-Link
A	HP	V AC/DC	V DC
0.1 ... 0.4	0.12	24	24
0.32 ... 1.25	0.43 ... 1.68	110 ... 240	
1 ... 4	1.34 ... 5.36		
3 ... 12	4.02 ... 16.1		
8 ... 32	10.7 ... 42.9		

Note:

The 3RA1 motor starters can be used as motor starters > 32 A up to 100 A.

The SENTRON 3VL circuit breakers and the SIRIUS 3RT contactors can be used for motor starters > 100 A.

Operating conditions

The SIRIUS 3RA6 compact starters are suitable for use in nearly all climates. They are intended for use in enclosed rooms in which no severe operating conditions (such as dust, caustic vapors, hazardous gases) prevail. Suitable covers must be provided for installation in dusty and damp locations.

The SIRIUS compact starters are generally designed to degree of protection IP20. The permissible ambient temperature during operation is -20 to +60 °C.

The maximum short-circuit current based on UL testing is 30 kA up to 12 A and 15 kA for the 8 ... 32 A versions at 480 V.

Note:

More technical specifications can be found in the system manual at

www.siemens.com/compactstarter

Overload tripping times

The overload tripping time can be set on the device to less than 10 s (CLASS 10) and less than 20 s (CLASS 20 for heavy starting). As the breaker mechanism still remains closed after an overload, resetting is possible by either local manual reset or autoreset after 3 minutes cooling time.

With autoreset there is no need to open the control cabinet.

Diagnostics options

The compact starter provides the following diagnostics options on site:

- With LEDs
 - Connection to the control voltage
 - Position of the main contacts
- With mechanical indication
 - Tripping due to overload
 - Tripping due to short-circuit
 - Tripping due to malfunction (end of service life reached because of worn switching contacts or a worn switching mechanism or faults in the control electronics)

These states can also be evaluated in the higher-level control system:

- With conventional wiring using the integrated auxiliary and signaling switches of the compact starter
- With AS-Interface or IO-Link in even greater detail using the respective communication interface

Four complement variants for 3RA6 compact starters

- For standard mounting rail or screw mounting: basic version including 1 pair of main circuit terminals and 1 pair of control circuit terminals
- For standard mounting rail or screw mounting when using the AS-i add-on module: comes without control circuit terminals because the AS-i add-on module is attached in lieu of them
- For use with the infeed system for 3RA6: without main circuit terminals because they are supplied with the infeed system and the expansion modules
- For use with the infeed system for 3RA6 and AS-i add-on module: without main or control circuit terminals as they are not needed
- The control circuit terminals are always required by the compact starters for IO-Link; the main circuit terminals depend on the use of the infeed system.

Additional components of the 3RA6

The two control circuit terminals on the 3RA61/3RA62 allow access to signalling contacts for overload (1 CO) and short-circuit / malfunction (1 NO). Furthermore, the 3RA61 has two auxiliary contacts (1 NO + 1 NC) for indicating the position of the main contacts, while the 3RA62 has one auxiliary contact (1 NO) per direction of rotation per main contact.

Function**Trip units**

The SIRIUS 3RA6 compact starters are equipped with the following trip units:

- Inverse-time delayed solid-state overload release
- Instantaneous electronic trip unit (electromagnetic short-circuit release)

The overload releases can be adjusted in accordance with the load current.

The electronic trip units are permanently set to a value 13 times the maximum rated current of the 4 A, 12 A and 32 A starter and thus enable trouble-free starting of motors.

Trip classes

The trip classes of electronically delayed trip units are based on the tripping time (t_A) at 7.2 times the set current in the cold state (excerpt from IEC 60947-4):

CLASS 10: $4s < t_A < 10s$

CLASS 20: $6s < t_A < 20s$ (for heavy starting)

The compact starter must trip within this time.

Disconnection due to malfunction

The following malfunctions can be detected:

- End of service life
 - Worn switching contacts (for electrical endurance see "Technical data")
 - Worn switching mechanisms (for mechanical endurance see "Technical data")
- Faults in the control electronics

Short-circuit protection

If a short-circuit occurs, the short-circuit releases of the SIRIUS 3RA6 compact starters isolate the faulty motor starter from the network and thus prevent further damage. The short-circuit releases are factory-set to 14 times the value of the maximum rated current I_n of the device.

The SIRIUS compact starters have a short-circuit breaking capacity up to 30 kA at a voltage of 480 V AC.

Overload relay function

In the event of an overload, the compact starter switches off without the breaker mechanism being opened.

The overload trip can be signaled to the higher-level control system through an integrated signal switch.

The overload signal can be reset automatically or by means of a manual reset.

Control through AS-Interface

For control through AS-Interface, the AS-i add-on module is mounted instead of the two control circuit terminals on the SIRIUS 3RA6 compact starters (direct-on-line starters and reversing starters).

The AS-i auxiliary voltage and the AS-i data line are installed on the AS-i add-on module easily and quickly without tools by means of two plug-in connector blocks with insulation displacement connection.

The AS-i add-on module is equipped with the latest A/B technology and has an addressing socket onboard.

An addressing unit is required and can be ordered for addressing the AS-i add-on module.

Bit assignment (see below) is similar to that for the SIRIUS motor starters, which means that the same programming can be used here.

DI 0.0 ready
DI 0.1 motor on
DI 0.2 group fault
DI 0.3 group warning

DO 0.0 motor on or motor clockwise
DO 0.1 motor counterclockwise

A 24 V DC PELV power supply unit according to EN 61140 safety class III is required for the auxiliary voltage.

The AS-i data line is supplied with voltage by means of a 30 V DC AS-i power supply unit and is controlled by means of the AS-i master.

The AS-i add-on modules are available in the following five versions:

- AS-i add-on module for compact starters
- AS-i add-on module for compact starters with two local inputs for safe disconnection of the "clockwise rotation" or "counterclockwise rotation" outputs
- AS-i add-on module with two free external inputs
- AS-i add-on module with two free external outputs
- AS-i add-on module with one free external input and output

The AS-i add-on module can only be used with compact starters with a control voltage of 24 V AC/DC.

Integrated auxiliary switches

The control circuit terminals of the SIRIUS 3RA6 compact starters have the following connections:

- A1/A2 for the control voltage for 3RA61, A1/A2 and B1/B2 for the control voltage for 3RA62
- "Overload" signal switch
- "Fault" signal switch, e. g. "short-circuit"
- Internal auxiliary switch for position of the main contacts (in case of direct-on-line starters: 1 NO + 1 NC with mirror contact to the main contact; in case of reversing starters: 2 NO)

Compact Combination Starters

3RA6 Compact Starters

Overview


Design

Mounting

The 3RA6 compact starters can be mounted in 4 ways:


1) By snapping onto a TH 35 standard mounting rail

The SIRIUS compact starters can be snapped onto a standard mounting rail according to EN 60715 with a width of 35 mm.

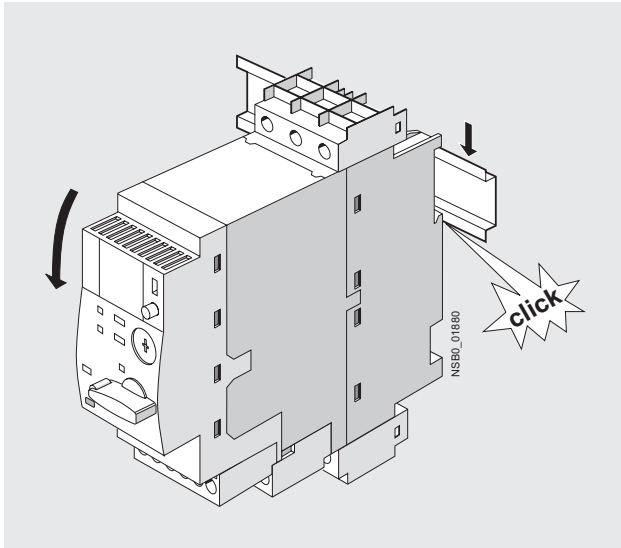

2) By screw fixing to a flat surface


The SIRIUS compact starters are suitable for screw fixing to a flat surface. One set of 3RA69 40-0A adapters for screw connection (including push-in lugs) is required per direct-on-line starter, two sets are required per reversing starter.

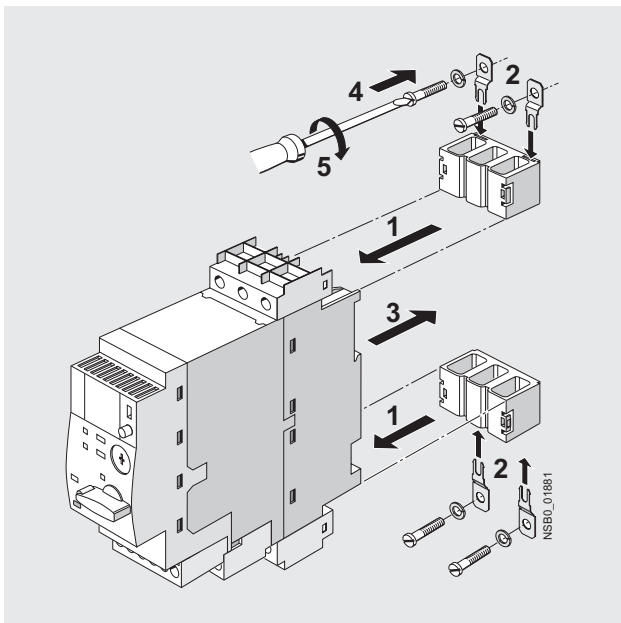


1 ... 5: order of mounting steps

3) By integrating in the infeed system for 3RA6

The SIRIUS compact starters can be assembled with the infeed system for 3RA6 (see "Infeed system for 3RA6").

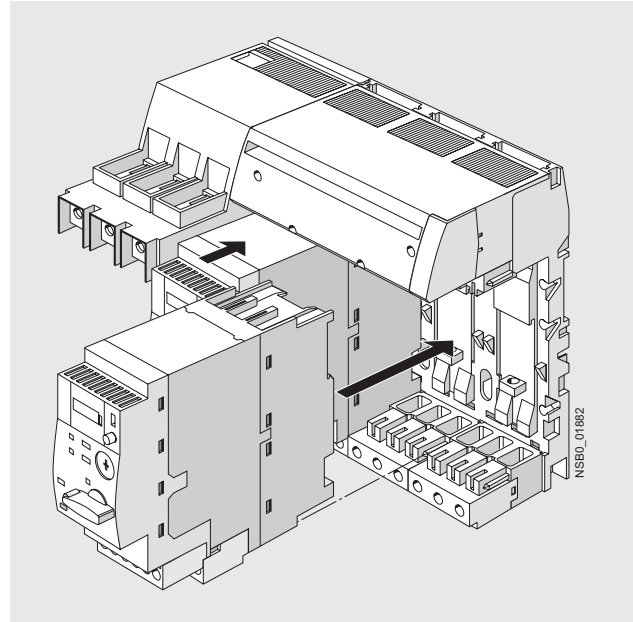

4) By using the 8US busbar adapter for Fast Bus systems with 60 mm busbar center-to-center clearance

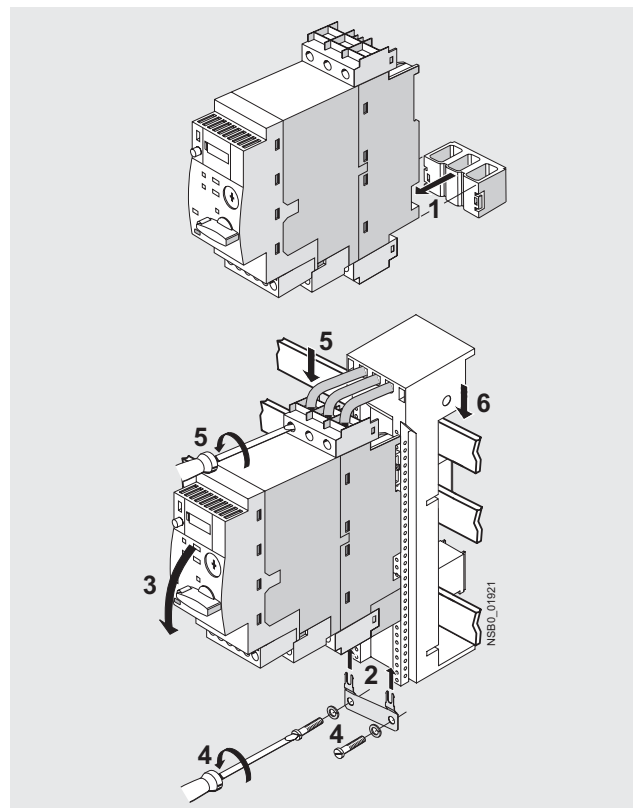


1 ... 6: order of mounting steps

4a) By using an additional device holder in the case of reversing starters


When the 8US busbar adapter is used on Fast Bus systems with 60 mm busbar center-to-center clearance, a device holder is needed in addition for a reversing starter on account of its double width.

The reversing starter is mounted in the same way as the direct-on-line starter on the busbar adapter. Then the device holder is snapped on alongside the busbar adapter.

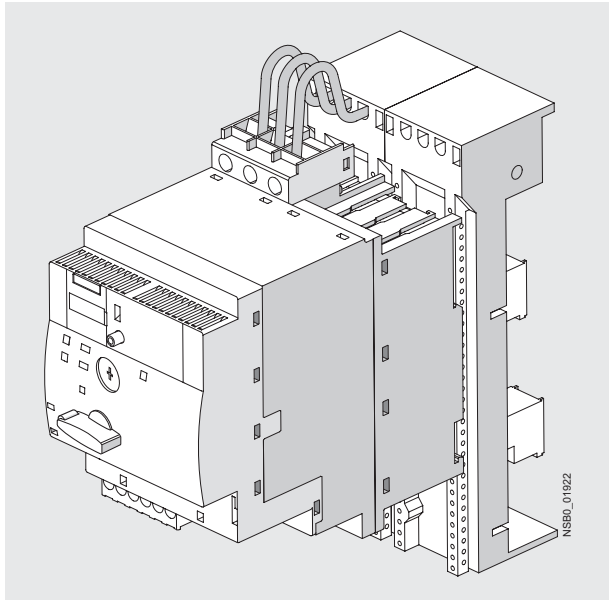

Mounting regulations

The module can be installed horizontally or vertically. For the different installations attention must be paid however to limit values for protective separation according to IEC/EN 60947-2 of the compact starters (for details see the "Technical specifications").

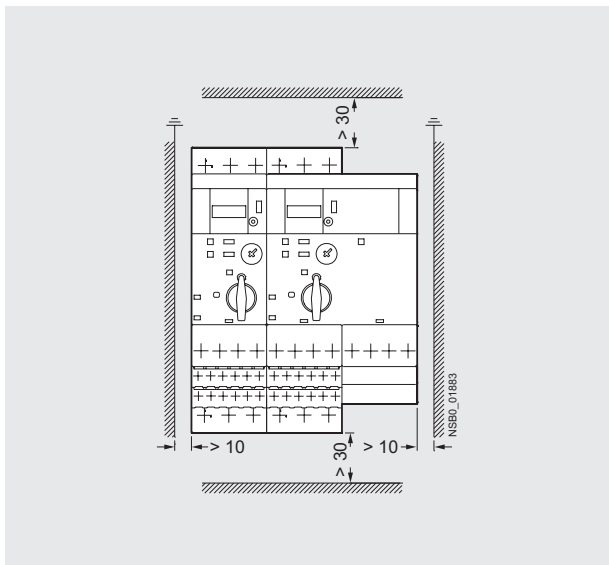

The following distances must be observed when mounting the compact starters:

- Lateral clearance to grounded components: 10 mm
- Arcing space at top and bottom: 30 mm

Selection and ordering data



3RA61 20-1CB32



3RA61 20-2EB32

Width 45 mm
One set of 3RA69
40-0A adapters
is required for
screw fixing.






3RA62 50-1CP32



3RA62 50-1CP32

Width 90 mm
One set of
3RA69
40-0A adapters
is required for
screw fixing.

Standard induction motor 4-pole at 400 V AC ¹⁾ Standard output <i>P</i>		Setting range for solid-state overload release	Order No.	Order No.
		A		
For use with the infeed system for 3RA6 and with the AS-i add-on module or as a replacement device, without main and control circuit terminals				
--	0.1 ... 0.4	3RA6□□0-0A □32	—	
1/2	0.32 ... 1.25	3RA6□□0-0B □32	—	
2	1 ... 4	3RA6□□0-0C □32	—	
7 1/2	3 ... 12	3RA6□□0-0D □32	—	
20	8 ... 32	3RA6□□0-0E □32	—	
				Spring-type terminals 
For standard mounting rail or screw mounting, including 1 pair of main circuit terminals and 1 pair of control circuit terminals				
--	0.1 ... 0.4	3RA6□□0-1A □32	3RA6□□0-2A □32	
1/2	0.32 ... 1.25	3RA6□□0-1B □32	3RA6□□0-2B □32	
2	1 ... 4	3RA6□□0-1C □32	3RA6□□0-2C □32	
7 1/2	3 ... 12	3RA6□□0-1D □32	3RA6□□0-2D □32	
20	8 ... 32	3RA6□□0-1E □32	3RA6□□0-2E □32	
For use in the infeed system for 3RA6, without main circuit terminals, with 1 pair of control circuit terminals				
--	0.1 ... 0.4	3RA6□□0-1A □33	3RA6□□0-2A □33	
1/2	0.32 ... 1.25	3RA6□□0-1B □33	3RA6□□0-2B □33	
2	1 ... 4	3RA6□□0-1C □33	3RA6□□0-2C □33	
7 1/2	3 ... 12	3RA6□□0-1D □33	3RA6□□0-2D □33	
20	8 ... 32	3RA6□□0-1E □33	3RA6□□0-2E □33	
For standard mounting rail or screw mounting when using the AS-i add-on module with 1 pair of main circuit terminals, without control circuit terminals				
--	0.1 ... 0.4	3RA6□□0-1A □34	3RA6□□0-2A □34	
1/2	0.32 ... 1.25	3RA6□□0-1B □34	3RA6□□0-2B □34	
2	1 ... 4	3RA6□□0-1C □34	3RA6□□0-2C □34	
7 1/2	3 ... 12	3RA6□□0-1D □34	3RA6□□0-2D □34	
20	8 ... 32	3RA6□□0-1E □34	3RA6□□0-2E □34	
Order No. supplements for rated control supply voltage		12 25 B P	12 25 B P	
• Direct-on-line starter				
• Reversing duty starter				
• 24 V AC/DC (for combining with AS-I add-on module)				
• 110 ... 240 V AC/DC				

¹⁾ Selection depends on the motor full load amps. Horse Power ratings provided for reference only.

²⁾ A set of 3RA69 40-0A adapters is required for screw mounting.

Selection and ordering data



3RA64 with 3RA69 11-1A

• Direct-on-line starters

- Rated control supply voltage 24 V DC
- Width 45 mm
- One set of 3RA69 40-0A adapters is required for screw fixing

Standard induction motor 3-pole at 460 V AC Standard output P HP ¹⁾	Setting range for solid-state overload release A	Screw terminals Order No.	Spring-type terminals Order No.
For standard mounting rail or screw mounting, including 1 pair of main circuit terminals and 1 pair of control circuit terminals			
—	0.1 ... 0.4	3RA64 00-1AB42	3RA64 00-2AB42
1/2	0.32 ... 1.25	3RA64 00-1BB42	3RA64 00-2BB42
2	1 ... 4	3RA64 00-1CB42	3RA64 00-2CB42
7 1/2	3 ... 12	3RA64 00-1DB42	3RA64 00-2DB42
20	8 ... 32	3RA64 00-1EB42	3RA64 00-2EB42
For use in the infeed system for 3RA6, without main circuit terminals, with 1 pair of control circuit terminals			
—	0.1 ... 0.4	3RA64 00-1AB43	3RA64 00-2AB43
1/2	0.32 ... 1.25	3RA64 00-1BB43	3RA64 00-2BB43
2	1 ... 4	3RA64 00-1CB43	3RA64 00-2CB43
7 1/2	3 ... 12	3RA64 00-1DB43	3RA64 00-2DB43
20	8 ... 32	3RA64 00-1EB43	3RA64 00-2EB43



3RA65 with 3RA69 11-1A

• Reversing starters

- Rated control supply voltage 24 V DC
- Width 90 mm
- One set of 3RA69 40-0A adapters is required for screw fixing

For standard mounting rail or screw mounting, including 1 pair of main circuit terminals and 1 pair of control circuit terminals			
—	0.1 ... 0.4	3RA65 00-1AB42	3RA65 00-2AB42
1/2	0.32 ... 1.25	3RA65 00-1BB42	3RA65 00-2BB42
2	1 ... 4	3RA65 00-1CB42	3RA65 00-2CB42
7 1/2	3 ... 12	3RA65 00-1DB42	3RA65 00-2DB42
20	8 ... 32	3RA65 00-1EB42	3RA65 00-2EB42
For use in the infeed system for 3RA6, without main circuit terminals, with 1 pair of control circuit terminals			
—	0.1 ... 0.4	3RA65 00-1AB43	3RA65 00-2AB43
1/2	0.32 ... 1.25	3RA65 00-1BB43	3RA65 00-2BB43
2	1 ... 4	3RA65 00-1CB43	3RA65 00-2CB43
7 1/2	3 ... 12	3RA65 00-1DB43	3RA65 00-2DB43
20	8 ... 32	3RA65 00-1EB43	3RA65 00-2EB43

1) Selection depends on the motor full load amps. Horse power ratings provided for reference only.

Overview**Accessories for SIRIUS 3RA6 compact starters**

The following accessories are available for the 3RA6 compact starters:

- AS-i add-on module: [see AS-Interface Add-On Modules for 3RA6, page 4/14](#)
- External auxiliary switch blocks: Snap-on auxiliary switch as versions 2 NO, 2 NC and 1 NO + 1 NC with screw or spring-type connections; the contacts of the auxiliary switch block open and close jointly with the main contacts of the compact starter. The NC contacts are designed as mirror contacts.
- Control kit: aid for manually closing the main contacts in order to evaluate the wiring and motor direction under conditions of short-circuit protection
- Adapter for screw mounting the compact starter, including push-in lugs
- Main circuit terminals: Available in screw and spring-type terminals
- Main circuit terminals for mixed connection method: With the main circuit terminal for the mixed connection method it is also possible in the main circuit to change over from the screw connection method on the incoming side to the spring-type connection method on the outgoing side. This enables for example the side-by-side mounting of several compact starters and their cost-effective connection using the three-phase busbars on the infeed side. The motors are then directly connected by the quick and reliably contacting spring-type connection method.

Accessories for UL applications

The terminal block for "Self-Protected Combination Motor Controller", type E is available for complying with the clearance and creepage distances according to UL 508.

Accessories for infeed using three-phase busbar systems

The three-phase busbars can be used as an easy, time-saving and clearly arranged means of feeding SIRIUS 3RA6 compact starters with screw connection. Motor starter protectors size S00 and S0 can also be integrated.

The busbars are suitable for between 2 and 5 devices. However, any kind of extension up to a maximum summation current of 63 A is possible by clamping the terminals of an additional busbar (rotated by 180°) underneath the terminals of the respective last motor circuit protector.

A connecting piece is required for the combination with motor starter protector size S00. S00 and S0 motor starter protectors of the 3RV2 series do not require the additional connecting piece. The motor starter protectors are supplied by appropriate feeder terminals. Special feeder terminals are required for constructing "Type E Starters" according to UL/CSA.

The three-phase busbar systems are finger-safe but empty connection terminals must be fitted with covers. They are designed for any short-circuit stress which can occur at the output side of connected SIRIUS 3RA6 compact starters or motor starter protectors.

8US Fast Bus busbar adapters for 60 mm systems

The compact starters are mounted directly with the aid of busbar adapters on the Fast Bus busbar systems with 60 mm center-to-center clearance in order to save space and to reduce infeed times and costs. These starters are suitable for copper busbars with a width from 12 to 30 mm. The busbars can be 4 to 5 mm or 10 mm thick.

The 8US Fast Bus busbar system can be loaded with a maximum summation current of 630A.

The "reversing starter" version requires a device holder along side the busbar adapter for lateral mounting.

The compact starters are snapped onto the adapter and connected on the line side. This prepared unit is then plugged directly onto the busbar system, and is thus connected both mechanically and electrically at the same time.

For more accessories such as incoming and outgoing terminals, flat copper profiles etc., [see Section 5 "Fastbus Busbar Systems"](#).

Accessories for operation with closed control cabinet doors











Door-coupling rotary operating mechanisms for standard and emergency-stop applications are available for operating the compact starter with closed control cabinet doors.

Accessories for SIRIUS 3RA6 compact starters in IO-Link version

The following accessories are available specifically for the 3RA64, 3RA65 compact starters:

- The 4SI SIRIUS solid-state module as IO-Link master allows for the simple and economical connection of SIRIUS controls with IO-Link (e.g. up to four groups of 4 compact starters) to the multifunctional SIMATIC ET 200S distributed I/O system.
- Additional connection cables for side-by-side mounting of up to 4 compact starters
- Operator panel for local control and diagnostics of up to 4 compact starters coupled to each other

Selection and ordering data

Version		Order No.	Std. pack qty.	Weight approx. kg
Accessories for 3RA6 compact starters				
 3RA69 50-0A	Control kits For mechanical actuation of the compact starter	3RA69 50-0A	1 unit	0.004
	Adapters for screw mounting the compact starter (set including push-in lugs) Direct-on-line starters require 1 set, reversing starters 2 sets.	3RA69 40-0A	1 unit	0.152
 3RA69 40-0A				
 3RA69 11-1A	Auxiliary switch blocks for compact starters <ul style="list-style-type: none"> • 2 NO • 2 NC • 1 NO + 1 NC (these auxiliary contacts are positively driven.)	Screw terminals  3RA69 11-1A 3RA69 12-1A 3RA69 13-1A	1 unit 1 unit 1 unit	0.018 0.018 0.018
	Main circuit terminals (line and load side)	3RA69 20-1A	1 unit	0.038
 3RA69 20-1A				
 3RA69 20-1B	Control circuit terminals <ul style="list-style-type: none"> • For 3RA61 • For 3RA62 	3RA69 20-1B 3RA69 20-1C	1 unit 1 unit	0.042 0.042
 3RA69 11-2A	Auxiliary switch blocks for compact starters <ul style="list-style-type: none"> • 2 NO • 2 NC • 1 NO + 1 NC (these auxiliary contacts are positively driven.)	Spring-type terminals  3RA69 11-2A 3RA69 12-2A 3RA69 13-2A	1 unit 1 unit 1 unit	0.018 0.018 0.018
	Main circuit terminals (line and load side)	3RA69 20-2A	1 unit	0.049
 3RA69 20-2A				
 3RA69 20-2B	Control circuit terminals <ul style="list-style-type: none"> • For 3RA61 • For 3RA62 	3RA69 20-2B 3RA69 20-2C	1 unit 1 unit	0.036 0.036

Version	Order No.	Std. pack qty.	Weight approx. kg
---------	-----------	----------------	----------------------

Accessories for 3RA6 compact starters (continued)



3RA69 20-3A

Main circuit terminals for mixed connection method

One set comprises:

- 1 joint block on the line side for the screw connection method
- 1 joint block on the motor side for the spring-type connection method

3RA69 20-3A

1 unit

0.044

Version	Order No.	Std. pack qty.	Weight approx. kg
---------	-----------	----------------	----------------------

Accessories specifically for 3RA64, 3RA65 compact starters with IO-Link



3RA69 31-0A

Additional connection cables (flat) for side-by-side mounting of up to 4 compact starters

- 10-pole
 - 8 mm¹⁾
 - 200 mm¹⁾
- 14-pole
 - 8 mm²⁾
 - 200 mm

3RA69 32-0A

5 units

0.007

3RA69 33-0B

5 units

0.012

3RA69 31-0A

5 units

0.007

3RA69 33-0C

5 units

0.014



3RA69 35-0A

Operator panels

- 1 operator panel
- 1 enabling module
- 1 interface cover
- 1 fixing terminal

3RA69 35-0A

1 unit

0.052

Enabling block**3RA69 36-0A**

1 unit

0.002

Blanking covers**3RA69 36-0B**

5 units

0.001

Connection cable (round) for connecting the operator panel
10-pole, 2000 mm**3RA69 33-0A**

1 unit

0.114



3RK1 005-0LB00-0AA0

SIRIUS 4SI solid-state modules

IO-Link master for connection of up to 4 SIRIUS controls (max. 16 in groups of 4) with IO-Link (3-wire connection) to SIMATIC ET 200S, width 15 mm, supports firmware update (STEP 7 V5.4 SP5 and higher). Can be used with the following terminal modules:

- TM-E15S26-A1 (screw terminals)
- TM-E15C26-A1 (spring-type terminals)
- TM-E15N26-A1 (Fast Connect)

3RK1 005-0LB00-0AA0

1 unit


0.057

¹⁾ 10-pole connection cables are required for EMERGENCY-STOP group concepts.

²⁾ Is included in the scope of supply of the SIRIUS 3RA6 compact starter in IO-Link version.

Version	Order No.	Std. pack qty.	Weight approx. kg
---------	-----------	----------------	----------------------

Terminal blocks and phase barriers for "Self-Protected Combination Motor Controllers (Type E)" according to UL 508



3RV29 28-1H

Note:

UL 508 demands 1-inch clearance and 2-inch creepage distance on the line side for "Combination Motor Controller Type E". The following terminal blocks or phase barriers must be used in 3RV20 motor starter protectors.

The terminal blocks or phase barriers cannot be used in combination with the 3RV19 .5 three-phase busbars.

For construction with three-phase busbars, see "Busbar accessories".

Terminal blocks type E





For extended clearance and creepage distances (1 and 2 inch)

S00, S0

3RV29 28-1H

1 unit

0.065

	Modular spacing	Number of motor starter protectors that can be connected			Rated current I_n at 690 V	For motor starter protectors	Order No.	Std. pack qty.	Weight approx.
		Without lateral accessories	With lateral auxiliary switch	With auxiliary release					
	mm				A	Size			
Three-phase busbars¹⁾									
For feeding several motor starter protectors with screw terminals, mounted side by side on standard mounting rails, insulated, with touch protection									
 3RV1915-1AB	45 ³⁾	2	--	--	63	S00, S0 ²⁾	3RV1915-1AB 3RV1915-1BB 3RV1915-1CB 3RV1915-1DB	1 unit	0.044
		3	--	--	63	S00, S0 ²⁾		1 unit	0.071
		4	--	--	63	S00, S0 ²⁾		1 unit	0.099
		5	--	--	63	S00, S0 ²⁾		1 unit	0.124
 3RV1915-1BB	55 ⁴⁾	--	2	--	63	S00, S0 ²⁾	3RV1915-2AB 3RV1915-2BB 3RV1915-2CB 3RV1915-2DB		
		--	3	--	63	S00, S0 ²⁾			
		--	4	--	63	S00, S0 ²⁾			
		--	5	--	63	S00, S0 ²⁾			
 3RV1915-1CB		2	--	--	108	S2	3RV1935-1A 3RV1935-1B 3RV1935-1C		
		3	--	--	108	S2			
		4	--	--	108	S2			
 3RV1915-1DB	63 ⁵⁾	--	--	2	63	S00, S0 ²⁾	3RV1915-3AB 3RV1915-3CB		
		--	--	4	63	S00, S0 ²⁾			
		--	2	2	108	S2			
		--	3	3	108	S2			
		--	4	4	108	S2	3RV1935-3A 3RV1935-3B 3RV1935-3C		




¹⁾ Not suitable for 3RV21 motor starter protectors for motor protection with overload relay function and for 3RV27 and 3RV28 circuit breakers according to UL 489/CSA C22.2 No. 5.

²⁾ Approved for motor starter protectors size S0 with $I_n \leq 32$ A.

³⁾ For 3RV2 motor starter protectors without accessories mounted on the side.


⁴⁾ For 3RV2 motor starter protectors with auxiliary switches with 1 NO + 1 NC, 2 NO and 2 NC mounted on the left (9 mm wide).

⁵⁾ For 3RV2 motor starter protectors with mounted accessories (18 mm wide). Auxiliary switches with 2 NO + 2 NC or signaling switch (mounted on the left) or with auxiliary release (mounted on the right).

Conductor cross-section			Tightening torque	For motor starter protectors/ circuit breakers	Order No.	Weight approx.
Solid or stranded	Finely stranded with end sleeve	AWG cables, solid or stranded				
mm²	mm²	AWG	Nm	Size		
Three-phase infeed terminals						
<div> 3RV2925-5AB</div>						
Connection from top						
2.5 ... 25	2.5 ... 16	10 ... 4	3 ... 4	S00, S0	3RV2925-5AB 3RV2935-5A	0.043
2 x (2.5 ... 50) ¹⁾	2 x (2.5 ... 35) ¹⁾	2 x (10 ... 1/0) ¹⁾	4 ... 6	S2 NEW		
1 x (2.5 ... 70) ¹⁾	1 x (2.5 ... 50) ¹⁾	1 x (10 ... 2/0) ¹⁾				
<div> 3RV2935-5A</div>						
Connection from below						
This terminal is connected in place of a switch, please take the space requirement into account.						
2.5 ... 25	2.5 ... 16	10 ... 4	Input: 4, Output: 2 ... 2.5	S00, S0	3RV2915-5B	0.093
<div> 3RV2915-5B</div>						

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.

Version	Order No.	Std. pack qty.	Weight approx. kg
---------	-----------	----------------------	-------------------------

8US Fast Bus busbar adapters for 60 mm systems

8US12 11-1NS10

For flat copper profiles according to DIN 46433
Width: 12 ... 30 mm
Thickness: 4 ... 5 mm or 10 mm

8US12 11-1NS10

1 unit

0.337

Device holders for lateral mounting along side the Fast Bus busbar adapter for 60 mm systems

8US12 50-1AA10

Required in addition to the busbar adapter for
mounting a reversing starter

8US12 50-1AA10

1 unit

0.239

Version	Color of handle	Version of extension shaft mm	Order No.	Std. pack qty.	Weight approx. kg
---------	--------------------	-------------------------------------	-----------	----------------------	-------------------------

Door-coupling rotary operating mechanisms for operating the compact starter with closed control cabinet doors

3RV29 26-0B

The door-coupling rotary operating mechanisms consist of a knob, a coupling driver and an extension shaft of 130/330 mm in length (6 mm x 6 mm). The door-coupling rotary operating mechanisms are designed to degree of protection IP65. The door interlocking prevents accidental opening of the control cabinet door in the ON position of the motor starter protector. The OFF position can be locked with up to 3 padlocks.

Door-coupling rotary operating mechanisms

Black

130

3RV29 26-0B

1 unit

0.111

EMERGENCY-STOP door-coupling rotary operating mechanismsRed/
Yellow

130

3RV29 26-0C

1 unit

0.110

Version	Order No.	Std. pack qty.	Weight approx. kg
---------	-----------	----------------------	-------------------------

Tools for opening spring-type terminals by hand


3RA29 08-1A

Screwdrivers
for all SIRIUS devices with spring-type terminals
Length approx. 200 mm,
3.0 mm x 0.5 mm,
titanium gray/black,
partially insulated

Spring-type terminals**3RA29 08-1A**

1 unit

0.045

Blank labels

3RT19 00-1SB20

Unit labeling plates¹⁾
for SIRIUS devices
20 mm x 7 mm,
titanium gray

3RT19 00-1SB20

340 units

0.200

¹⁾ PC labeling system for individual inscription of unit labeling plates
available from: Murrplastik Systems, Inc. www.murrplastik.com.

Overview

Various AS-i add-on modules are available for communication of the 3RA6 compact starter with the control system using AS-Interface:

- Standard version
- With two local inputs
- With two free external inputs
- With one free external input and one free external output
- With two free external outputs
- For local control

The AS-i add-on modules can be combined only in connection with compact starters with a rated control supply voltage of 24 V AC/DC.

AS-i add-on module for communications controlling

With this new module it is also possible for the connected compact starter to be operated directly using simple switches, i.e. without recourse to AS-i Communication, if required.

"Automatic" mode

NC contacts can be connected to the inputs Y2 and Y4 through the local terminals on the AS-i add-on module. If the "+" connections are connected simultaneously to both local inputs, the AS-i add-on module will be in "Automatic" mode, i.e. it will communicate with the control system through AS-Interface.

Local control


Opening the two inputs Y2 and Y4 will result in the direct disconnection of the compact starter. Operation through AS-i Communication is ended and the compact starter can now be switched on and off directly using NO contacts (one NO contact per direction of rotation on the reversing starter).

"LED AUX Power" must light up green, the 24 V DC supply must be connected and the AS-i control supply voltage must no longer be applied.


Resetting to "Automatic" mode

Simultaneous application of a "1" signal at the local inputs. The availability bit DI 0 is switched to a "1" signal.

If AS-i Communication is reset, the motor is first switched off and then on again when requested by the control system.

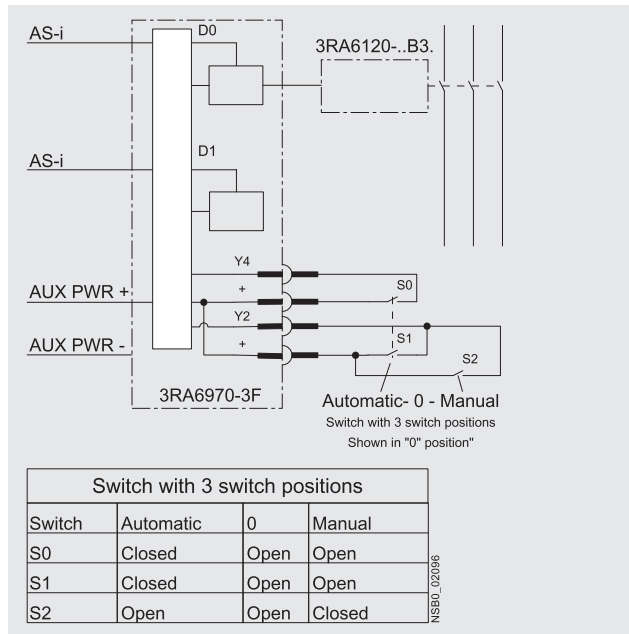

Circuit diagram example for operating a 3RA61 20 direct-on-line starter using an AS-i add-on module for on-site controller

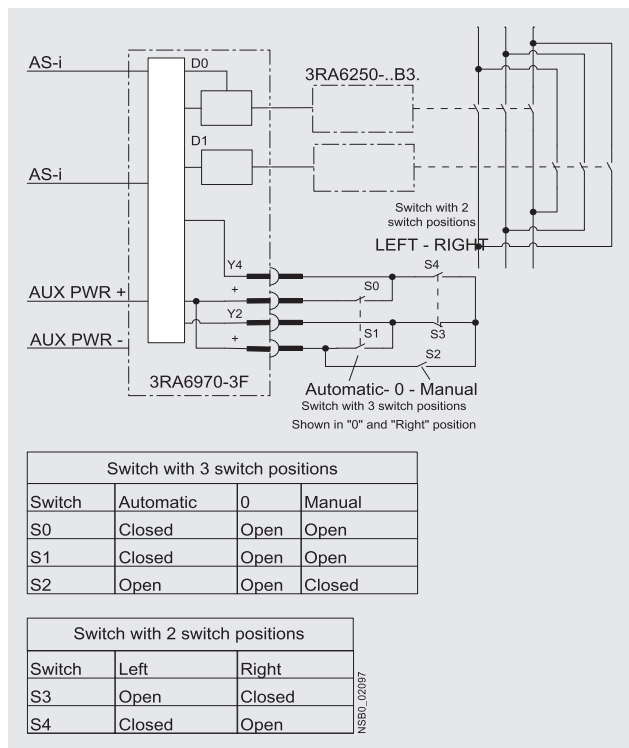

Circuit diagram example for operating a 3RA62 50 reversing starter using an AS-i add-on module for on-site controller

Selection and ordering data

Version		Order No.	Std. pack qty.	Weight approx. kg
AS-i add-on modules				
 3RA69 70-3A  3RA69 70-3B to -3F	Standard version For communication of the compact starter with the control system using AS-Interface	3RA69 70-3A	1 unit	0.045
	With two local inputs For safe disconnection through local safety relays, e.g. cable-operated switches	3RA69 70-3B	1 unit	0.045
	With two free external inputs Replaces the digital standard inputs "Motor On" and "Group warning"	3RA69 70-3C	1 unit	0.045
	With one free external input and one free external output Replaces the digital standard input "Group warning"	3RA69 70-3D	1 unit	0.045
	With two free external outputs Only for direct-on-line starters, replaces the digital standard output "Motor left"	3RA69 70-3E	1 unit	0.045
	For local control Control of the compact starter optionally using AS-Interface or local switches	3RA69 70-3F	1 unit	0.045
Spare parts for AS-i add-on modules				
	Connectors for data and auxiliary supply cable with 2 insulation displacement terminations for standard litz wires 2 x 0.5 ... 0.75 mm ² <ul style="list-style-type: none"> • Flat, yellow, extender • Flat, black, extender 	3RK1901-0NA00 3RK1901-0PA00	5 units 5 units	
Accessories for AS-i add-on modules				
 3RK1904-2AB02	AS-Interface addressing unit V 3.0 <ul style="list-style-type: none"> • For AS-Interface modules and sensors and actuators with integrated AS-Interface in accordance with AS-i Specification V3.0 • For setting the AS-i address of standard slaves, and slaves with extended addressing mode (A/B slaves) • With input/output test function and many other commissioning functions • Battery operation with 4 batteries type AA (IEC LR6, NEDA 15) • Scope of supply: <ul style="list-style-type: none"> - Addressing unit with 4 batteries - Addressing cable, with M12 plug to addressing plug (hollow plug), length 1.5m 	3RK1904-2AB02	1 unit	0.540


Overview

The infeed system for 3RA6 compact starters enables far less wiring in the main circuit and, thanks to the easy exchangeability of the compact starters, reduces the usual downtimes for maintenance work during the plant's operating phase.

The infeed system provides the possibility of completely prewiring the main circuit without a compact starter needing to be connected at the same time. As the result of the removable terminals in the main circuit, compact starters can be integrated in an infeed system in an easy manner (without the use of tools).

In addition, the integrated PE bar means it is optionally possible to connect the motor cable directly to the infeed system without additional intermediate terminals. The infeed system for 3RA6 compact starters is designed for summation currents up to 100 A with a conductor cross-section of max. 2/0 AWG on the feeder terminal block.

The infeed system can be mounted on a standard mounting rail or flat surfaces.

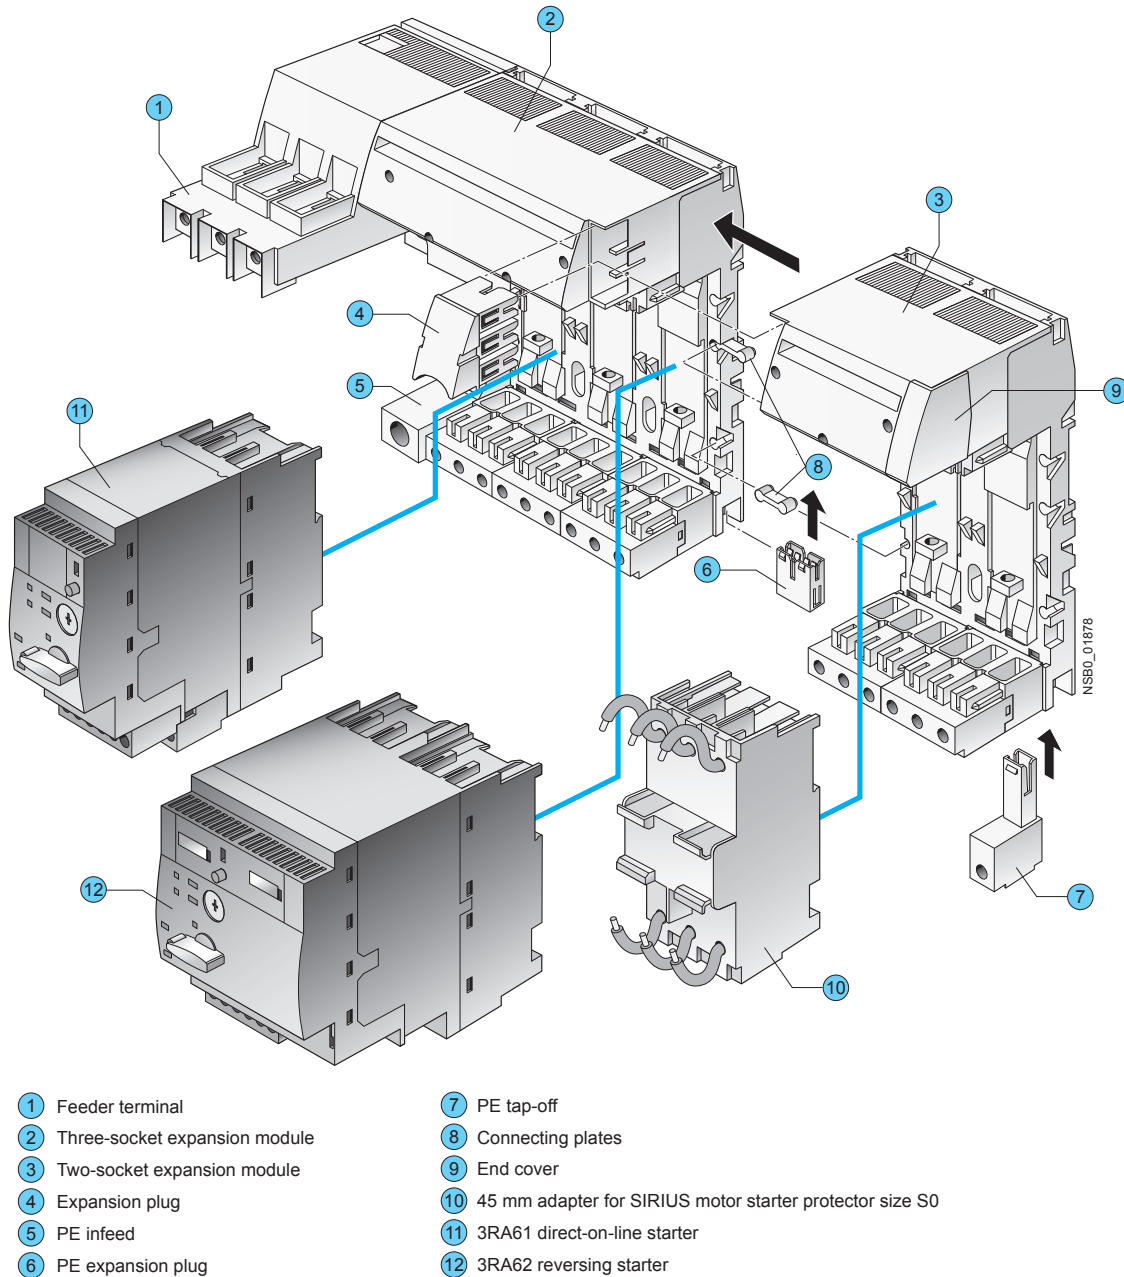

Infeed system for 3RA6 compact starters

1 Infeed

The 3-phase infeed is available as an infeed with screw connection (4-2 AWG up to 63 A or 0-2/0 AWG up to 100 A) and an infeed with spring-type connection (4-2 AWG up to 63 A).

The infeed with spring-type terminal can be attached to the left side, as well as the right side, of an expansion module.

The screw terminal infeeds are permanently fitted to the left side of a 3-socket expansion module.

The infeeds with screw connection enable connection of the main conductors (L1, L2, L3) either from above or from below.

The infeeds with screw connection come packaged with 1 end cover, while the infeed with spring-type connection comes packaged with 2 end covers.

2 Three-socket expansion modules

The expansion module with 3 sockets for compact starters is available with screw connection and with spring-type connection.

Expansion modules enable the infeed system to be expanded and can be connected to each other in any number up to a maximum length of 1.2 meters.

Two expansion modules are held together with the help of 2 connecting plates and 1 expansion plug. These assembly parts are included in the scope of supply of the respective expansion module.

When the infeed system for 3RA6 compact starters is used, the compact starters (plug-in modules) are easily mounted and removed even when live.

Optional possibilities:

- PE connection on motor starter side
- Outfeed for external auxiliary devices
- Connection to 3RV29 infeed system
- Integration of SIRIUS 3RV1 and 3RV2 motor starter protectors size S0 up to 25 A (using 3RA68 90-0BA adapter)

3 Two-socket expansion modules

If only 2 instead of 3 additional sockets are required, then the 2-socket expansion module is the right choice. It has the same functionality as the 3-socket expansion module.

4 Expansion plug

Two expansion modules can be connected together using the expansion plug. Flexible expansion of the infeed system is thus possible.

5 PE infeeds

This module enables a PE cable to be connected.

The PE infeed can be ordered with screw connection and spring-type connection (2 AWG) and can be fitted on the right or left to the expansion block.

6 PE expansion plug

The PE expansion plug is inserted from below and enables two PE bars to be connected.

7 PE tap-off

The PE tap-off is available with screw connection and spring-type connection (10-8 AWG). It is snapped into the infeed system from below.

8 Connecting plates

Two connecting plates are used to hold together 2 adjacent expansion modules.

9 End covers

On the last expansion module of a row, the slot provided for the expansion plug can be covered by inserting the end cover.

10 45 mm adapters for SIRIUS 3RV motor starter protectors

SIRIUS 3RV1 and 3RV2 motor starter protectors size S0 with screw connection can be fitted to the adapter, enabling them to be plugged into the infeed system.

Terminal blocks

Using the terminal block, three phase power can be fed out of the infeed system; this means that single-phase, two-phase and three-phase components can also be integrated in the system.

If the end cover is removed, the terminal block can be inserted into an expansion module.

Expansion plug for SIRIUS 3RV29 infeed systems

If the end cover is removed, the expansion plug for the SIRIUS 3RV29 infeed system can be inserted into an expansion module. It connects the infeed system for 3RA6 compact starters with the SIRIUS 3RV29 infeed system.

Maximum rated operational current

The following maximum rated operational currents apply for the components of the infeed system for 3RA6:

Component	Maximum rated operational current A
Infeed with screw connection 0-2/0 AWG	100
Infeed with screw connection 4-2 AWG	63
Infeed with spring-type connection 4-2 AWG	63
Expansion plugs	63

When several expansion modules are mounted side by side, the maximum rated operational current from the 2nd expansion module to the end of the row is 63 A.

Proposal for upstream short-circuit protection devices

The following short-circuit data apply for the components of the infeed system for 3RA6 compact starters:


Conductor cross-section AWG	Inscriptions	Proposal for upstream short-circuit protection device
Short-circuit protection for infeed block (4-2 AWG) with screw connection		
14-2	$I_{d, \max} = 19 \text{ kA}$, $I^2t = 440 \text{ kA}^2\text{s}$	3RV10 41-4JA10
Short-circuit protection for infeed block (0-2/0 AWG) with screw connection		
14-2/0	$I_{d, \max} = \text{approx. } 22 \text{ kA}$	3RV10 41-4MA10
Short-circuit protection for infeed block with spring-type connection		
12	$I_{d, \max} = 9.5 \text{ kA}$, $I^2t = 85 \text{ kA}^2\text{s}$	3RV10 21-4DA10
10	$I_{d, \max} = 12.5 \text{ kA}$, $I^2t = 140 \text{ kA}^2\text{s}$	3RV10 31-4EA10
8	$I_{d, \max} = 15 \text{ kA}$, $I^2t = 180 \text{ kA}^2\text{s}$	3RV10 31-4HA10
6-4	$I_{d, \max} = 19 \text{ kA}$, $I^2t = 440 \text{ kA}^2\text{s}$	3RV10 41-4JA10
Short-circuit protection for terminal block		
16	$I_{d, \max} = 7.5 \text{ kA}$	5SY... ¹⁾
14	$I_{d, \max} = 9.5 \text{ kA}$	
12	$I_{d, \max} = 9.5 \text{ kA}$	
10	$I_{d, \max} = 12.5 \text{ kA}$	

¹⁾ To prevent the possibility of short-circuits, the cables on the terminal block must be installed so that they are short-circuit proof according to EN 60439-1 Section 7.5.5.1.2.

Selection and ordering data

Version	Order No.	Weight approx. kg
---------	-----------	----------------------

Three-phase infeeds and expansion modules



3RA68 12-8AB

**Infeeds with screw connection
4-2 AWG left**

Infeed with screw connection with permanently fitted **3-socket expansion module with screw or spring-type terminals on the outgoing side and integrated PE bar**

Expansion module with 3 sockets for 3 direct-on-line starters or 1 direct-on-line starter and 1 reversing starter


- Screw terminals on outgoing side
- Spring-type terminals on outgoing side

**Screw terminals****3RA68 12-8AB**


0.957

3RA68 12-8AC


0.990



3RA68 12-8AC



3RA68 13-8AB



3RA68 13-8AC

**Infeeds with screw connection
0-2/0 AWG left**

Infeed with screw connection with permanently fitted **3-socket expansion module with screw or spring-type terminals** on the outgoing side and integrated PE bar

Expansion module with 3 sockets for 3 direct-on-line starters or 1 direct-on-line starter and 1 reversing starter, suitable for UL duty according to UL 508 Type E

- Screw terminals on outgoing side
- Spring-type terminals on outgoing side

**Screw terminals****3RA68 13-8AB**

1.146

3RA68 13-8AC

1.179










3RA68 30-5AC

**Infeeds with spring-type
connection 4-2 AWG left or right**





Up to 63 A








Spring-type terminals**3RA68 30-5AC**

0.283


Version		Order No.	Weight approx. kg
Expansion modules			
 3RA68 22-0AB	Two-socket expansion modules With screw or spring-type terminals and integrated PE bar with 2 sockets for 2 direct-on-line starters or 1 reversing starter Expansion plug and 2 connecting plates are included in the scope of supply.		
	• Screw terminals	Screw terminals  3RA68 22-0AB	0.505
	• Spring-type terminals	Spring-type terminals  3RA68 22-0AC	0.527
 3RA68 23-0AB	Three-socket expansion modules With screw or spring-type terminals and integrated PE bar with 3 sockets for 3 direct-on-line starters or 1 direct-on-line starter and 1 reversing starter Expansion plug and 2 connecting plates are included in the scope of supply.		
	• Screw terminals	Screw terminals  3RA68 23-0AB	0.717
	• Spring-type terminals	Spring-type terminals  3RA68 23-0AC	0.750
 3RA68 23-0AC			

Accessories

Version	Order No.	Weight approx. kg
Accessories for 3RA6 infeed systems		
<i>PE infeeds 4-2 AWG</i>		
 3RA68 60-6AB	Screw terminals  • Screw terminals 3RA68 60-6AB	0.060
 3RA68 60-5AC	Spring-type terminals  • Spring-type terminals 3RA68 60-5AC	0.070
<i>PE tap-offs 10-8 AWG</i>		
 3RA68 70-4AB	Screw terminals  • Screw terminals 3RA68 70-4AB	0.019
 3RA68 70-3AC	Spring-type terminals  • Spring-type terminals 3RA68 70-3AC	0.017
<i>Expansion plugs</i>		
 3RA68 90-0EA	PE expansion plugs 3RA68 90-0EA	0.008
 3RA68 90-1AB	Expansion plugs between 2 expansion modules Is included in the scope of supply of the expansion modules. 3RA68 90-1AB	0.029
 3RA68 90-1AA	Expansion plugs for SIRIUS 3RV19/29 infeed system Connects infeed system for 3RA6 to 3RV29 infeed systems 3RA68 90-1AA	0.079

	Version	Order No.	Weight approx.
Accessories for infeed systems for 3RA6 (continued)			
 <p>3RA6890-0BA</p>	<p>45 mm adapters For SIRIUS 3RV1.2 and 3RV2.2 motor starter protectors. Size S0 up to 25 A</p> <ul style="list-style-type: none"> Screw terminals (conductor cross-section AWG 10) 	<p>Screw terminals </p> <p>3RA6890-0BA</p>	0.152
 <p>3RA6880-2AB</p>	<p>Terminal covers for infeeds with screw connection IP20 terminal covers for infeeds with screw connection 25/35 mm² (3RA6812-8AB/AC) (2 units per pack)</p>	<p>3RA6880-2AB</p>	
 <p>3RA6880-3AB</p>	<p>IP20 terminal covers for infeeds with screw connection 50/70 mm² (3RA6813-8AB/AC) (2 units per pack)</p>	<p>3RA6880-3AB</p>	
 <p>3RV2917-5D</p>	<p>Terminal blocks For integration of single-phase, 2-phase and 3-phase external components</p> <ul style="list-style-type: none"> Spring-type terminals 	<p>Spring-type terminals </p> <p>3RV2917-5D</p>	.0.050
Tools for opening spring-type terminals			
 <p>3RA2908-1A</p>	<p>Screwdrivers For all SIRIUS devices with spring-type terminals</p> <p>Length approx. 200 mm, 3.0 mm x 0.5 mm, titanium gray/black, partially insulated</p>	<p>Spring-type terminals </p> <p>3RA2908-1A</p>	.0.045
System Manual "SIRIUS Compact Starters and Accessories"			
	<p>The system manual can be downloaded free of charge in PDF format from the Internet, see http://support.automation.siemens.com/WW/view/en/27136554/133300</p>		

More information

Type			3RA61	3RA62	3RA64	3RA65
Size			S0			
Number of poles			3			
General technical specifications						
Device standard			IEC/EN 60947-6-2			
Mounting dimensions (WxHxD)						
• Screw terminals						
• Spring-type terminals						
		mm	45 x 170 x 165	90 x 170 x 165	45 x 170 x 165	90 x 170 x 165
		mm	45 x 191 x 165	90 x 191 x 165	45 x 191 x 165	90 x 191 x 165
Weight		kg	1.4	2.3 -2.4	1.3	2.3
Permissible mounting positions			No restrictions, preferably vertical or horizontal installation			
Max. rated current I_e						
in the respective setting range	0.1 ... 0.4 A	A	0.4			
	0.32 ... 1.25 A	A	1.25			
	1 ... 4 A	A	4			
	3 ... 12 A	A	12			
	8 ... 32 A	A	32			
Permissible ambient temperature						
• During operation	Acc. to IEC/EN 60721-3-3	°C	-20 ... +60, with derating up to +70			
• For installation in SIRIUS infeed system for 3RA6		°C	-20 ... +40			
• During storage	IEC/EN 60732-3-1	°C	-55 ... +80			
• During transport	IEC/EN 60721-3-2	°C	-55 ... +80			
Permissible rated current of the compact starter,						
when several compact starters are mounted side-by-side on a vertical standard mounting rail or in the 3RA6 infeed system						
• For a control cabinet inside temperature of +40 °C		%	100			
• For a control cabinet inside temperature of +60 °C		%	80			
• For a control cabinet inside temperature of +70 °C		%	60			
Relative air humidity		%	10 ... 90			
Installation altitude		m	Up to 2000 above sea level without restriction			
Rated frequency		Hz	50/60			
Rated insulation voltage U_i		V	690			
(pollution degree 3)						
Rated impulse withstand voltage U_{imp}		kV	6			
Trip class (CLASS)	Acc. to IEC 60947-4-1, EN 60947-4-1		10/20			
Rated short-circuit current I_q at AC 50/60 Hz 480 V	Acc. to IEC 60947-4-1, EN 60947-4-1	kA	30 (up to 12 A units) 15 (8 ... 32 A unit)			
Types of coordination	Acc. to IEC 60947-6-2, EN 60947-6-2		Continuous			
Power loss $P_{v,max}$ of all main current paths						
Dependent on the rated current I_e (upper setting range)	0.4 A	mW	10			
	1.25 A	mW	100			
	4 A	W	1			
	12 A	W	1.8			
	32 A	W	5.4			
Max. switching frequency	AC-41	1/h	750			
	AC-43	1/h	250			
	AC-44	1/h	15			
Drive losses						
Active power	At 24 V					
	• 0.1 ... 12 A	W	2.7			
	• 8 ... 32 A	W	2.95			
	At 110 ... 240 V					
	• 0.1 ... 12 A	W	3.4			
	• 8 ... 32 A	W	3.8			
Overload function						
Ratio of lower to upper current mark			1:4			
Shock resistance (sine-wave pulse)			$a = 60 \text{ m/s}^2 = 6 \text{ g}$ with 10 ms; for every 3 shocks in all axes			
Vibratory load			$f = 4 \dots 5.8 \text{ Hz}$; $d = 15 \text{ mm}$; $f = 5.8 \dots 500 \text{ Hz}$; $a = 20 \text{ m/s}^2$; 10 cycles			
Degree of protection	Acc. to IEC 60947-1		IP20			
Touch protection	Acc. to IEC/EN 61140		Finger-safe			
Isolating features of the compact starter	Acc. to IEC/EN 60947-3		Yes: Isolation is assured only by moving the actuator into the "OFF" position			
Main and EMERGENCY-STOP switch characteristics of the compact starter and accessories	Acc. to IEC 60204		Yes			

Type			3RA61	3RA62	3RA64	3RA65
Size			S0			
Number of poles			3			
General technical specifications (continued)						
Protective separation	Acc. to IEC 60947-2					
Control circuit to auxiliary circuit						
• Horizontal standard mounting rail		V	Up to 400			
• Other mounting position		V	Up to 250			
Auxiliary circuit to auxiliary circuit						
• Horizontal standard mounting rail		V	Up to 400			
• Other mounting position		V	Up to 250			
Main circuit to auxiliary circuit						
• Any mounting position		V	Up to 400			
EMC interference immunity	Acc. to IEC/EN 60947-1		Corresponds to degree of severity 3			
Conductor-related interference	BURST acc. to IEC/EN 61000-4-4					
• In the main circuit		kV	4		4	
• In the auxiliary circuit		kV	3		2	
Conductor-related interference	SURGE acc. to IEC/EN 61000-4-5					
• In the main circuit						
- Conductor - Ground		kV	4		2	
- Conductor - Conductor		kV	2		1	
• In the auxiliary circuit						
- Conductor - Ground		kV	2		0.5 ¹⁾	
- Conductor - Conductor		kV	1		0.5 ¹⁾	
Auxiliary switches						
• Integrated						
- Position of the main contacts			1 NO + 1 NC	2 NO	1 NO + 1 NC	2 NO
- Overload/short-circuit signal			1 CO/1 NO			
• Expandable						
- Position of the main contacts			2 NO, 2 NC, 1 NO + 1 NC			
Surge suppressors			Integrated (Varistor)			
Pollution degree			3			
Depth from standard mounting rail		mm	160			
Electromagnetic operating mechanism						
Control voltage		V				
		V	24 AC/DC		24 DC	
			110 ... 240 AC/DC		--	
Frequency	At AC	Hz	50/60 (±5%)			
Primary operating range			0.7 ... 1.25 U _s			
No-load switching frequency		1/h	3600			
Make-time		ms	max. 70			
Break-time		ms	max. 120			

¹⁾ To maintain maximum interference immunity in a harsh electromagnetic environment, additional overvoltage protection should be provided in the control supply current circuit. A suitable choice is for example the Dehn Blitzduktor BVT AD 24 V, Art. No. 918 402 or an equivalent protective element.
Manufacturer: DEHN+SÖHNE GmbH+Co. KG, Hans-Dehn-Straße. 1, Postfach 1640, D-92306 Neumarkt

Type		3RA61 20-□B3., 3RA62 50-□B3. □ = A, B, C or D Rated operational current ≤12 A		3RA61 20-EB3., 3RA62 50-EB3. Rated operational current 32 A	
Rated control supply voltage	V	24 AC	24 DC	24 AC	24 DC
Inrush peak current	A	0.59	0.47	0.59	0.47
Hold current	A	0.13	0.12	0.17	0.14
Closed	W	2.8	2.9	3.5	3.1
Operating times, typical					
• On	ms	<160	<140	<160	<140
• Off	ms	<35	<35	<30	<30
Type		3RA61 20-□E3., 3RA62 50-□P3. □ = A, B, C or D Rated operational current ≤12 A		3RA61 20-EE3., 3RA62 50-EE3. Rated operational current 32 A	
Rated control supply voltage	V	110 AC	240 AC	110 DC	240 DC
Inrush peak current	A	0.24	0.40	0.17	0.29
Hold current	A	0.06	0.08	0.03	0.02
Closed	W	3.8	6	3.1	5.1
Operating times, typical					
• On	ms	<160	<140	<150	<140
• Off	ms	<50	<80	<50	<70
Type		3RA64 00-□B4., 3RA65 00-□B4. □ = A, B, C or D Rated operational current ≤12A		3RA64 00-EB4., 3RA65 00-EB4. Rated operational current 32 A	
Rated control supply voltage	V	24 DC		24 DC	
Inrush peak current	A	0.39		0.53	
Hold current	A	0.13		0.15	
Closed	W	2.9		3.4	
Operating times, typical ¹⁾					
• On	ms	<140		<140	
• Off	ms	<35		<30	

Type			3RA61	3RA62	3RA64	3RA65
Size			S0			
Number of poles			3			
Electromagnetic operating mechanism (continued)						
Switching capacity at 480 V		kA	30 (up to 12 A) 15 (8 ... 32 A)			
Switching capacity at 600 V		kA	10 (up to 12 A) 5 (8 ... 32 A)			
Line protection	At 10 kA At 50 kA	AWG AWG	14 12			
Shock resistance						
• Breaker mechanism OFF		g	25			
• Breaker mechanism ON		g	15			
Normal switching duty						
Making capacity			12 x I _n			
Breaking capacity			10 x I _n			
Switching capacity dependent on rated current	Up to 12 A Up to 32 A	HP HP	7 1/2 20			
Endurance in operating cycles						
• Electrical endurance	At I _e = 0.9 x I _n and 400 V		3 ... 10 000 000	2 x 3 ... 10 000 000	3 000 000	2 x 1 500 000
Control circuit						
Rated operational voltage						
• External auxiliary switch block		V	400/690			
• Internal auxiliary switch		V	400/690			
• Short-circuit signaling switch		V	400			
• Overload signaling switch		V	400			
Switching capacity						
• External auxiliary switch block	AC-15					
	• At U _e = 230 V	A	6			
	• At U _e = 400 V	A	3			
	• At U _e = 289/500 V	A	2			
	• At U _e = 400/690 V	A	1			
	DC-13					
	• At U _e = 24 V	A	6			
	• At U _e = 60 V	A	0.9			
	• At U _e = 125 V	A	0.55			
	• At U _e = 250 V	A	0.27			
	AC-15					
	• At U _e = 230 V	A	6			
	• At U _e = 400 V	A	3			
	• At U _e = 289/500 V	A	2			
	• At U _e = 400/690 V	A	1			
	DC-13					
	• At U _e = 24 V	A	10			
	• At U _e = 60 V	A	2			
	• At U _e = 125 V	A	1			
	• At U _e = 250 V	A	0.27			
	• At U _e = 480 V	A	0.1			
	AC-15					
	• At U _e = 230 V	A	3			
	• At U _e = 400 V	A	1			
	DC-13					
	• At U _e = 24 V	A	2			
	• At U _e = 250 V	A	0.11			
• Internal auxiliary switch						
• Signaling switch						


Type			3RA61	3RA62	3RA64	3RA65
Size			S0			
Number of poles			3			
External auxiliary switch block, internal auxiliary switch						
Endurance in operating cycles						
• Mechanical endurance			10 000 000		3 000 000	
• Electrical endurance						
	AC-15, 230 V					
	• At 6 A		200 000			
	• At 3 A		500 000			
	• At 1 A		2 000 000			
	• At 0.3 A		10 000 000			
	DC-13, 24 V					
	• At 6 A		300 000			
	• At 3 A		100 000			
	• At 0.5 A		2 000 000			
	• At 0.2 A		10 000 000			
	DC-13, 110 V					
	• At 1 A		40 000			
	• At 0.55 A		100 000			
	• At 0.3 A		300 000			
	• At 0.1 A		2 000 000			
	• At 0.04 A		10 000 000			
	DC-13, 220 V					
	• At 0.3 A		110 000			
	• At 0.1 A		650 000			
	• At 0.05 A		2 000 000			
	• At 0.018 A		10 000 000			
Contact stability	At 17 V and 5 mA	Operating cycles	1 incorrect switching operation per 100 000 000			
Short-circuit protection						
• Short-circuit current $I_K \leq 1.1$ kA		Fuse links operational class gG - NEOZED Type 5SE - DIAZED Type 5SB - LV HRC Type 3NA	A	10		
• Short-circuit current $I_K < 400$ A		Miniature circuit breaker up to 230 V with C characteristic	A	10		
Signaling switches						
Endurance in operating cycles						
• Mechanical endurance			20000			
• Electrical endurance AC-15		At 230 V and 3 A	6050			
Contact stability	At 17 V and 5 mA	Operating cycles	1 incorrect switching operation per 100 000 000			
Short-circuit protection						
• Short-circuit current $I_K \leq 1.1$ kA		Fuse links operational class gG - NEOZED Type 5SE - DIAZED Type 5SB - LV HRC Type 3NA	A	6		
• Short-circuit current $I_K < 400$ A		Miniature circuit breaker up to 230 V with C characteristic	A	6		
Overload (short-circuit current $I_K \leq 1.1$ kA)	Fuse links operational class gG - NEOZED Type 5SE - DIAZED Type 5SB - LV HRC Type 3NA	A	4			

Technical data

Connection type		Screw connection		Spring-type connection	
		12 A	32 A	12 A	32 A
Max. rated current I_{max}					
Conductor cross-sections of main circuit terminals					
Tools		Posidrive size 2		(3.5 x 0.5) mm, 8WA2 803	
Prescribed tightening torque	NM	2 ... 2.5		--	
Minimum/maximum conductor cross-sections					
• Solid	mm ²	2 x (1.5 ... 2.5)	2 x (2.5 ... 6)	2 x (1.5 ... 6)	2 x (2.5 ... 6)
	mm ²	2 x (2.5 ... 6)	Max. 1 x 10	Max. 1 x 10	Max. 1 x 10
	mm ²	Max. 1 x 10			
• Finely stranded without ferrule	mm ²	--	--	2 x (1.5 ... 6)	2 x (2.5 ... 6)
• Finely stranded with ferrule	mm ²	2 x (1.5 ... 2.5)	2 x (2.5 ... 6)	2 x (1.5 ... 6)	2 x (2.5 ... 6)
	mm ²	2 x (2.5 ... 6)			
• AWG cables	AWG	2 x (16 ... 14)	2 x (14 ... 10)	2 x (16 ... 10)	2 x (14 ... 10)
	AWG	2 x (14 ... 10)	1 x 8	1 x 8	1 x 8
	AWG	1 x 8			


Connection type		Screw connection		Spring-type connection	
		12 A	32 A	12 A	32 A
Conductor cross-sections of control circuit terminals					
Tools		Posidrive size 2		(3.0 x 0.5) mm, DIN ISO 2380-1A	
Prescribed tightening torque	NM	0.8 ... 1.2		--	
Minimum/maximum conductor cross-sections					
• Solid	mm ²	1 x (0.5 ... 4)		2 x (0.25 ... 1.5)	
	mm ²	2 x (0.5 ... 2.5)			
• Finely stranded without ferrule	mm ²	--		2 x (0.25 ... 1.5)	
• Finely stranded with ferrule	mm ²	1 x (0.5 ... 2.5)		2 x (0.25 ... 1.5)	
	mm ²	2 x (0.5 ... 1.5)			
• AWG cables	AWG	2 x (20 ... 14)		2 x (24 ... 16)	
Conductor cross-sections of the auxiliary switch for compact starters					
Order No.		3RA69 1.-1A		3RA69 1.-2A	
Tools		Posidrive size 2		(2.5 x 0.4) mm, 8WA2 807	
Prescribed tightening torque	NM	0.8 ... 1.2		--	
Conductor cross-sections					
• Solid	mm ²	2 x (0.5 ... 1.5)		2 x (0.25 ... 2.5)	
	mm ²	2 x (0.75 ... 2.5)			
	mm ²	2 x (1 ... 4)			
• Finely stranded without ferrule	mm ²	--		2 x (0.25 ... 2.5)	
• Finely stranded with ferrule	mm ²	2 x (0.5 ... 1.5)		2 x (0.25 ... 1.5)	
	mm ²	2 x (0.75 ... 2.5)			
• AWG cables	AWG	2 x (20 ... 16)		2 x (24 ... 14)	
	AWG	2 x (18 ... 14)			
	AWG	1 x 12			

Technical data












Order No.			3RA6970-3A, 3RA6970-3B, 3RA6970-3C, 3RA6970-3D, 3RA6970-3E
General data of the AS-i add-on module			
Permissible ambient temperature			
• Storage	Acc. to IEC/EN 60721-3-1	°C	-25 ... +70
• Transport	Acc. to IEC/EN 60721-3-2	°C	-25 ... +70
Degree of protection	Acc. to IEC/EN 60947-1		IP20
EMC interference immunity	Acc. to EN 50295		
Conductor-related interference	BURST acc. to IEC/EN 61000-4-4	kV	1/2
Electrostatic discharge	Acc. to IEC/EN 61000-4-2	kV	6/8
Field-related interference	Acc. to IEC/EN 61000-4-3	V/m	10 (80 MHz ... 2.7 GHz)
Maximum pick-up current		mA	400
Maximum hold current		mA	200
Power consumption, max.		mA	30
IO code			7
ID code			A
ID2 code			E
Order No.			3RA6970-3B, 3RA6970-3C, 3RA6970-3D, 3RA6970-3E
Connection type			 Screw connection
Conductor cross-sections of the AS-i add-on module			
Tools			Posidrive size 1
Prescribed tightening torque	NM		0.5 ... 0.6
Conductor cross-sections			
• Solid	mm ²		1 x (0.5 ... 2.5)
	mm ²		2 x (0.5 ... 1.0)
• Finely stranded with ferrule	mm ²		1 x (0.5 ... 2.5)
	mm ²		2 x (0.5 ... 1.0)
• AWG cables	AWG		1 x (20 ... 12)

Technical data

Type		3RA6.	
General data			
Max. rated operational current			
• Infeed with screw connection 0-2/0 AWG	A	100	
• Infeed with screw connection 4-2 AWG	A	63	
• Infeed with spring-type connection 10-3 AWG	A	63	
• Expansion plug	A	63	
Permissible ambient temperature			
• During operation	°C	-20 ... +60 (over +40 current reduction is required)	
- Permissible rated current at control cabinet inside temperature: +40 °C	%	100	
+60 °C	%	80	
• During storage/transport	°C	-55 ... +80	
Relative air humidity		%	10 ... 90
Installation altitude		m	Up to 2000 above sea level without restriction
Rated operational voltage U_e		V	690 AC
Rated frequency		Hz	50/60
Shock resistance		$a = 60 \text{ m/s}^2 = 6g$ with 10 ms; for every 3 shocks in all axes	
Vibratory load		$f = 1 \dots 6 \text{ Hz}$; $d = 15 \text{ mm}$ 10 cycles $f = 150 \text{ Hz}$; $a = 2 g$	
Degree of protection		Acc. to IEC 60947-1	IP20 (IP 00 terminal compartment)
Touch protection		Acc. to EN 50274	Finger-safe
Degree of pollution		3	
Short-circuit protection for infeed with screw connection 4-2 AWG and infeed with screw connection 0-2/0 AWG			Recommendation for upstream short-circuit protection device 3RV1041-4JA10 3RV1041-4MA10
	$I_{d,max}$	kA	< 21
	I^2t	kA²s	530
Short-circuit protection for infeed with spring-type connection			Recommendation for upstream short-circuit protection device 3RV2021-4DA10
• Conductor cross-section 12 AWG	$I_{d,max}$	kA	< 9.5
	I^2t	kA²s	85
• Conductor cross-section 10 AWG	$I_{d,max}$	kA	< 12.5
	I^2t	kA²s	140
• Conductor cross-section 8 AWG	$I_{d,max}$	kA	< 15
	I^2t	kA²s	180
• Conductor cross-section 6-4 AWG	$I_{d,max}$	kA	< 19
	I^2t	kA²s	440
Short-circuit protection for terminal block			Recommendation for upstream short-circuit protection device 5SY... 1)
• Conductor cross-section 16 AWG	$I_{d,max}$	kA	7.5
• Conductor cross-section 14 AWG	$I_{d,max}$	kA	9.5
• Conductor cross-section 12 AWG	$I_{d,max}$	kA	9.5
• Conductor cross-section 10 AWG	$I_{d,max}$	kA	12.5
1) To prevent the possibility of short-circuits, the cables on the terminal block must be installed so that they are short-circuit resistant according to EN 60439-1 Section 7.5.5.1.2.			

Type		3RV29.	
Connection type		 Spring-type connection	
Conductor cross-sections of terminal block			
Order No.		3RV29 17-5D	
Conductor cross-sections			
• Solid	mm²	1.5 ... 6	
• Finely stranded with ferrule	mm²	1.5 ... 4	
• Finely stranded without ferrule	mm²	1.5 ... 6	
• AWG cables, solid or stranded	AWG	15 ... 10	


Technical data

Type		3RA6.			
Connection type		 Screw connection			
Conductor cross-sections of infeed with screw connection 16-2 AWG (L1, L2, L3) ¹⁾ and PE infeed 2 AWG ²⁾					
Order No.		3RA68 12-8AB, 3RA68 12-8AC, 3RA68 60-6AB			
Tools		Posidrive size 2			
Specified tightening torque		NM 3 ... 4.5			
		  			
Conductor cross-sections					
• Solid	mm ²	2.6 ... 16	2.6 ... 16	max. 2 x 16	
• Stranded	mm ²	2.5 ... 35	2.5 ... 35	max. 2 x 25	
• Finely stranded with ferrule	mm ²	2.5 ... 25	2.5 ... 25	max. 2 x 16	
• Finely stranded without ferrule	mm ²	2.5 ... 25	2.5 ... 25	max. 2 x 16	
• AWG cables	AWG	12 ... 2	12 ... 2	max. 2 x (16 ... 2)	
Connection type		 Screw connection			
Conductor cross-sections of infeed with screw connection 10-2/0 AWG (L1, L2, L3) ¹⁾					
Order No.		3RA68 13-8AB, 3RA68 13-8AC			
Tools		SW	4		
Specified tightening torque		NM	6 ... 8		
		  			
Conductor cross-sections					
• Solid	mm ²	2.5 ... 16	2.5 ... 16	max. 2 x 16	
• Stranded	mm ²	4 ... 70	10 ... 70	max. 2 x 50	
• Finely stranded with ferrule	mm ²	2.5 ... 35	2.5 ... 50	max. 2 x 35	
• Finely stranded without ferrule	mm ²	4 ... 50	10 ... 50	max. 2 x 35	
• AWG cables	AWG	10 ... 2/0	10 ... 2/0	max. 2 x (10 ... 1/0)	
Connection type		 Spring-type connection			
Conductor cross-sections of infeed with spring-type connection 10-3 AWG (L1, L2, L3) ¹⁾ and PE infeed 3 AWG					
Order No.		3RA68 30-5AC, 3RA68 60-5AC			
Tools		8WA2 806 mm	5.5 x 0.8		
Conductor cross-sections					
• Solid	mm ²	4 ... 16			
• Stranded	mm ²	4 ... 35			
• Finely stranded with ferrule	mm ²	4 ... 25			
• Finely stranded without ferrule	mm ²	6 ... 25			
• AWG cables	AWG	10 ... 3			
Connection type		 Screw connection		 Spring-type connection	
Conductor cross-sections of infeed with screw connection 4-2 AWG (T1, T2, T3) ²⁾ , infeed with screw connection 0-2/0 AWG (T1, T2, T3) ²⁾ 2-socket and 3-socket expansion modules (T1, T2, T3) ²⁾ and PE tap-off 10-8 AWG					
Order No.		3RA68 12-8AB, 3RA68 13-8AB, 3RA68 22-0AB, 3RA68 23-0AB, 3RA68 70-4AB		3RA68 12-8AC, 3RA68 13-8AC, 3RA68 22-0AC, 3RA68 23-0AC, 3RA68 70-3AC	
Tools		Posidrive size 2		(3.5 x 0.5) mm, 8WA2 803	
Specified tightening torque		NM 2 ... 2.5		--	
Maximum rated current		A	12 32	12	32
Conductor cross-sections					
• Solid	mm ²	2 x (1 ... 2.5)	2 x (2.5 ... 6)	2 x (1.5 ... 6)	2 x (2.5 ... 6)
	mm ²	2 x (2.5 ... 6)	max. 1 x 10	max. 1 x 10	max. 1 x 10
	mm ²	max. 1 x 10			
• Finely stranded with ferrule	mm ²	--	--	2 x (1.5 ... 6)	2 x (2.5 ... 6)
• Finely stranded without ferrule	mm ²	2 x (1 ... 2.5)	2 x (2.5 ... 6)	2 x (1.5 ... 6)	2 x (2.5 ... 6)
	mm ²	2 x (2.5 ... 6)			
• AWG cables	AWG	2 x (16 ... 14)	2 x (14 ... 10)	2 x (16 ... 10)	2 x (14 ... 10)
	AWG	2 x (14 ... 10)			
	AWG	1 x 8	1 x 8	1 x 8	1 x 8

¹⁾ L1, L2, L3 main conductors on input side.²⁾ T1, T2, T3 main conductors on output side.


Dimensional drawings

3RA62 reversing starters

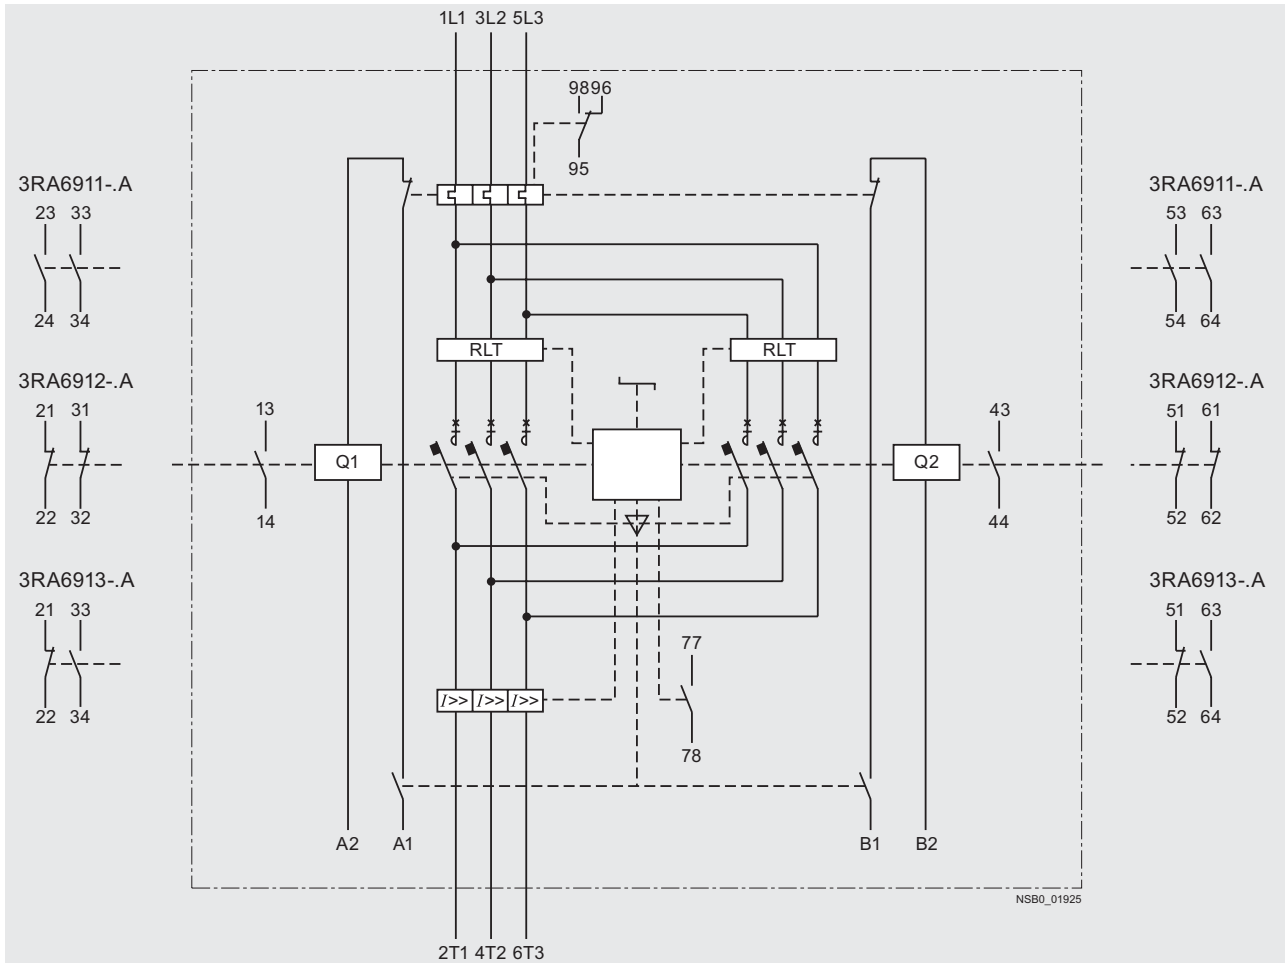


Schematic for 3RA62 reversing starters (main circuit)


Dimensional drawings

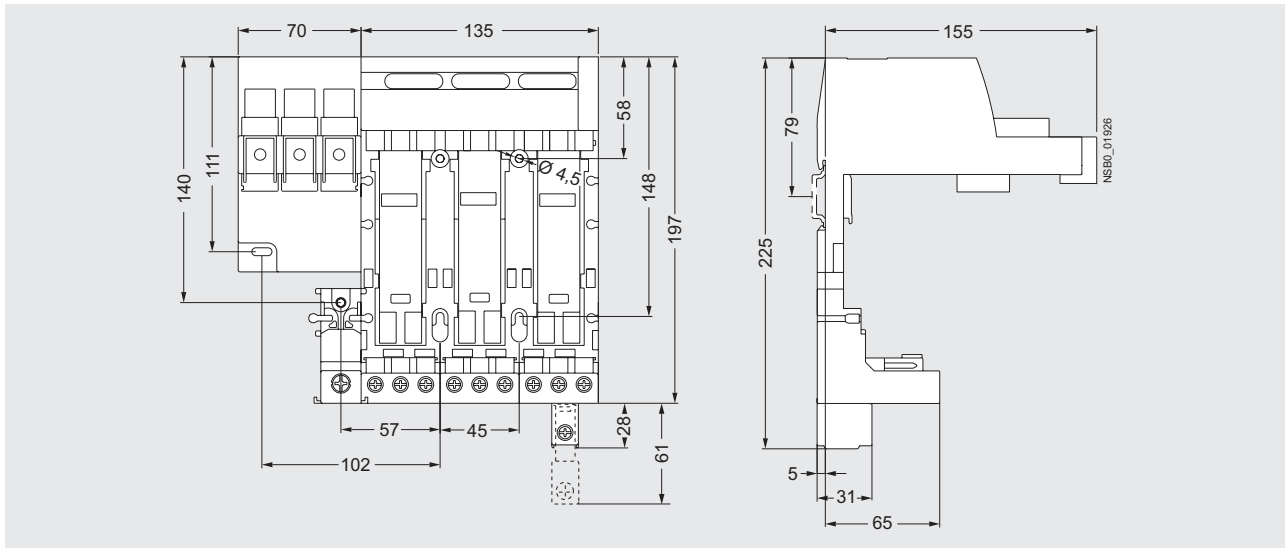


Infeed with screw connection 0-2/0 AWG on left with fixed 3-socket expansion module with outgoing screw terminals

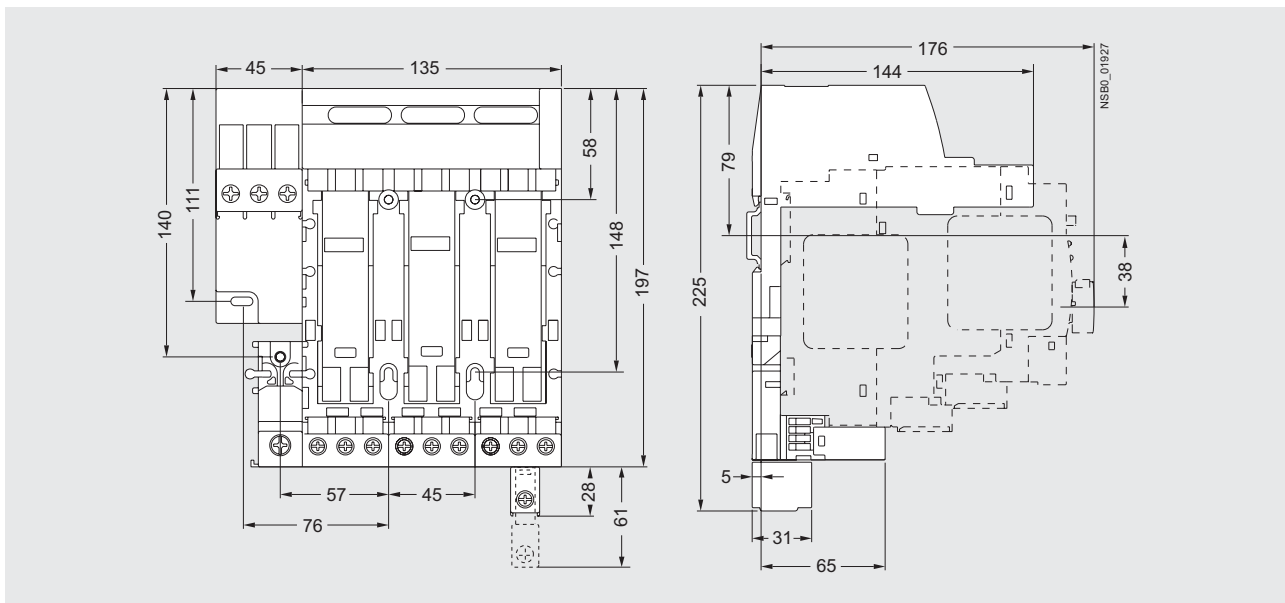


Infeed with screw connection 4-2 AWG on left with fixed 3-socket expansion module with outgoing screw terminals

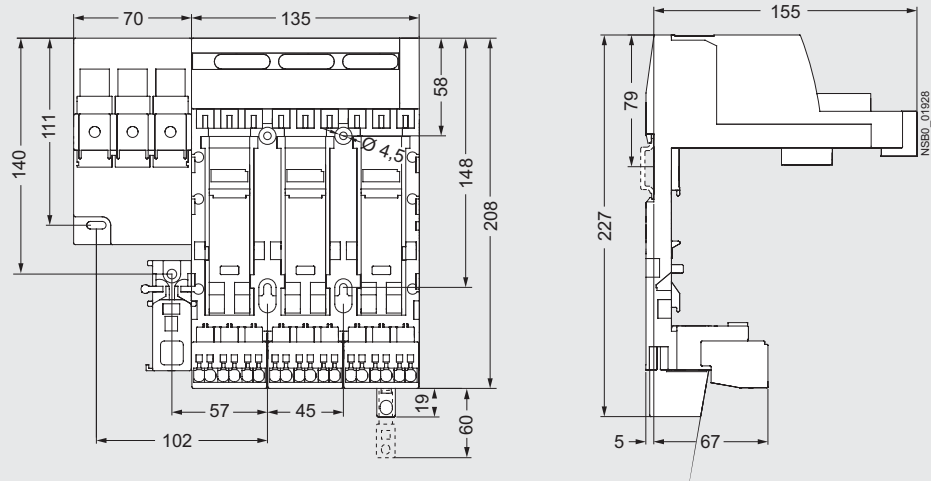


Infeed with screw connection 0-2/0 AWG on left with fixed 3-socket expansion module with outgoing spring-type terminals

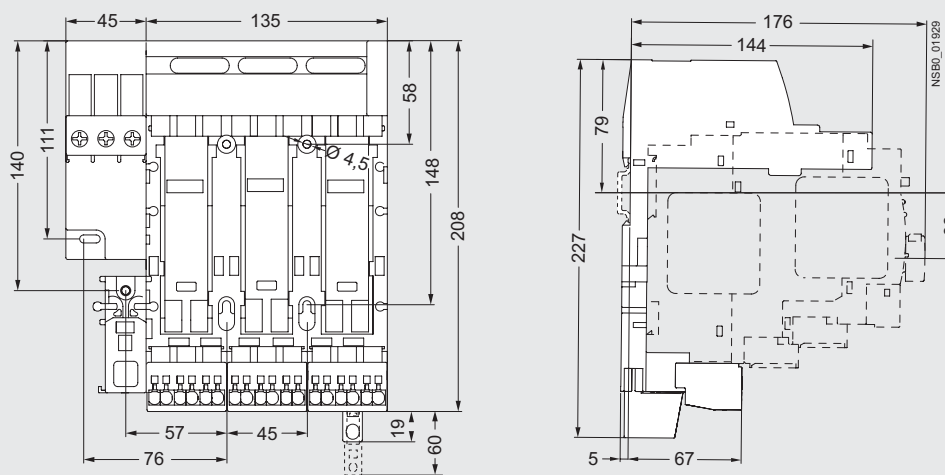


Infeed with screw connection 4-2 AWG on left with fixed 3-socket expansion module with outgoing spring-type terminals

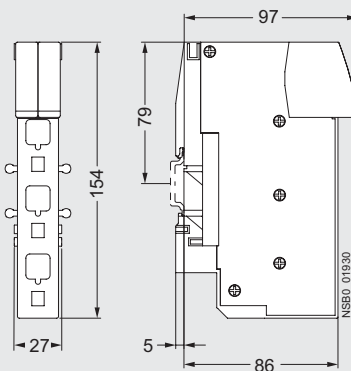


Infeed with spring-type terminals

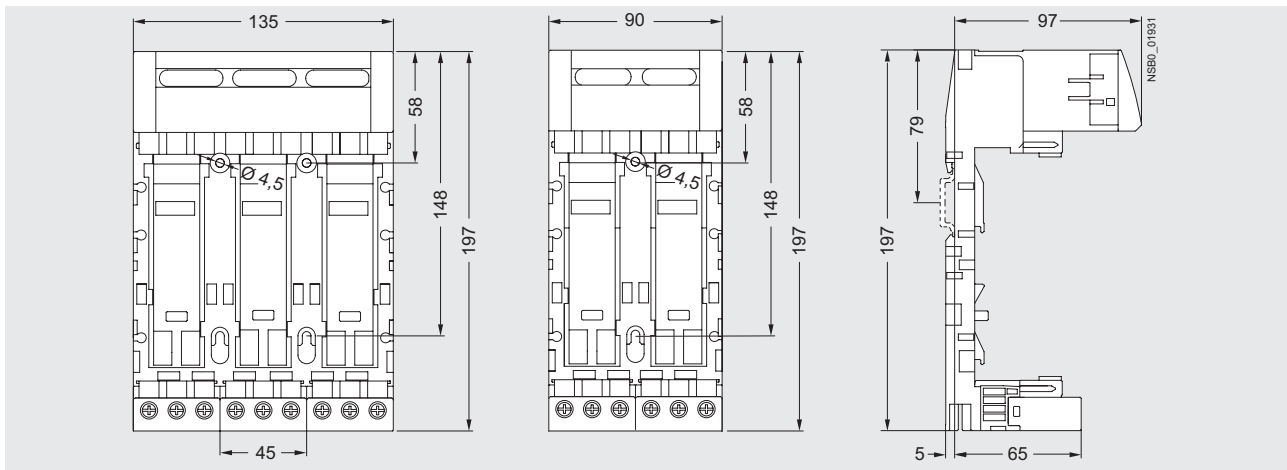

3-socket expansion module and 2-socket expansion module with outgoing screw terminals

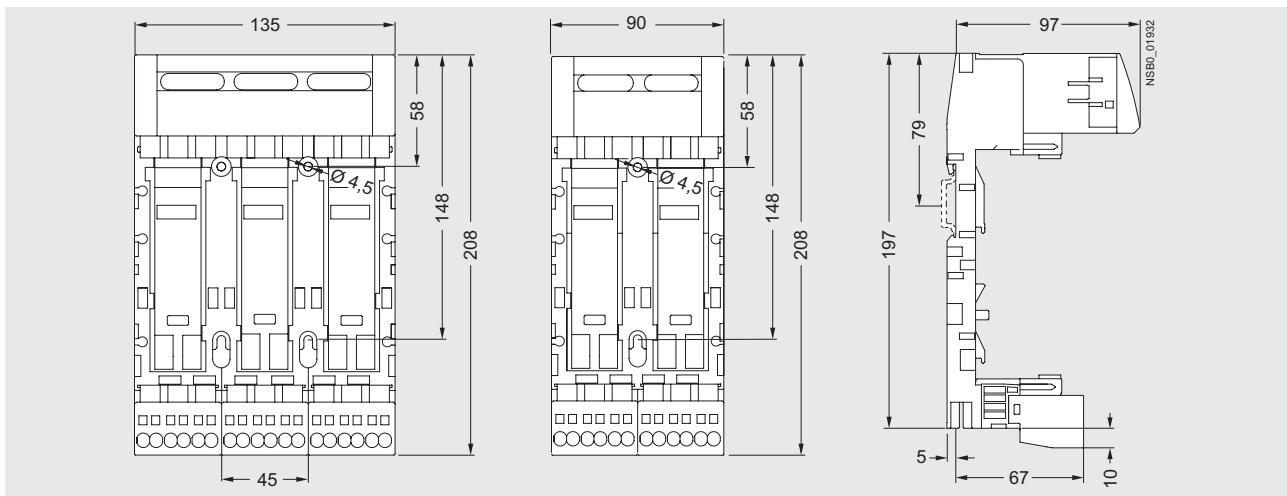

3-socket expansion module and 2-socket expansion module with outgoing spring-type terminals

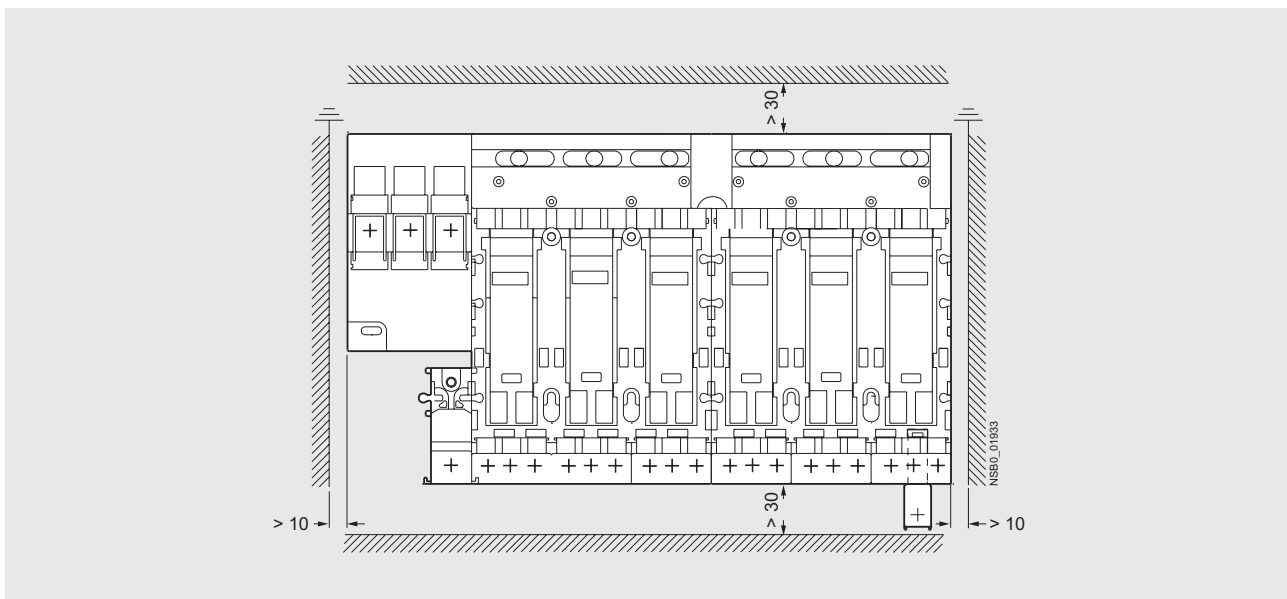


Minimum clearances to adjacent components when using infeed system for 3RA6

3RA2 Starters

Non-Reversing, AC Coil – up to 22 A


Selection and ordering data

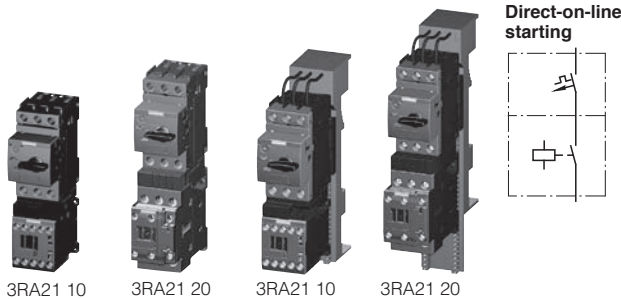Rated control supply voltage 50/60 Hz 110/120 V AC
With screw connections

- The motor starter protector and contactor are mechanically and electrically connected by means of the link module.
- Auxiliary switches¹⁾ on the motor starter protector and the contactor can be easily fitted due to the modular system.
- Integrated auxiliary switches:
 - Contactor size S00: 1 NO;
 - Contactor size S0: 1 NO + 1 NC

Combination Starter, UL508 Type F

All size S00 and S0 devices can be applied as Combination Starters with the addition of either of these line side connectors: 3RV29 28-1H, 3RV29 25-5EB or 3RV29 28-1K.

Size	UL Data						FLA setting range inverse-time delayed overload release	Consisting of the following single devices			Assembled starter		Weight approx.
	Single-phase HP ratings		Three-phase ²⁾ HP ratings		SCCR at 480 V			Motor starter protector	+ Contactor	+ Link module + Busbar adapter ³⁾	Screw terminals		
	115 V	230 V	200 V	230 V	460 V	575 V					kA		
Selection depends on motor full load amps													
S00							3RV20	3RT20	3RA				
	--	--	--	--	--	--	65	0.11...0.16	11-0AA10	15-1AK61	1921-1DA00 + 8US1251-5DS10	3RA21 1□-0A□15-1AK6	0.575
	--	--	--	--	--	--	65	0.14...0.2	11-0BA10			3RA21 1□-0B□15-1AK6	0.575
	--	--	--	--	--	--	65	0.18...0.25	11-0CA10			3RA21 1□-0C□15-1AK6	0.575
	--	--	--	--	--	--	65	0.22...0.32	11-0DA10			3RA21 1□-0D□15-1AK6	0.575
	--	--	--	--	--	--	65	0.28...0.4	11-0EA10			3RA21 1□-0E□15-1AK6	0.575
	--	--	--	--	--	--	65	0.35...0.5	11-0FA10			3RA21 1□-0F□15-1AK6	0.575
	--	--	--	--	--	--	65	0.45...0.63	11-0GA10			3RA21 1□-0G□15-1AK6	0.575
	--	--	--	--	--	--	65	0.55...0.8	11-0HA10			3RA21 1□-0H□15-1AK6	0.575
	--	--	--	--	--	1/2	65	0.7... 1	11-0JA10			3RA21 1□-0J□15-1AK6	0.575
	--	--	--	--	1/2	1/2	65	0.9... 1.25	11-0KA10			3RA21 1□-0K□15-1AK6	0.575
	--	1/10	--	--	3/4	3/4	65	1.1... 1.6	11-1AA10			3RA21 1□-1A□15-1AK6	0.575
	--	1/8	--	--	3/4	1	65	1.4... 2	11-1BA10			3RA21 1□-1B□15-1AK6	0.575
	--	1/6	1/2	1/2	1	1 1/2	65	1.8... 2.5	11-1CA10			3RA21 1□-1C□15-1AK6	0.575
	1/10	1/4	1/2	3/4	1 1/2	2	65	2.2... 3.2	11-1DA10			3RA21 1□-1D□15-1AK6	0.575
	1/8	1/3	3/4	3/4	2	3	65	2.8... 4	11-1EA10			3RA21 1□-1E□15-1AK6	0.575
	1/6	1/2	1	1	3	3	65	3.5... 5	11-1FA10			3RA21 1□-1F□15-1AK6	0.575
	1/4	1/2	1	1 1/2	3	5	65	4.5... 6.3	11-1GA10			3RA21 1□-1G□15-1AK6	0.575
	1/3	1	2	2	5	5	65	5.5... 8	11-1HA10	16-1AK61		3RA21 1□-1H□16-1AK6	0.575
	1/2	1 1/2	2	3	5	7 1/2	65	7... 10	11-1JA10			3RA21 1□-1J□16-1AK6	0.575
	1/2	2	3	3	7 1/2	10	65	9... 12	11-1KA10	17-1AK61		3RA21 1□-1K□17-1AK6	0.575
1	2	3	5	10	--	65	11... 16	11-4AA10	18-1AK61		3RA21 1□-4A□18-1AK6	0.575	
S0	1/6	1/2	1	1	3	3	65	3.5... 5	11-1FA10	24-1AK60	2921-1AA00 + 8US1251-5NT10	3RA21 2□-1F□24-0AK6	0.761
	1/4	1/2	1	1 1/2	3	5	65	4.5... 6.3	11-1GA10			3RA21 2□-1G□24-0AK6	0.761
	1/3	1	2	2	5	5	65	5.5... 8	11-1HA10			3RA21 2□-1H□24-0AK6	0.761
	1/2	1 1/2	2	3	5	7 1/2	65	7... 10	11-1JA10			3RA21 2□-1J□24-0AK6	0.761
	1/2	2	3	3	7 1/2	10	65	9... 12.5	11-1KA10			3RA21 2□-1K□24-0AK6	0.761
	1	2	3	5	10	--	65	11... 16	21-4AA10	26-1AK60		3RA21 2□-4A□26-0AK6	0.761
	1 1/2	3	5	5	10	--	65	14... 20	21-4BA10			3RA21 2□-4B□26-0AK6	0.761
	1 1/2	3	5	7 1/2	15	--	50	17... 22	21-4CA10	27-1AK60		3RA21 2□-4C□27-0AK6	0.761
	2	3	5	7 1/2	15	--	50	20... 25	21-4DA10			3RA21 2□-4D□27-0AK6	0.761
	2	5	7 1/2	10	20	--	50	27... 32	21-4EA10			3RA21 2□-4E□27-0AK6	0.761

Order No. supplement for:

- Standard DIN rail or screw mounting with no additional auxiliaries
- Standard DIN rail or screw mounting with 1 SPDT NO/NC MSP auxiliary (S00 frame contactor has 1NO auxiliary and S0 frame contactor has 1NO/1NC auxiliary)
- With Fast Bus adaptor and no additional auxiliaries
- With Fast Bus adaptor and 1 SPDT NO/NC MSP auxiliary (S00 frame contactor has 1NO auxiliary and S0 frame contactor has 1NO/1NC auxiliary)

0	A
5	A
0	D
5	D

1) For auxiliary switches see Accessories page 4/44.

2) Selection depends on the motor full load amps.
HP ratings for reference only.

3) Used only for mounting starter on 8US Fast Bus busbar systems.


3RA2 Starters

Non-Reversing, AC and DC Coil – up to 100 A

Selection and ordering data



Direct-on-line starting



For 35 mm standard mounting rail or screw mounting

- The motor starter protector and contactor are mechanically and electrically connected by means of the link module.
- Auxiliary switches¹⁾ on the motor starter protector and the contactor can be easily fitted due to the modular system.
- Integrated auxiliary switches:
 - Contactor size S2: 1 NO & 1 NC
 - Contactor size S3: 1 NO & 1 NC

Combination Starter, UL508 Type F

- Size S2 devices can be applied as Combination Starters. For versions of 50A or higher, the addition of a 3RV2938-1K line side phase barrier is required.
- Size S3 devices can be applied as Combination Starters with the addition of a 3RT2946-4GA07 line side terminal kit

						SCCR at 480Y/277V	FLA setting range Inverse-time delayed overload release	Starter Order No.	Size	Consisting of the following individual devices			
Single-Phase HP Ratings		Three-Phase ²⁾ HP ratings				kA	A			Motor starter protector	+ Contactor	+ Link module	Adapter for standard mounting rail ³⁾
115V	230V	200V	230V	460V	575V								
110VAC 50Hz / 120VAC 60 Hz													
3	7.5	10	15	30	40	65	22... 32	3RA21 3□-4EA35-□AK6	S2	3RV20 31-4EA10	3RT2035-1AK60	3RT2036-1AK60	3RA2931-1AA00 + 3RA2932-1AA00 (must be ordered separately)
3	10	15	15	40	50	65	28... 36	3RA21 3□-4PA36-□AK6		3RV20 31-4PA10			
3	10	15	15	40	50	65	32... 40	3RA21 3□-4UA36-□AK6		3RV20 31-4UA10			
3	10	15	15	40	50	65	35... 45	3RA21 3□-4VA36-□AK6		3RV20 31-4VA10			
5	10	20	20	50	50	65	42... 52	3RA21 3□-4WA37-□AK6		3RV20 31-4WA10	3RT2037-1AK60	3RT2038-1AK60	
5	15	20	25	50	60	20	49... 59	3RA21 3□-4XA38-□AK6		3RV20 31-4XA10			
5	15	20	25	50	60	20	54... 65	3RA21 3□-4JA38-□AK6		3RV20 31-4JA10			
7.5	15	25	30	60	60	65	28... 40	3RA21 4□-4FB45-□AK6	S3	3RV20 41-4FA10	3RT2045-1AK60	3RT2046-1AK60	3RA1941-1AA00 + 3RA2942-1AA00
7.5	15	25	30	60	60	65	36... 50	3RA21 4□-4HB45-□AK6		3RV20 41-4HA10			
7.5	15	25	30	60	60	65	45... 63	3RA21 4□-4JB45-□AK6		3RV20 41-4JA10			
10	20	30	30	75	75	65	57... 75	3RA21 4□-4KB46-□AK6		3RV20 41-4KA10			
10	20	30	30	75	75	65	65... 84	3RA21 4□-4RB46-□AK6		3RV20 41-4RA10		3RT2047-1AK60	
10	20	30	30	75	–	65	75... 93	3RA21 4□-4YB46-□AK6		3RV20 41-4YA10			
10	20	30	40	75	–	65	80...100	3RA21 4□-4MB47-□AK6		3RV20 41-4MA10			

24V UC													
3	7.5	10	15	30	40	65	22... 32	3RA21 3□-4EA35-□NB3	S2	3RV20 31-4EA10	3RT2035-1NB30	3RT2036-1NB30	3RA2931-1AA00 + 3RA2932-1AA00 (must be ordered separately)
3	10	15	15	40	50	65	28... 36	3RA21 3□-4PA36-□NB3		3RV20 31-4PA10			
3	10	15	15	40	50	65	32... 40	3RA21 3□-4UA36-□NB3		3RV20 31-4UA10			
3	10	15	15	40	50	65	35... 45	3RA21 3□-4VA36-□NB3		3RV20 31-4VA10			
5	10	20	20	50	50	65	42... 52	3RA21 3□-4WA37-□NB3		3RV20 31-4WA10	3RT2037-1NB30	3RT2038-1NB30	
5	15	20	25	50	60	20	49... 59	3RA21 3□-4XA38-□NB3		3RV20 31-4XA10			
5	15	20	25	50	60	20	54... 65	3RA21 3□-4JA38-□NB3		3RV20 31-4JA10			
7.5	15	25	30	60	60	65	28... 40	3RA21 4□-4FB45-□NB3	S3	3RV20 41-4FA10	3RT2045-1NB30	3RT2046-1NB30	3RA1941-1BA00 + 3RA2942-1AA00
7.5	15	25	30	60	60	65	36... 50	3RA21 4□-4HB45-□NB3		3RV20 41-4HA10			
7.5	15	25	30	60	60	65	45... 63	3RA21 4□-4JB45-□NB3		3RV20 41-4JA10			
10	20	30	30	75	75	65	57... 75	3RA21 4□-4KB46-□NB3		3RV20 41-4KA10			
10	20	30	30	75	75	65	65... 84	3RA21 4□-4RB46-□NB3		3RV20 41-4RA10		3RT2047-1NB30	
10	20	30	30	75	–	65	70... 90	3RA21 4□-4YB46-□NB3		3RV20 41-4YA10			
10	20	30	40	75	–	65	80...100	3RA21 4□-4MB47-□NB3		3RV20 41-4MA10			

Order No. supplement for:

- Standard DIN rail or screw mounting with no additional auxiliaries
- Standard DIN rail or screw mounting with 1 SPDT NO/NC MSP auxiliary (S2 frame contactor has 1NO/1NC integrated auxiliary) (S3 frame contactor has 1NO top mounted auxiliary)

0	0
5	0 (S2)
5	1 (S3)

1) For auxiliary switches, see accessories page 4/44.

2) Selection depends on motor full load amps. Horsepower ratings for reference only.


3) Adapters for standard mounting rail are included for all S3 starters and optional to be ordered as accessories for S2 non-reversing starters.

Note:

In the S2 frame, for 100kA SCCR versions, replace the prefix 3RA213x with 3RA215x. Rating exceptions would be the 59A and 65A versions having a 30kA SCCR at 480Y/277V. For UL 508 type E/F, order 3RV2938-1K Phase Barrier for field installation on all versions.

3RA2 Starters


Non-Reversing, DC Coil – up to 22 A

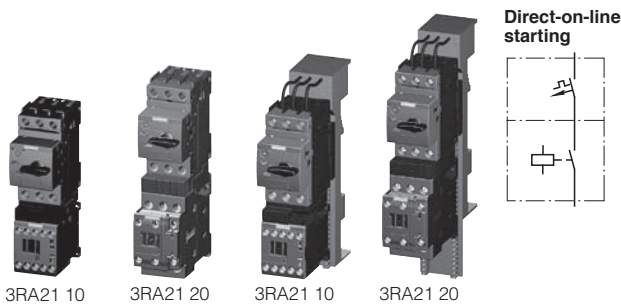
Rated control supply voltage 24 V DC
With screw connections

- The motor starter protector and contactor are mechanically and electrically connected by means of the link module.
- Auxiliary switches¹⁾ on the motor starter protector and the contactor can be easily fitted due to the modular system.
- Integrated auxiliary switches:
 - Contactor size S00: 1 NO;
 - Contactor size S0: 1 NO + 1 NC

Combination Starter, UL508 Type F

All size S00 and S0 devices can be applied as Combination Starters with the addition of either of these line side connectors: 3RV29 28-1H, 3RV29 25-5EB or 3RV29 28-1K.

Size	UL Data						SCCR at 480 V	FLA setting range inverse-time delayed overload release	Consisting of the following single devices			Assembled starter		Weight approx.
	Single-phase HP ratings		Three-phase ²⁾ HP ratings		Motor starter protector	+ Contactor			+ Link module + Busbar adapter ³⁾	Screw terminals				
	115 V	230 V	200 V	230 V						460 V		575 V	Order No.	
Selection depends on motor full load amps													kg	
									3RV20	3RT20	3RA			
S00	--	--	--	--	--	--	65	0.11...0.16	11-0AA10	15-1BB41	1921-1DA00	3RA21 1□-0A□15-1BB4	0.630	
	--	--	--	--	--	--	65	0.14...0.2	11-0BA10		+ 8US1251-5DS10	3RA21 1□-0B□15-1BB4	0.630	
	--	--	--	--	--	--	65	0.18...0.25	11-0CA10			3RA21 1□-0C□15-1BB4	0.630	
	--	--	--	--	--	--	65	0.22...0.32	11-0DA10			3RA21 1□-0D□15-1BB4	0.630	
	--	--	--	--	--	--	65	0.28...0.4	11-0EA10			3RA21 1□-0E□15-1BB4	0.630	
	--	--	--	--	--	--	65	0.35...0.5	11-0FA10			3RA21 1□-0F□15-1BB4	0.630	
	--	--	--	--	--	--	65	0.45...0.63	11-0GA10			3RA21 1□-0G□15-1BB4	0.630	
	--	--	--	--	--	--	65	0.55...0.8	11-0HA10			3RA21 1□-0H□15-1BB4	0.630	
	--	--	--	--	--	1/2	65	0.7... 1	11-0JA10			3RA21 1□-0J□15-1BB4	0.630	
	--	--	--	--	1/2	1/2	65	0.9... 1.25	11-0KA10			3RA21 1□-0K□15-1BB4	0.630	
	--	1/10	--	--	3/4	3/4	65	1.1... 1.6	11-1AA10			3RA21 1□-1A□15-1BB4	0.630	
	--	1/8	--	--	3/4	1	65	1.4... 2	11-1BA10			3RA21 1□-1B□15-1BB4	0.630	
	--	1/6	1/2	1/2	1	1 1/2	65	1.8... 2.5	11-1CA10			3RA21 1□-1C□15-1BB4	0.630	
	1/10	1/4	1/2	3/4	1 1/2	2	65	2.2... 3.2	11-1DA10			3RA21 1□-1D□15-1BB4	0.630	
	1/8	1/3	3/4	3/4	2	3	65	2.8... 4	11-1EA10			3RA21 1□-1E□15-1BB4	0.630	
	1/6	1/2	1	1	3	3	65	3.5... 5	11-1FA10			3RA21 1□-1F□15-1BB4	0.630	
	1/4	1/2	1	1 1/2	3	5	65	4.5... 6.3	11-1GA10			3RA21 1□-1G□15-1BB4	0.630	
	1/3	1	2	2	5	5	65	5.5... 8	11-1HA10	16-1BB41		3RA21 1□-1H□16-1BB4	0.630	
	1/2	1 1/2	2	3	5	7 1/2	65	7... 10	11-1JA10			3RA21 1□-1J□16-1BB4	0.630	
	1/2	2	3	3	7 1/2	10	65	9... 12	11-1KA10	17-1BB41		3RA21 1□-1K□17-1BB4	0.630	
	1	2	3	5	10	--	65	11...16	11-4AA10	18-1BB41		3RA21 1□-4A□18-1BB4	0.630	
S0	1/6	1/2	1	1	3	3	65	3.5... 5	11-1FA10	24-1BB40	2921-1BA00	3RA21 2□-1F□24-0BB4	0.948	
	1/4	1/2	1	1 1/2	3	5	65	4.5... 6.3	11-1GA10		+ 8US1251-5NT10	3RA21 2□-1G□24-0BB4	0.948	
	1/3	1	2	2	5	5	65	5.5... 8	11-1HA10			3RA21 2□-1H□24-0BB4	0.948	
	1/2	1 1/2	2	3	5	7 1/2	65	7... 10	11-1JA10			3RA21 2□-1J□24-0BB4	0.948	
	1/2	2	3	3	7 1/2	10	65	9... 12.5	11-1KA10			3RA21 2□-1K□24-0BB4	0.948	
	1	2	3	5	10	--	65	11... 16	21-4AA10	26-1BB40		3RA21 2□-4A□26-0BB4	0.948	
	1 1/2	3	5	5	10	--	65	14... 20	21-4BA10			3RA21 2□-4B□26-0BB4	0.948	
	1 1/2	3	5	7 1/2	15	--	50	17... 22	21-4CA10	27-1BB40		3RA21 2□-4C□27-0BB4	0.948	
	2	3	5	7 1/2	15	--	50	20... 25	21-4DA10			3RA21 2□-4D□27-0BB4	0.948	
	2	5	7 1/2	10	20	--	50	27... 32	21-4EA10			3RA21 2□-4E□27-0BB4	0.948	

Order No. supplement for:

- Standard DIN rail or screw mounting with no additional auxiliaries
- Standard DIN rail or screw mounting with 1 SPDT NO/NC MSP auxiliary (S00 frame contactor has 1NO auxiliary and S0 frame contactor has 1NO/1NC auxiliary)

- With Fast Bus adaptor and no additional auxiliaries
- With Fast Bus adaptor and 1 SPDT NO/NC MSP auxiliary (S00 frame contactor has 1NO auxiliary and S0 frame contactor has 1NO/1NC auxiliary)

0	A
5	A
0	D
5	D

1) For auxiliary switches, see [Accessories page 4/44](#).

2) Selection depends on the concrete motor full load amps. HP ratings for reference only.

3) Use only for mounting starter on 8US Fast Bus busbar systems.


3RA2 Starters

Non-Reversing Fast Bus® – AC and DC Coil

Selection and ordering data



Direct-on-line starting




For 60mm Fast Bus busbar systems

- The motor starter protector and contactor are mechanically and electrically connected by means of the link module.
- Auxiliary switches¹⁾ on the motor starter protector and the contactor can be easily fitted due to the modular system.
- Integrated auxiliary switches:
 - Contactor size S2: 1 NO & 1 NC
 - Contactor size S3: 1 NO & 1 NC

Combination Starter, UL508 Type F

- Size S2 devices can be applied as Combination Starters. For versions of 50A or higher, the addition of a 3RV2938-1K line side phase barrier is required.
- Size S3 devices can be applied as Combination Starters with the addition of a 3RT1946-4GA07 line side terminal kit

						SCCR at 480Y/277V kA		FLA setting range Inverse-time delayed overload release		Starter Order No.		Size	Consisting of the following individual devices						
Single-Phase HP Ratings		Three-Phase ²⁾ HP ratings						A					Motor starter protector	+ Contactor	+ Link module +	Adapter for standard mounting rail ³⁾			
115V	230V	200V	230V	460V	575V	110VAC 50Hz / 120 VAC 60Hz													
3	7.5	10	15	30	40	65	22... 32	3RA21 3□-4ED35-□AK6		S2	3RV20 31-4EA10	3RT2035-1AK60	3RA2931-1AA00 + 8US1261-6MT10						
3	10	15	15	40	50	65	28... 36	3RA21 3□-4PD36-□AK6			3RV20 31-4PA10	3RT2036-1AK60							
3	10	15	15	40	50	65	32... 40	3RA21 3□-4UD36-□AK6			3RV20 31-4UA10								
3	10	15	15	40	50	65	35... 45	3RA21 3□-4VD36-□AK6			3RV20 31-4VA10	3RT2037-1AK60							
5	10	20	20	50	50	65	42... 52	3RA21 3□-4WD37-□AK6			3RV20 31-4WA10								
5	15	20	25	50	60	20	49... 59	3RA21 3□-4XD38-□AK6			3RV20 31-4XA10	3RT2038-1AK60							
5	15	20	25	50	60	20	54... 65	3RA21 3□-4JD38-□AK6		3RV20 31-4JA10									
7.5	15	25	30	60	60	65	28... 40	3RA21 4□-4FD45-□AK6		S3	3RV20 41-4FA10	3RT2045-1AK60	3RA1941-1AA00 + 8US1211-4TR00						
7.5	15	25	30	60	60	65	36... 50	3RA21 4□-4HD45-□AK6			3RV20 41-4HA10								
7.5	15	25	30	60	60	65	45... 63	3RA21 4□-4JD45-□AK6			3RV20 41-4JA10	3RT2046-1AK60							
10	20	30	30	75	75	65	57... 75	3RA21 4□-4KD46-□AK6			3RV20 41-4KA10								
10	20	30	30	75	75	65	65... 84	3RA21 4□-4RD46-□AK6			3RV20 41-4RA10	3RT2047-1AK60							
10	20	30	30	75	–	65	75... 93	3RA21 4□-4YD46-□AK6			3RV20 41-4YA10								
10	20	30	40	75	–	65	80...100	3RA21 4□-4MD47-□AK6			3RV20 41-4MA10								

24V UC															
3	7.5	10	15	30	40	65	22... 32	3RA21 3□-4ED35-□NB3	S2	3RV20 31-4EA10	3RT2035-1NB30	3RA2931-1AA00 + 8US1261-6MT10			
3	10	15	15	40	50	65	28... 36	3RA21 3□-4PD35-□NB3		3RV20 31-4PA10	3RT2036-1NB30				
3	10	15	15	40	50	65	32... 40	3RA21 3□-4UD35-□NB3		3RV20 31-4UA10					
3	10	15	15	40	50	65	35... 45	3RA21 3□-4VD36-□NB3		3RV20 31-4VA10	3RT2037-1NB30				
5	10	20	20	50	50	65	42... 52	3RA21 3□-4WD36-□NB3		3RV20 31-4WA10					
5	15	20	25	50	60	20	49... 59	3RA21 3□-4XD37-□NB3		3RV20 31-4XA10	3RT2038-1NB30				
5	15	20	25	50	60	20	54... 65	3RA21 3□-4JD37-□NB3		3RV20 31-4JA10					
7.5	15	25	30	60	60	65	28... 40	3RA21 4□-4FD44-□NB3	S3	3RV20 41-4FA10	3RT2045-1NB30	3RA1941-1BA00 + 8US1211-4TR00			
7.5	15	25	30	60	60	65	36... 50	3RA21 4□-4HD44-□NB3		3RV20 41-4HA10					
7.5	15	25	30	60	60	65	45... 63	3RA21 4□-4JD44-□NB3		3RV20 41-4JA10	3RT2046-1NB30				
10	20	30	30	75	75	65	57... 75	3RA21 4□-4KD45-□NB3		3RV20 41-4KA10					
10	20	30	30	75	75	65	65... 84	3RA21 4□-4RD45-□NB3		3RV20 41-4RA10	3RT2047-1NB30				
10	20	30	30	75	-	65	75... 93	3RA21 4□-4YD46-□NB3		3RV20 41-4YA10					
10	20	30	40	75	-	65	80...100	3RA21 4□-4MD47-□NB3		3RV20 41-4MA10					

Order No. supplement for:

- Standard DIN rail or screw mounting with no additional auxiliaries
- Standard DIN rail or screw mounting with 1 SPDT NO/NC MSP auxiliary (S2 frame contactor has 1NO/1NC integrated auxiliary) (S3 frame contactor has 1NO top mounted auxiliary)

0	0
5	0 (S2)
5	1 (S3)

1) For auxiliary switches, see Accessories page 4/44.

2) Selection depends on motor full load amps. Horsepower ratings for reference only.


Note:

In the S2 frame, for 100kA SCCR versions, replace the prefix 3RA213x with 3RA215x. Rating exceptions would be the 59A and 65A versions having a 30kA SCCR at 480Y/277V. For UL 508 type E/F, order 3RV2938-1K Phase Barrier for field installation on all versions.


3RA2 Starters

Reversing, AC Coil – up to 22 A

Selection and ordering data

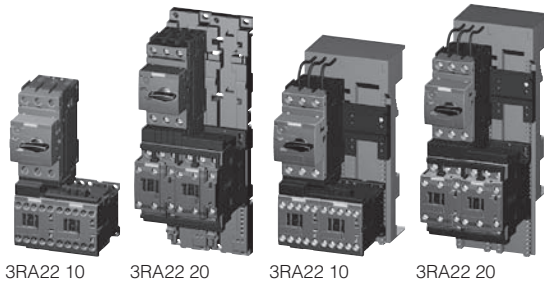


Reversing duty

**Rated control supply voltage 50/60 Hz 110/120 V AC With screw connections**

- The motor starter protector and contactor are mechanically and electrically connected by means of the link module.
- Auxiliary switches¹⁾ on the motor starter protector and the contactor can be easily fitted due to the modular system.
- With the contactor S0, an integrated NO contact is available for free use.

Combination Starter, UL508 Type F

All size S00 and S0 devices can be applied as Combination Starters with the addition of either of these line side connectors: 3RV29 28-1H, 3RV29 25-5EB or 3RV29 28-1K.

Size	UL Data						FLA setting range inverse-time delayed overload release	Consisting of the following single devices			Assembled starter		Weight approx. kg
	Single-phase HP ratings		Three-phase ²⁾ HP ratings		SCCR at 480 V kA	Motor starter protector		+ 2 contactors	+ Link module + Assembly kit RH/RS ³⁾	Screw terminals			
	115 V	230 V	200 V	230 V						460 V		575 V	
Selection depends on motor full load amps													
S00	--	--	--	--	--	--	65	0.11...0.16	11-0AA10	15-1AK62	1921-1DA00	3RA22 10-0A □15-2AK6	0.824
	--	--	--	--	--	--	65	0.14...0.2	11-0BA10		+ 2913-2AA1 ⁴⁾	3RA22 10-0B □15-2AK6	0.824
	--	--	--	--	--	--	65	0.18...0.25	11-0CA10		+ 2913-1DB1 (RS)	3RA22 10-0C □15-2AK6	0.824
	--	--	--	--	--	--	65	0.22...0.32	11-0DA10			3RA22 10-0D □15-2AK6	0.824
	--	--	--	--	--	--	65	0.28...0.4	11-0EA10			3RA22 10-0E □15-2AK6	0.824
	--	--	--	--	--	--	65	0.35...0.5	11-0FA10			3RA22 10-0F □15-2AK6	0.824
	--	--	--	--	--	--	65	0.45...0.63	11-0GA10			3RA22 10-0G □15-2AK6	0.824
	--	--	--	--	--	--	65	0.55...0.8	11-0HA10			3RA22 10-0H □15-2AK6	0.824
	--	--	--	--	--	1/2	65	0.7... 1	11-0JA10			3RA22 10-0J □15-2AK6	0.824
	--	--	--	--	1/2	65	0.9... 1.25	11-0KA10				3RA22 10-0K □15-2AK6	0.824
	--	1/10	--	--	3/4	65	1.1... 1.6	11-1AA10				3RA22 10-1A □15-2AK6	0.824
	--	1/8 <th>--</th> <th>--</th> <td>3/4</td> <td>65</td> <td>1.4... 2</td> <td>11-1BA10</td> <td></td> <td></td> <td></td> <td>3RA22 10-1B □15-2AK6</td> <td>0.824</td>	--	--	3/4	65	1.4... 2	11-1BA10				3RA22 10-1B □15-2AK6	0.824
	--	1/6	1/2	1/2	1	1 1/2	65	1.8... 2.5	11-1CA10			3RA22 10-1C □15-2AK6	0.824
	1/10	1/4	1/2	3/4	1 1/2	2	65	2.2... 3.2	11-1DA10			3RA22 10-1D □15-2AK6	0.824
	1/8	1/3	3/4	3/4	2	3	65	2.8... 4	11-1EA10			3RA22 10-1E □15-2AK6	0.824
	1/6	1/2	1	1	3	3	65	3.5... 5	11-1FA10			3RA22 10-1F □15-2AK6	0.824
	1/4	1/2	1	1 1/2	3	5	65	4.5... 6.3	11-1GA10			3RA22 10-1G □15-2AK6	0.824
	1/3	1	2	2	5	5	65	5.5... 8	11-1HA10	16-1AK62		3RA22 10-1H □16-2AK6	0.824
	1/2	1 1/2	2	3	5	7 1/2	65	7... 10	11-1JA10			3RA22 10-1J □16-2AK6	0.824
	1/2	2	3	3	7 1/2	10	65	9... 12	11-1KA10	17-1AK62		3RA22 10-1K □17-2AK6	0.824
	1	2	3	5	10	--	65	11...16	11-4AA10	18-1AK62		3RA22 10-4A □18-2AK6	0.824
S0	1/6	1/2	1	1	3	3	65	3.5... 5	11-1FA10	24-1AK60	2921-1AA00	3RA22 20-1F □24-0AK6	1.434
	1/4	1/2	1	1 1/2	3	5	65	4.5... 6.3	11-1GA10		+ 2923-1BB1 (RH)	3RA22 20-1G □24-0AK6	1.434
	1/3	1	2	2	5	5	65	5.5... 8	11-1HA10		+ 2923-1DB1 (RS)	3RA22 20-1H □24-0AK6	1.434
	1/2	1 1/2	2	3	5	7 1/2	65	7... 10	11-1JA10			3RA22 20-1J □24-0AK6	1.434
	1/2	2	3	3	7 1/2	10	65	9... 12.5	11-1KA10			3RA22 20-1K □24-0AK6	1.434
	1	2	3	5	10	--	65	11... 16	21-4AA10	26-1AK60		3RA22 20-4A □26-0AK6	1.434
	1 1/2	3	5	5	10	--	65	14... 20	21-4BA10			3RA22 20-4B □26-0AK6	1.434
	1 1/2	3	5	7 1/2	15	--	50	17... 22	21-4CA10	27-1AK60		3RA22 20-4C □27-0AK6	1.434
	2	3	5	7 1/2	15	--	50	20... 25	21-4DA10			3RA22 20-4D □27-0AK6	1.434
	2	5	7 1/2	10	20	--	50	27... 32	21-4EA10			3RA22 20-4E □27-0AK6	1.434

Order No. supplement for mounting onto standard mounting rail or screw fixing

- Without standard mounting rail adapter for size S00⁴⁾
 - With 2 standard mounting rail adapters for size S0
- Screw fixing with 2 push-in lugs each per motor starter is possible

Order No. supplement for mounting onto Fastbus 60mm busbar system

With 8US Fast Bus busbar adapter

for size S00
for size S0

1
2

A
B

Add. weight

1
2

D
D

0.486
0.293

1) For push-in lugs and auxiliary switches, see [Accessories](#) on pages 4/44 and 4/52.

2) Selection depends on the motor full load amps. HP ratings for reference only.

3) According to ordering option:

RH = assembly kit for reversing duty with standard rail mounting adapter in size S0.

RS = assembly kit for reversing duty with 8US Fast Bus busbar mounting.

4) With standard rail mounting or screw fixing, the 3RA29 13-2AA1 wiring kit is required for size S00.

3RA2 Starter


Reversing, AC Coil – up to 100 A

Selection and ordering data

3RA12 40



Reversing duty



For 35 mm standard mounting rail or screw mounting

- All starters are suitable for use in Group Installation applications per NEC 430-53 (c)
- Motor starter protector and contactor are linked electrically and mechanically by means of a link module and adapter plate
- Starter includes both electrical and mechanical interlocks
- Auxiliary switches ¹⁾ can be added easily to the MSP and the contactor

Combination Starter, UL508 Type F

- Size S2 devices can be applied as Combination Starters. For versions of 50A or higher, the addition of a 3RV2938-1K line side phase barrier is required.
- Size S3 devices can be applied as Combination Starters with the addition of a 3RT1946-4GA07 line side terminal kit
- SCCR: 65kA at 480V

							FLA setting range Inverse-time delayed overload	Starter Order No.	Size	Consisting of the following individual devices		
Single-Phase HP Ratings		Three-Phase ²⁾ HP ratings								Motor starter protector	+ 2 Contactors +	Link module + assembly kit RH ³⁾
115V	230V	200V	230V	460V	575V	A						
110VAC 50Hz / 120VAC 60Hz												
3	7.5	10	15	30	40	22 ... 32	For customer assembly	S2	3RV20 31-4EA10	3RT2035-1AK60	3RA2931-1AA00 + 3RA2933-1BB1	
3	10	15	15	40	50	28 ... 36			3RV20 31-4PA10	3RT2036-1AK60		
3	10	15	15	40	50	32 ... 40			3RV20 31-4UA10			
3	10	15	15	40	50	35 ... 45			3RV20 31-4VA10	3RT2037-1AK60		
5	10	20	20	50	50	42 ... 52			3RV20 31-4WA10			
5	15	20	25	50	60	49 ... 59			3RV20 31-4XA10	3RT2038-1AK60		
5	15	20	25	50	60	54 ... 65			3RV20 31-4JA10			
7.5	15	25	30	60	60	28 ... 40	For customer assembly	S3	3RV20 41-4FA10	3RT2045-1AK60	3RA1941-1AA00 + 3RA1943-1B ⁴⁾	
7.5	15	25	30	60	60	36 ... 50			3RV20 41-4HA10			
7.5	15	25	30	60	60	45 ... 63			3RV20 41-4JA10	3RT2046-1AK60		
10	20	30	30	75	75	57 ... 75			3RV20 41-4KA10			
10	20	30	30	75	75	65 ... 84			3RV20 41-4RA10	3RT2047-1AK60		
10	20	30	30	75	–	75 ... 93			3RV20 41-4YA10			
10	20	30	40	75	–	80 ...100			3RV20 41-4MA10			
24VDC												
3	7.5	10	15	30	40	22... 32	For customer assembly	S2	3RV20 31-4EA10	3RT2035-1NB30	3RA2931-1AA00 + 3RA2933-1BB1	
3	10	15	15	40	50	28... 36			3RV20 31-4PA10	3RT2036-1NB30		
3	10	15	15	40	50	32... 40			3RV20 31-4UA10			
3	10	15	15	40	50	35... 45			3RV20 31-4VA10	3RT2037-1NB30		
5	10	20	20	50	50	42... 52			3RV20 31-4WA10			
5	15	20	25	50	60	49... 59			3RV20 31-4XA10	3RT2038-1NB30		
5	15	20	25	50	60	54... 65			3RV20 31-4JA10			
7.5	15	25	30	60	60	28 ... 40	For customer assembly	S3	3RV20 41-4FA10	3RT2045-1NB30	3RA1941-1BA00 + 3RA1943-1B ⁴⁾	
7.5	15	25	30	60	60	36 ... 50			3RV20 41-4HA10			
7.5	15	25	30	60	60	45 ... 63			3RV20 41-4JA10	3RT2046-1NB30		
10	20	30	30	75	75	57 ... 75			3RV20 41-4KA10			
10	20	30	30	75	75	65 ... 84			3RV20 41-4RA10	3RT2047-1NB30		
10	20	30	30	75	–	75 ... 93			3RV20 41-4YA10			
10	20	30	40	75	–	80 ...100			3RV20 41-4MA10			

RH = Reversing duty for rail mounting.

1) For auxiliary switches, see [Accessories page 4/44](#).


2) Selection depends on motor full load amps. Horse power ratings for reference only.

3) Adapters for standard mounting rail are also suitable for screw mounting.


4) Mechanical interlock must be ordered separately; see [Accessories page 4/50](#)

3RA2 Starter

Reversing, DC Coil – up to 22 A

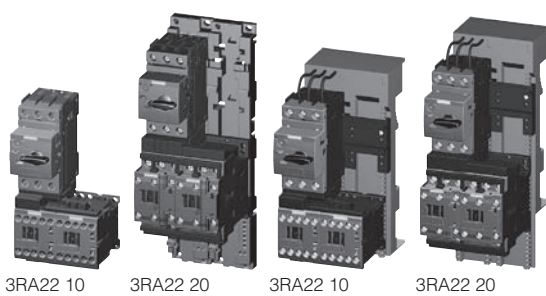

Reversing duty




Rated control supply voltage 24 V DC
With screw connections

- The motor starter protector and contactor are mechanically and electrically connected by means of the link module.
- Auxiliary switches¹⁾ on the motor starter protector and the contactor can be easily fitted due to the modular system.
- With the contactor S0, an integrated NO contact is available for free use.

Combination Starter, UL508 Type F

All size S00 and S0 devices can be applied as Combination Starters with the addition of either of these line side connectors: 3RV29 28-1H, 3RV29 25-5EB or 3RV29 28-1K.

Size	UL Data							FLA setting range inverse-time delayed overload release	Consisting of the following single devices			Assembled starter		Weight approx.			
	Single-phase HP ratings		Three-phase ²⁾ HP ratings			SCCR at 480 V	Motor starter protector		+ 2 contactors	+ Link module + Assembly kit RH/RS ³⁾	Screw terminals						
	115 V	230 V	200 V	230 V	460 V						575 V		kA		Order No.	kg	
Selection depends on motor full load amps																	
													3RV20	3RT20	3RA		
S00	--	--	--	--	--	--	65	0.11...0.16	11-0AA10	15-1BB42	1921-1DA00 ' + 2913-2AA1 ⁴⁾ ' + 2913-1DB1 (RS)	3RA22 10-0A□15-2BB4	0.934				
	--	--	--	--	--	--	65	0.14...0.2	11-0BA10			3RA22 10-0B□15-2BB4	0.934				
	--	--	--	--	--	--	65	0.18...0.25	11-0CA10			3RA22 10-0C□15-2BB4	0.934				
	--	--	--	--	--	--	65	0.22...0.32	11-0DA10			3RA22 10-0D□15-1BB4	0.934				
	--	--	--	--	--	--	65	0.28...0.4	11-0EA10			3RA22 10-0E□15-2BB4	0.934				
	--	--	--	--	--	--	65	0.35...0.5	11-0FA10			3RA22 10-0F□15-1BB4	0.934				
	--	--	--	--	--	--	65	0.45...0.63	11-0GA10			3RA22 10-0G□15-2BB4	0.934				
	--	--	--	--	--	--	65	0.55...0.8	11-0HA10			3RA22 10-0H□15-2BB4	0.934				
	--	--	--	--	--	1/2	65	0.7... 1	11-0JA10			3RA22 10-0J□15-2BB4	0.934				
	--	--	--	--	1/2	1/2	65	0.9... 1.25	11-0KA10			3RA22 10-0K□15-2BB4	0.934				
	--	1/10	--	--	3/4	3/4	65	1.1... 1.6	11-1AA10			3RA22 10-1A□15-2BB4	0.934				
	--	1/8	--	--	3/4	1	65	1.4... 2	11-1BA10			3RA22 10-1B□15-2BB4	0.934				
	--	1/6	1/2	1/2	1	1 1/2	65	1.8... 2.5	11-1CA10			3RA22 10-1C□15-2BB4	0.934				
	1/10	1/4	1/2	3/4	1 1/2	2	65	2.2... 3.2	11-1DA10			3RA22 10-1D□15-2BB4	0.934				
	1/8	1/3	3/4	3/4	2	3	65	2.8... 4	11-1EA10			3RA22 10-1E□15-2BB4	0.934				
	1/6	1/2	1	1	3	3	65	3.5... 5	11-1FA10			3RA22 10-1F□15-2BB4	0.934				
	1/4	1/2	1	1 1/2	3	5	65	4.5... 6.3	11-1GA10			3RA22 10-1G□15-2BB4	0.934				
	1/3	1	2	2	5	5	65	5.5... 8	11-1HA10	16-1BB42		3RA22 10-1H□16-2BB4	0.934				
	1/2	1 1/2	2	3	5	7 1/2	65	7... 10	11-1JA10			3RA22 10-1J□16-2BB4	0.934				
	1/2	2	3	3	7 1/2	10	65	9... 12	11-1KA10	17-1BB42		3RA22 10-1K□17-2BB4	0.934				
	1	2	3	5	10	--	65	11...16	11-4AA10	18-1BB42		3RA22 10-4A□18-2BB4	0.934				
S0	1/6	1/2	1	1	3	3	65	3.5... 5	11-1FA10	24-1BB40	2921-1BA00 ' + 2923-1BB1 (RH) ' + 2923-1DB1 (RS)	3RA22 20-1F□24-0BB4	1.811				
	1/4	1/2	1	1 1/2	3	5	65	4.5... 6.3	11-1GA10			3RA22 20-1G□24-0BB4	1.811				
	1/3	1	2	2	5	5	65	5.5... 8	11-1HA10			3RA22 20-1H□24-0BB4	1.811				
	1/2	1 1/2	2	3	5	7 1/2	65	7... 10	11-1JA10			3RA22 20-1J□24-0BB4	1.811				
	1/2	2	3	3	7 1/2	10	65	9... 12.5	11-1KA10			3RA22 20-1K□24-0BB4	1.811				
	1	2	3	5	10	--	65	11... 16	21-4AA10	26-1BB40		3RA22 20-4A□26-0BB4	1.811				
	1 1/2	3	5	5	10	--	65	14... 20	21-4BA10			3RA22 20-4B□26-0BB4	1.811				
	1 1/2	3	5	7 1/2	15	--	50	17... 22	21-4CA10	27-1BB40		3RA22 20-4C□27-0BB4	1.811				
	2	3	5	7 1/2	15	--	50	20... 25	21-4DA10			3RA22 20-4D□27-0BB4	1.811				
	2	5	7 1/2	10	20	--	50	27... 32	21-4EA10			3RA22 20-4E□27-0BB4	1.811				

Order No. supplement for mounting onto standard mounting rail or screw fixing

- Without standard mounting rail adapter for size S00⁴⁾
 - With 2 standard mounting rail adapters for size S0
- Screw fixing with 2 push-in lugs each per motor starter is possible

Order No. supplement for mounting onto Fastbus 60mm busbar system
With 8US Fast Bus busbar adapterfor size S00
for size S0

		Add. weight	
1	A		
2	B		
1	D	0.486	
2	D	0.306	

1) For push-in lugs and auxiliary switches, see [Accessories on pages 4/44 and 4/52](#).

2) Selection depends on the motor full load amps. HP ratings for reference only.

3) Code for abbreviations:

RH = assembly kit for reversing duty with standard rail mounting adapter in size S0.


RS = assembly kit for reversing duty with 8US Fast Bus busbar mounting.

4) With standard rail mounting or screw fixing, the 3RA29 13-2AA1 wiring kit and link module are required for size S00.


3RA2 Starter

Reversing Fast Bus®, AC and DC Coil – up to 100 A

Selection and ordering data

Representative image
of assembled starter

Reversing duty




For 60 mm Fast Bus busbar systems

- All starters are suitable for use in Group Installation applications per NEC 430-53 (c)
- Motor starter protector and contactor are linked electrically and mechanically by means of a link module and mounted on a Fast-bus Shoe
- Starter includes both electrical and mechanical interlocks
- Auxiliary switches¹⁾ can be added easily to the MSP and the contactor
- Size S3 is kit form only - assembly required

Combination Starter, UL508 Type F

- Size S2 devices can be applied as Combination Starters
- Size S3 devices can be applied as Combination Starters with the addition of a 3RT2946-4GA07 line side terminal kit
- SCCR: 65kA at 480V

							FLA setting range Inverse-time delayed overload release	Starter Order No.	Size	Consisting of the following individual devices			
Single-Phase HP Ratings		Three-Phase ²⁾ HP ratings								Motor starter protector	+ Contactor	+	Link module + Adapter shoe for Fastbus
115V	230V	200V	230V	460V	575V	A							
110VAC 50Hz / 120VAC 60Hz													
3	7.5	10	15	30	40	22... 32	For customer assembly		S2	3RV20 31-4EA10	3RT2035-1AK60	3RA2931-1AA00 + 3RA2933-1DB1	
3	10	15	15	40	50	28... 36				3RV20 31-4PA10	3RT2036-1AK60		
3	10	15	15	40	50	32... 40				3RV20 31-4UA10			
3	10	15	15	40	50	35... 45				3RV20 31-4VA10	3RT2037-1AK60		
5	10	20	20	50	50	42... 52				3RV20 31-4WA10			
5	15	20	25	50	60	49... 59				3RV20 31-4XA10	3RT2038-1AK60		
5	15	20	25	50	60	54... 65	3RV20 31-4JA10						
7.5	15	25	30	60	60	28... 40	For customer assembly		S3	3RV20 41-4FA10	3RT2045-1AK60	3RA1941-1AA00 + 3RA1943-2A ³⁾	
7.5	15	25	30	60	60	36... 50				3RV20 41-4HA10			
7.5	15	25	30	60	60	32... 40				3RV20 41-4JA10	3RT2046-1AK60		
10	20	30	30	75	75	57... 75				3RV20 41-4KA10			
10	20	30	30	75	75	42... 52				3RV20 41-4RA10	3RT2047-1AK60		
10	20	30	30	75	–	75... 93				3RV20 41-4YA10			
10	20	30	40	75	–	80...100				3RV20 41-4MA10			
24VDC													
3	7.5	10	15	30	40	22... 32	For customer assembly		S2	3RV20 31-4EA10	3RT2035-1NB30	3RA2931-1AA00 + 3RA2933-1DB1	
3	10	15	15	40	50	28... 36				3RV20 31-4PA10	3RT2036-1NB30		
3	10	15	15	40	50	32... 40				3RV20 31-4UA10			
3	10	15	15	40	50	35... 45				3RV20 31-4VA10	3RT2037-1NB30		
5	10	20	20	50	50	42... 52				3RV20 31-4WA10			
5	15	20	25	50	60	49... 59				3RV20 31-4XA10	3RT2038-1NB30		
5	15	20	25	50	60	54... 65	3RV20 31-4JA10						
7.5	15	25	30	60	60	28... 40	For customer assembly		S3	3RV20 41-4FA10	3RT2045-1NB30	3RA1941-1BA00 + 3RA 1943-2A ³⁾	
7.5	15	25	30	60	60	36... 50				3RV20 41-4HA10			
7.5	15	25	30	60	60	45... 63				3RV20 41-4JA10	3RT2046-1NB30		
10	20	30	30	75	75	57... 75				3RV20 41-4KA10			
10	20	30	30	75	75	65... 84				3RV20 41-4RA10	3RT2047-1NB30		
10	20	30	30	75	–	75... 93				3RV20 41-4YA10			
10	20	30	40	75	–	80...100				3RV20 41-4MA10			

RH = Reversing duty for rail mounting.

1) For auxiliary switches, see [Accessories page 4/44](#).

2) Selection depends on motor full load amps. Horsepower ratings for reference only.

3) Mechanical interlock must be ordered separately; see [Accessories page 4/50](#).

Overview

The accessories listed here are parts and add-ons for the 3RA2 direct-on-line and reversing starters as well as components for the customer assembly of motor starters

Selection and ordering data

3RV29 01-1E



3RV29 01-2E



3RV29 01-1A



3RV29 01-2A



3RV29 02-1A



3RV29 02-2D

	For MSPs	Screw Terminals		Weight approx.	Spring-type Terminals		Weight approx.
Size		Order No.		kg	Order No.		kg

Auxiliary switches for motor starter protectors ¹**Transverse auxiliary switches**

For front mounting

1 CO	S00 ... S3	3RV29 01-1D	0.014	—	
1 NO + 1 NC	S00 ... S3	3RV29 01-1E	0.016	3RV29 01-2E	0.016

Lateral auxiliary switches

Mountable on the left

1 NO + 1 NC	S00 ... S3	3RV29 01-1A	0.036	3RV29 01-2A	0.035
-------------	------------	--------------------	-------	--------------------	-------

¹ One transverse auxiliary switch and one lateral auxiliary switch can be attached per motor starter protector.
When the lateral auxiliary switch with 2 NO + 2 NC is used, a transverse auxiliary switch is not allowed.

Rated control supply voltage U_s				For MSPs	Screw Terminals		Weight approx.	Spring-type Terminals		Weight approx.
AC 50 Hz V	AC 60 Hz V	AC 50/60 Hz 100% ON period ¹ V	AC/DC 50/60 Hz, DC 5s ON period ² V	Size	Order No.		kg	Order No.		kg

Auxiliary releases for motor starter protectors ³**Undervoltage releases**

415	480	—	—	S00 ... S3	3RV29 02-1AV1	0.117	—		
-----	-----	---	---	------------	----------------------	-------	---	--	--

Shunt releases







—	—	20...24	20...70	S00 ... S3	3RV29 02-1DB0	0.119	3RV29 02-2DB0	0.115
—	—	90...110	70...190		3RV29 02-1DF0	0.119	3RV29 02-2DF0	0.115

¹ The voltage range is valid for 100% (infinite) ON period. The response voltage lies at 0.9 of the lower limit of the voltage range.

² The voltage range is valid for 5s ON period at AC 50 Hz/60 Hz and DC. The response voltage lies at 0.85 of the lower limit of the voltage range.

³ One auxiliary release can be mounted on the right per motor starter protector
(does not apply to 3RV21 motor starter protectors with overload reset function).

Selection and ordering data

	For Conductors Size	Version	Screw Terminals Order No.	Weight approx. kg	Spring-type Terminals Order No.	Weight approx. kg
Auxiliary switch blocks for snapping on the front for contactors						
Cable entry from below  3RH29 11-1BA10  3RH29 11-1MA20	S00 ... S3	1-pole 1 NC	3RH29 11-1BA10	0.020	—	
	S00 ... S3	1-pole 1 NO	3RH29 11-1BA01	0.020	—	
	S00 ... S3	2-pole 1 NO + 1 NC	3RH29 11-1MA11	0.050	—	
	S00 ... S3	2-pole 2 NO	3RH29 11-1MA20	0.050	—	
Cable entry from two sides  3RH29 11-1FA22	S00 ... S3	4-pole 2 NO + 2 NC	3RH29 11-1FA22	0.060	3RH29 11-2FA22	0.049
	S00	2-pole 1 NO + 1 NC	3RH29 11-1DA11	0.039	3RH29 11-2DA11	0.050
	S00	2-pole 2 NC	3RH29 11-1DA02	0.039	3RH29 11-2DA02	0.050
	S0 ... S3	2-pole 1 NO + 1 NC	3RH29 21-1DA11	0.039	3RH29 21-2DA11	0.050
	S0 ... S3	2-pole 2 NC	3RH29 21-1DA02	0.041	3RH29 21-2DA02	0.050
	S0 ... S3	2-pole 2 NO	3RH29 21-1DA20	0.041	3RH29 21-2DA20	0.050
Laterally mountable auxiliary switch blocks for contactors						
 3RH29 11-1DA11	S00	2 NC	3RH29 11-1DA02	0.020	3RH29 11-2DA02	0.050
	S00	1 NO + 1 NC	3RH29 11-1DA11	0.040	3RH29 11-2DA11	0.050
	S00	1 NO	3RH29 11-1DA20	0.040	3RH29 11-2DA20	0.050
	S0 ... S3	2 NC	3RH29 21-1DA02	0.050	3RH29 21-2DA02	0.050
	S0 ... S3	1 NO + 1 NC	3RH29 21-1DA11	0.050	3RH29 21-2DA11	0.050
	S0 ... S3	2 NO	3RH29 21-1DA20	0.050	3RH29 21-2DA20	0.050
Connection modules for contactors with screw terminals						
Adaptors for contactors						
 3RT19 26-4RD01	Ambient temperature $T_{u \max} = 60^\circ\text{C}$					
	S00	Rated operational current I_e at AC-3/400 V: 20A	3RT19 16-4RD01	0.020	—	
	S0	Rated operational current I_e at AC-3/400 V: 25A	3RT19 26-4RD01	0.020	—	
Plugs for contactors	S00, S0		3RT19 00-4RE01	0.025	—	
 3RT19 00-4RE01						

Selection and ordering data

For Conductors Size	Version	Screw Terminals Order No.	Weight approx. kg
---------------------------	---------	---------------------------------	-------------------------

Auxillary switch blocks for snapping on the front for contactors



3RV29 28-1H

Note: UL 508 demands for "Combination Motor Controller Type E" 1" air gaps and 2" creepage distances at lineside. The following terminal blocks must be used in S3 MSP's 3RV10. The S2 MSP 3RV10 conforms with stipulated air gaps and creepage distances without terminal block.

Terminal blocks are not required for use according to CSA. With size S0 these terminal blocks cannot be used in combination with 3-phase busbars 3RV19.5. This also applies to size S3 in combination with transverse auxiliary switches.



3RV29 28-1K

Terminal block type E

for extended air/creepage distance (1" and 2")

S00, S0	3RV29 28-1H	0.120
S00, S0	3RV29 28-1K	0.120
S2	3RV29 38-1K	0.120
S3	3RT29 46-4GA07	0.120




3RT19 46-4GA07

Selection and ordering data


For Conductors Size	Version	Rated control supply voltage U_s		Surge Suppressors Order No.	Weight approx. kg
		AC V	DC V		

Auxiliary switch blocks for snapping on the front for contactors



Size S00 — For plugging onto the front side of the contactors with and without auxiliary switch blocks

	3RT2.1	Varistors	24 ... 48 AC	24 ... 70 DC	3RT29 16-1BB00	0.010
			48 ... 127 AC	70 ... 150 DC	3RT29 16-1BC00	0.010
	3RT2.1	RC elements	24 ... 48 AC	24 ... 70 DC	3RT29 16-1CB00	0.010
			48 ... 127 AC	70 ... 150 DC	3RT29 16-1CC00	0.010
	3RT2.1	Noise suppression		12 ... 250 DC	3RT29 16-1DG00	0.010
	3RT2.1	Diode assemblies (diode and Zener diode) for DC operation and short break times		12 ... 250 DC	3RT29 16-1EH00	0.010


Size S0 — For plugging onto the front side of the contactors (prior to mounting of the auxiliary switch block)

	3RT2.2	Varistors	24 ... 48 AC	24 ... 70 DC	3RT29 26-1BB00	0.010
			48 ... 127 AC	70 ... 150 DC	3RT29 26-1BC00	0.010
	3RT2.2	RC elements	24 ... 48 AC	24 ... 70 DC	3RT29 26-1CB00	0.010
			48 ... 127 AC	70 ... 150 DC	3RT29 26-1CC00	0.010
	3RT2.2	Diode assemblies for DC operation and short break times		24 DC	3RT29 26-1ER00	0.010
				30 ... 250 DC	3RT29 26-1ES00	0.010

Sizes S2








	3RT2.3	Varistors	24 ... 48 AC	24 ... 70 DC	3RT29 36-1BB00	0.010
			127 ... 240 AC	150 ... 250 DC	3RT29 36-1BD00	0.010
			48 ... 127 AC	70 ... 150 DC	3RT29 36-1BC00	0.010
	3RT2.3	RC elements	24 ... 48 AC	24 ... 70 DC	3RT29 36-1CB00	0.010
			127 ... 240 AC	150 ... 250 DC	3RT29 36-1CD00	0.010
			48 ... 127 AC	70 ... 150 DC	3RT29 36-1CC00	0.010
	3RT2.3	Diode assemblies	--	24 DC	3RT29 36-1ER00	0.010
			--	30 ... 250 DC	3RT29 36-1ES00	0.010

Sizes S3

	3RT20 4.	Varistors	24 ... 48 AC	24 ... 70 DC	3RT29 36-1BB00	0.025
			48 ... 127 AC	70 ... 150 DC	3RT29 36-1BC00	0.025
	3RT20 4.	RC elements	24 ... 48 AC	24 ... 70 DC	3RT29 36-1CB00	0.040
			48 ... 127 AC	70 ... 150 DC	3RT29 36-1CC00	0.040
	3RT20 4.	Diode assemblies for DC operation and short break times, can be plugged in at bottom		24 DC	3RT29 36-1ER00	0.025
				30 ... 250 DC	3RT29 36-1ES00	0.025





For additional surge suppression, [see page 2/73](#)

Selection and ordering data

	For MSP Size	For contactors	Actuating voltage of contactor	Screw Terminals Order No.		Pack Qty.	Weight approx. kg
Auxiliary switch blocks for snapping on the front for contactors							
Electrical and mechanical link between motor starter protector and contactor							
 3RA29 11-2AA00	Single-unit packaging	S00, S0	S00	AC and DC	3RA19 21-1DA00		
		S00, S0	S0	AC	3RA29 21-1AA00	1 unit	0.055
		S00, S0	S0	DC	3RA29 21-1BA00	1 unit	0.068
		S2	S2	AC and DC	3RA29 31-1AA00	1 unit	0.104
		S3	S3	AC and DC	3RA19 41-1AA00	1 unit	0.090
	Multi-unit packaging	S00, S0	S00	AC and DC	3RA19 21-1D	10 unit	0.021
		S00, S0	S0	AC	3RA29 21-1A	10 unit	0.001
		S00, S0	S0	DC	3RA29 21-1B	10 unit	0.001
		S2	S2	AC and DC	3RA29 31-1A	5 unit	0.104
		S3	S3	AC and DC	3RA19 41-1A	5 unit	0.073
 3RA29 11-2AA00	Electrical and mechanical link between motor starter protector and contactor				Spring-type Terminals 		
					Order No.		
	Single-unit packaging	S00	S00	AC and DC	3RA29 11-2AA00		
		S0	S0	AC ¹⁾ and DC	3RA29 21-2AA00	1 unit	0.040
	Multi-unit packaging	S00	S00	AC and DC	3RA29 11-2A	10 unit	0.400
S0		S0	AC ¹⁾ and DC	3RA29 21-2A	10 unit	0.770	
Hybrid link modules from motor starter protector to contactor							
For mechanical and electrical connection between motor starter protector with screw terminals and contactor with spring-type terminals							
 3RA29 11-2FA00	Single-unit packaging	S00	S00	AC and DC	3RA29 11-2FA00	1 unit	0.029
		S0	S0	AC ¹⁾ and DC	3RA29 21-2FA00	1 unit	0.056
	Multi-unit packaging	S00	S00	AC and DC	3RA29 11-2F	10 unit	0.290
		S0	S0	AC ¹⁾ and DC	3RA29 21-2F	10 unit	0.560
Link modules from motor starter protector to soft starters							
Electrical and mechanical link between motor starter protector and soft starter							
 3RA29 11-2GA00	Single-unit packaging	S00/S0		S00/S0	3RA29 21-1BA00	1 unit	0.001
		S00/S0		S00/S0	3RA29 21-1B	10 unit	0.001
	Multi-unit packaging	S00/S0		S00/S0	3RA29 11-2GA00	1 unit	0.038
		S00/S0		S00/S0	3RA29 21-2GA00	1 unit	0.072
 3RA29 11-2GA00	Single-unit packaging	S00		S00	3RA29 11-2G	10 unit	0.380
		S0		S0	3RA29 21-2G	10 unit	0.720
	Multi-unit packaging	S00		S00	3RA29 11-2G	10 unit	0.380
		S0		S0	3RA29 21-2G	10 unit	0.720

¹⁾ A spacer for height compensation on AC contactors with spring-type terminals, size S0 is optionally available, [see page 4/52](#).






Accessories







	For Conductors Size	Version	Screw Terminals Order No.	Pack Qty.	Weight approx. kg
Wiring kits for contactors					
 3RA29 23-2AA1	Reversing				
	S00	Electrical and mechanical connection for reversing contactors, optionally with integrated electrical and mechanical interlock	3RA29 13-2AA1	1 unit	0.001
	S0		3RA29 23-2AA1	1 unit	0.001
	S2	The kit contains: 2 connecting pins for 2 contactors, wiring modules on the top and bottom • for main and auxiliary circuits	3RA29 33-2AA1	1 unit	0.120
 3RA29 23-2BB1	Wye-delta starting				
	S00	Electrical and mechanical link for three contactors of same size	3RA29 13-2BB1	1 unit	0.001
	S0		3RA29 23-2BB1	1 unit	0.001
	S2-S2-S0		3RA29 33-2C	1 unit	0.070
	S2-S2-S2		29RA2933-2BB1	1 unit	0.160
			Spring-type Terminals		
 3RA29 23-2AA2	Reversing Duty				
	S00	Electrical and mechanical connection for reversing contactors, optionally with integrated electrical and mechanical interlock	3RA29 13-2AA2	1 unit	0.001
	S0		3RA29 23-2AA2	1 unit	0.001
	S2	The kit contains: 2 connecting pins for 2 contactors, wiring modules on the top and bottom • for main circuits only	3RA29 33-2AA2	1 unit	0.001
	Wye-delta starting				
	S00	Electrical and mechanical link for three contactors of same size	3RA29 13-2BB2	1 unit	0.001
	S0		3RA29 23-2BB2	1 unit	0.001
	S2-S2-S0		3RA29 33-2C	1 unit	0.001
	S2-S2-S2		3RA29 33-2BB2	1 unit	0.001
			Screw Terminals		
Wiring kits for contactors					
 3RA29 16-1A	Reversing				
	S00	Switches 2 contactors in series	3RA29 16-1A	1 unit	0.001
	S0		3RA29 26-1A	1 unit	0.001
	S2		3RA29 36-1A	1 unit	0.001

3RA2 Accessories

Mounting kits for Fast Bus

Accessories

	For Conductors Size	For MSPs Size	Version	Screw Terminals Order No.	Pack Qty.	Weight approx. kg
Mechanical interlocks						
	S2/S3	--	For reversing contactors, laterally mounted, no electrical connections (each contactor has 1NO/1NC auxiliaries)	3RA29 34-2B		0.010
3RA29 34-2B						
Terminals for contactor coil						
	S3	--	For A1 and A2 of reversing contactors (includes 2 x A1 and 1 x A2)	3RA19 23-3B		0.020
3RA19 23-3B						
Standard mounting rail adapters						
	For mechanical fixing of motor start protector and contactor; for snapping onto standard mounting rail or for screw fixing.					
	S00, S0	S00, S0	Single-unit packaging	3RA29 22-1AA00	1 unit	0.001
	S2	S2		3RA19 31-1AA00	1 unit	0.020
	S3	S3		3RA19 41-1AA00	1 unit	0.250
3RA29 22-1AA00	S00, S0	S00, S0	Multi-unit packaging	3RA29 22-1A	5 units	0.001
Side modules for standard mounting rail adaptors						
	S00 ...S3	S00 ...S3	For standard mountin rail adaptors 10 mm wide, 96 mm long, for widening standard mounting rail adaptors when using lateral auxiliary switches, For size S00 to S2: 2 units required. For size S3: 3 units required	3RA19 02-1B	10 units	0.009
3RA19 02-1B						
RH assembly kits for reversing duty and standard rail mounting						
	RH assembly kits for screw terminals					
	S0	S0	Comprising: • Wiring kits	3RA29 23-1BB1	1 unit	0.001
	S2	S2	• 2 standard mounting rail adaptors	3RA29 33-1BB1	1 unit	0.560
	S3	S3	• 2 connecting wedges	3RA29 43-1BB1	1 unit	0.810
			Link modules may be ordered seperately.			
	RH assembly kits for spring-type terminals			Spring-type Terminals		
3RA29 23-1BB1	S0	S0	Comprising: • Wiring kits	3RA29 23-1BB2	1 unit	0.001
			• 2 standard mounting rail adaptors			
			• 2 connecting wedges			
			• Spacers			
			Link modules may be ordered seperately.			

	For motor starter protector	For contactors	Version	Order No.	Std. pack qty.	Weight approx.	
	Size	Size				kg	
Busbar adapters for 60 mm systems							
 8US12 51-5DS10	 8US12 51-5DT11	For flat copper profiles according to DIN 46433 Width: 12 mm and 30 mm Thickness: 5 mm and 10 mm also for T and double-T special profiles					
		For motor starter protectors and contactors with screw terminals					
		S00	S00	Rated current 16 A, 45 mm wide, 200 mm long	8US12 51-5DS10	1 unit	0.183
		S0	S0	Rated current 32 A, 45 mm wide, 260 mm long	8US12 51-5NT10	1 unit	0.183
		S2	S2	Up to 65A, 55mm wide, 260mm long	8US12 61-6MT10	1 unit	0.572
		For motor starter protectors and contactors with spring-type terminals					
	S00	S00	Rated current 16 A, 45 mm wide, 260 mm long	8US12 51-5DT11	1 unit	0.183	
	S0	S0	Rated current 32 A, 45 mm wide, 260 mm long	8US12 51-5NT11	1 unit	0.183	
Device holders for lateral mounting onto busbar adapters for 60 mm system							
 8US12 50-5AS10	 8US12 50-5AT10	S00, S0	S00, S0	Up to 25 A, 45 mm wide, 200 mm long	8US12 50-5AS10	1 unit	0.183
		S0	S0	Up to 40 A, 45 mm wide, 260 mm long	8US12 50-5AT10	1 unit	0.183
		S2	S2	Up to 65A, 118mm wide, 260mm long (includes 8US1261-6MT10 adapter)	8US12 11-6MT10	1 unit	0.873
Side modules for widening busbar adapters							
	--	--	Including connecting wedges, for widening busbar adapters or device holders, 9 mm wide, 200 mm long	8US19 98-2BJ10	1 unit	0.023	
Spacers for fixing the motor starter onto the busbar adapter							
	--	S00, S0	(1 pack = 100 units)	8US19 98-1BA10	1 pack	0.183	
Vibration and shock kits for high vibration and shock loads							
	--	S00, S0		8US19 98-1CA10	1 unit	0.183	
RS assembly kits for reversing duty for 60 mm busbar systems							
 3RA29 23-1DB1 only Busbar adapter pictured	RS assembly kits for screw terminals			Screw terminals			
	S00, S0	S00	Comprising: • Wiring kits • Busbar adapters • Device holders • 2 connecting wedges • Side modules Link modules must be ordered separately.	3RA29 13-1DB1	1 unit	0.001	
	S0	S0		3RA29 23-1DB1	1 unit	0.001	
	S00	S0		3RA29 23-1EB1	1 unit	0.001	
	S2	S2		3RA29 33-1DB1	1 unit	1.235	
 3RA29 23-1DB2 only Busbar adapter pictured	RS assembly kits for spring-type terminals			Spring-type terminals			
	S00	S00	Comprising: • Wiring kits • Busbar adapters • Device holders • 2 connecting wedges • Spacers • Side modules Link modules must be ordered separately.	3RA29 13-1DB2	1 unit	0.001	
	S0	S0		3RA29 23-1DB2	1 unit	0.001	

For motor starter protector	For contactors	Version	Order No.	Std. pack qty.	Weight approx.
Size	Size				kg

Connecting wedges



8US19 98-1AA00

For mechanical linking of busbar adapters and device holders or of standard mounting rail adapters (2 units per combination required)

8US19 98-1AA00

100 units

0.100

Spacers



3RA29 11-1CA00

For height compensation on AC contactors size S0 with spring-type terminals

S0 S0

Single-unit packaging

S0 S0

Multi-unit packaging

Spring-type terminals



3RA29 11-1CA00

1 unit

0.001

3RA29 11-1C

5 units

0.001

Version	Order No.	Std. pack qty.	Weight approx.
			kg

Tools for opening spring-type terminals by hand



3RA29 08-1A

Screwdrivers

for all SIRIUS devices with spring-type terminals

Length approx. 200 mm,
3.0 mm x 0.5 mm,
titanium gray/black,
partially insulated

Spring-type terminals




3RA29 08-1A

1 unit

0.045

Blank labels



3RT19 00-1SB20

Unit labeling plates¹⁾

for SIRIUS devices
20 mm x 7 mm,
pastel turquoise

3RT19 00-1SB20

340 units

0.200

¹⁾ PC labeling system for individual inscription of unit labeling plates available from: murrplastik Systems, Inc. www.murrplastik.com.

Selection and ordering data

For MSPs	For Conductors	Version	Order No.	Std. Pack Qty.	Weight approx.
Size	Size				kg

Push-in lugs for screw fixing



3RV29 28-0B

S00

--


For screwing the motor starter protector onto mounting plates; for each motor starter protector, 2 units are required.

3RV29 28-0B

10 units 0.100

Components for IEC types of coordination 1 and 2 at AC 500 V

Technical data


Three-phase standard motor ¹⁾ 4-pole at AC 500 V		Setting range Inverse-time delayed overload release	Motor starter protector	Contactor ²⁾	Size
Standard output <i>P</i> kW	Motor current (guide value) <i>I</i> A		Type	Type	
IEC Type of coordination 1 at <i>I</i> _q = 50 kA/AC 400 V Normal starting Class 10					
1.5	3.6	3.5 ... 5	3RV20 11-1FA10	3RT20 15-1AP00	S00
2.2	4.9	4.5 ... 6.3	3RV20 11-1GA10		
3	6.5	5.5 ... 8	3RV20 11-1HA10		
4	8.5	7 ... 10	3RV20 11-1JA10	3RT20 16-1AP01	
5.5	11.5	9 ... 12.5	3RV20 11-1KA10	3RT20 17-1AP01	
7.5	15.5	11 ... 16	3RV20 11-4AA10	3RT20 18-1AP01	
IEC Type of coordination 2 at <i>I</i> _q = 50 kA/AC 400 V Normal starting Class 10					
0.06	0.2	0.14 ... 0.2	3RV20 11-0BA10	3RT20 15-1AP01	S00
0.06	0.2	0.18 ... 0.25	3RV20 11-0CA10		
0.09	0.3	0.22 ... 0.32	3RV20 11-0DA10		
0.09	0.3	0.28 ... 0.4	3RV20 11-0EA10		
0.12	0.4	0.35 ... 0.5	3RV20 11-0FA10		
0.18	0.6	0.45 ... 0.63	3RV20 11-0GA10		
0.18	0.6	0.55 ... 0.8	3RV20 11-0HA10		
0.25	0.85	0.7 ... 1	3RV20 11-0JA10		
0.37	1.1	0.9 ... 1.25	3RV20 11-0KA10		
0.55	1.5	1.1 ... 1.6	3RV20 11-0AA10		
0.75	1.9	1.4 ... 2	3RV20 11-1BA10		
0.75	1.9	1.8 ... 2.5	3RV20 11-1CA10		
1.1	2.7	2.2 ... 3.2	3RV20 11-1DA10		
1.5	3.6	2.8 ... 4	3RV20 11-1EA10		
1.5	3.6	3.5 ... 5	3RV20 11-1FA10	3RT20 24-1AP01	S0
2.2	4.9	4.5 ... 6.3	3RV20 11-1GA10		
3	6.5	5.5 ... 8	3RV20 11-1HA10		
4	8.5	7 ... 10	3RV20 11-1JA10		
5.5	11.5	9 ... 12.5	3RV20 11-1KA10		
7.5	15.5	11 ... 16	3RV20 21-4AA10	3RT20 26-1AP01	
7.5	15.5	14 ... 20	3RV20 21-4BA10		
11	22	17 ... 22	3RV20 21-4CA10	3RT20 27-1AP01	
11	22	20 ... 35	3RV20 21-4DA10		
15	29	27 ... 32	3RV20 21-4EA10		

1) Selection depends on the actual startup and rated data of the protected motor.

2) Rated control supply voltage 120 V AC. Other voltages are possible.

Components for IEC types of coordination 1 and 2 at AC 500 V

Technical data

Three-phase standard motor ¹⁾ 4-pole at AC 500 V		Setting range Inverse-time delayed overload release	Motor starter protector	Contactor ²⁾	Size
Standard output <i>P</i> kW	Motor current (guide value) <i>I</i> A		Type	Type	

IEC Type of coordination 1 at $I_q = 50$ kA/AC 500 V Normal starting Class 10

On request	3RV2031-4DA10	3RT20 35-1AK60	S2
On request	3RV2031-4EA10	3RT20 35-1AK60	
On request	3RV2031-4FA10	3RT20 35-1AK60	
On request	3RV2031-4GA10	3RT20 36-1AK60	
On request	3RV2031-4HA10	3RT20 36-1AK60	
On request	3RV2041-4JA10	3RT20 45-1AK60	S3
On request	3RV2041-4KA10	3RT20 45-1AK60	
On request	3RV2041-4LA10	3RT20 46-1AK60	

IEC Type of coordination 2 at $I_q = 50$ kA/AC 500 V Normal starting Class 10

On request	3RV20 31-4AA10	3RT20 35-1AK60	S2
On request	3RV20 31-4BA10	3RT20 35-1AK60	
On request	3RV20 31-4DA10	3RT20 35-1AK60	
On request	3RV20 31-4EA10	3RT20 35-1AK60	
On request	3RV20 31-4FA10	3RT20 35-1AK60	
On request	3RV20 31-4GA10	3RT20 36-1AK60	
On request	3RV20 31-4HA10	3RT20 36-1AK60	
On request	3RV20 31-4JA10	3RT20 45-1AK60	S3
On request	3RV20 31-4KA10	3RT20 45-1AK60	
On request	3RV20 31-4LA10	3RT20 46-1AK60	

1) Selection depends on the actual startup and rated data of the protected motor.

2) Rated control supply voltage 120 V AC. Other voltages are possible.

Components for IEC types of coordination 1 and 2 at AC 690 V

Technical data

Three-phase standard motor 4-pole at AC 690 V ³⁾		Setting range MSP	Standard IEC circuit-breaker with limiting function	Subsequent MSP	Contactor ¹⁾	Size	Short-circuit switching capacity I_q at 690 V
Standard output	Motor current (guide value)		Type	Type	Type		
P kW	I A	A					kA


IEC Types of coordination 1 and 2 at AC 690 V Normal starting Class 10

On request	11 ... 16	3RV13 31-4HC10	3RV20 31-4AA10	3RT20 35-1AK60	S2	50
On request	14 ... 20	Size S2	3RV20 31-4BA10	3RT20 35-1AK60		
On request	18 ... 25	$I_n = 50$ A	3RV20 31-4DA10	3RT20 35-1AK60		
On request	22 ... 32		3RV20 31-4EA10	3RT20 35-1AK60		
On request	28 ... 40		3RV20 31-4FA10	3RT20 45-1AK60 ²⁾	S2/S3	50
On request	36 ... 45		3RV20 31-4GA10	3RT20 45-1AK60 ²⁾		
On request	40 ... 50		3RV20 31-4HA10	3RT20 46-1AK60 ²⁾		

Installation guidelines for AC 400/500 V

The following distances from earthed components must be observed when installing combinations:

Motor starter protectors in combination with contactors			Distances from earthed or live parts		
MSP	Contactor	Rated operational voltage	Y mm	X2 ⁴⁾ mm	Z mm
3RV2. 1 with	3RT20 1	400/500 V	20	10	9
3RV2. 2 with	3RT20 1	400/500 V	30	10	9
	3RT2. 2	400/500 V	30	10	9
	3RT2. 3	400/500 V	30	10	9
3RV2. 3 with	3RT20 2	400/500 V	50	10	10
	3RT2. 3	400/500 V	50	10	10
	3RT20 4	400/500 V	50	10	10
3RV2. 4 with	3RT20 4	400 V	90	10	12
	3RT20 4	500 V	220	10	20

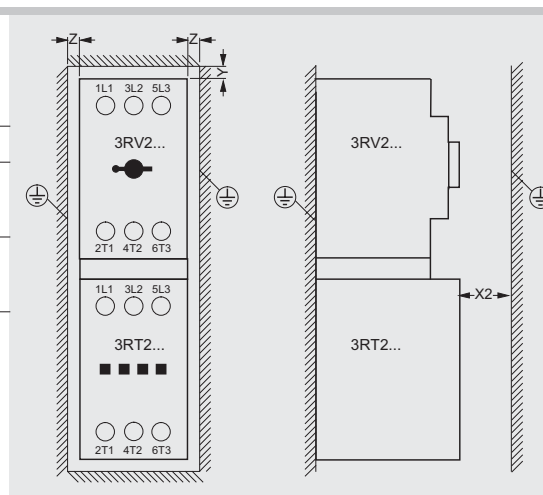


- No upstream circuit-breaker required; short-circuit proof up to 100 kA.

- Rated control supply voltage 120 V AC. Other voltages are possible.
- With these combinations, the distance between the subsequent MSP and the contactor must be at least 10 cm.
- Selection depends on the specific startup and rated data of the protected motor.
- Minimum distance to contactor at front. For the MSP, no minimum distance at the front must be maintained.

Technical data

Installation guidelines for AC 690 V

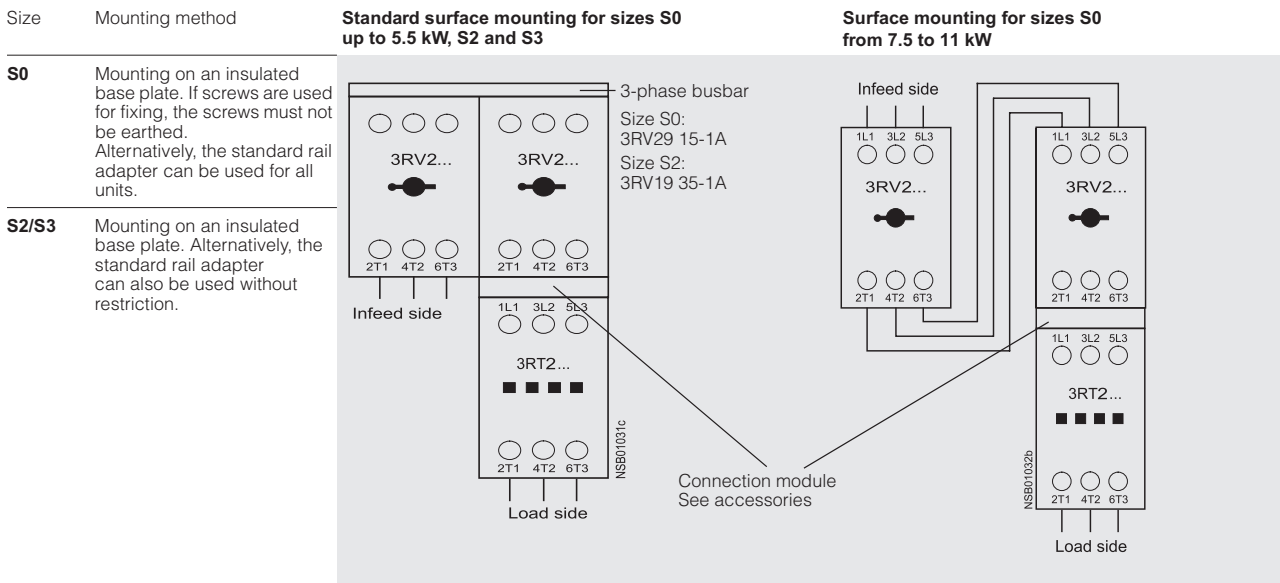


The following distances from earthed components must be observed when installing combinations:

Two MSPs in combination with contactors			Distances from earthed or live components					
MSP	Contactor	Rated operational voltage	Y1 mm	Y2 mm	Y3 mm	X1 mm	X2 mm	Z mm
3RV2... 2 with	3RT20 2	690 V	80	10	95	20	14	20
3RV2... 3 with	3RT20 3	690 V	50	10	120	10	32	10
	3RT20 4	690 V	50	10	120	10	40	10

a 3-phase busbar:

Size S0: 3RV29 15-1A
Size S2: 3RV19 35-1A

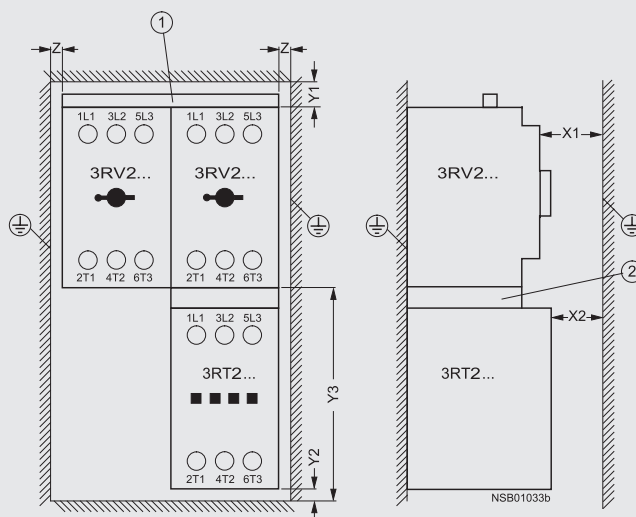

b In combination with size S2 MSPs and size S3 contactors, a spacing of 100 mm must be maintained.

Technical data


General data

Specifications		IEC 60 947-1, EN 60 947-1 (VDE 0660 Part 100) IEC 60 947-2, EN 60 947-2 (VDE 0660 Part 101) IEC 60 947-4-1, EN 60 947-4-1 (VDE 0660 Part 102)			
Type		3RA2. 1	3RA2. 2	3RA2. 3	3RA2.4
Size		S00	S0	S2	S3
Number of poles		3	3	3	3
Max. rated current I_{nmax} (= max. rated operational current I_e)	A	16	32	65	100
Permissible ambient temperature	°C for storage/transport °C for operation	-55 ... +80 -20 ... +60 (restrictions apply at more than +60 °C)		-50 ... +80 -20 ... +60	
Rated operational voltage U_o	V	690			
Rated frequency	Hz	50/60			
Rated insulation voltage U_i	V	690			
Rated impulse withstand voltage U_{imp}	kV	6			
Release class (CLASS)	acc. to IEC 60 947-4-1, EN 60 947-4-1 (VDE 0660 Part 102)	10			
Rated fused short-circuit current I_{cs} at 50/60 Hz AC 400 V acc. to IEC 60 947-4-1, DIN EN 60 947-4-1 (VDE 0660 Part 102)	kA	150		100	50
Types of coordination to IEC 60 947-4-1, EN 60 947-4-1 (VDE 0660 Part 102)		1)			
Power losses P_{vmax} of all main conducting paths depending on the rated current I_n (upper current setting range)	<ul style="list-style-type: none">• Up to 1.25 A• 1.6 - 6.3 A• 8 - 12 A• 16 A• 5 - 6.3 A• 8 - 12 A• 16 - 32 A• 25 - 32 A• 40 A• 45 - 50 A• 63 A• 75 - 90 A• 100 A	<ul style="list-style-type: none">WWWWWWWWWWWW	<ul style="list-style-type: none">22.33.54.3	<ul style="list-style-type: none">2.33.54.3	<ul style="list-style-type: none">16.217.221 <

1) See selection and ordering data on pages 4/36 to 4/43.

Technical data

Conductor cross-sections of main circuit

Specifications		IEC 60 947-1, EN 60 947-1 (VDE 0660 Part 100) IEC 60 947-2, EN 60 947-2 (VDE 0660 Part 101) IEC 60 947-4-1, EN 60 947-4-1 (VDE 0660 Part 102)			
Type		3RA2. 1	3RA2. 2	3RA2.3	3RA21 4
Size		S00	S0	S2	S3
Number of poles		3	3	3	3
Connection type		Screw terminal M3 Posidrive size 2	Screw terminal M3 Posidrive size 2	Screw Terminals M6 Pozidriv size 2	Box terminals Allen screw
Terminal screw					
Conductor cross-sections (min./max)					
1 or 2 conductors can be connected					
• Solid and stranded	mm ² mm ² mm ²	2 x (0.5 ... 1.5) ²⁾ only for contactors 2 x (0.75 ... 2.5) ²⁾ max. 2 x 4		2 x (1 ... 25) ²⁾ 1 x (1 ... 35) ²⁾ 2 x (1 ... 35) ²⁾ 1 x (1 ... 50) ²⁾	
• Finely stranded without end sleeve	mm ²	–			
• Finely stranded with end sleeves (DIN 46 228 T1)	mm ²	2 x (0.5 ... 1.5) ²⁾ 2 x (0.75 ... 2.5) ²⁾		2 x (1 ... 16) ²⁾ 1 x (1 ... 25) ²⁾ 2 x (1 ... 25) ²⁾ 1 x (1 ... 35) ²⁾	
• AWG cables, solid or stranded	AWG AWG AWG	2 x (20 ... 16) ²⁾ 2 x (18 ... 14) 2 x 12		2 x (18 ... 3) ²⁾ 1 x (18 ... 2) ²⁾ 2 x (18 ... 2) ²⁾ 1 x (18 ... 1) ²⁾	
Minimum/maximum conductor cross-sections					
• flexible with ferrule					
- 1 conductor	mm ²			0.75/25	2.5/50 ¹⁾
- 2 conductors	mm ²			0.75/16	2.5/35 ¹⁾
• solid or stranded					
- 1 conductor	mm ²			0.75/35	2.5/70 ¹⁾
- 2 conductors	mm ²			0.75/25	2.5/50 ¹⁾
Ribbon cable				yes	yes
Bus connection				–	yes
• solid or stranded	AWG			2 x (30 ... 2)	–
• stranded	AWG			–	2 x (10 ... 1/0)
Connection type		Spring Loaded connection			
• Solid and stranded	mm ²	2 x (0.5 ... 2.5)	–	2 x (0.5 ... 2.5)	
• Finely stranded without end sleeve	mm ²			2 x (0.5 ... 2.5)	
• Finely stranded with end sleeves	mm ²			2 x (0.5 ... 2.5)	
• AWG cables, solid or stranded	AWG	2 x (20 ... 12)		2 x (20 ... 14)	
Permissible mounting position		 <p>Attention: acc. to DIN 43 602 Start command "I" right-hand or above</p>			

1) Cable-lug and busbar connection possible after removing the box terminals.

2) If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in the range specified. If identical cross-sections are used, this restriction does not apply.

Overview

The 3RA combination starters consist of the 3RV MSP and the 3RT contactor. MSP and contactor are prewired and mechanically connected with preassembled kits (link modules, connection assembly kits and mounting rail or busbar adapters).

As the 3RA combination starters are constructed from 3RV MSPs and 3RT contactors, the same accessories can be used for the combination starter as for these MSPs and contactors.

Pre-assembled link modules are available as accessories for the power spectrum up to 75 HP. The desired combination starter can thus be assembled quickly and economically by the customer. A time saving is also achieved with the link modules as – unlike with conventional wiring systems – there is no need to rectify possible wiring errors.

As a combination starter rated for tap conductor protection for group installation the 3RV MSP is responsible for overload and short-circuit protection in the motor circuit. Back-up protective devices, such as fuses or SIEMENS Sentron circuit breakers are required as per NEC 430-53 guidelines for group installations for multiple motor applications

The 3RT contactor is ideal for extremely complex switching tasks requiring durable components.

The permissible ambient temperature is 60 °C with butt-mounting and without derating (70 °C possible subject to certain restrictions).

3RA combination starters are available for motors up to 75 Hp at 460 V AC and setting ranges from 0.14 A to 100 A.

3RA combination starters are supplied in four different sizes:

Size	Overall width mm	Max. rated current $I_{n\ max}$ A	For three-phase motors up to HP
S00	45	8	5
S0	45	22	15
S2	55	50	40
S3	70	100	75

Operating conditions

3RA combination starters are climate-proof. They are intended for use in enclosed rooms in which no severe conditions (such as dust, caustic vapors, hazardous gases) prevail. Suitable enclosures must be provided for installation in dusty and damp locations.

Accessories

The accessories for the special equipment, such as auxiliary contacts and undervoltage trips, can also be used for the 3RA combination starters.

In addition, certain accessories have been optimized for the combination starters. They include the top-connected, transverse auxiliary contact on the MSP with one changeover contact or one NO contact + one NC contact. Special auxiliary contact blocks that can be snapped on from below are available for the contactor.

These two accessories enable the combination starters to be wired easily without having to route cables via the equipment.

The special accessories for 3RA combination starters take the form of link modules for 3RV MSPs and 3RT contactors.

Technical data

For technical data, see pages 4/56-4/58. Additional details are contained in the respective tables for the 3RV MSPs and 3RT contactors.

Configuration

Overload tripping times

All the 3RA combination starters described here are designed for normal starting, in other words for overload tripping times of less than 10 s (CLASS 10). At rated-load operating temperature the tripping times are shorter, depending on the particular equipment and the setting range. The exact values can be derived from the tripping characteristics of the MSPs.

Classification types

DIN VDE 0660 Part 102 and IEC 60 947-4-1 make a distinction between two different types of coordination (types 1 and 2). Any short-circuits that occur are cleared safely by both types of coordination. The only differences concern the extent of the damage caused to the equipment by a short-circuit.

IEC Type of coordination 1

The combination starter may be non-operational after a short-circuit has been cleared. Damage to the contactor or to the overload relay is permissible. In 3RA load feeders, the MSP itself always achieves type of coordination 2.

IEC Type of coordination 2

There must be no damage to the overload trip or to any other components after a short-circuit has been cleared. The 3RA combination starter can resume operation without needing to be renewed. At most, it is permissible to weld the contactor contacts if they can be disconnected easily without any significant deformation.

Mounting

Complete equipment

The 3RA combination starters can be ordered as complete equipment for direct starting or for reversing mode. Control supply voltages of 50 Hz AC 230 V or DC 24 V and assembly on a 35 mm standard mounting rail or in a 40 or 60 mm busbar system are possible.

Special equipment for customer assembly can be ordered if other rated control supply voltages are required. The link modules simplify customer assembly of the load feeders.

The corresponding distances from earthed or live parts, as detailed in the technical data, must be observed.

Customer assembly

The standard devices can be combined optimally in terms of both technical data and dimensions, thanks to the modular system of the SIRIUS series.

The combination starters can thus be assembled easily by the customer. It is simply necessary to assemble the standard 3RV MSP and 3RT contactor and the appropriate link module together.

For the order numbers for special equipment and link modules, see the selection and ordering data.

For the link modules for direct starting or reversing mode and assembly on a standard mounting rail or busbar, see accessories.

If a MSP with a rotary operating mechanism is required for the lower setting ranges up to 12 A, the S0 MSP can also be assembled with an S00 contactor. A special connecting module is available for this purpose.

For the installation of feeders, it is imperative to use standard rail adapters, as from size S2 for direct starting and as from size S0 for reversing, to ensure the necessary mechanical strength. A standard rail adapter is not necessary if a busbar adapter is used.

Assembly


3RA combination starters are available for assembly on standard mounting rails in accordance with EN 50 022-35 x 15 or on busbar adapters with a busbar centre-line spacing of 40 or 60 mm and a busbar thickness of 5 or 10 mm.

The combination starters are also suitable for screw fixing.

Size S00 and S0 can be screwed on with the aid of plug-in clips (see accessories on page 4/47).

3RA2 – up to 100 A

Direct-on-line starting • For standard rail mounting or screw fixing • Sizes S00 and S0

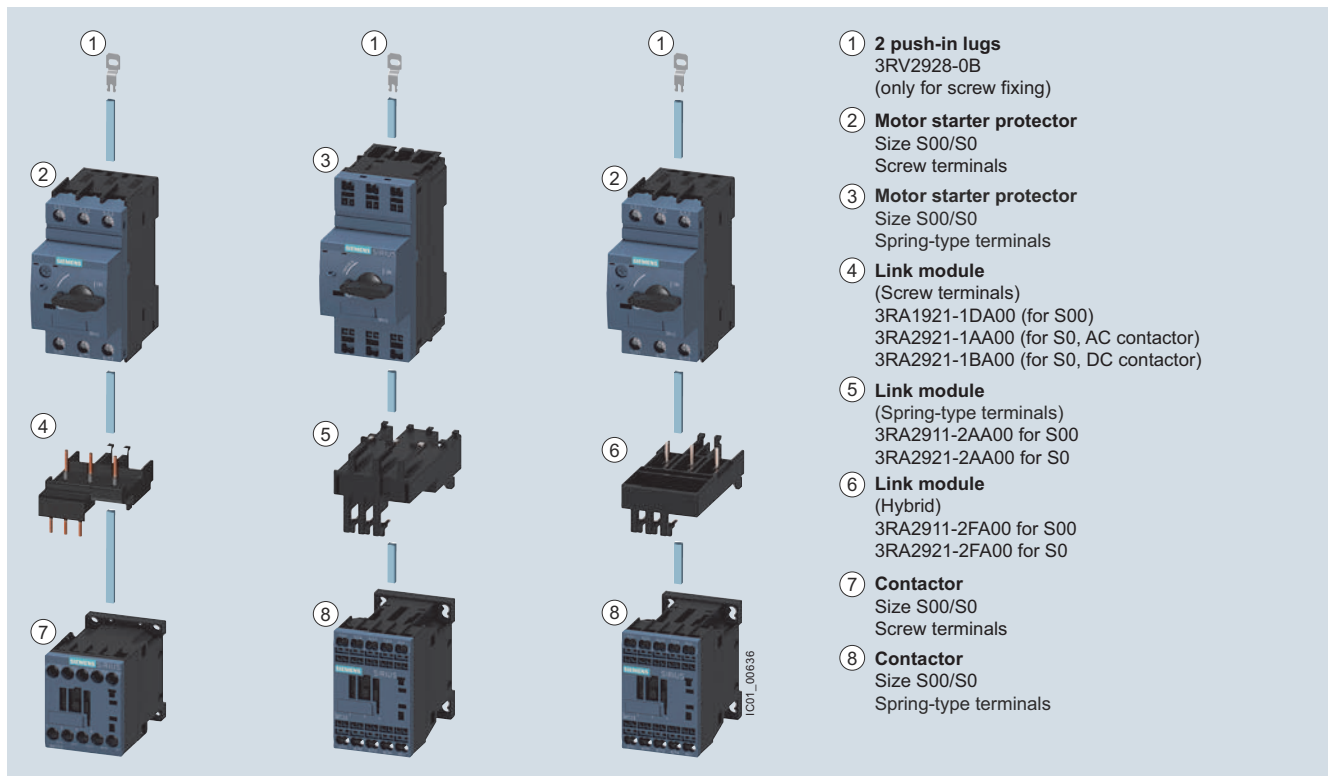


Left: 3RA21 load feeder with screw terminals

Center: 3RA21 load feeder with spring-type terminals

Right: Motor starter protector combination with screw terminals, with contactor with spring-type terminals


Direct-on-line starting • For standard rail mounting • Up to Size S3

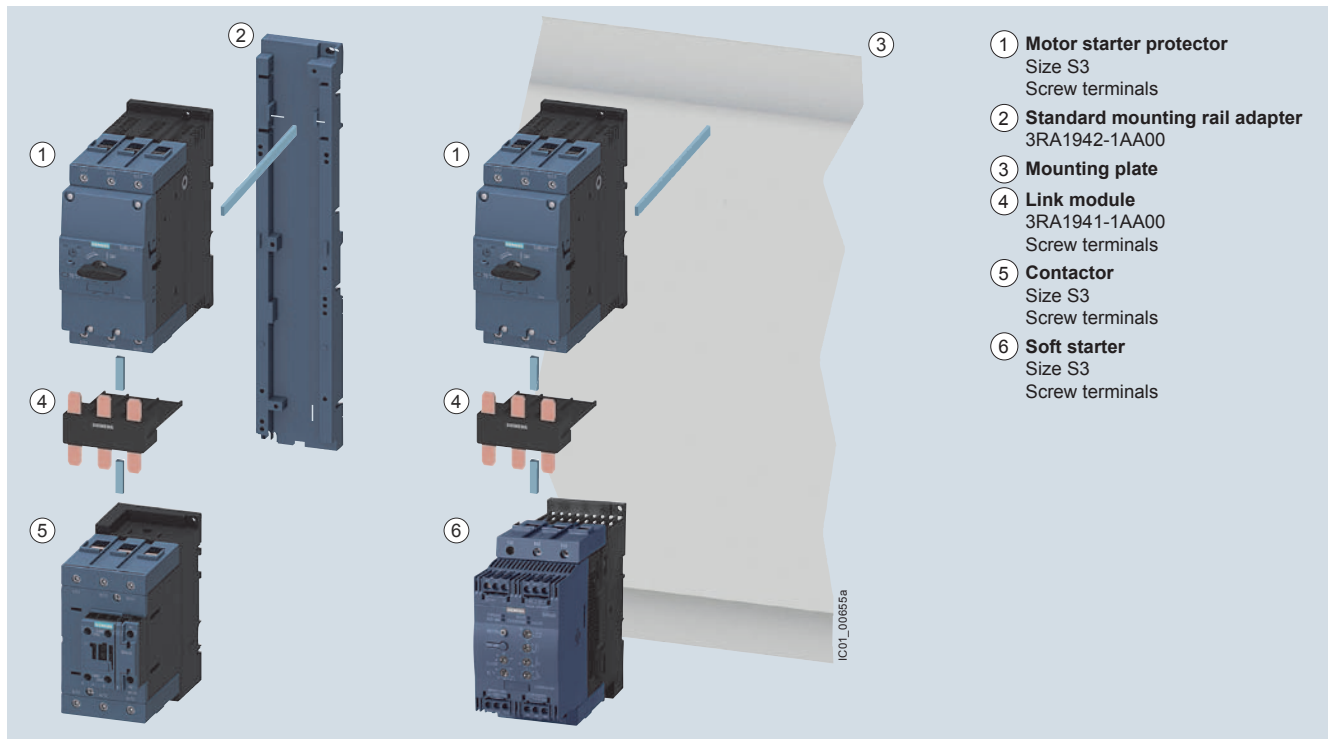

Load feeder for direct-on-line starting and standard rail mounting in size S3 (the version with screw terminals is shown in the picture)

3RA2 – up to 100 A


Direct-on-line starting • For 60 mm busbar systems • Sizes S00 and S0

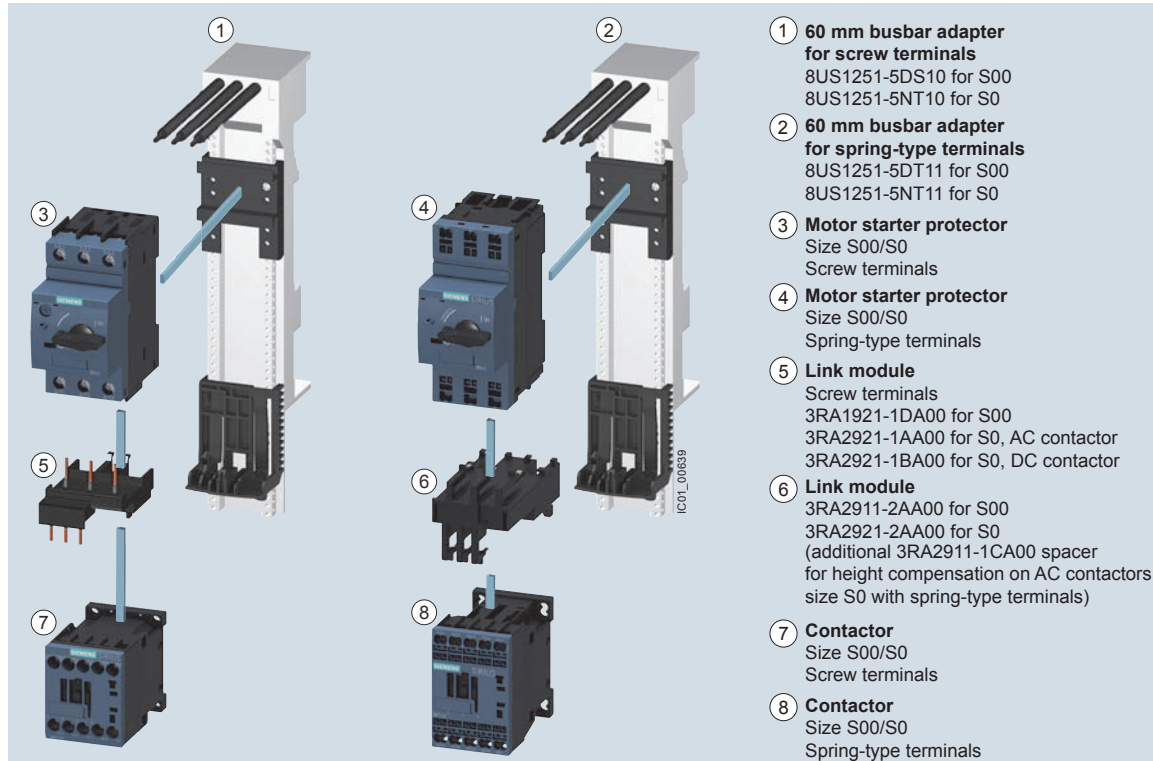

Left: 3RA21 load feeder for direct-on-line starting with busbar adapter with screw terminals


Right: 3RA21 load feeder for direct-on-line starting with busbar adapter with spring-type terminals

Direct-on-line starting • For 60 mm busbar systems • Size S2

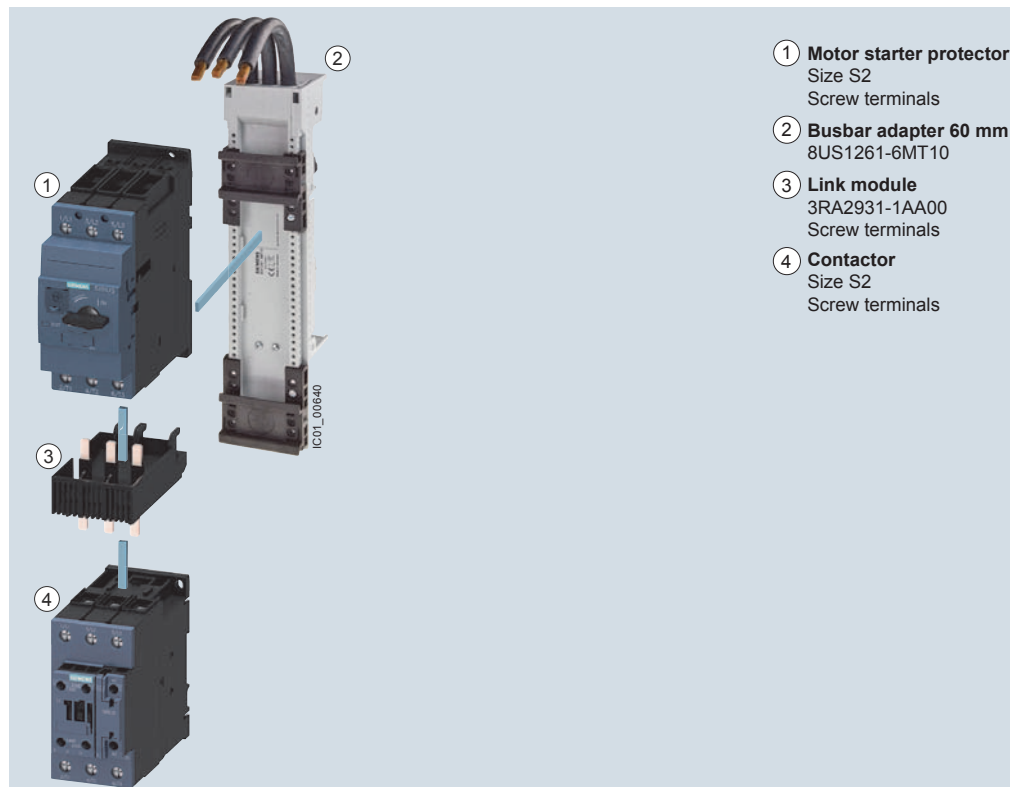

3RA21 load feeder for direct-on-line starting with busbar adapter with screw terminals


Reversing duty • For standard rail mounting or screw fixing • Size S00

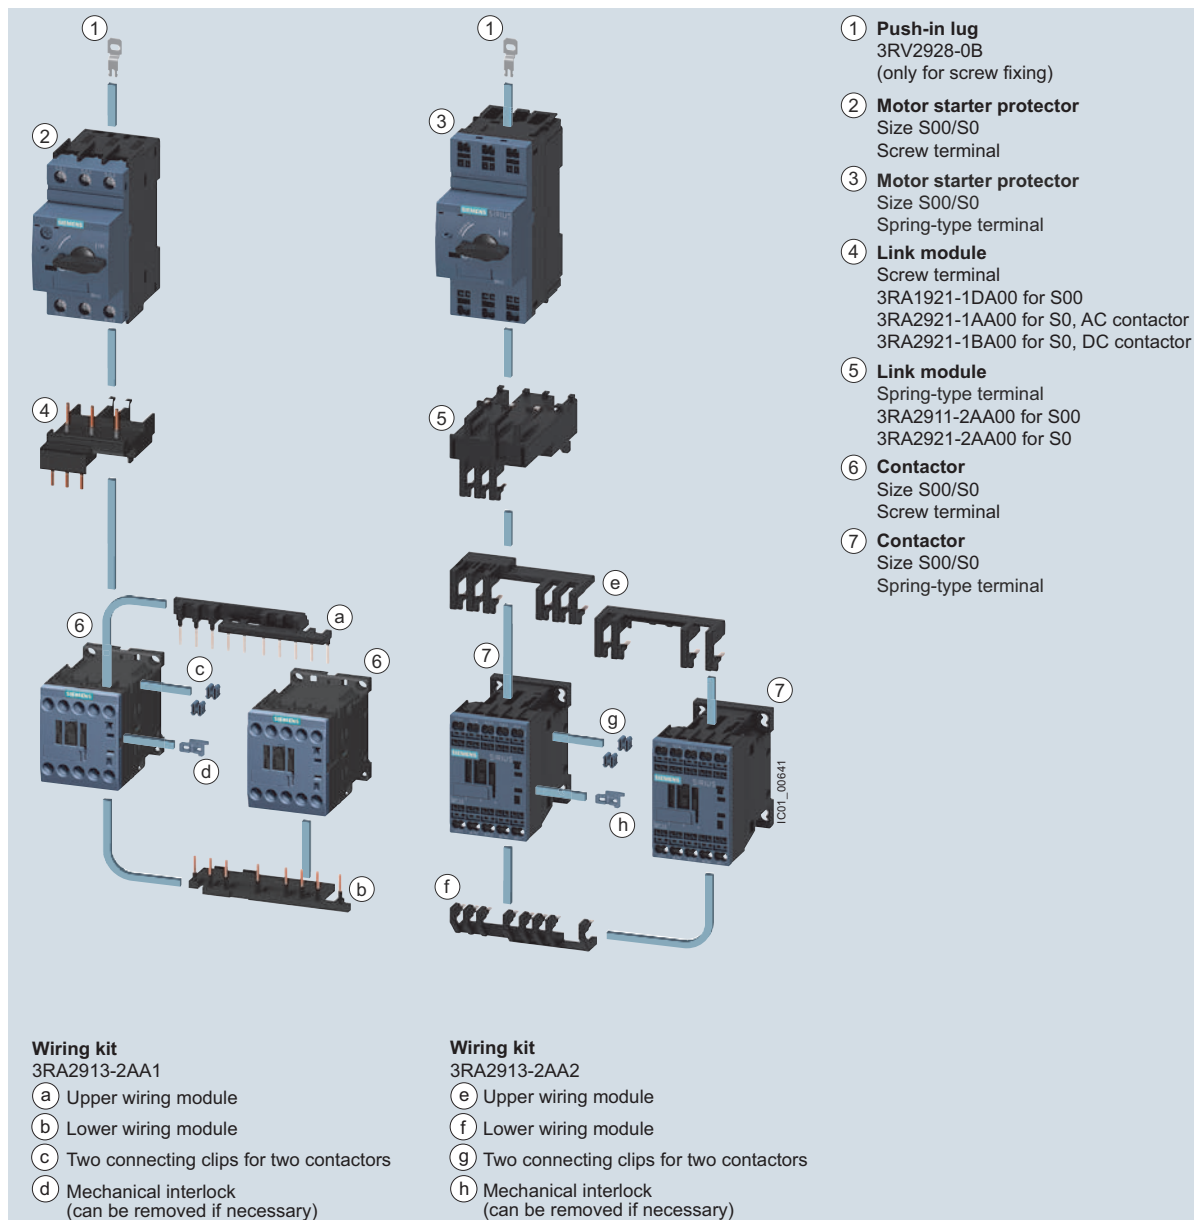

Left: 3RA22 load feeder with screw terminals with push-in lugs with two contactors for reversing duty and 3RA2913-2AA1 wiring kit for connection of the contactors (incl. mechanical interlocking and connecting clips)

Right: 3RA22 load feeder with spring-type terminals with push-in lugs with two contactors for reversing duty and 3RA2913-2AA2 wiring kit (incl. mechanical interlocking and connecting clips)

Reversing duty • For standard rail mounting • Size S0

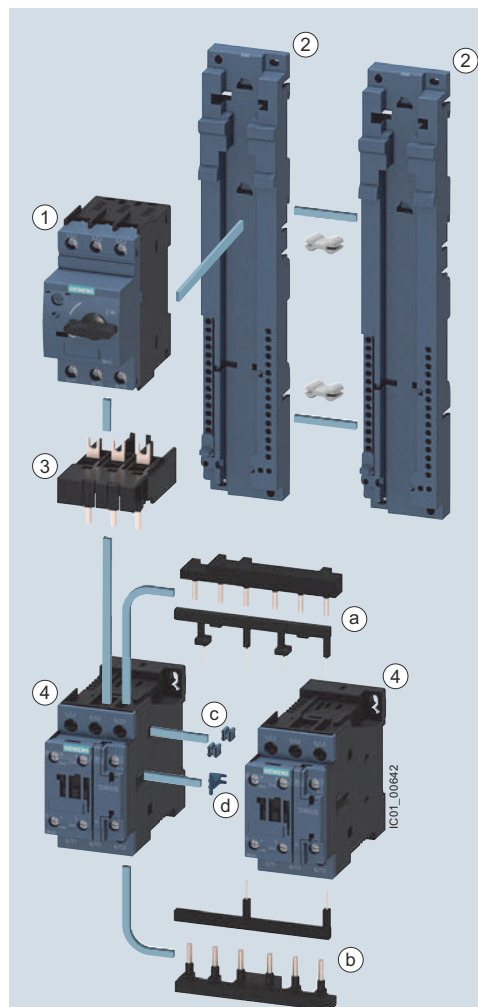

RH assembly kit for reversing duty and standard rail mounting in size S0

Screw terminals

3RA2923-1BB1

Spring-type terminals

3RA2923-1BB2¹⁾

Comprising:

- Wiring kit for the main and auxiliary circuits
- Two standard mounting rail adapters
- Two connecting wedges
- Mechanical interlock
- Two connecting clips
- Fixing accessories

- Motor starter protector**
Size S0
Screw terminals/spring-type terminals
- Standard mounting rail adapters**
3RA2922-1AA00
with two connecting wedges
8US1998-1AA00
- Link module**
Screw terminals:
3RA2921-1AA00 for S0, AC contactor
3RA2921-1BA00 for S0, DC contactor
Spring-type terminals:
3RA2921-2AA00²⁾
- Contactor**
Size S0
Screw terminals/spring-type terminals

Wiring kit

Screw terminals:

3RA2923-2AA1

Spring-type terminals:

3RA2923-2AA2

- Upper wiring module
- Lower wiring module
- Two connecting clips for two contactors
- Mechanical interlock
(can be removed if necessary)


¹⁾ Contains two 3RA2911-1CA00 spacers for height compensation on AC contactors size S0 with spring-type terminals.

²⁾ Additionally two 3RA2911-1CA00 spacers for height compensation on AC contactors size S0 with spring-type terminals.

3RA22 load feeder for reversing duty and standard rail mounting in size S0 (the version with screw terminals is shown in the picture)

RH assembly kits for reversing duty and standard rail mounting in size S0, [see page 8/51](#).

Reversing duty • For standard rail mounting • Size S2

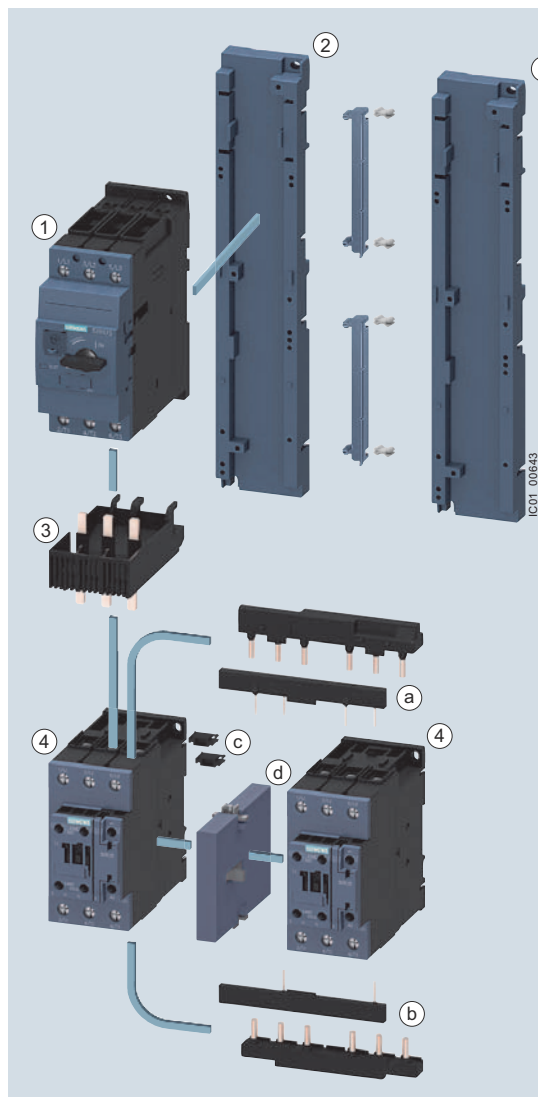

RH assembly kit for reversing duty and standard rail mounting in size S2

3RA2933-1BB1

Comprising:

- Wiring kit for the main and auxiliary circuits
- Two standard mounting rail adapters
- Two side modules
- Four connecting wedges
- Mechanical interlock
- Two connectors for two contactors
- Fixing accessories

① Motor starter protector

Size S2
Screw terminals

② Standard mounting rail adapter

3RA2932-1AA00
with two side modules
3RA1902-1B
and four connecting wedges
8US1998-1AA00

③ Link module

3RA2931-1AA00
Screw terminals

④ Contactor

size S2
Screw terminals

Wiring kit

Screw terminals
3RA2933-2AA1

(a) Upper wiring module

(b) Lower wiring module


(c) Two connectors for two contactors

(d) Mechanical interlock 3RA2934-2B (not part of the wiring kit, must be ordered separately)

Load feeder for reversing duty and standard rail mounting in size S2
(the version with screw terminals is shown in the picture)

RH assembly kits for reversing duty and standard rail mounting
in size S2, [see page 8/51](#).


Reversing duty • For standard rail mounting • size S3

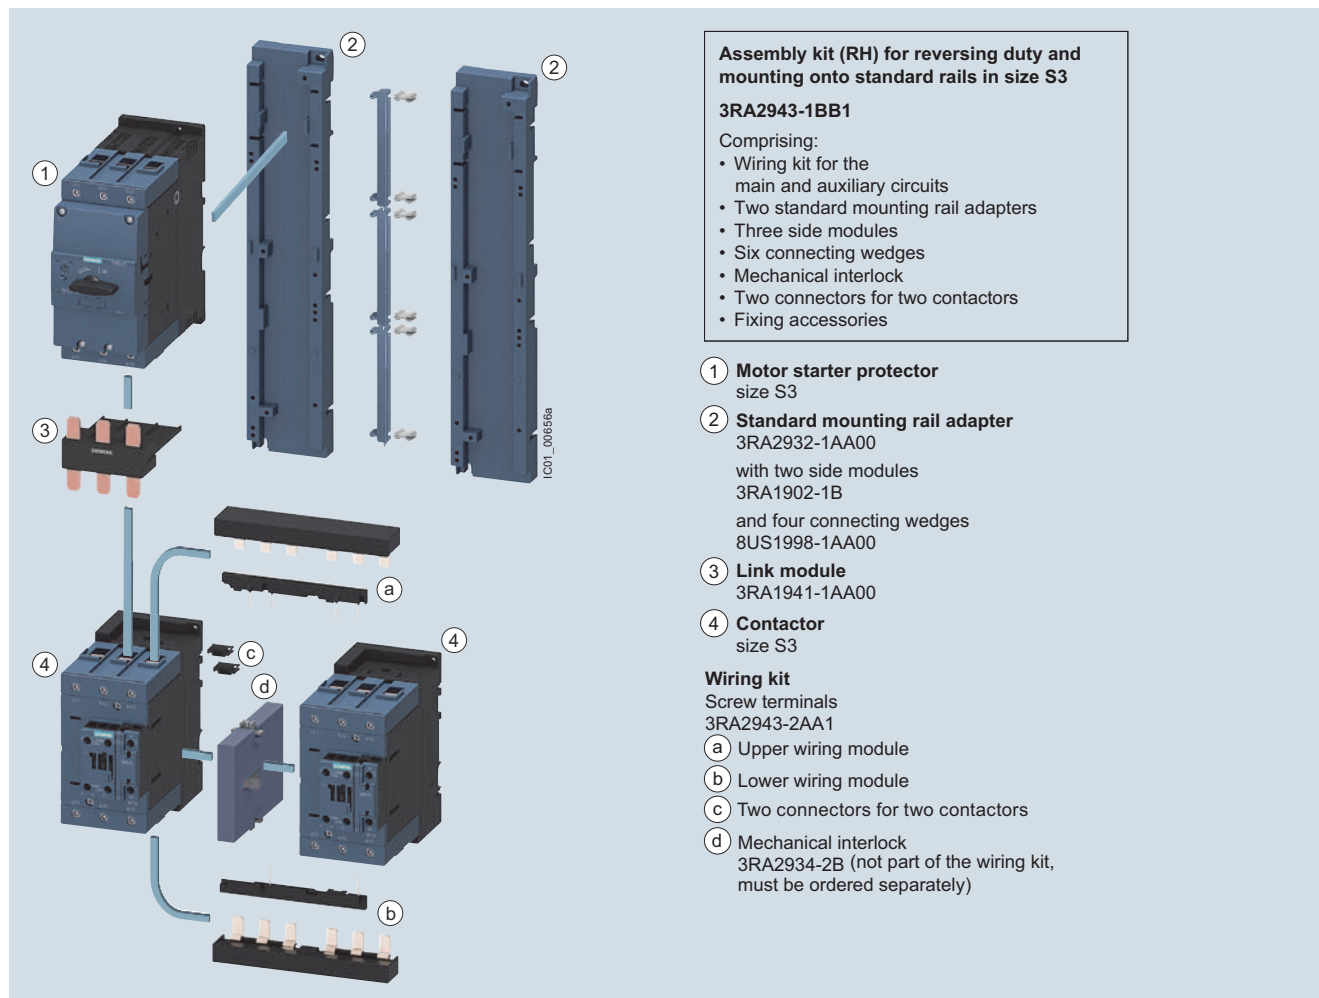

Load feeder for reversing duty and standard rail mounting in size S3
 (the version with screw terminals is shown in the picture)

RH assembly kits for reversing duty and standard rail mounting
 in size S3, [see page 8/51](#).

Reversing duty • For 60 mm busbar systems • Sizes S00 and S0

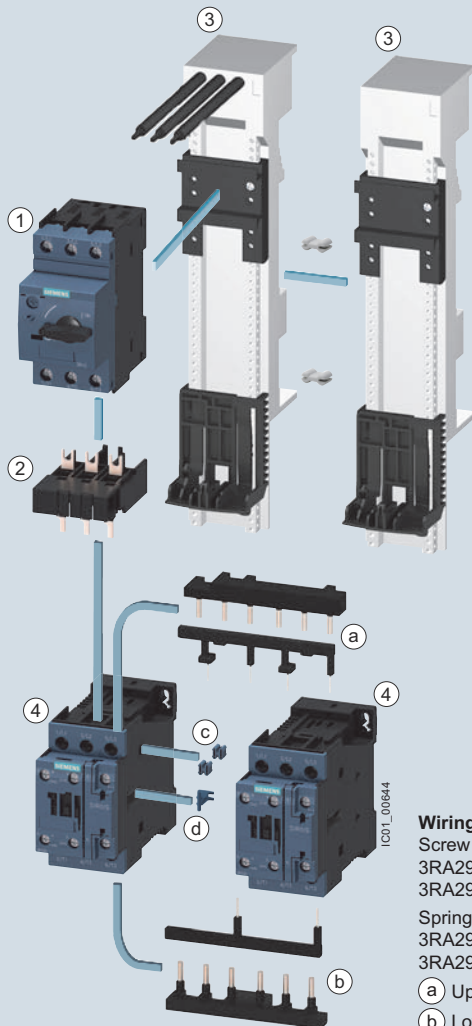

Wiring kit

Screw terminals
3RA2913-2AA1 for S00
3RA2923-2AA1 for S0

Spring-type terminals
3RA2913-2AA2 for S00
3RA2923-2AA2 for S0

- (a) Upper wiring module
- (b) Lower wiring module
- (c) Two connecting clips for two contactors
- (d) Mechanical interlock
(can be removed if necessary)

RS assembly kit for reversing duty and busbar mounting in size S00/S0

Screw terminals

3RA2913-1DB1 for S00

3RA2923-1DB1 for S0

Spring-type terminals

3RA2913-1DB2 for S00

3RA2923-1DB2 for S0¹⁾

Comprising:

- Wiring kit for the main and auxiliary circuits
- Busbar adapter
- Device holder
- Two connecting wedges
- Mechanical interlock
- Two connecting clips for two contactors
- Fixing accessories

1 Motor starter protector

Size S00/S0

Screw terminals/spring-type terminals

2 Link module

Screw terminals

3RA1921-1DA00 for S00

3RA2921-1AA00 for S0, AC contactor

3RA2921-1BA00 for S0, DC contactor

Spring-type terminals

3RA2911-2AA00 for S00

3RA2921-2AA00 for S0²⁾

3 60 mm busbar adapter

Screw terminals

8US1251-5DS10 for S00/S0

8US1251-5NT10 for S0

Spring-type terminals

8US1251-5DT11 for S00/S0

8US1251-5NT11 for S0

2 connecting wedges

8US1998-1AA00

60 mm device holder

8US1250-5AS10 or

8US1250-5AT10

(according to left adapter)

4 Contactor

Size S00/S0

Screw terminals/spring-type terminals


¹⁾ Contains two 3RA2911-1CA00 spacers for height compensation on AC contactors size S0 with spring-type terminals.

²⁾ Additionally two 3RA2911-1CA00 spacers for height compensation on AC contactors size S0 with spring-type terminals.

3RA22 load feeder for reversing duty and 60 mm busbar
(the version with screw terminals is shown in the picture)

RS assembly kits for reversing duty and busbar mounting in
size S00/S0, [see page 8/53](#).

Reversing duty • For 60 mm busbar systems • size S2

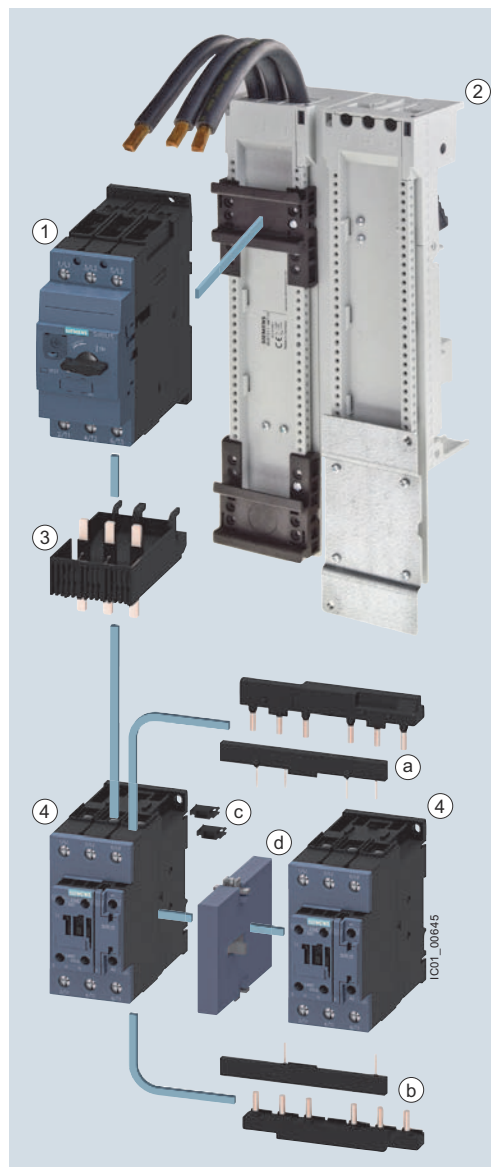

RS assembly kit for reversing duty and busbar mounting in size S2

3RA2933-1DB1

Comprising:

- Wiring kit for the main and auxiliary circuits
- Busbar adapter
- Mechanical interlock
- Two connectors for two contactors
- Fixing accessories

① Motor starter protector

Size S2
Screw terminals

② Busbar adapter 60 mm

8US1211-6MT10

③ Link module

3RA2931-1AA00
Screw terminals

④ Contactor

Size S2
Screw terminals

Wiring kit

For screw terminals
3RA2933-2AA1

a Upper wiring module

b Lower wiring module

c Two connecting pins for two contactors

d Mechanical interlock 3RA2934-2B (not part of the wiring kit, must be ordered separately)

Load feeder for reversing duty and 60 mm busbar in size S2
(the version with screw terminals is shown in the picture)

RS assembly kits for reversing duty and busbar mounting in size S2,
[see page 8/53](#).

3RA2 – up to 100 A

Components for Fast Bus mounting

- ① Link module
for AC: 3RA19 41-1A
for DC: 3RA19 41-1B
- ② Mechanical
interlock
3RA19 24-2B

3RV204 with Reversing 3RT204

Adapter shoe
8US1211-4TR00

MSP
3RV204

3RA2943-2AA1 Wiring kit (screw type)
3RA2943-2AA2 Wiring kit (spring type)

- ① Upper wiring module
② Lower wiring module


2 Contactors
3RT204

2 Brackets
FBS0070B


Circuit diagrams

Direct-on-line starting

Size S00: 3RA21.1




Sizes S0, S2 and S3: 3RA21 2, 3RA21 3




Reversing duty

Size S00: 3RA22




Size S0: 3RA22




Dimension drawings

Size S00 · for standard rail mounting

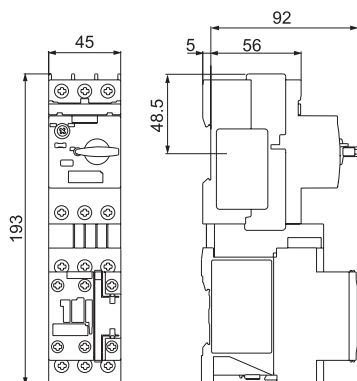


S0 direct-on-line starter,
AC, screw-type connection system
3RA2120-..A

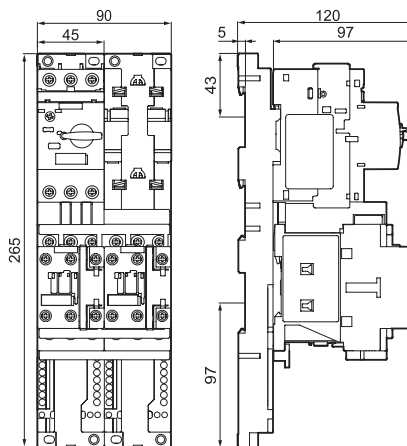


S0/S0 and S00/S0 reversing starters,
AC, screw-type connection system
3RA2220-..B...0AP0

Size S00 · for 40 mm and 60 mm busbar systems

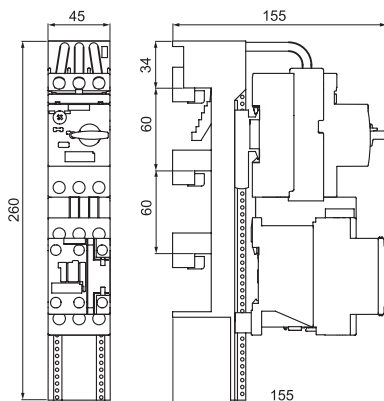

S0/S0 and S00/S0 direct-on-line starters,
AC, screw-type connection system
3RA2120-..D...0AP0

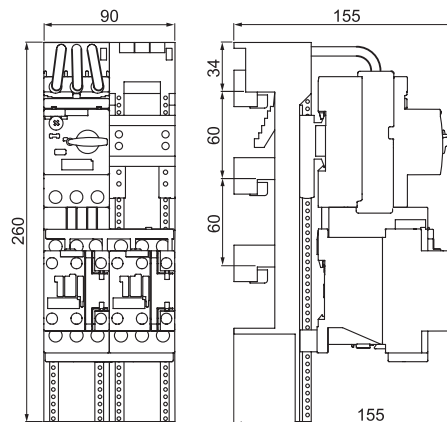


S0/S0 and S00/S0 reversing starters,
AC, screw-type connection system
3RA2220-..D...0AP0


When mounting the combinations, observe the installation guidelines (page 4/60-4/61).

Dimension drawings

Size S0 · for standard rail mounting

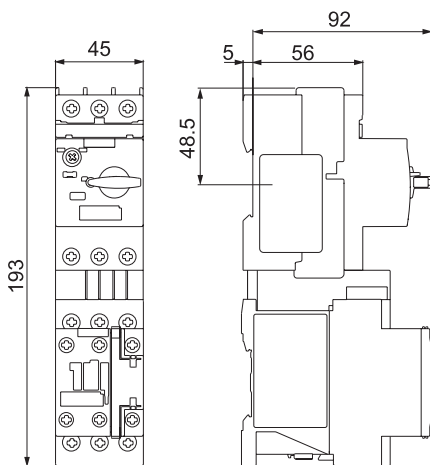


S0 direct-on-line starter, AC, screw-type connection system
3RA2120-..A

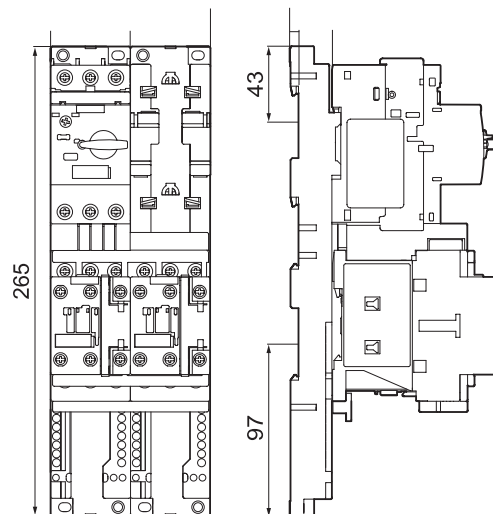


S0/S0 and S00/S0 reversing starters,
AC, screw-type connection system
3RA2220-..B..-0AP0

Size S0 · for 40 mm and 60 mm busbar systems

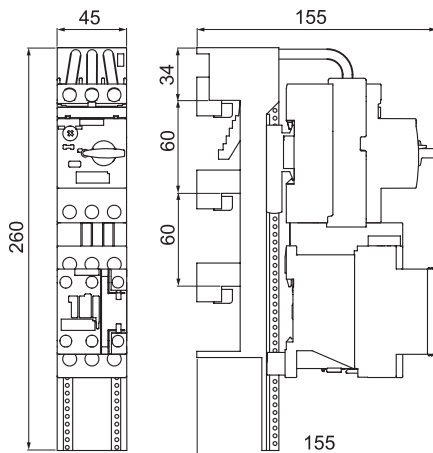

S0/S0 and S00/S0 direct-on-line starters, AC,
screw-type connection system
3RA2120-..D..-0AP0

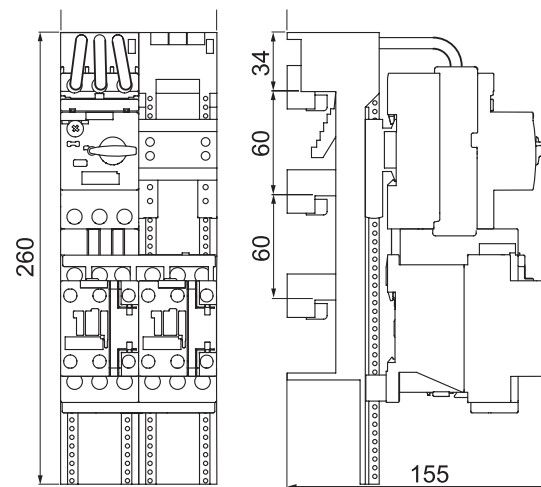


S0/S0 and S00/S0 reversing starters,
AC, screw-type connection system
3RA2220-..D..-0AP0

When mounting the combinations, observe the installation guidelines (page 4/60-4/61).


Dimension drawings

Size S2 · for standard rail mounting

Direct-on-line starting

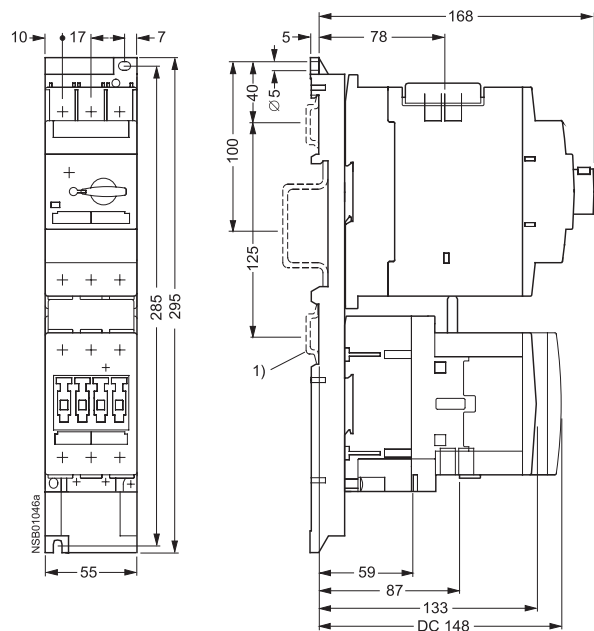


Reversing duty

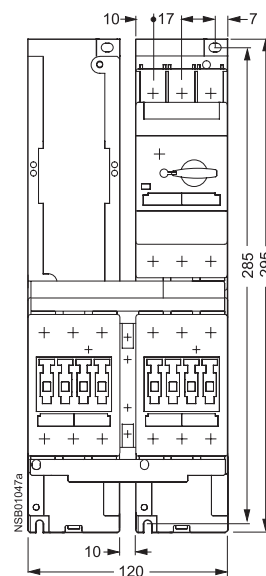


- 1) Alternative fixing methods
a) 2 35 mm mounting rails acc. to DIN EN 50022 Spacing: 125 mm Depth: 7.5 or 15 mm.
b) 1 75 mm mounting rail acc. to DIN EN 50 023.

Size S2 · for 40 mm and 60 mm busbar systems

Direct-on-line starting

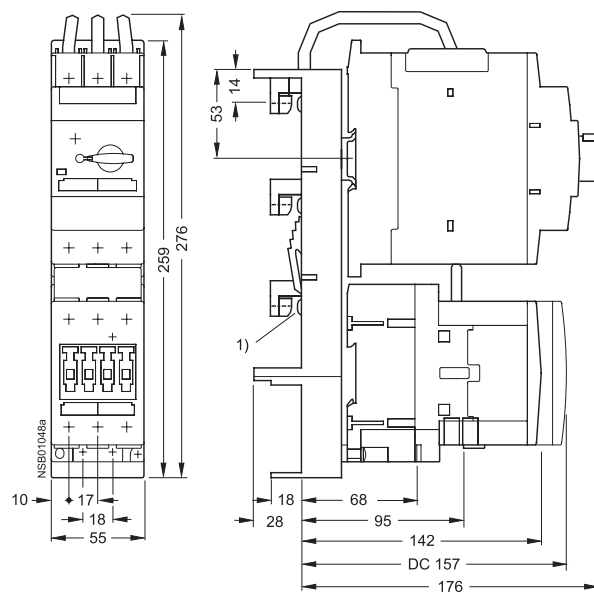

Reversing duty

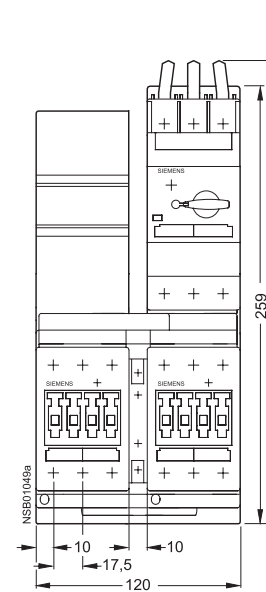


- 1) Busbar adapter suitable for rail thicknesses of 5 and 10 mm with chamfered edges.

When mounting the combinations, observe the installation guidelines (page 4/60-4/61).


Dimension drawings

Size S3 · for standard rail mounting

Direct-on-line starting

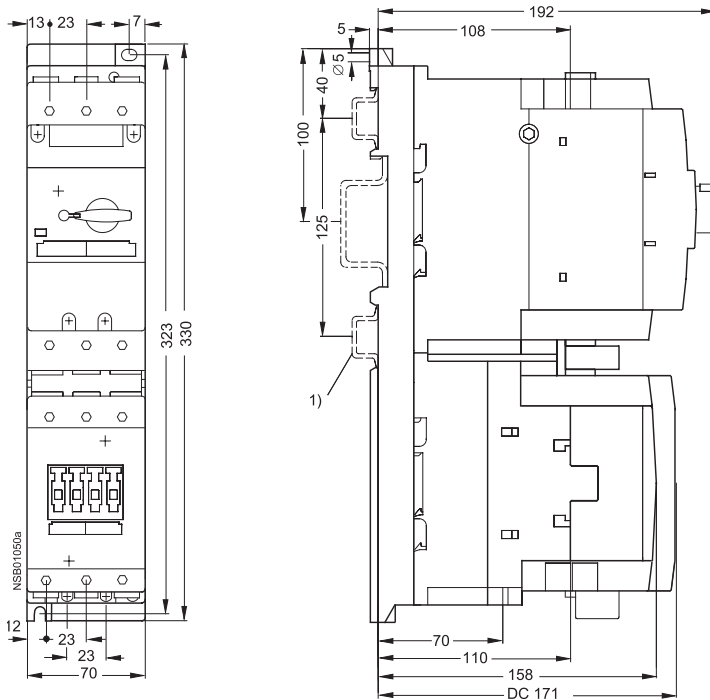

Reversing duty

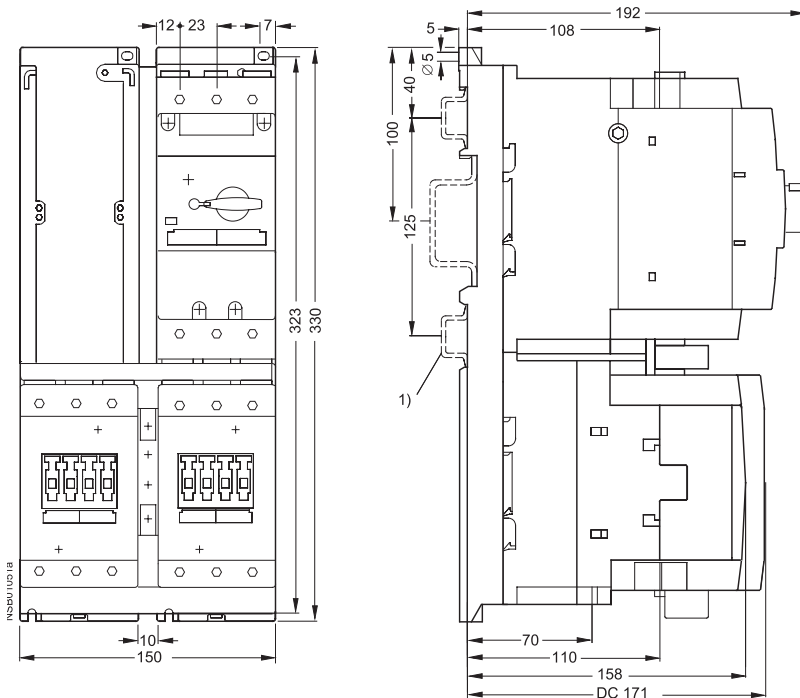

- 1) Alternative fixing methods
- a) 2 35 mm mounting rails acc. to DIN EN 50 022
Spacing: 125 mm
Depth: 7.5 or 15 mm.
 - b) 1 75 mm mounting rail acc. to DIN EN 50 023.

When mounting the combinations, observe the installation guidelines (page guidelines 4/60-4/64).

3RE4 Enclosed IEC Controllers

Product overview

3RE4 Enclosed IEC motor controllers are well suited for both industrial and commercial applications. They are durable and dependable, particularly when it comes to motor protection. Protecting the performance of motors is a critical priority and the 3RE4 enclosed starters are offered with either thermal or solid-state overload relays to maximize your motor protection.



Controller Features

General

- UL motor horsepower rated
- From fractional up to 60 Hp at 575 V
- Non-combination type starters and contactors
- Reversing and non-reversing controllers
- Single phase and 3-phase loads
- Thermal and solid-state overload relays
- NEMA Type enclosures 1, 3/3R/4/12 and 4X 304 stainless steel
- Standard size and extra larger enclosures
- RoHS compliant
- Standards: UL 60947-4-1
- Certifications: cULus

Overload Relay Features

Thermal overload relays

- Trip Class 10
- Phase failure sensitivity
- UL for Single and three phase loads
- Includes NC trip contact and NO alarm contact
- Manual and automatic RESET (selectable)
- Switch position indicator
- TEST function
- STOP button
- Sealable cover (optional)
- Screw-type terminals

Available Factory Mods, Field Kits, Accessories

Factory modifications

- Push buttons
- Selector switches
- Pilot lights
- Control power transformers

Contactor

- Horsepower rated per UL
- High contact reliability
- NO and NC auxiliary contacts included as standard
- Permanently secured with screws on mounting panel
- Screw type terminal connections

Solid-state overload relays

- Selectable Trip Class 5, 10, 20 and 30
- Overload, phase failure and unbalance protection
- Internal ground fault detection (selectable)
- Internal power supply
- Includes NC trip contact and NO alarm contact
- Manual and automatic RESET (selectable)
- Electrical remote RESET integrated
- Switch position indicator
- TEST function and self-monitoring
- Sealable cover (optional)
- Screw-type terminals

Field kits and accessories

- Push buttons
- Selector switches
- Pilot lights
- Auxiliary contacts
- Control power transformers
- Control relays and timers
- Control circuit fuse block
- Terminal blocks
- etc.

Catalog Numbering System

3RE4 Nomenclature**Non-Combination Controllers**

3RE4	1	2	2	-	3	A	A	3	1	-	1	H	Y	0
------	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Controller Type

- 11 = Non-combination non-reversing starter, 1-phase, 2-pole
- 12 = Non-combination non-reversing starter, 3-phase, 3-pole
- 14 = Non-combination reversing starter, 3-phase, 3-pole
- 16 = Non-combination non-reversing contactor
- 18 = Non-combination reversing contactor

Frame Size: UL60947-4-1 Hp Rating

- 15 = S00: 1-Ph Hp (0.25@115V, 0.5@208V, 0.75@230V), 3-Ph Hp (1.5@208V, 2@230V, 3@460V, 5@575V)
- 23 = S0: 1-Ph Hp (1@115V, 1@208V, 1@230V), 3-Ph Hp (2@208V, 3@230V, 5@460V, 7.5@575V)
- 24 = S0: 1-Ph Hp (1@115V, 2@208V, 2@230V), 3-Ph Hp (3@208V, 3@230V, 7.5@460V, 10@575V)
- 25 = S0: 1-Ph Hp (1@115V, 2@208V, 3@230V), 3-Ph Hp (5@208V, 5@230V, 10@460V, 15@575V)
- 26 = S0: 1-Ph Hp (2@115V, 3@208V, 3@230V), 3-Ph Hp (7.5@208V, 7.5@230V, 15@460V, 20@575V)
- 27 = S0: 1-Ph Hp (2@115V, 5@208V, 5@230V), 3-Ph Hp (10@208V, 10@230V, 20@460V, 25@575V)
- 28 = S0: 1-Ph Hp (3@115V, 5@208V, 5@230V), 3-Ph Hp (10@208V, 10@230V, 25@460V, 25@575V)
- 35 = S2: 1-Ph Hp (3@115V, 5@208V, 7.5@230V), 3-Ph Hp (10@208V, 15@230V, 30@460V, 40@575V)
- 36 = S2: 1-Ph Hp (3@115V, 7.5@208V, 10@230V), 3-Ph Hp (15@208V, 15@230V, 40@460V, 50@575V)
- 37 = S2: 1-Ph Hp (5@115V, 10@208V, 10@230V), 3-Ph Hp (20@208V, 20@230V, 50@460V, 50@575V)
- 38 = S2: 1-Ph Hp (5@115V, 10@208V, 15@230V), 3-Ph Hp (20@208V, 25@230V, 50@460V, 60@575V)

Enclosure Type and Size

- A = NEMA Type 1 - standard size
- B = NEMA Type 1 - large size^①
- C = NEMA Type 3/3R/4/12 - standard size
- E = NEMA Type 4X 304 SS - standard size

Disconnect Type

- A = None

Nominal Coil Voltage

- 1 = 24 V AC 50/60Hz
- 2 = 24 V DC
- 3 = 110/120 V AC 50/60Hz
- 4 = 208 V AC 50/60Hz
- 5 = 220/240 V AC 50/60Hz
- 6 = 277 V AC 60Hz
- 7 = 480 V AC 60Hz
- 8 = 600 V AC 60Hz

Overload Relay Type

- 0 = (none)
- 1 = Thermal fixed trip Class 10
- 5 = Solid-state selectable trip Class 5-10-20-30

Overload Relay Amp Range

- 0Y = No overload relay (contactor)
- See amp range selection on page 4/15.

Special

- Y0 = (none)
- Factory modifications (See selection starting on page 4/47.)

^① Large size enclosures are not applicable for some configurations.
Refer to product selection tables for specifics.

3RE4 Non-Reversing Starter, 3-Phase, 3-Pole, Thermal or Solid-State Overload Relay

Selection **NEW**

Ordering Information

- Replace the (●) with the code from the coil table on this page.
- Replace the (□) with the overload relay (OLR) code from this page.
- Replace the (◆◆) with the OLR current adjustment range from pg. 4/80.
- For factory modifications, see page 4/81 – 4/83.
- For accessories, see page 4/84 – 4/85.
- For replacement parts, see page 4/85.
- For dimensions, see page 4/86.
- For wiring diagrams, see page 4/87 – 4/89.

Coil Selection (●)^①

Nominal Voltage	Code
24 VAC 50/60 Hz	1
24 VDC	2
110/120 VAC 50/60 Hz	3
208 VAC 50/60 Hz	4
220/240 VAC 50/60 Hz	5
277 VAC 60 Hz	6
480 VAC 60 Hz	7
600 VAC 60 Hz	8

Non-Reversing Starter, 3-Phase, 3-Pole, Thermal or Solid-State Overload Relay, Standard Enclosure

3-Phase Motor Hp Rating per UL				NEMA Type Enclosure (Standard Size)			Unused Auxiliary Contacts		Frame Size	Contactor (for ref. only)
208 V	230 V	460 V	575 V	Type 1 General Purpose, Indoor only Catalog Number	Type 3/3R/4/12 Weatherproof, Watertight, Dust-tight Catalog Number	Type 4X 304 Stain. Steel Watertight, Dust-tight, Corrosion Resistant Catalog Number	NO	NC		
1.5	2	3	5	3RE4121-5AA●□-◆◆Y0	3RE4121-5CA●□-◆◆Y0	3RE4121-5EA●□-◆◆Y0	1	0	S00	3RT2015
2	3	5	7.5	3RE4122-3AA●□-◆◆Y0	3RE4122-3CA●□-◆◆Y0	3RE4122-3EA●□-◆◆Y0	1	1	S0	3RT2023
3	3	7.5	10	3RE4122-4AA●□-◆◆Y0	3RE4122-4CA●□-◆◆Y0	3RE4122-4EA●□-◆◆Y0	1	1	S0	3RT2024
5	5	10	15	3RE4122-5AA●□-◆◆Y0	3RE4122-5CA●□-◆◆Y0	3RE4122-5EA●□-◆◆Y0	1	1	S0	3RT2025
7.5	7.5	15	20	3RE4122-6AA●□-◆◆Y0	3RE4122-6CA●□-◆◆Y0	3RE4122-6EA●□-◆◆Y0	1	1	S0	3RT2026
10	10	20	25	3RE4122-7AA●□-◆◆Y0	3RE4122-7CA●□-◆◆Y0	3RE4122-7EA●□-◆◆Y0	1	1	S0	3RT2027
10	10	25	25	3RE4122-8AA●□-◆◆Y0	3RE4122-8CA●□-◆◆Y0	3RE4122-8EA●□-◆◆Y0	1	1	S0	3RT2028
10	15	30	40	3RE4123-5AA●□-◆◆Y0	3RE4123-5CA●□-◆◆Y0	3RE4123-5EA●□-◆◆Y0	1	1	S2	3RT2035
15	15	40	50	3RE4123-6AA●□-◆◆Y0	3RE4123-6CA●□-◆◆Y0	3RE4123-6EA●□-◆◆Y0	1	1	S2	3RT2036
20	20	50	50	3RE4123-7AA●□-◆◆Y0	3RE4123-7CA●□-◆◆Y0	3RE4123-7EA●□-◆◆Y0	1	1	S2	3RT2037
20	25	50	60	3RE4123-8AA●□-◆◆Y0	3RE4123-8CA●□-◆◆Y0	3RE4123-8EA●□-◆◆Y0	1	1	S2	3RT2038

□ Thermal overload relay Class 10 = 1
 Solid-state overload relay selectable Class = 5

□ 1
 5

□ 1
 5

Non-Reversing Starter, 3-Phase, 3-Pole, Thermal or Solid-State Overload Relay, Large Enclosure

3-Phase Motor Hp Rating per UL				NEMA Type Enclosure (Large Size)			Unused Auxiliary Contacts		Frame Size	Contactor (for ref. only)
208 V	230 V	460 V	575 V	Type 1 General Purpose, Indoor only Catalog Number	Type 3/3R/4/12 Weatherproof, Watertight, Dust-tight Catalog Number	Type 4X 304 Stain. Steel Watertight, Dust-tight, Corrosion Resistant Catalog Number	NO	NC		
1.5	2	3	5	3RE4121-5BA●□-◆◆Y0	Not applicable — Standard enclosure includes extra mounting space for accessories.		1	0	S00	3RT2015
2	3	5	7.5	3RE4122-3BA●□-◆◆Y0			1	1	S0	3RT2023
3	3	7.5	10	3RE4122-4BA●□-◆◆Y0			1	1	S0	3RT2024
5	5	10	15	3RE4122-5BA●□-◆◆Y0			1	1	S0	3RT2025
7.5	7.5	15	20	3RE4122-6BA●□-◆◆Y0			1	1	S0	3RT2026
10	10	20	25	3RE4122-7BA●□-◆◆Y0			1	1	S0	3RT2027
10	10	25	25	3RE4122-8BA●□-◆◆Y0			1	1	S0	3RT2028

□ Thermal overload relay Class 10 = 1
 Solid-state overload relay selectable Class = 5

① For 3-phase controllers, 208 - 600 V coils will be wired for incoming voltage. 24 and 120 V coils will be wired as separate source or control power transformer

secondary (if ordered). For single phase controllers, 120 and 240 V coils will be wired for incoming voltage. 24 V coils will be wired as separate source or control

power transformer secondary (if ordered). 277 - 600 V coils do not apply.

Enclosed IEC Controls

3RE4 Non-Reversing Starter, 1-Phase, 2-Pole, Thermal Overload Relay

Selection **NEW**



Ordering Information

- Replace the (●) with the code from the coil table on this page.
- Replace the (□) with the overload relay (OLR) code from this page.
- Replace the (◆◆) with the OLR current adjustment range from pg. 4/80.
- For factory modifications, see page 4/81 – 4/83.
- For accessories, see page 4/84 – 4/85.
- For replacement parts, see page 4/85.
- For dimensions, see page 4/86.
- For wiring diagrams, see page 4/87 – 4/89.

Coil Selection (●)^①

Nominal Voltage	Code
24 VAC 50/60 Hz	1
24 VDC	2
110/120 VAC 50/60 Hz	3
208 VAC 50/60 Hz	4
220/240 VAC 50/60 Hz	5
277 VAC 60 Hz	6
480 VAC 60 Hz	7
600 VAC 60 Hz	8

4
COMBINATION
STARTERS

Non-Reversing Starter, Single Phase, 2-Pole, Thermal Overload Relay, Standard Enclosure

1-Phase Motor Hp Rating per UL			NEMA Type Enclosure (Standard Size)			Unused Auxiliary Contacts		Frame Size	Contactor (for ref. only)
115 V	208 V	230 V	Type 1 General Purpose, Indoor only	Type 3/3R/4/12 Weatherproof, Watertight, Dust-tight	Type 4X 304 Stain. Steel Watertight, Dust-tight, Corrosion Resistant	NO	NC		
Catalog Number	Catalog Number	Catalog Number							
0.25	0.5	0.75	3RE4111-5AA●1-◆◆Y0	3RE4111-5CA●1-◆◆Y0	3RE4111-5EA●1-◆◆Y0	1	0	S00	3RT2015
1	1	1	3RE4112-3AA●1-◆◆Y0	3RE4112-3CA●1-◆◆Y0	3RE4112-3EA●1-◆◆Y0	1	1	S0	3RT2023
1	2	2	3RE4112-4AA●1-◆◆Y0	3RE4112-4CA●1-◆◆Y0	3RE4112-4EA●1-◆◆Y0	1	1	S0	3RT2024
1	2	3	3RE4112-5AA●1-◆◆Y0	3RE4112-5CA●1-◆◆Y0	3RE4112-5EA●1-◆◆Y0	1	1	S0	3RT2025
2	3	3	3RE4112-6AA●1-◆◆Y0	3RE4112-6CA●1-◆◆Y0	3RE4112-6EA●1-◆◆Y0	1	1	S0	3RT2026
2	5	5	3RE4112-7AA●1-◆◆Y0	3RE4112-7CA●1-◆◆Y0	3RE4112-7EA●1-◆◆Y0	1	1	S0	3RT2027
3	5	5	3RE4112-8AA●1-◆◆Y0	3RE4112-8CA●1-◆◆Y0	3RE4112-8EA●1-◆◆Y0	1	1	S0	3RT2028
3	5	7.5	3RE4113-5AA●1-◆◆Y0	3RE4113-5CA●1-◆◆Y0	3RE4113-5EA●1-◆◆Y0	1	1	S2	3RT2035
3	7	10	3RE4113-6AA●1-◆◆Y0	3RE4113-6CA●1-◆◆Y0	3RE4113-6EA●1-◆◆Y0	1	1	S2	3RT2036
5	10	10	3RE4113-7AA●1-◆◆Y0	3RE4113-7CA●1-◆◆Y0	3RE4113-7EA●1-◆◆Y0	1	1	S2	3RT2037
5	10	15	3RE4113-8AA●1-◆◆Y0	3RE4113-8CA●1-◆◆Y0	3RE4113-8EA●1-◆◆Y0	1	1	S2	3RT2038

Non-Reversing Starter, Single Phase, 2-Pole, Thermal Overload Relay, Large Enclosure

1-Phase Motor Hp Rating per UL			NEMA Type Enclosure (Large Size)			Unused Auxiliary Contacts		Frame Size	Contactor (for ref. only)	
			Type 1 General Purpose, Indoor only	Type 3/3R/4/12 Weatherproof, Watertight, Dust-tight	Type 4X 304 Stain. Steel Watertight, Dust-tight, Corrosion Resistant					
115 V	208 V	230 V	Catalog Number	Catalog Number	Catalog Number	NO	NC			
0.25	0.5	0.75	3RE4111-5BA●1-◆◆Y0	Not applicable — Standard enclosure includes extra mounting space for accessories.			1	0	S00	3RT2015
1	1	1	3RE4112-3BA●1-◆◆Y0				1	1	S0	3RT2023
1	2	2	3RE4112-4BA●1-◆◆Y0				1	1	S0	3RT2024
1	2	3	3RE4112-5BA●1-◆◆Y0				1	1	S0	3RT2025
2	3	3	3RE4112-6BA●1-◆◆Y0				1	1	S0	3RT2026
2	5	5	3RE4112-7BA●1-◆◆Y0				1	1	S0	3RT2027
3	5	5	3RE4112-8BA●1-◆◆Y0				1	1	S0	3RT2028


① For 3-phase controllers, 208 - 600 V coils will be wired for incoming voltage. 24 and 120 V coils will be wired as separate source or control power transformer

secondary (if ordered). For single phase controllers, 120 and 240 V coils will be wired for incoming voltage. 24 V coils will be wired as separate source or control

power transformer secondary (if ordered). 277 - 600 V coils do not apply.

3RE4 Reversing Starter, 3-Phase, 3-Pole, Thermal or Solid-State Overload Relay

Selection **NEW**

	Ordering Information		Coil Selection (●) ^①	
	<ul style="list-style-type: none"> ▶ Replace the (●) with the code from the coil table on this page. ▶ Replace the (□) with the overload relay (OLR) code from this page. ▶ Replace the (◆◆) with the OLR current adjustment range from pg. 4/80. ▶ For factory modifications, see page 4/81 – 4/83. ▶ For accessories, see page 4/84 – 4/85. ▶ For replacement parts, see page 4/85. ▶ For dimensions, see page 4/86. ▶ For wiring diagrams, see page 4/87 – 4/89. 		Nominal Voltage	Code
			24 VAC 50/60 Hz	1
			24 VDC	2
			110/120 VAC 50/60 Hz	3
			208 VAC 50/60 Hz	4
			220/240 VAC 50/60 Hz	5
			277 VAC 60 Hz	6
			480 VAC 60 Hz	7
			600 VAC 60 Hz	8

Reversing Starter, 3-Phase, 3-Pole, Thermal or Solid-State Overload Relay, Standard Enclosure

3-Phase Motor Hp Rating per UL				NEMA Type Enclosure (Standard Size)			Unused Auxiliary Contacts		Frame Size	Contactor (for ref. only)
208 V	230 V	460 V	575 V	Type 1 General Purpose, Indoor only	Type 3/3R/4/12 Weatherproof, Watertight, Dust-tight	Type 4X 304 Stain. Steel Watertight, Dust-tight, Corrosion Resistant	NO	NC		
Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number	NO	NC	Frame Size	Contactor (for ref. only)
1.5	2	3	5	3RE4141-5AA●□-◆◆Y0	3RE4141-5CA●□-◆◆Y0	3RE4141-5EA●□-◆◆Y0	2	2	S00	3RA2315
2	3	5	7.5	3RE4142-3AA●□-◆◆Y0	3RE4142-3CA●□-◆◆Y0	3RE4142-3EA●□-◆◆Y0	2	0	S0	3RA2323
3	3	7.5	10	3RE4142-4AA●□-◆◆Y0	3RE4142-4CA●□-◆◆Y0	3RE4142-4EA●□-◆◆Y0	2	0	S0	3RA2324
5	5	10	15	3RE4142-5AA●□-◆◆Y0	3RE4142-5CA●□-◆◆Y0	3RE4142-5EA●□-◆◆Y0	2	0	S0	3RA2325
7.5	7.5	15	20	3RE4142-6AA●□-◆◆Y0	3RE4142-6CA●□-◆◆Y0	3RE4142-6EA●□-◆◆Y0	2	0	S0	3RA2326
10	10	20	25	3RE4142-7AA●□-◆◆Y0	3RE4142-7CA●□-◆◆Y0	3RE4142-7EA●□-◆◆Y0	2	0	S0	3RA2327
10	10	25	25	3RE4142-8AA●□-◆◆Y0	3RE4142-8CA●□-◆◆Y0	3RE4142-8EA●□-◆◆Y0	2	0	S0	3RA2328
10	15	30	40	3RE4143-5AA●□-◆◆Y0	3RE4143-5CA●□-◆◆Y0	3RE4143-5EA●□-◆◆Y0	2	0	S2	3RA2335
15	15	40	50	3RE4143-6AA●□-◆◆Y0	3RE4143-6CA●□-◆◆Y0	3RE4143-6EA●□-◆◆Y0	2	0	S2	3RA2336
20	20	50	50	3RE4143-7AA●□-◆◆Y0	3RE4143-7CA●□-◆◆Y0	3RE4143-7EA●□-◆◆Y0	2	0	S2	3RA2337
20	25	50	60	3RE4143-8AA●□-◆◆Y0	3RE4143-8CA●□-◆◆Y0	3RE4143-8EA●□-◆◆Y0	2	0	S2	3RA2338

□
Thermal overload relay Class 10 = 1
Solid-state overload relay selectable Class = 5

□
1
5

□
1
5

Reversing Starter, 3-Phase, 3-Pole, Thermal or Solid-State Overload Relay, Large Enclosure

3-Phase Motor Hp Rating per UL				NEMA Type Enclosure (Large Size)			Unused Auxiliary Contacts		Frame Size	Contactor (for ref. only)
208 V	230 V	460 V	575 V	Type 1 General Purpose, Indoor only	Type 3/3R/4/12 Weatherproof, Watertight, Dust-tight	Type 4X 304 Stain. Steel Watertight, Dust-tight, Corrosion Resistant	NO	NC		
Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number	NO	NC	Frame Size	Contactor (for ref. only)
1.5	2	3	5	3RE4141-5BA●□-◆◆Y0	Not applicable — Standard enclosure includes extra mounting space for accessories.		2	2	S00	3RA2315
2	3	5	7.5	3RE4142-3BA●□-◆◆Y0			2	0	S0	3RA2323
3	3	7.5	10	3RE4142-4BA●□-◆◆Y0			2	0	S0	3RA2324
5	5	10	15	3RE4142-5BA●□-◆◆Y0			2	0	S0	3RA2325
7.5	7.5	15	20	3RE4142-6BA●□-◆◆Y0			2	0	S0	3RA2326
10	10	20	25	3RE4142-7BA●□-◆◆Y0			2	0	S0	3RA2327
10	10	25	25	3RE4142-8BA●□-◆◆Y0			2	0	S0	3RA2328

□
Thermal overload relay Class 10 = 1
Solid-state overload relay selectable Class = 5

① For 3-phase controllers, 208 - 600 V coils will be wired for incoming voltage. 24 and 120 V coils will be wired as separate source or control power transformer

secondary (if ordered). For single phase controllers, 120 and 240 V coils will be wired for incoming voltage. 24 V coils will be wired as separate source or control

power transformer secondary (if ordered). 277 - 600 V coils do not apply.

Enclosed IEC Controls

3RE4 Non-Reversing Contactor, 3-Pole (for both 1-Phase and 3-Phase)

Selection **NEW**



Ordering Information

- Replace the (●) with the code from the coil table on this page.
- For factory modifications, see page 4/81 – 4/83.
- For accessories, see page 4/84 – 4/85.
- For replacement parts, see page 4/85.
- For dimensions, see page 4/86.
- For wiring diagrams, see page 4/87 – 4/89.

Coil Selection (●)^①

Nominal Voltage	Code
24 VAC 50/60 Hz	1
24 VDC	2
110/120 VAC 50/60 Hz	3
208 VAC 50/60 Hz	4
220/240 VAC 50/60 Hz	5
277 VAC 60 Hz	6
480 VAC 60 Hz	7
600 VAC 60 Hz	8

4 COMBINATION STARTERS

Non-Reversing Contactor, 3-Pole (for both 1-Phase and 3-Phase), Standard Enclosure

1-Phase Motor Hp Rating per UL			3-Phase Motor Hp Rating per UL				NEMA Type Enclosure (Standard Size)			Unused Auxiliary Contacts		Frame Size	Contactor (for ref. only)
							Type 1 General Purpose, Indoor only	Type 3/3R/4/12 Weatherproof, Watertight, Dust-tight	Type 4X 304 Stain. Steel Watertight, Dust-tight, Corrosion Resistant				
115V	208V	230V	208V	230V	460V	575V	Catalog Number	Catalog Number	Catalog Number	NO	NC		
0.25	0.5	0.75	1.5	2	3	5	3RE4161-5AA●0-0YY0	3RE4161-5CA●0-0YY0	3RE4161-5EA●0-0YY0	1	0	S00	3RT2015
1	1	1	2	3	5	7.5	3RE4162-3AA●0-0YY0	3RE4162-3CA●0-0YY0	3RE4162-3EA●0-0YY0	1	1	S0	3RT2023
1	2	2	3	3	7.5	10	3RE4162-4AA●0-0YY0	3RE4162-4CA●0-0YY0	3RE4162-4EA●0-0YY0	1	1	S0	3RT2024
1	2	3	5	5	10	15	3RE4162-5AA●0-0YY0	3RE4162-5CA●0-0YY0	3RE4162-5EA●0-0YY0	1	1	S0	3RT2025
2	3	3	7.5	7.5	15	20	3RE4162-6AA●0-0YY0	3RE4162-6CA●0-0YY0	3RE4162-6EA●0-0YY0	1	1	S0	3RT2026
2	5	5	10	10	20	25	3RE4162-7AA●0-0YY0	3RE4162-7CA●0-0YY0	3RE4162-7EA●0-0YY0	1	1	S0	3RT2027
3	5	5	10	10	25	25	3RE4162-8AA●0-0YY0	3RE4162-8CA●0-0YY0	3RE4162-8EA●0-0YY0	1	1	S0	3RT2028
3	5	7.5	10	15	30	40	3RE4163-5AA●0-0YY0	3RE4163-5CA●0-0YY0	3RE4163-5EA●0-0YY0	1	1	S2	3RT2035
3	7	10	15	15	40	50	3RE4163-6AA●0-0YY0	3RE4163-6CA●0-0YY0	3RE4163-6EA●0-0YY0	1	1	S2	3RT2036
5	10	10	20	20	50	50	3RE4163-7AA●0-0YY0	3RE4163-7CA●0-0YY0	3RE4163-7EA●0-0YY0	1	1	S2	3RT2037
5	10	15	20	25	50	60	3RE4163-8AA●0-0YY0	3RE4163-8CA●0-0YY0	3RE4163-8EA●0-0YY0	1	1	S2	3RT2038

Non-Reversing Contactor, 3-Pole (for both 1-Phase and 3-Phase), Large Enclosure

1-Phase Motor Hp Rating per UL			3-Phase Motor Hp Rating per UL				NEMA Type Enclosure (Large Size)			Unused Auxiliary Contacts		Frame Size	Contactor (for ref. only)	
							Type 1 General Purpose, Indoor only	Type 3/3R/4/12 Weatherproof, Watertight, Dust-tight	Type 4X 304 Stain. Steel Watertight, Dust-tight, Corrosion Resistant					
115V	208V	230V	208V	230V	460V	575V	Catalog Number	Catalog Number	Catalog Number	NO	NC			
0.25	0.5	0.75	1.5	2	3	5	3RE4161-5BA●0-0YY0	Not applicable — Standard enclosure includes extra mounting space for accessories.			1	0	S00	3RT2015
1	1	1	2	3	5	7.5	3RE4162-3BA●0-0YY0				1	1	S0	3RT2023
1	2	2	3	3	7.5	10	3RE4162-4BA●0-0YY0				1	1	S0	3RT2024
1	2	3	5	5	10	15	3RE4162-5BA●0-0YY0				1	1	S0	3RT2025
2	3	3	7.5	7.5	15	20	3RE4162-6BA●0-0YY0				1	1	S0	3RT2026
2	5	5	10	10	20	25	3RE4162-7BA●0-0YY0				1	1	S0	3RT2027
3	5	5	10	10	25	25	3RE4162-8BA●0-0YY0				1	1	S0	3RT2028

① For 3-phase controllers, 208 - 600 V coils will be wired for incoming voltage. 24 and 120 V coils will be wired as separate source or control power transformer


secondary (if ordered). For single phase controllers, 120 and 240 V coils will be wired for incoming voltage. 24 V coils will be wired as separate source or control

power transformer secondary (if ordered). 277 - 600 V coils do not apply.

Enclosed IEC Controls

3RE4 Reversing Contactor, 3-Pole (for both 1-Phase and 3-Phase)

Selection **NEW**

	Ordering Information		Coil Selection (●) ^①	
	<ul style="list-style-type: none"> ► Replace the (●) with the code from the coil table on this page. ► For factory modifications, see page 4/81 – 4/83. ► For accessories, see page 4/84 – 4/85. ► For replacement parts, see page 4/85. ► For dimensions, see page 4/86. ► For wiring diagrams, see page 4/87 – 4/89. 		Nominal Voltage	Code
			24 VAC 50/60 Hz	1
			24 VDC	2
			110/120 VAC 50/60 Hz	3
			208 VAC 50/60 Hz	4
			220/240 VAC 50/60 Hz	5
			277 VAC 60 Hz	6
			480 VAC 60 Hz	7
			600 VAC 60 Hz	8

Reversing Contactor, 3-Pole (for both 1-Phase and 3-Phase), Standard Enclosure

1-Phase Motor Hp Rating per UL		3-Phase Motor Hp Rating per UL				NEMA Type Enclosure (Standard Size)			Unused Auxiliary Contacts		Frame Size	Contactor (for ref. only)
115V	230V	208V	230V	460V	575V	Type 1 General Purpose, Indoor only	Type 3/3R/4/12 Weatherproof, Watertight, Dust-tight	Type 4X 304 Stain. Steel Watertight, Dust-tight, Corrosion Resistant	NO	NC		
						Catalog Number	Catalog Number	Catalog Number				
0.25	0.75	1.5	2	3	5	3RE4181-5AA●0-0YY0	3RE4181-5CA●0-0YY0	3RE4181-5EA●0-0YY0	2	2	S00	3RA2315
1	1	2	3	5	7.5	3RE4182-3AA●0-0YY0	3RE4182-3CA●0-0YY0	3RE4182-3EA●0-0YY0	2	0	S0	3RA2323
1	2	3	3	7.5	10	3RE4182-4AA●0-0YY0	3RE4182-4CA●0-0YY0	3RE4182-4EA●0-0YY0	2	0	S0	3RA2324
1	3	5	5	10	15	3RE4182-5AA●0-0YY0	3RE4182-5CA●0-0YY0	3RE4182-5EA●0-0YY0	2	0	S0	3RA2325
2	3	7.5	7.5	15	20	3RE4182-6AA●0-0YY0	3RE4182-6CA●0-0YY0	3RE4182-6EA●0-0YY0	2	0	S0	3RA2326
2	5	10	10	20	25	3RE4182-7AA●0-0YY0	3RE4182-7CA●0-0YY0	3RE4182-7EA●0-0YY0	2	0	S0	3RA2327
3	5	10	10	25	25	3RE4182-8AA●0-0YY0	3RE4182-8CA●0-0YY0	3RE4182-8EA●0-0YY0	2	0	S0	3RA2328
3	7.5	10	15	30	40	3RE4183-5AA●0-0YY0	3RE4183-5CA●0-0YY0	3RE4183-5EA●0-0YY0	2	0	S2	3RA2335
3	10	15	15	40	50	3RE4183-6AA●0-0YY0	3RE4183-6CA●0-0YY0	3RE4183-6EA●0-0YY0	2	0	S2	3RA2336
5	10	20	20	50	50	3RE4183-7AA●0-0YY0	3RE4183-7CA●0-0YY0	3RE4183-7EA●0-0YY0	2	0	S2	3RA2337
5	15	20	25	50	60	3RE4183-8AA●0-0YY0	3RE4183-8CA●0-0YY0	3RE4183-8EA●0-0YY0	2	0	S2	3RA2338

Reversing Contactor, 3-Pole (for both 1-Phase and 3-Phase), Large Enclosure

1-Phase Motor Hp Rating per UL		3-Phase Motor Hp Rating per UL				NEMA Type Enclosure (Large Size)			Unused Auxiliary Contacts		Frame Size	Contactor (for ref. only)
115V	230V	208V	230V	460V	575V	Type 1 General Purpose, Indoor only	Type 3/3R/4/12 Weatherproof, Watertight, Dust-tight	Type 4X 304 Stain. Steel Watertight, Dust-tight, Corrosion Resistant	NO	NC		
						Catalog Number	Catalog Number	Catalog Number				
0.25	0.75	1.5	2	3	5	3RE4181-5BA●0-0YY0	Not applicable — Standard enclosure includes extra mounting space for accessories.		2	2	S00	3RA2315
1	1	2	3	5	7.5	3RE4182-3BA●0-0YY0			2	0	S0	3RA2323
1	2	3	3	7.5	10	3RE4182-4BA●0-0YY0			2	0	S0	3RA2324
1	3	5	5	10	15	3RE4182-5BA●0-0YY0			2	0	S0	3RA2325
2	3	7.5	7.5	15	20	3RE4182-6BA●0-0YY0			2	0	S0	3RA2326
2	5	10	10	20	25	3RE4182-7BA●0-0YY0			2	0	S0	3RA2327
3	5	10	10	25	25	3RE4182-8BA●0-0YY0			2	0	S0	3RA2328

① For 3-phase controllers, 208 - 600 V coils will be wired for incoming voltage. 24 and 120 V coils will be wired as separate source or control power transformer


secondary (if ordered). For single phase controllers, 120 and 240 V coils will be wired for incoming voltage. 24 V coils will be wired as separate source or control

power transformer secondary (if ordered). 277 - 600 V coils do not apply.

Selection Tables for 3RE4 Overload Relays

Selection **NEW**

Selection Tables for 3RE4 Overload Relays

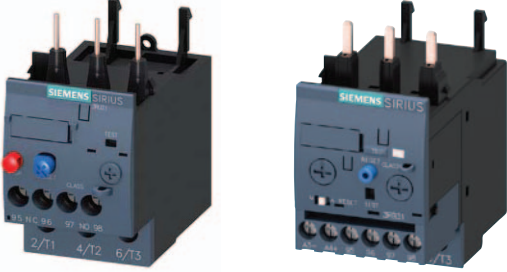

Thermal Overload Relay

Solid-State Overload Relay

Selection Information

► Replace the (♦♦) within the incomplete 3RE4 catalog number with a code selected from the tables below. The frame size must match that of the 3RE4 product.

Thermal Overload Relays, Trip Class 10, Single and Three Phase

Features and technical characteristics:

- Phase failure sensitivity
- Includes NC trip contact and NO alarm contact
- Manual and automatic RESET (selectable)
- Switch position indicator
- TEST function
- STOP button
- Sealable cover (optional)
- Screw-type terminals

Current Adjustment Range (Amp)	Code ♦♦	Thermal Overload Relay (reference only)
Frame Size S00		
0.7 - 1	0J	3RU2116-0JB0
0.9 - 1.25	0K	3RU2116-0KB0
1.1 - 1.6	1A	3RU2116-1AB0
1.4 - 2	1B	3RU2116-1BB0
1.8 - 2.5	1C	3RU2116-1CB0
2.2 - 3.2	1D	3RU2116-1DB0
2.8 - 4	1E	3RU2116-1EB0
3.5 - 5	1F	3RU2116-1FB0
4.5 - 6.3	1G	3RU2116-1GB0
5.5 - 8	1H	3RU2116-1HB0
7 - 10	1J	3RU2116-1JB0
9 - 12.5	1K	3RU2116-1KB0
11 - 16	4A	3RU2116-4AB0

Current Adjustment Range (Amp)	Code ♦♦	Thermal Overload Relay (reference only)
Frame Size S0		
1.8 - 2.5	1C	3RU2126-1CB0
2.2 - 3.2	1D	3RU2126-1DB0
2.8 - 4	1E	3RU2126-1EB0
3.5 - 5	1F	3RU2126-1FB0
4.5 - 6.3	1G	3RU2126-1GB0
5.5 - 8	1H	3RU2126-1HB0
7 - 10	1J	3RU2126-1JB0
9 - 12.5	1K	3RU2126-1KB0
11 - 16	4A	3RU2126-4AB0
14 - 20	4B	3RU2126-4BB0
17 - 22	4C	3RU2126-4CB0
20 - 25	4D	3RU2126-4DB0
23 - 28	4N	3RU2126-4NB0
27 - 32	4E	3RU2126-4EB0
30 - 36	4P	3RU2126-4PB0
34 - 40	4F	3RU2126-4FB0

Current Adjustment Range (Amp)	Code ♦♦	Thermal Overload Relay (reference only)
Frame Size S2		
22 - 32	4E	3RU2136-4EB0
28 - 40	4F	3RU2136-4FB0
36 - 45	4G	3RU2136-4GB0
40 - 50	4H	3RU2136-4HB0
47 - 57	4Q	3RU2136-4QB0
54 - 65	4J	3RU2136-4JB0
62 - 73	4K	3RU2136-4KB0
70 - 80	4R	3RU2136-4RB0

Solid-State Overload Relays, Selectable Trip Class 5, 10, 20 and 30, Three Phase Only

Features and technical characteristics:

- Overload, phase failure and unbalance protection
- Internal ground fault detection (selectable)
- Internal power supply
- Includes NC trip contact and NO alarm contact
- Manual and automatic RESET (selectable)
- Electrical remote RESET integrated
- Switch position indicator
- TEST function and self-monitoring
- Sealable cover (optional)
- Screw-type terminals

Current Adjustment Range (Amp)	Code ♦♦	Solid-State Overload Relay (reference only)
Frame Size S00		
0.32 - 1.25	4N	3RB3113-4NB0
1 - 4	4P	3RB3113-4PB0
3 - 12	4S	3RB3113-4SB0
4 - 16	4T	3RB3113-4TB0

Current Adjustment Range (Amp)	Code ♦♦	Solid-State Overload Relay (reference only)
Frame Size S0		
0.32 - 1.25	4N	3RB3123-4NB0
1 - 4	4P	3RB3123-4PB0
3 - 12	4S	3RB3123-4SB0
6 - 25	4Q	3RB3123-4QB0
10 - 40	4V	3RB3123-4VB0

Current Adjustment Range (Amp)	Code ♦♦	Solid-State Overload Relay (reference only)
Frame Size S2		
12 - 50	4U	3RB3133-4UB0
20 - 80	4W	3RB3133-4WB0

Selection Information

- ▶ These tables apply to 3RE4 products.
- ▶ Replace the last two characters of the 3RE4 catalog number (Y0), with a code selected from the tables below.

Start-Stop Push Button Combinations

Description	Code (Y0)	Restrictions
(No modifications included)	Y0	—
Start-Stop Push Buttons	B0	1
Start-Stop Push Buttons, Red On Pilot Light	B1	1
Start-Stop Push Buttons, Red On Pilot Light, Green Off Pilot Light	B2	1
Start-Stop Push Buttons, CPT Std Capacity ^① 208:120V	B3	1, 2 and 4
Start-Stop Push Buttons, CPT Std Capacity ^① 208:120V, Red On Pilot Light	B4	1, 2 and 4
Start-Stop Push Buttons, CPT Std Capacity ^① 208:120V, Red On Pilot Light, Green Off Pilot Light	B5	1, 2 and 4
Start-Stop Push Buttons, CPT Std Capacity ^① 208:24V	B6	1, 3 and 4
Start-Stop Push Buttons, CPT Std Capacity ^① 208:24V, Red On Pilot Light	B7	1, 3 and 4
Start-Stop Push Buttons, CPT Std Capacity ^① 208:24V, Red On Pilot Light, Green Off Pilot Light	B8	1, 3 and 4
Start-Stop Push Buttons, CPT Std Capacity ^① 240:120V	C0	1 and 2
Start-Stop Push Buttons, CPT Std Capacity ^① 240:120V, Red On Pilot Light	C1	1 and 2
Start-Stop Push Buttons, CPT Std Capacity ^① 240:120V, Red On Pilot Light, Green Off Pilot Light	C2	1 and 2
Start-Stop Push Buttons, CPT Std Capacity ^① 240:24V	C3	1 and 3
Start-Stop Push Buttons, CPT Std Capacity ^① 240:24V, Red On Pilot Light	C4	1 and 3
Start-Stop Push Buttons, CPT Std Capacity ^① 240:24V, Red On Pilot Light, Green Off Pilot Light	C5	1 and 3
Start-Stop Push Buttons, CPT Std Capacity ^① 480/240:120V	C6	1, 2 and 4
Start-Stop Push Buttons, CPT Std Capacity ^① 480/240:120V, Red On Pilot Light	C7	1, 2 and 4
Start-Stop Push Buttons, CPT Std Capacity ^① 480/240:120V, Red On Pilot Light, Green Off Pilot Light	C8	1, 2 and 4
Start-Stop Push Buttons, CPT Std Capacity ^① 480/240:24V	D0	1, 3 and 4
Start-Stop Push Buttons, CPT Std Capacity ^① 480/240:24V, Red On Pilot Light	D1	1, 3 and 4
Start-Stop Push Buttons, CPT Std Capacity ^① 480/240:24V, Red On Pilot Light, Green Off Pilot Light	D2	1, 3 and 4

Fwd-Rev-Stop Push Button Combinations

Description	Code (Y0)	Restrictions
(No modifications included)	Y0	—
Fwd-Rev-Stop Push Buttons	D3	5
Fwd-Rev-Stop Push Buttons, Red On Pilot Light	D4	5
Fwd-Rev-Stop Push Buttons, Red On Pilot Light, Green Off Pilot Light	D5	5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 208:120V	D6	2, 4 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 208:120V, Red On Pilot Light	D7	2, 4 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 208:120V, Red On Pilot Light, Green Off Pilot Light	D8	2, 4 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 208:24V	E0	3, 4 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 208:24V, Red On Pilot Light	E1	3, 4 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 208:24V, Red On Pilot Light, Green Off Pilot Light	E2	3, 4 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 240:120V	E3	2 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 240:120V, Red On Pilot Light	E4	2 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 240:120V, Red On Pilot Light, Green Off Pilot Light	E5	2 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 240:24V	E6	3 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 240:24V, Red On Pilot Light	E7	3 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 240:24V, Red On Pilot Light, Green Off Pilot Light	E8	3 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 480/240:120V	F0	2, 4 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 480/240:120V, Red On Pilot Light	F1	2, 4 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 480/240:120V, Red On Pilot Light, Green Off Pilot Light	F2	2, 4 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 480/240:24V	F3	3, 4 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 480/240:24V, Red On Pilot Light	F4	3, 4 and 5
Fwd-Rev-Stop Push Buttons, CPT Std Capacity ^① 480/240:24V, Red On Pilot Light, Green Off Pilot Light	F5	3, 4 and 5

Restrictions:

1. Valid only with non-reversing controllers.
2. Valid only with 120 V coil.
3. Valid only with 24 VAC coil.
4. Not valid with single-phase controllers.
5. Not valid in NEMA Type 1 enclosures.

① A CPT in a NEMA type 1 enclosure with a size S00 or S0 controller requires a large size enclosure. A CPT in a NEMA type 1 enclosure with a size S2 controller requires a standard size enclosure. All other enclosure types may be standard size.

Selection Information

- ▶ These tables apply to 3RE4 products.
- ▶ Replace the last two characters of the 3RE4 catalog number (Y0), with a code selected from the tables below.

Hand-Off-Auto Selector Switch Combinations

Description	Code (Y0)	Restrictions
(No modifications included)	Y0	—
Hand-Off-Auto Selector Switch	F6	1
Hand-Off-Auto Selector Switch, Red On Pilot Light	F7	1
Hand-Off-Auto Selector Switch, Red On Pilot Light, Green Off Pilot Light	F8	1
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 208:120V	G0	1, 2 and 4
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 208:120V, Red On Pilot Light	G1	1, 2 and 4
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 208:120V, Red On Pilot Light, Green Off Pilot Light	G2	1, 2 and 4
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 208:24V	G3	1, 3 and 4
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 208:24V, Red On Pilot Light	G4	1, 3 and 4
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 208:24V, Red On Pilot Light, Green Off Pilot Light	G5	1, 3 and 4
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 240:120V	G6	1 and 2
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 240:120V, Red On Pilot Light	G7	1 and 2
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 240:120V, Red On Pilot Light, Green Off Pilot Light	G8	1 and 2
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 240:24V	H0	1 and 3
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 240:24V, Red On Pilot Light	H1	1 and 3
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 240:24V, Red On Pilot Light, Green Off Pilot Light	H2	1 and 3
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 480/240:120V	H3	1, 2 and 4
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 480/240:120V, Red On Pilot Light	H4	1, 2 and 4
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 480/240:120V, Red On Pilot Light, Green Off Pilot Light	H5	1, 2 and 4
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 480/240:24V	H6	1, 3 and 4
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 480/240:24V, Red On Pilot Light	H7	1, 3 and 4
Hand-Off-Auto Selector Switch, CPT Std Capacity ^① 480/240:24V, Red On Pilot Light, Green Off Pilot Light	H8	1, 3 and 4

On-Off Selector Switch Combinations

Description	Code (Y0)	Restrictions
(No modifications included)	Y0	—
On-Off Selector Switch	J0	1
On-Off Selector Switch, Red On Pilot Light	J1	1
On-Off Selector Switch, Red On Pilot Light, Green Off Pilot Light	J2	1
On-Off Selector Switch, CPT Std Capacity ^① 208:120V	J3	1, 2 and 4
On-Off Selector Switch, CPT Std Capacity ^① 208:120V, Red On Pilot Light	J4	1, 2 and 4
On-Off Selector Switch, CPT Std Capacity ^① 208:120V, Red On Pilot Light, Green Off Pilot Light	J5	1, 2 and 4
On-Off Selector Switch, CPT Std Capacity ^① 208:24V	J6	1, 3 and 4
On-Off Selector Switch, CPT Std Capacity ^① 208:24V, Red On Pilot Light	J7	1, 3 and 4
On-Off Selector Switch, CPT Std Capacity ^① 208:24V, Red On Pilot Light, Green Off Pilot Light	J8	1, 3 and 4
On-Off Selector Switch, CPT Std Capacity ^① 240:120V	K0	1 and 2
On-Off Selector Switch, CPT Std Capacity ^① 240:120V, Red On Pilot Light	K1	1 and 2
On-Off Selector Switch, CPT Std Capacity ^① 240:120V, Red On Pilot Light, Green Off Pilot Light	K2	1 and 2
On-Off Selector Switch, CPT Std Capacity ^① 240:24V	K3	1 and 3
On-Off Selector Switch, CPT Std Capacity ^① 240:24V, Red On Pilot Light	K4	1 and 3
On-Off Selector Switch, CPT Std Capacity ^① 240:24V, Red On Pilot Light, Green Off Pilot Light	K5	1 and 3
On-Off Selector Switch, CPT Std Capacity ^① 480/240:120V	K6	1, 2 and 4
On-Off Selector Switch, CPT Std Capacity ^① 480/240:120V, Red On Pilot Light	K7	1, 2 and 4
On-Off Selector Switch, CPT Std Capacity ^① 480/240:120V, Red On Pilot Light, Green Off Pilot Light	K8	1, 2 and 4
On-Off Selector Switch, CPT Std Capacity ^① 480/240:24V	L0	1, 3 and 4
On-Off Selector Switch, CPT Std Capacity ^① 480/240:24V, Red On Pilot Light	L1	1, 3 and 4
On-Off Selector Switch, CPT Std Capacity ^① 480/240:24V, Red On Pilot Light, Green Off Pilot Light	L2	1, 3 and 4

Restrictions:

1. Valid only with non-reversing controllers.
2. Valid only with 120 V coil.
3. Valid only with 24 VAC coil.
4. Not valid with single-phase controllers.

^① A CPT in a NEMA type 1 enclosure with a size S00 or S0 controller requires a large size enclosure. A CPT in a NEMA type 1 enclosure with a size S2 controller requires a standard size enclosure. All other enclosure types may be standard size.

Selection Information

- These tables apply to 3RE4 products.
- Replace the last two characters of the 3RE4 catalog number (Y0), with a code selected from the tables below.

Fwd-Off-Rev Selector Switch Combinations


Description	Code (Y0)	Restrictions
(No modifications included)	Y0	—
Fwd-Off-Rev Selector Switch	L3	—
Fwd-Off-Rev Selector Switch, Red On Pilot Light	L4	—
Fwd-Off-Rev Selector Switch, Red On Pilot Light, Green Off Pilot Light	L5	—
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 208:120V	L6	1 and 3
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 208:120V, Red On Pilot Light	L7	1 and 3
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 208:120V, Red On Pilot Light, Green Off Pilot Light	L8	1 and 3
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 208:24V	M0	2 and 3
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 208:24V, Red On Pilot Light	M1	2 and 3
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 208:24V, Red On Pilot Light, Green Off Pilot Light	M2	2 and 3
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 240:120V	M3	1
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 240:120V, Red On Pilot Light	M4	1
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 240:120V, Red On Pilot Light, Green Off Pilot Light	M5	1
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 240:24V	M6	2
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 240:24V, Red On Pilot Light	M7	2
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 240:24V, Red On Pilot Light, Green Off Pilot Light	M8	2
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 480/240:120V	N0	1 and 3
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 480/240:120V, Red On Pilot Light	N1	1 and 3
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 480/240:120V, Red On Pilot Light, Green Off Pilot Light	N2	1 and 3
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 480/240:24V	N3	2 and 3
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 480/240:24V, Red On Pilot Light	N4	2 and 3
Fwd-Off-Rev Selector Switch, CPT Std Capacity ^① 480/240:24V, Red On Pilot Light, Green Off Pilot Light	N5	2 and 3

Restrictions:






1. Valid only with 120 V coil.
2. Valid only with 24 VAC coil.
3. Not valid with single-phase controllers.

^① A CPT in a NEMA type 1 enclosure with a size S00 or S0 controller requires a large size enclosure. A CPT in a NEMA type 1 enclosure with a size S2 controller requires a standard size enclosure. All other enclosure types may be standard size.


Pilot Devices

	Device ^①	Enclosure NEMA Type	Catalog Number
	Start-Stop Push Buttons, momentary ^②	1	49SDPB5
		3/3R/4/12 & 4X	49SDP05
	Fwd-Rev-Stop Push Buttons, momentary ^②	1	NA
		3/3R/4/12 & 4X	49SDP02
	Hand-Off-Auto Selector Switch	1	49SDSBJ
		3/3R/4/12 & 4X	49SDS01
	On-Off Selector Switch	1	49SDSB4
		3/3R/4/12 & 4X	49SDS04
	Fwd-Off-Rev Selector Switch	1	49SDSBJ
		3/3R/4/12 & 4X	49SDS02

Pilot Lights

	Device ^①	Enclosure NEMA Type	Voltage	Catalog Number
	Light module and lens color: RED, GREEN, and AMBER. Legends include: ON, RUN, OFF ^③ , OLR TRIPPED ^④	1	24 to 240 V AC/DC	49SDLBU
			277 V AC	49SDLBL
	Red FORWARD, Red REVERSE	1	24 to 240 V AC/DC	49SDLB7RU
			277 V AC	49SDLB7RL
		3/3R/4/12 & 4X 3/3R/4/12 & 4X	24 to 240 V AC/DC	49SDL07RU
			277 V AC	49SDL07RL
	Green FORWARD, Green REVERSE	1	24 to 240 V AC/DC	49SDLB7GU
			277 V AC	49SDLB7GL
		3/3R/4/12 & 4X 3/3R/4/12 & 4X	24 to 240 V AC/DC	49SDL07GU
			277 V AC	49SDL07GL
	Red ON	3/3R/4/12 & 4X 3/3R/4/12 & 4X	24 to 240 V AC/DC	49SDL0BRU
	Red OFF ^③	3/3R/4/12 & 4X 3/3R/4/12 & 4X	24 to 240 V AC/DC	49SDL0BRL
			277 V AC	49SDL0ARU
	Green ON	3/3R/4/12 & 4X 3/3R/4/12 & 4X	24 to 240 V AC/DC	49SDL0BGU
			277 V AC	49SDL0BGL
	Green OFF ^③	3/3R/4/12 & 4X 3/3R/4/12 & 4X	24 to 240 V AC/DC	49SDL0AGU
			277 V AC	49SDL0AGL

Auxiliary Contacts

	Device	Frame Size	Catalog Number
	1 NO & 1 NC laterally mounted, screw terminals	S00	3RH2911-1DA11
		S0 and S2	3RH2921-1DA11
	2 NO laterally mounted, screw terminals	S00	NA
		S0 and S2	3RH2921-1DA20
	2 NC laterally mounted, screw terminals	S00	3RH2911-1DA02
		S0 and S2	3RH2921-1DA02


③ 3SU 22 mm devices. Pilot lights include LED bulbs.

④ Each contactor must have a normally open (NO) auxiliary contact available for seal-in circuit. Order separately as needed.


⑤ To use as an OFF indicator, the contactor must have a normally closed (NC) auxiliary contact available for the circuit. Order separately as needed.

⑥ To use as an overload relay (OLR) trip indicator, the OLR must have a normally open (NO) auxiliary contact available for the circuit.


Control Power Transformers^①

	Device	Frame Size	Catalog Number	Transformer Table		
				Primary Volts	Secondary Volts	Code
	45 VA, 1-secondary fuse	S00	KT*050	120	24	1
	75 VA, 2-primary and 1-secondary fuses	S0 & S2	KT*075	208	24	G
				208	120	H
				240/480	24	4
				240/480	120	8
				277	24	5
				277	120	7
				600	24	6
				600	120	9
	▶ Replace * with code from Transformer Table. ▶ 45VA CPT does not require primary fuses per NEC.					


Control Relays and Timers^{①②}

	Device	Catalog Number	Coil Voltage Table	
			Voltage	Code
	Control relay, 4 NO / 0 NC	3RH2140-1●●●●0	24 VAC 50/60 Hz	AB0
	Control relay, 3 NO / 1 NC	3RH2131-1●●●●0	24 VDC	BB4
	Control relay, 2 NO / 2 NC	3RH2122-1●●●●0	110/120 VAC 50/60 Hz	AK6
	ON-delay timer, 0.05 sec. – 100 hr., 24 – 240V AC/DC	3RP2525-1BW30	208 VAC 50/60 Hz	AM2
	OFF-delay timer, 0.05 sec. – 100 hr., 24 – 240V AC/DC	3RP2535-1AW30	220/240 VAC 50/60 Hz	AP6
			277 VAC 60 Hz	—
			480 VAC 60 Hz	AV6
			600 VAC 60 Hz	—
	▶ Replace ●●● with code from Coil Voltage Table. ▶ Relays and timers include screw terminals.			


Miscellaneous

	Device	Catalog Number
	1-pole fuse block for control circuit, 600V / 30A, DIN rail mounted, CC fuses (not included)	3NW7513-0HG
	2-pole fuse block for control circuit, 600V / 30A, DIN rail mounted, CC fuses (not included)	3NW7523-0HG
	Ground Lug, 3 Conductor, 2-14 AWG AL/CU Wire	75D28182001
	Terminal block, 1-point unwired, DIN rail mounted, 6mm, 26A ^②	8WA1011DF11
	End retainer for DIN rail ^②	8WA1808
	DIN rail kit, 35mm x 5 in, for mounting optional accessories ^①	MTR5
	Sealable cover for rotary dial on overload relay (10 per package)	3RV29 08-0P

Replacement Parts

	Device	Catalog Number
	Contactors parts (Obtain Cat. No. from device and refer to Industrial Control Catalog).	—
	Overload relay (Obtain Cat. No. from device and refer to Industrial Control Catalog).	—
	Overload Relay Reset Operator for all NEMA Type enclosures	49MBRS

Enclosure Kits

	Controller Frame Size & Type NR = Non-Reversing R = Reversing	Type 1	Type 1	Type 3/3R/4/12	Type 4X 304 S.S.
		Standard Size	Large Size ^⑤	Standard Size ^⑥	Standard Size ^⑥
		Catalog Number	Catalog Number	Catalog Number	Catalog Number
	S00 NR, S0 NR	49EC14EB110705R	49EC14GB140807R ^③	49EFN121006XRX	49EFW121006XRX
	S00 R, S0 R	49EC14GB140807R ^③	49EC14IB201208R ^④	49EFN121006XRX	49EFW121006XRX
	S2 NR, S2 R	49EC14IB201208R ^{④⑤}	—	49EFN141208XRX	49EFW141208XRX

① The accessory in a NEMA type 1 enclosure requires a large size enclosure. All other enclosure types may be standard size.
 ② Requires DIN rail kit or equivalent.

③ Enclosure 49EC14GB140807R requires mounting adaptor plate 49EFA070500XXA which is sold separately.
 ④ Enclosure 49EC14IB201208R requires mounting adaptor plate 49EFA060800XXA which is sold separately.

⑤ These large enclosures are required for certain accessories as indicated in the Field Modification pages.
 ⑥ These standard size enclosures include extra mounting space for accessories.

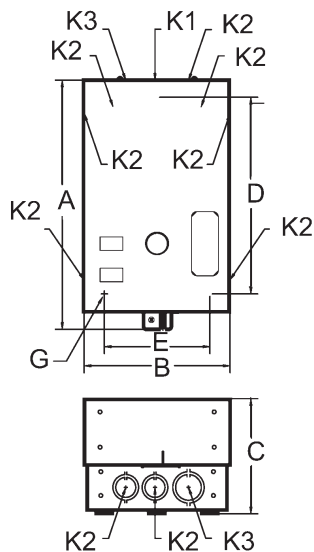


Figure 1

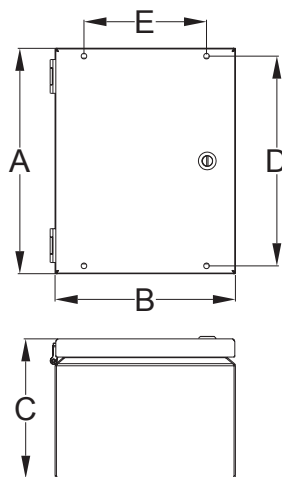


Figure 2

3RE4 Non-Combination Type Controllers


Enclosure Type	Contactor Rating	Fig.	Outline Dimensions			Mounting		Conduit Size		
			A	B	C	D	E	K1	K2	K3
1 (standard size)	S00 NR, S0 NR	1	10.97	6.41	5.03	8.22	4.62	0.5	0.50-0.75	0.75-1
	S00 R, S0 R	1	13.53	7.97	6.38	10.25	6.00	0.50-0.75	0.75-1	1-1.25
	S2 NR, S2 R	1	19.12	11.38	7.69	15.62	8.25	0.50-0.75	1-1.25	1.5-2
1 (large size)	S00 NR, S0 NR	1	13.53	7.97	6.38	10.25	6.00	0.50-0.75	0.75-1	1-1.25
	S00 R, S0 R	1	19.12	11.38	7.69	15.62	8.25	0.50-0.75	1-1.25	1.5-2
3/3R/4/12 & 4X 304 SS	S00 NR, S00 R, S0 NR, S0 R	2	12.00	10.00	6.00	11.30	7.44	—	—	—
	S2 NR, S2 R	2	14.00	12.00	8.00	13.30	9.44	—	—	—

Sxx = Frame size; NR = Non-reversing; R = Reversing


Mounting screw G is 0.25".

Dimensions are in inches.


Non-combination non-reversing starter, 1-phase, 2-pole

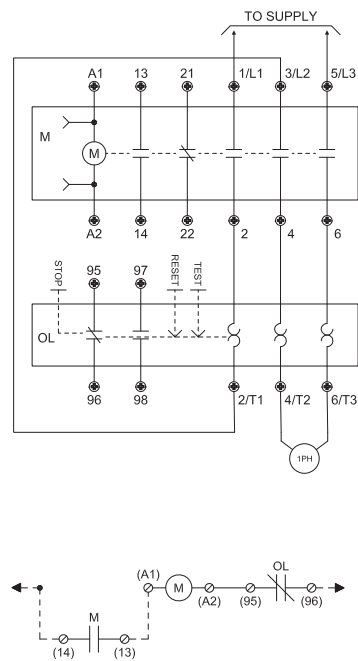


Non-combination non-reversing starter, 3-phase, 3-pole

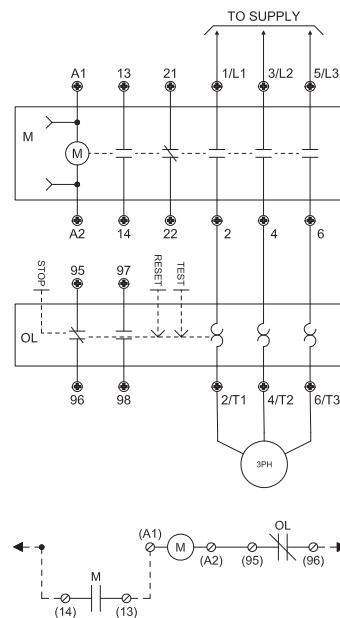



Non-combination reversing starter, 3-phase, 3-pole

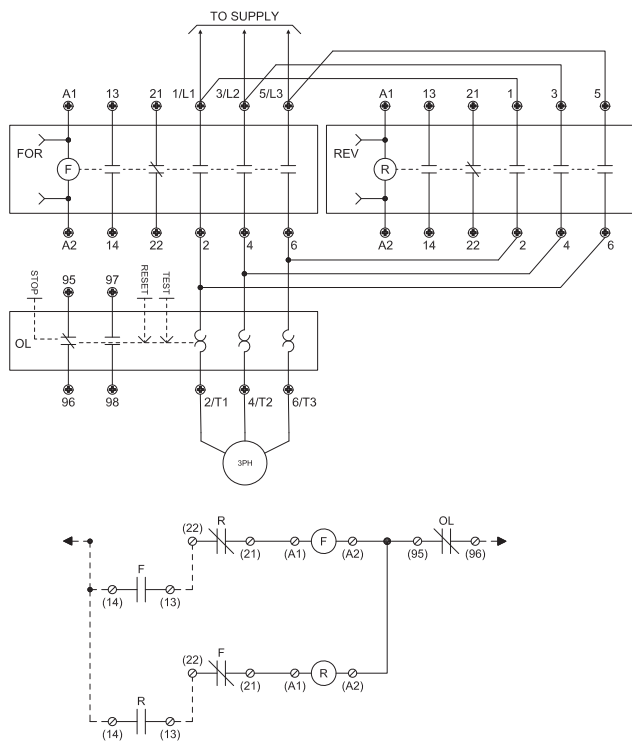



Non-combination non-reversing contactor, 1-phase, 2-pole

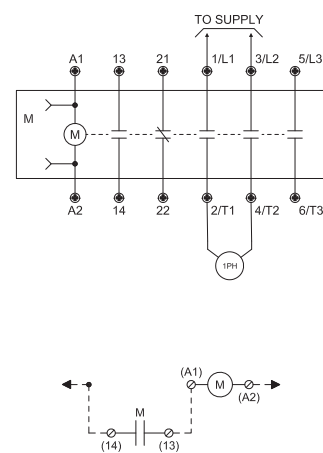



**Non-combination non-reversing
contactor, 3-phase, 3-pole**























**Non-combination reversing contactor,
1-phase, 3-wire, 2-pole**

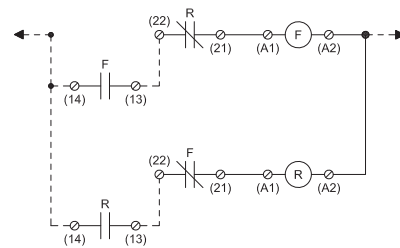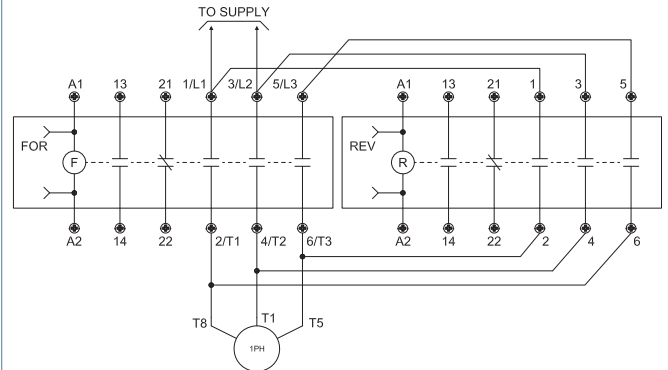

**Non-combination reversing contactor,
3-phase, 3-pole**

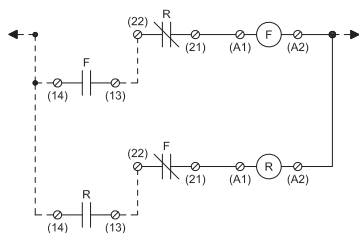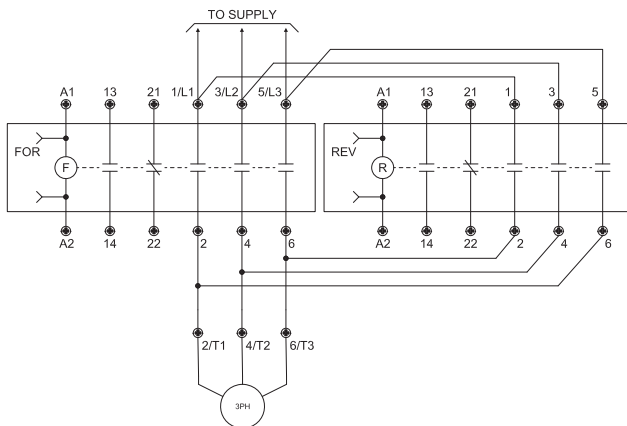

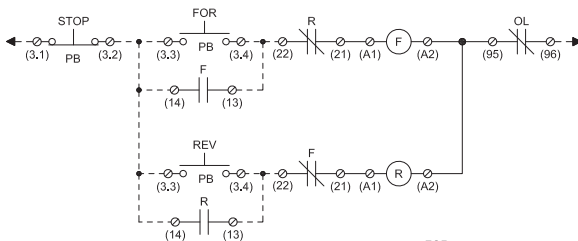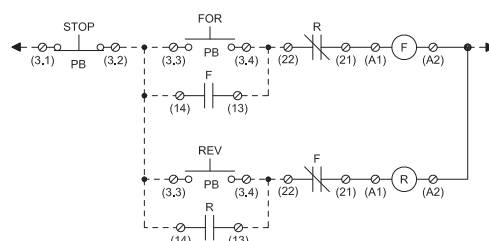[illegible]

Enclosed IEC Controls
3RE4 IEC Controllers

Notes

4

COMBINATION
STARTERS