

SIEMENS 3 Phase Outdoor Load Center

Catalog Number **W2442B3150CU** Series **A** Enclosure Type **3R**

RATINGS:
 150A MAXIMUM - SEE MAIN BREAKER RATING.
 240/120 V ~, 3Ø 4W DELTA
 208Y/120 V ~, 3Ø 4W
 240 V ~, 3Ø 3W

WHEN USED ON A 240/120 V ~, 3 PHASE, 4 WIRE DELTA SYSTEM, THE CENTER BUS MUST BE CONNECTED TO THE PHASE HAVING THE HIGHEST VOLTAGE TO GROUND. ALL BREAKERS CONNECTED TO THIS BUS MUST BE RATED 240 V ~. WHEN USED ON A 240 V ~, 3 PHASE, 3 WIRE SYSTEM, ALL BREAKERS MUST BE RATED 240 V ~.

FOR INSTALLATION BY A QUALIFIED PERSON IN ACCORDANCE WITH ALL LOCAL ELECTRICAL CODES AND/OR THE NATIONAL ELECTRICAL CODE®.

SUITABLE FOR USE AS SERVICE EQUIPMENT. WHEN USED AS SERVICE EQUIPMENT, APPLY "SERVICE DISCONNECT" LABEL TO FRONT NEXT TO MAIN BREAKER HANDLE.

WHEN USED AS SERVICE EQUIPMENT, UNUSED NEUTRAL BAR TERMINALS MAY BE USED TO TERMINATE EQUIPMENT GROUNDING WIRES IN THE COMBINATIONS INDICATED FOR EQUIPMENT GROUND BAR TERMINALS.

REMOVE TWISTOUTS FROM TRIM ONLY WHERE BREAKERS WILL BE INSTALLED. ALL OPENING MUST BE FILLED WITH BREAKERS OR FILLER PLATES.

TO RESET BREAKERS WITH TRIPPED HANDLE POSITION BETWEEN "ON" AND "OFF", MOVE HANDLE TO "OFF" THEN TO "ON".

SUM OF QT BREAKER RATING IS NOT TO EXCEED 110 AMPS PER BRANCH CIRCUIT BUS STAB.

USE COPPER OR ALUMINUM 60°/75°C WIRE

| TERMINALS | WIRE | TORQUE |
|---|--------------------------------------|--|
| A, B, C | SEE MARKING ON BREAKER | |
| N | 250 KCMIL - 4 AWG | 340 LB-INS |
| G | 2/0 - 4 AWG | 45 LB-INS |
| NEUTRAL/GROUND (USE TYPE "ECGB" GROUND BAR KIT ACCESSORY) | 14-10 AWG 8 AWG 6 AWG 4 AWG | 20 LB-INS 25 LB-INS 35 LB-INS 45 LB-INS |
| GRD CONDUCTORS ONLY | (2) or (3) 14 AWG (2) 12-10 AWG | 20 LB-INS |
| ECLK1-2 (ACCESSORY) | 2/0-2 AWG | 45 LB-INS |
| ECLK2 (ACCESSORY) | 2/0-4 AWG | 135 LB-INS |
| ECLK3 (ACCESSORY) | 300 KCMIL - 1 AWG | 340 LB-INS |
| BRANCH BREAKERS | SEE MARKING ON BREAKER | |
| TYPE "ECLK" SUBFEED LUG KIT | SEE MARKING ON LUG KIT | |

| ACCESSORIES | |
|------------------------|----------------------------------|
| DESCRIPTION | CAT. NO. |
| INS. NEUTRAL TIE STRAP | ECINTS |
| MAIN BREAKER RETAINER | ECMBR1 |
| FILLER PLATE | ECQF3 |
| SUBFEED LUG KIT | ECLK2125 ECLK2150 ECLK3150 |


| CONDUIT HUBS | |
|--------------|----------|
| TRADE SIZE | CAT. NO. |
| 1-1/4 INCH | ECHS125 |
| 1-1/2 INCH | ECHS150 |
| 2 INCH | ECHS200 |
| 2-1/2 INCH | ECHS250 |

SHORT CIRCUIT CURRENT RATING THIS PANELBOARD HAS A MAXIMUM SHORT CIRCUIT CURRENT RATING OF 10,000 AMPS RMS SYMMETRICAL, 240 V~ WITH SIEMENS TYPE QJ2 MAIN BREAKER INSTALLED AND WHEN USED WITH SIEMENS TYPE QP, QT, QPH, HQP, QPF, QPHF, QAF, QE, QEH AND QAFH CIRCUIT BREAKERS. ANY CIRCUIT BREAKER INSTALLED, REPLACED, OR ADDED IN THIS PANELBOARD MUST BE MANUFACTURED BY SIEMENS AND MUST BE ONE OF THE ABOVE TYPES. USE OF OTHER CIRCUIT BREAKERS IN THIS EQUIPMENT WILL VOID THE WARRANTY.

Assembled in Mexico
 © The National Electrical Code is a registered trademark of the National Fire Protection Association.
 © 2007 Copyright Siemens Energy & Automation, Inc.

Siemens Energy & Automation, Inc. Alpharetta, Georgia U.S.A. **J2** 4094934 Rev.B

IMPORTANT: DO NOT ALLOW PETROLEUM BASED (HYDROCARBON) SPRAYS, CHEMICALS, SOLVENTS OR ANY PAINT TO CONTACT INTERIOR COMPONENTS. PETROLEUM BASED CHEMICALS CAN CAUSE DEGRADATION OF ELECTRICAL INSULATING MATERIALS.

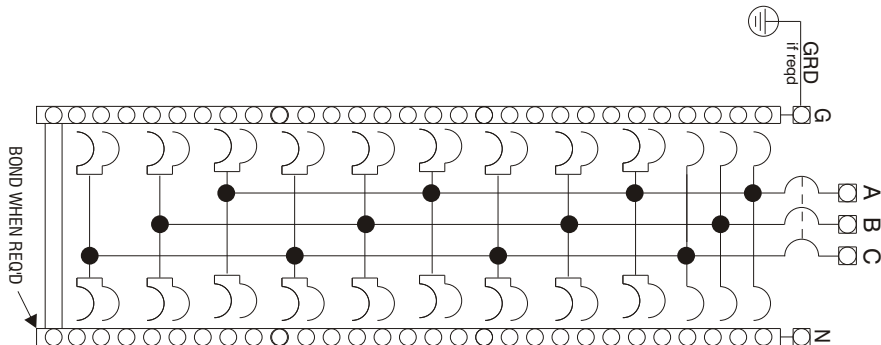

| | | |
|---|--|---|
| ⚠ DANGER | | ⚠ PELIGRO |
| Hazardous Voltage. Will cause death, serious injury or substantial property damage. | | Voltaje peligroso. Causará la muerte, lesiones graves o daño substancial a la propiedad. |
| Turn off power supplying this equipment before working inside. | | Desconecte el suministro de energía a este equipo antes de trabajar en su interior. |