

Contents

Distribution Switchboards (Type SB1, SB2, SB3)	11-2
SB Switchboard Replacement Information, Accessories & Modifications	11-5
Type SMP	
Construction Details Features	11-7
Features	11-8
Specification	11-13
SMP Switchboard Replacement Information, Accessories & Modifications	11-15
Type FCI, FCII	
Construction Details Features	11-16
Features	11-18
Specifications	11-20
FCI, FCII Switchboard Replacement Information, Accessories & Modifications	11-23
Protective Devices	
Fusible Switches	11-25
HCP Disconnect Switches	11-26
Metering Data	11-27
Type IPS - Integrated Power Systems Switchboard	
Features	11-28
Embedded Micro Metering Module (SEM3)	11-30

Distribution Switchboards

Type SB1, SB2 and SB3

General

11

SWITCHBOARDS

Product Description

Siemens modular front connected switchboard design provides a broad range of features and capabilities for a wide range of applications.

Every aspect of design of Siemens switchboards has been aimed at improving layout convenience, reducing installation costs and minimizing the impact and cost of changes to the system.

Siemens switchboards provide a rugged design and the flexibility necessary in electrical systems for all types of applications, some examples are:

- Commercial buildings
- Industrial plants
- Retail chain stores
- Health care facilities
- Hi-rise complexes



Front Connected Distribution Switchboard (Type SB2)

Features & Benefits

Features

- Up to 4000 ampere main bus rating
- Up to 600 volts AC
- Bus bracing up to 100KAIC
- Tin plated aluminum bus, silver plated copper bus or tin plated copper bus
- Bussing can be temperature or density rated
- Type 1, Type 2, Sprinkler Proof and Type 3R enclosures
- Main and branch circuit breakers and fusible switches
- Thermal magnetic and solid state circuit breakers
- Surge protective devices
- Customer metering
- Utility metering provisions
- Ground fault protection on mains and distribution devices
- Busway and transformer connections
- Power monitoring on mains and branches

Service Sections

Typical switchboards require one or more service main disconnects that feed one or more distribution sections. Service sections can be fed from overhead or underground, occasionally underground applications require that a pull section to be added to the switchboard lineup.

Distribution Sections

All switchboard distribution sections can accommodate any combination of panel mounted or individually mounted circuit breakers or fusible switches. This modularity allows future system modifications to be made without adding switchboard sections.

Front Accessibility

All Siemens switchboards are rear aligned and front accessible, enabling switchboards to be placed against a wall, while minimizing floor space requirements. Switchboards are standard rear aligned to minimize floor space requirements but can be front and rear aligned as an option.

Rear Accessibility

Rear access is available as an option for when bus maintenance and cable entry and exit require access to the rear of the switchboard.

Distribution Switchboards

Type SB1, SB2 and SB3

Selection

Features & Benefits (continued)

Protective Devices

Thermal magnetic molded case circuit breakers can be supplied from 15 to 1200 amperes. Solid state (electronic) molded case circuit breakers are available from 30 to 1200 amperes. The solid state trip units provide finite trip setting adjustment, Modbus and Profibus communication along with many other features.

WL circuit breakers can be provided from 200 to 4000 amperes with solid state trip units.

For fusible applications VB and VK fusible switches can be supplied as branch devices.

Power Monitoring

Power monitoring can be accomplished in both service and distribution sections with a wide array of power monitoring products. Digital and analog meters can be applied as well as branch circuit monitoring devices for tenant sub-billing or cost allocation applications. See section 8 of the Power Product Catalogue for further information on power monitoring devices.

Surge Protective Devices

Siemens surge protective devices can be applied in switchboards to improve the electrical system's protection, safety and reliability. These devices can be applied in customer metering compartments in main service sections or can be panel mounted in auxiliary compartments in distribution sections. See section 9 of the Power Product Catalogue for further information on surge protection devices.

Arc Flash Mitigation

Many arc flash mitigating features can be incorporated into switchboards. The WL breaker can be provided with Dynamic Arc Flash Sentry to allow for safer device settings when personnel are working near the switchboard. Also, breaker shutters, remote racking devices and infrared scanning windows can be supplied to further protect personnel from potential arc flash hazards.

Busway and Transformer Connections

Busway and transformer incoming and outgoing connections can be provided in switchboards. For busway connections to the switchboard, bussing is provided up to where the busway enters the switchboard. Also, a cutout for the busway is provided to allow for quick connection of the switchboard to the busway. For transformer connections, flex connectors are supplied for close coupling the switchboard to the secondary side of the unit substation.

Standards and Certifications

- UL891 (cUL)
- NEMA PB-2
- Seismically qualified
- CSA C22.2 No. 244

Additional Information

For complete application and pricing information contact your local Siemens sales office.

For detailed configuration information consult the selection and application guide on the website.



**Front Connected Distribution
Switchboard (Type SB2)**

Distribution Switchboards

Type SB1, SB2 and SB3

General

11

SWITCHBOARDS

Individual Product lines

SB1 Switchboards

Siemens SB1 switchboards have been specifically designed for applications where floor space is at a premium. The rear of all sections align so the switchboard can be installed against a wall. SB1 switchboards can contain main and branch protective devices and through bus ratings up to 2000 amperes and 600 Volts AC.

SB2 Switchboards

Siemens SB2 switchboards have been designed to be able to incorporate additional features. SB2 switchboards can have extra depth behind the bussing in each distribution section, can be front and rear aligned and can handle up to 4000 amperes and 600 Volts AC. These switchboards may also include insulated case circuit breakers, solid state molded case circuit breakers and density rated bussing.

SB3 Switchboards

Siemens SB3 switchboards are designed for custom options. SB3 switchboards can incorporate custom busway & transformer connections, rear access, all types of utility metering provisions and many other options. No matter your need, Siemens SB3 switchboards can provide a solution.

SB1 Switchboards

Available Features	Device Usage	Device Type	Ampere Rating	Mounting
<ul style="list-style-type: none"> Individual or panel mounted mains Individual or panel mounted branches Thermal magnetic MCCBs 2000A maximum main bus Front accessible Rear Aligned Standard Utility Metering Position Customer metering: digital & analog meters 65KAIC interruption rating 65C Copper and Aluminum bussing Type 1, Type 2, Sprinkler Proof and Type 3R enclosures 	Main	Molded Case Circuit Breakers (MCCB)	400 - 1200	Panel / Individual
	Branch	Molded Case Circuit Breakers (MCCB) Fusible Switches (VB and VK)	15 - 1200 30 - 600	Panel Panel

SB2 Switchboards

Available Features	Device Usage	Device Type	Ampere Rating	Mounting
<ul style="list-style-type: none"> All SB1 options 4000A maximum main bus Electronic trip unit (solid state) MCCBs Density rated copper and aluminum bussing 100KAIC interruption rating Standard Maintenance Mode DAS (Dynamic Arc Sentry) 	Main	All SB1 main devices WL Insulated Case Circuit Breakers (WL)	Up to 4000	Individual
	Branch	All SB1 branch devices WL Insulated Case Circuit Breakers (WL)	Up to 4000	Individual

SB3 Switchboards


Available Features	Device Usage	Device Type	Ampere Rating	Mounting
<ul style="list-style-type: none"> All SB1 & SB2 options 4000A maximum main bus 200KAIC interruption rating Rear accessible Custom busway and transformer connections Additional special options and configurations 	Main	All SB1 & SB2 main devices WL Insulated Case Circuit Breakers (WL)	Up to 4000	Individual
	Branch	All SB1 & SB2 branch devices WL Insulated Case Circuit Breakers (WL)	Up to 4000	Individual

SB Switchboard Replacement Parts & Modification Kits


Replacement Information, Accessories & Modifications

Selection

Field Installed Provisions

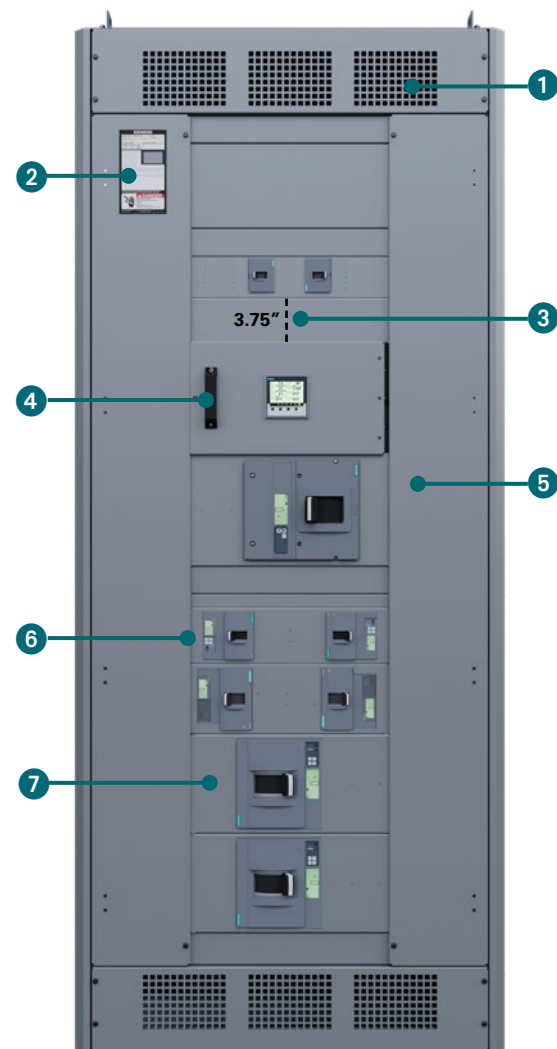

- ① Vented Cover
- ② Main Rating Label
- ③ Open Unit Space (3.75")
- ④ Auxiliary Compartment
- ⑤ Gutter Cover
- ⑥ Twin Mounted Breakers
- ⑦ Single Mounted Breaker

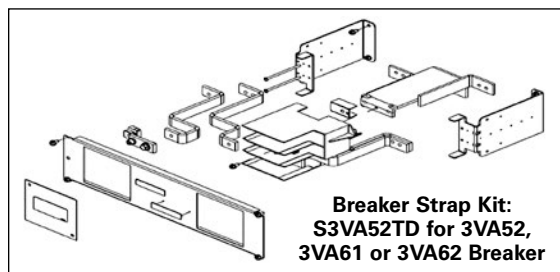

For inches / millimeters conversion, see conversion table

- Ⓢ High Density Kit, requires 7.5" Unit Space to fit QTY (6) 2 Pole breakers
- Ⓢ Includes qty 1 kit #S3VA52PR
- Ⓢ Includes qty 1 kit #S3VA53PR

*S3VA41TD strap kit can also accommodate xGB2 breakers, reference Installation Instructions.

Connection Strap Kits - Circuit Breaker

Siemens offers strap kits to field install molded case circuit breakers in existing switchboard distribution sections with available Unit Space. Unit Space represents the amount of vertical height required to mount each breaker. Strap kits are unique to specific breaker frame size and/or trip unit type (thermal magnetic or electronic trip).

The connecting kits below are for use with SB1, SB2, SB3.

Information Required When Selecting Strap Kits and Blank Plates:

1. How much available Unit Space is in the Switchboard?
2. What breaker frame is being installed?
3. Are blank plates required? To calculate the size of the blank plate required, use the following formula: Available Unit Space - Connection Strap Kit Height = Height of Blank Plates. Reference Blank Plate table 17, page 11-21.

Example: A Customer needs to add two 125 Amp, 3VA41 circuit breakers to an existing Switchboard.

- The section on the right has an available 3.75 inches of available Unit Space (the cover marked by bullet #3).
- Referencing the Connection Strap Kit table below, 3.75 inches of Unit Space is required to mount two 3VA41 breakers. #S3VA41TD is the appropriate strap kit.
- 3VA41 takes up exactly 3.75 inches of Unit Space thus no further blank plate is required.

Max Amp Rating	Breaker Family	Breaker Type	Catalog Number	Unit Space Hgt (in.)	Min. Section Width	Mounting
100	General	BQD	SBLBD	3.75	32	Twin
125	3VA	3VA41	S3VA41TD	3.75	32	Twin
	3VA	3VA41	S3VA41TDHD	7.50	32	Twin, High Density
	General	ED	SE6D	3.75	32	Twin
	General	CED	SCED	3.75	32	Twin
	General	QR	SQRD	5.00	32	Twin
150	3VA	3VA61	S3VA52TD [Ⓢ]	5.00	32	Twin
225	General	QR	SQRD	5.00	32	Twin
	3VA	3VA52, 3VA62	S3VA52TD [Ⓢ]	5.00	32	Twin
	Sentron	FD	SF6D	5.00	32	Twin
	Sentron	CFD	SCFD	5.00	32	Single
	Sentron	SCJD	SSCJD	8.75	32	Single
400	3VA	3VA53, 3VA63	S3VA53TD [Ⓢ]	6.25	32	Single
	3VA	3VA53, 3VA63	S3VA53T2D	6.25	38	Twin
	Sentron	JD	SJ1D	8.75	32	Single
	Sentron	JD	SJ2D	8.75	38	Twin
	Sentron	CJD	SCJD	8.75	32	Single
	Sentron	SJD	SSJ1D	8.75	32	Single
	Sentron	SCJD	SSCJD	8.75	32	Single
	3VA	3VA54, 3VA64	S3VA54TD [Ⓢ]	6.25	32	Single
	3VA	3VA54, 3VA64	S3VA54T2D	6.25	46	Twin
	Sentron	LD	SL6D	8.75	32	Single
600	Sentron	CLD	SCLD	8.75	32	Single
	Sentron	SLD	SSL6D	8.75	32	Single
	Sentron	SCLD	SSCLD	8.75	32	Single
	3VA	3VA55, 3VA65	S3VA55TD	8.75	32	Single
	Sentron	LMD	SLM1D	8.75	32	Single
	Sentron	MD, CMD	SMND	10.00	32	Single
	Sentron	SMD	SSMND	10.00	32	Single
	3VA	3VA66	S3VA55TD	8.75	38	Single
	3VA	3VA57, 3VA67	S3VA57TD	10.00	38	Single
	Sentron	ND	SMND	10.00	38	Single
1000	Sentron	SND	SSMND	10.00	38	Single
	Sentron	SND	SSMND	10.00	38	Single

SB Switchboard Replacement Parts & Modification Kits

Replacement Information, Accessories & Modifications

Selection

11

SWITCHBOARDS

Factory Installed Provisions

Hardware Kits (Provision Kits)

Additional hardware may be necessary when installing a breaker on factory-provisioned configurations for 3VA52, 3VA61, and 3VA62 twin mount breakers, as well as 3VA5/3VA6 400A & 600A single mount breakers.

Catalog Number	Breaker Type	Description
S3VA52PR	Twin mount 3VA52, 3VA61 or 3VA62 Breakers	These kits include (3) Bus Extensions, (3) 3VA5 Nut Keepers, (3) 3VA6 Nut Keepers and hardware
S3VA53PR	Single mount 3VA53, 3VA63, 3VA54 or 3VA64 Breakers	

Switchboards with **ship date in June 2021 or later** require one of the following Nut Keeper kits:

Catalogue Number	Description
3VA9233-0QA00	3VA52 250A Nut Keeper Kit (3)
3VA9243-0QA00	3VA61/62 150A/250A Nut Keeper Kit (3)
3VA9473-0QA00	3VA5, 3VA6 400A/600A Nut Keeper Kit (3)

Blank Plates - Circuit Breaker & Fusible Switch^①

For use with SB1, SB2, SB3, SB4, FCI, FCII switchboards or series 5 or 6 VB and CDP panelboards.

Unit Height (Inches)	Catalogue Number
1.25	6FPB01
2.5	6FPB02
3.75	6FPB03
5	6FPB05
10	6FPB10

Filler Plates^①

For use with cUL, SB1, SB2, SB3, SB4, FCI, FCII, CDP-6 & VB-6 switchboards or series 5 or 6 CDP circuit breaker panelboards.


Breaker Frame	Filler Plate Catalog Number	Notes
BL, BQD, ED, xGB, xGB2	DFFP1	Per Pole

Note: When a front filler plate is not completely filled with breakers, the openings in the unused space must be closed with 1-pole filler plates from table.

Cover Plates

For use with SB1, SB2, SB3, SB4, FCI, FCII, CDP-6 & VB-6 switchboards or series 5 or 6 CDP circuit breaker panelboards.

Breaker Type	Catalog Number
QR	SQRC^②

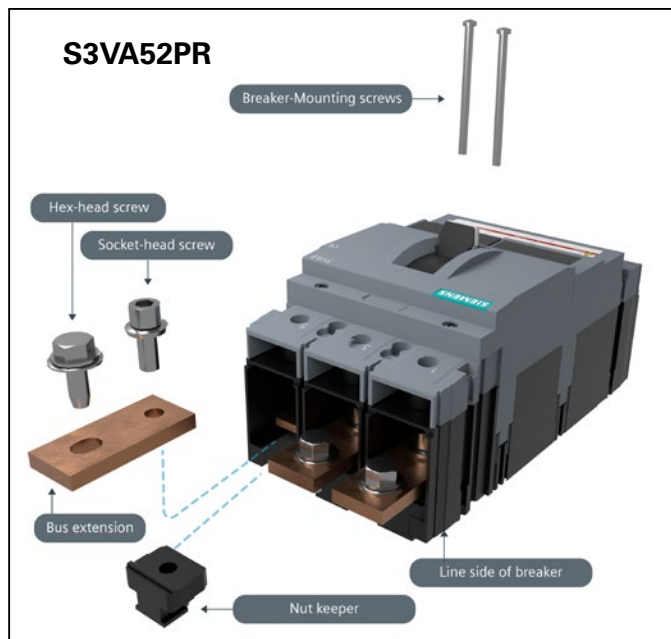

3VA Padlocking and Handle Blocking Devices — Padlocks in "OFF", Handle Blocking in either the "ON" or "OFF" position

Breaker Type	Amp.	Handle Block	Padlocking Device
3VA52	250A	3VA93780LB10	3VA91380LB11
3VA53	400A	3VA93780LB10	3VA93380LB11
3VA54	600A	3VA93780LB10	3VA93380LB11
3VA55	800A	N/A	3VA95780LB10
3VA57	1200A	3VA98770LB10	3VA98770LB11
3VA61	150A	3VA93780LB10	3VA91380LB11
3VA62	250A	3VA93780LB10	3VA91380LB11
3VA63	400A	3VA93780LB10	3VA93380LB11
3VA64	600A	3VA93780LB10	3VA93380LB11
3VA65	800A	N/A	3VA95780LB10
3VA66	1000A	N/A	3VA95780LB10
3VA67	1200A	3VA98770LB10	3VA98770LB11

^① Consult sales office for availability

^② To replace a QJ with a QR only a new cover is needed up to 225A.

Sentron® SMP Switchboards

Construction Details

Simplified system design.

A typical SMP switchboard consists of a floor mounted, wall supported service section, and a distribution section. The wireway can also be added where required by the local utility or if additional cable termination space is required.

Wireways are modular to allow flexibility.

The wireway is available in 2 depths to suit customer needs. Wireway has split front doors as standard with optional hinged doors. The lug pads are standard NEMA hole pattern and accept up to 5 mechanical lugs or 6 compression lugs.

90°C rated wireway.

The termination temperature for main incoming cables can be sized at 90°C for bussed pull sections.

Service Entrance Sections house a variety of equipment.

▪ *Service Entrance Sections.*

Service sections can be fed directly from overhead by cable.

Service entrance sections equipped for bottom feed will accept cable from underground directly into the service section.

▪ *Utility Metering*

In addition to the main device, the service section contains utility metering provisions. "Cold" metering provisions (CT's on the load side of the main device) are furnished. The CT's are provided by the utility company. The compartment will be built to utility company standards, with hinged doors and provisions for utility metering equipment.

▪ *User Metering*

The service section provides space for the Siemens Digital Meter with remote display, and its associated components.

▪ *Main protective device*

The MCCB is mounted individually so that it can be located quickly in an emergency. SMP switchboards will accommodate different types of main circuit breakers. Selection depends on the characteristics of your individual electrical system.

Distribution Sections have ample wiring room and front accessibility.

Generous top or bottom gutters have been created by locating the bus-link in the top or bottom of the distribution section, so there's ample room to run cables into the distribution section and make connections.

Standard bolted covers allow complete access to load conductors. Future flexibility comes standard in the Siemens SMP switchboard. The distribution section can accommodate any combination of panel mounted devices, including MCCBs and fusible disconnect switches.

Operating temperatures are in accordance with CSA Standards

Bus bars are available in standard tin-finished aluminum or optional silver-finished copper. Standard bus is sized on the basis of heat rise criteria, in accordance with CSA C22.2 #31. All bus bars are sized to limit heat rise to 65°C above an ambient temperature of 40°C.

Construction


Bus-Link Connections are accessible from the front.

The Bus-Link can be bolted from the front of the switchboard. Each bus-link is attached by grade five bolts to assure solid joints between sections, and to maintain full bus ampacity through the joint.

To make installation and servicing of the bus-link easier, all phase and neutral busses are stacked one above the other.

Cable Terminals

Screw mechanical connectors (lugs) are provided as standard equipment.

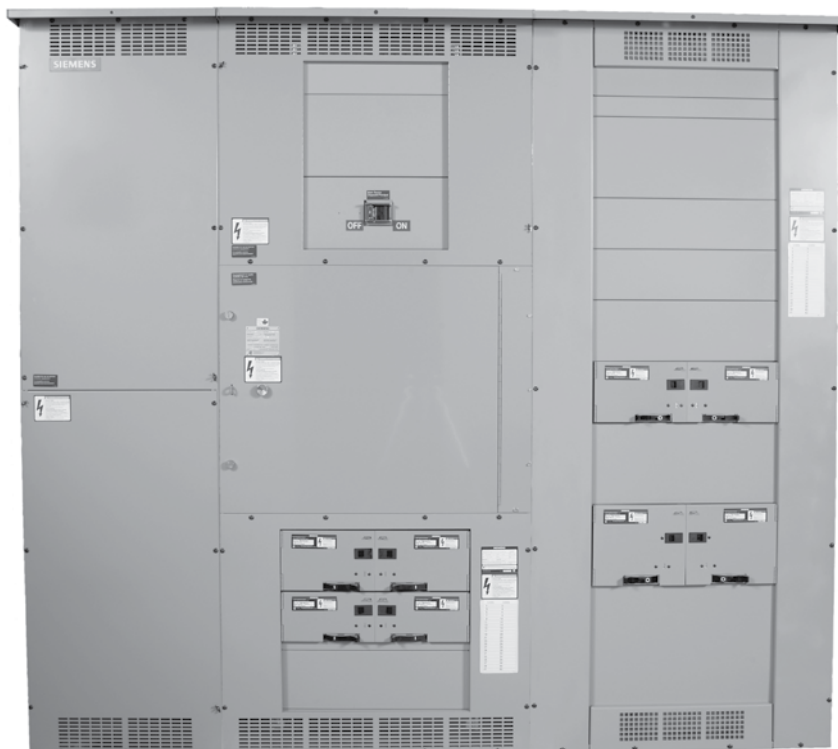

Sentron® SMP Switchboards

Power and Distribution

General

SMP Switchboard Introduction

Whether the design is for a 240V AC, 400 ampere system; a 600V AC, 1200 A ampere system; or something in between, Siemens Sentron Switchboards should be considered. Every aspect of design has been aimed at improving layout convenience, reducing installation costs, and minimizing the impact and cost of system changes. These switchboards provide the space saving construction and service flexibility necessary in systems for light industrial plants, retail strip malls, and commercial buildings.

Service entrance sections of the SMP accepts a wide range of Sentron Molded Case Circuit Breakers as main disconnect devices.

The SMP switchboard is designed for special configurations. It can be equipped with incoming and outgoing cable/conduit connections, supplied with metering and other special features.

The distribution sections of all Sentron Switchboards are designed with improved wiring space and greater accessibility. They're also designed for easier installation and maintenance. Conveniently located bus-link without compromising useful wiring gutter space, and standard bolted gutter covers offer complete access to load conductors. Front accessibility to bus and protective devices makes adding or replacing circuit breakers or switches quick and easy.

SMP Switchboard Features and Ratings

- **Main bus** rated up to 1200 ampere.
- Rear of all sections aligned so that switchboard can be floor mounted and secured against the wall.
- Front connected and front accessible.
- **Main devices** – individually mounted.
Molded Case Breaker: 400-1200 amps.
- **Branch Devices** – panel mounted.
Molded Case Breaker: 15–1200 amps fixed.
Quick-Make Quick-Break Fusible Switch: 30 - 600A

600 Volts AC Maximum

1200 Ampere Mains

1200 Ampere Maximum Branch

CSA Short Circuit Rating —

65,000A IR Maximum

CSA Certified To: CAN/CSA-22.2 No. 31-18

CSA Certificate No. 70172996

SMP Specifications (Table 1)

SMP Switchboard	
Enclosure Type	Type 1 Type 2 (dripproof & sprinklerproof) Optional: Dripshield
Dimensions Main or Distribution Wireway	38" W x 90" H x 12.75" Dp 24" W x 90" H x 12.75" Dp or 25.5" Dp
Volts	600V Max
Amperes	400-1200A
Bus Type	Aluminum (tin plated) Copper (silver finished) optional
Bus Bracing	50 KA 65 KA (optional)
Interrupting Capacity	50 KA 65 KA (optional)
Entry	Cable only (top or bottom)
Main Device	MCCB 400-1200A ▪ 80% Rated ▪ 100% Rated (option)
Branch Devices (Unit Space)	52.5" in Main with Distribution Section, or 22.5" in MUD Section, or 60" in Distribution Section
Metering Devices	Siemens Digital Metering with Remote Display SEM3 Embedded Metering
Other Options	SPD Units Sill Channels (1.5") Lifting Hooks

Main and Distribution Section Dimensions (Table 2)

Switchboard Type	Access	Dimensions - Inches (mm)		
		H	W	D
SMP	Front	90" (2286)	38" (965)	12.75" (324)



© Only available as a Wireway.

Sentron® SMP Switchboards

Power and Distribution

Selection

Protective Devices - Molded Case Circuit Breakers

Standard

Breakers are designed for commercial, industrial, institutional and other heavy duty applications. They are rated up to 600V AC and 250V DC. Their interrupting ratings are higher than normal duty breakers.

High Interrupting

Breakers are designed for heavy duty applications where the interrupting requirements exceed the ratings of heavy duty breakers. They are rated up to 600V AC.


Current Limiting

Molded case breakers incorporate the exclusive I-TE blow-apart interruption principle. They meet the CSA requirements for current-limiting breakers. Current-limiting circuit breakers can limit the let-through I^2t to a value less than the I^2t of one-half cycle wave of the symmetrical prospective current without any fusible elements when operating within their current-limiting range.

Main Breaker Selection (Table 3)

Amperage Rating	Breaker Type	Trip Type	Maximum Interrupting Rating (kA)			Available Trip Values
			240V	480V	600V	
400	JXD6	Thermal Magnetic	65	35	25	200, 225, 250, 300, 350, 400
	JD6		65	35	25	200, 225, 250, 300, 350, 400
	HJD6		100	65	35	200, 225, 250, 300, 350, 400
	HHJD6		200	100	50	200, 225, 250, 300, 350, 400
	CJD6		200	150	100	200, 225, 250, 300, 350, 400
	SJD6	Electronic (Solid State)	65	35	25	200, 300, 400
	SHJD6		100	65	35	200, 300, 400
	SCJD6		200	150	100	200, 300, 400
600	LXD6	Thermal Magnetic	65	35	25	450, 500, 600
	LD6		65	35	25	250, 300, 350, 400, 450, 500, 600
	HLD6		100	65	35	250, 300, 350, 400, 450, 500, 600
	HHLD6		200	100	50	250, 300, 350, 400, 450, 500, 600
	CLD6		200	150	100	450, 500, 600
	SLD6	Electronic (Solid State)	65	35	25	300, 400, 500, 600
	SHLD6		100	65	35	300, 400, 500, 600
	SCLD6		200	150	100	300, 400, 500, 600
800	MXD6	Thermal Magnetic	65	50	25	500, 600, 700, 800
	MD6		65	50	25	500, 600, 700, 800
	HMD6		100	65	50	500, 600, 700, 800
	CMD6		200	100	65	500, 600, 700, 800
	SMD6	Electronic (Solid State)	65	50	25	600, 700, 800
	SHMD6		100	65	50	600, 700, 800
	SCMD6		200	100	65	600, 700, 800
1200	NXD6	Thermal Magnetic	65	50	25	800, 900, 1000, 1200
	ND6		65	50	25	800, 900, 1000, 1200
	HND6		100	65	50	800, 900, 1000, 1200
	CND6		200	100	65	800, 900, 1000, 1200
	SND6	Electronic (Solid State)	65	50	25	800, 1000, 1200
	SHND6		100	65	50	800, 1000, 1200
	SCND6		200	100	65	800, 1000, 1200

Branch Breaker Gutter Dimensions For 38"W Distribution Section (Table 5)

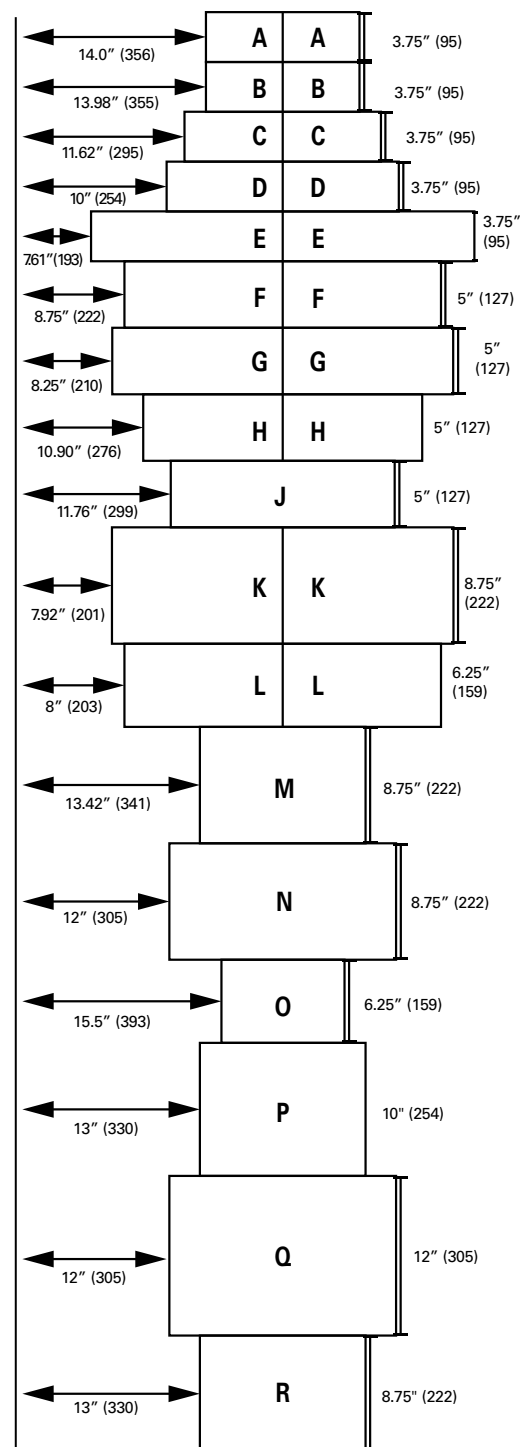

Sentron® SMP Switchboards

Power and Distribution

Selection

Branch Circuit Breaker Selection^① (Table 4)

Breaker Frame Rating	Trip Type	Breaker Type	Poles	Trip Amperage	Mounting Height Inches (mm)			Max IC Rating (kA)			
					Single	Twin	Gutter®	240V	480V	600V	
100	Thermal Magnetic	BL	1, 2, 3	15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100	—	3.75 (95)②③	14 (356)	10	—	—	
		BLH	1, 2, 3	15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100	—	3.75 (95)②③	14 (356)	22	—	—	
		HBL	1, 2, 3	15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100	—	3.75 (95)②③	14 (356)	65	—	—	
		BQD6④	1, 2, 3	15, 20, 30, 40, 50, 60, 70	—	3.75 (95)②③	14 (356)	65	—	10	
	Ground Fault Circuit Interrupter	BLE (GFCI)	1, 2	15, 20, 30, 40, 50, 60	—	3.75 (95)②	14 (356)	10	—	—	
		BLF (GFCI)	1, 2	15, 20, 30, 40, 50, 60	—	3.75 (95)②	14 (356)	10	—	—	
		BLHF (GFCI)	1, 2	15, 20, 30, 40, 50, 60	—	3.75 (95)②	14 (356)	22	—	—	
	Arc Fault Circuit Interrupter	BAF (AFCI)	1	15, 20	—	3.75 (95)②	14 (356)	10	—	—	
		BAFH (AFCI)	1	15, 20	—	3.75 (95)②	14 (356)	22	—	—	
	Thermal Magnetic	ED2	1, 2, 3	15, 20, 30, 35, 40, 50, 60, 70, 80, 90, 100	3.75 (95)②③	3.75 (95)②③	10 (254)	10	—	—	
		ED4	1, 2, 3	15, 20, 30, 35, 40, 50, 60, 70, 80, 90, 100, 110, 125	3.75 (95)②③	3.75 (95)②③	10 (254)	65	18	—	
		ED6	1, 2, 3	15, 20, 30, 35, 40, 50, 60, 70, 80, 90, 100, 110, 125	3.75 (95)②③	3.75 (95)②③	10 (254)	100	18	18	
		HED4	1, 2, 3	15, 20, 30, 35, 40, 50, 60, 70, 80, 90, 100, 110, 125	3.75 (95)②③	3.75 (95)②③	10 (254)	100	65	30	
CED6		2, 3	15, 20, 30, 35, 40, 50, 60, 70, 80, 90, 100, 110, 125	3.75 (95)③	3.75 (95)③	7.61 (193)	200	200	100		
NGB2		1, 2, 3	15, 20, 25, 30, 35, 40, 50, 60, 70, 80, 90, 100, 110, 125	3.75 (95)②③	3.75 (95)②③	13.98 (355)	100	25	14		
HGB2		1, 2, 3	15, 20, 25, 30, 35, 40, 50, 60, 70, 80, 90, 100, 110, 125	3.75 (95)②③	3.75 (95)②③	13.98 (355)	100	35	22		
LGB2		1, 2, 3	15, 20, 25, 30, 35, 40, 50, 60, 70, 80, 90, 100, 110, 125	3.75 (95)②③	3.75 (95)②③	13.98 (355)	100	65	25		
3VA41 (SEAB)		1, 2, 3	15, 20, 25, 30, 35, 40, 45, 50, 60, 70, 80, 90, 100, 110, 125	3.75 (95)	3.75 (95)	13.98 (355)	65	25	14		
3VA41 (MEAB)		1, 2, 3	15, 20, 25, 30, 35, 40, 45, 50, 60, 70, 80, 90, 100, 110, 125	3.75 (95)	3.75 (95)	13.98 (355)	85	35	18		
3VA41 (HEAB)		1, 2, 3	15, 20, 25, 30, 35, 40, 45, 50, 60, 70, 80, 90, 100, 110, 125	3.75 (95)	3.75 (95)	13.98 (355)	150	65	25		
150		Electronic (Solid State)	3VA61 (MDAE)	3	40, 100, 150	5 (127)	5 (127)	9.59 (244)	100	35	18
			3VA61 (HDAE)	3	40, 100, 150	5 (127)	5 (127)	9.59 (244)	100	65	22
	3VA61 (CDAE)		3	40, 100, 150	5 (127)	5 (127)	9.59 (244)	200	100	35	
	3VA61 (LDAE)		3	40, 100, 150	5 (127)	5 (127)	9.59 (244)	200	150	50	
225	Thermal Magnetic	QR2	2, 3	100, 110, 125, 150, 175, 200, 225	5 (127)	5 (127)	8.75 (222)	10	—	—	
		QRH2	2, 3	100, 110, 125, 150, 175, 200, 225	5 (127)	5 (127)	8.75 (222)	25	—	—	
		HQR2	2, 3	100, 110, 125, 150, 175, 200, 225	5 (127)	5 (127)	8.75 (222)	65	—	—	
		HQR2H	2, 3	100, 110, 125, 150, 175, 200, 225	5 (127)	5 (127)	8.75 (222)	100	—	—	
250	Thermal Magnetic	FXD6, FD6	2, 3	70, 80, 90, 100, 110, 125, 150, 175, 200, 225, 250	5 (127)	5 (127)	8.25 (210)	65	35	22	
		HFD6	2, 3	70, 80, 90, 100, 110, 125, 150, 175, 200, 225, 250	5 (127)	5 (127)	8.25 (210)	100	65	25	
		CFD6	2, 3	70, 80, 90, 100, 110, 125, 150, 175, 200, 225, 250	—	5 (127)	11.76 (299)	200	200	100	
		3VA52 (MFAS)	2, 3	40, 45, 50, 60, 70, 80, 90, 100, 110, 125, 150, 175, 200, 225, 250	5 (127)	5 (127)	10.10 (257)	85	35	18	
		3VA52 (HFAS)	2, 3	40, 45, 50, 60, 70, 80, 90, 100, 110, 125, 150, 175, 200, 225, 250	5 (127)	5 (127)	10.10 (257)	100	65	25	
		3VA52 (CFAS)	2, 3	40, 45, 50, 60, 70, 80, 90, 100, 110, 125, 150, 175, 200, 225, 250	5 (127)	5 (127)	10.10 (257)	200	100	35	
	Electronic (Solid State)	3VA62 (MFAE)	3	100, 250	5 (127)	5 (127)	9.59 (244)	100	35	18	
		3VA62 (HFAE)	3	100, 250	5 (127)	5 (127)	9.59 (244)	100	65	22	
		3VA62 (CFAE)	3	100, 250	5 (127)	5 (127)	9.59 (244)	200	100	35	
		3VA62 (LFAE)	3	100, 250	5 (127)	5 (127)	9.59 (244)	200	150	50	
400	Thermal Magnetic	JXD6, JD6	2, 3	200, 225, 250, 300, 350, 400	8.75 (222)	8.75 (222)	7.92 (201)	65	35	25	
		HJD6	2, 3	200, 225, 250, 300, 350, 400	8.75 (222)	8.75 (222)	7.92 (201)	100	65	35	
		HHJD6	2, 3	200, 225, 250, 300, 350, 400	8.75 (222)	8.75 (222)	7.92 (201)	200	100	50	
		CJD6	2, 3	200, 225, 250, 300, 350, 400	8.75 (222)	—	12 (305)	200	150	100	
	Electronic (Solid State)	SJD6	3	200, 300, 400	8.75 (222)	—	13.42 (341)	65	35	25	
		SHJD6	3	200, 300, 400	8.75 (222)	—	13.42 (341)	100	65	35	
		SCJD6	3	200, 300, 400	8.75 (222)	—	12 (305)	200	150	100	
		NJG	3	250, 400	6.25 (159)	6.25 (159)	8 (203)	65	35	25	
	LJG	3	250, 400	6.25 (159)	6.25 (159)	8 (203)	200	100	25		
600	Thermal Magnetic	LXD6	2, 3	450, 500, 600	8.75 (222)	—	13.42 (341)	65	35	25	
		LD6	2, 3	250, 300, 350, 400, 450, 500, 600	8.75 (222)	—	13.42 (341)	65	35	25	
		HLD6	2, 3	250, 300, 350, 400, 450, 500, 600	8.75 (222)	—	13.42 (341)	100	65	35	
		HHLD6	2, 3	250, 300, 350, 400, 450, 500, 600	8.75 (222)	—	13.42 (341)	200	100	50	
		CLD6	2, 3	450, 500, 600	8.75 (222)	—	12 (305)	200	150	100	
	Electronic (Solid State)	SLD6	3	300, 400, 500, 600	8.75 (222)	—	13.42 (341)	65	35	25	
	SHLD6	3	300, 400, 500, 600	8.75 (222)	—	13.42 (341)	100	65	35		
	SCLD6	3	300, 400, 500, 600	8.75 (222)	—	12 (305)	200	150	100		
800	Thermal Magnetic	MXD6	2, 3	500, 600, 700, 800	10 (254)	—	13 (330)	65	50	25	
		MD6	2, 3	500, 600, 700, 800	10 (254)	—	13 (330)	65	50	25	
		HMD6	2, 3	500, 600, 700, 800	10 (254)	—	13 (330)	100	65	50	
		CMD6	2, 3	500, 600, 700, 800	10 (254)	—	13 (330)	200	100	65	
	Electronic (Solid State)	SMD6	3	600, 700, 800	10 (254)	—	12 (305)	65	50	25	
		SHMD6	3	600, 700, 800	10 (254)	—	12 (305)	100	65	50	
	SCMD6	3	600, 700, 800	10 (254)	—	12 (305)	200	100	65		
1200	Thermal Magnetic	NXD6	2, 3	800, 900, 1000, 1200	10 (254)	—	13 (330)	65	50	25	
		ND6	2, 3	800, 900, 1000, 1200	10 (254)	—	13 (330)	65	50	25	
		HND6	2, 3	800, 900, 1000, 1200	10 (254)	—	13 (330)	100	65	50	
		CND6	2, 3	800, 900, 1000, 1200	10 (254)	—	13 (330)	200	100	65	
	Electronic (Solid State)	SND6	3	800, 1000, 1200	10 (254)	—	12 (305)	65	50	25	
		SHND6	3	800, 1000, 1200	10 (254)	—	12 (305)	100	65	50	
	SCND6	3	800, 1000, 1200	10 (254)	—	12 (305)	200	100	65		

① Space includes housing frame plate with blank cover plate. Provision includes all necessary mounting hardware, less circuit breaker, and includes housing frame cover plate with breaker handle opening.

② 1 to 6 poles may be mounted in 3.75" (95) of unit space
 ③ Accessories such as shunt trips on three pole breakers require 6.25" (159) of unit space.
 ④ Also 10kA at 600Y/347 Volts.

⑤ Refer to Table 5 for layout dimensions.

Sentron® SMP Switchboards

Power and Distribution

Selection

Protective Devices - Fusible Disconnects

Fuse Selection

The Proper Fuse Type for the Application is Selected Using the Following Parameters:

- Voltage Requirements
- Conductor Ampacity
- Horsepower Requirements
- Maximum Available RMS Fault Current
- CSA Fuse Class


Maximum VB HP Ratings (Table 6)^③

Amp Rating	Volts			
	3 Phase			Single Phase
	240	480	600	
30	7.5	15	20	3
60	15	30	50	10
100	30	60	50	15
200	60	125	50	—
400	50	50	50	—
600	50	50	50	—

Branch Switch Connectors (Table 10)^④

Switch Ampere Rating	Wire and Cable Range
30	(1)—#14—#4 AWG (Cu or Al)
60	(1)—#14—#4 AWG (Cu or Al)
100	(1)—#10—#1/0 AWG (Cu or Al)
200	(1)—#6 AWG-350kcmil (Cu or Al)
400	(1)—#1/0 AWG-750 MCM OR (2)—#1/0 AWG-250 MCM (Cu or Al)
600	(1)—#1/0 AWG-750 MCM OR (2)—#1/0 AWG-250 MCM (Cu or Al)

Branch Switch Gutter Dimensions For 38W Distribution Section (Table 8)

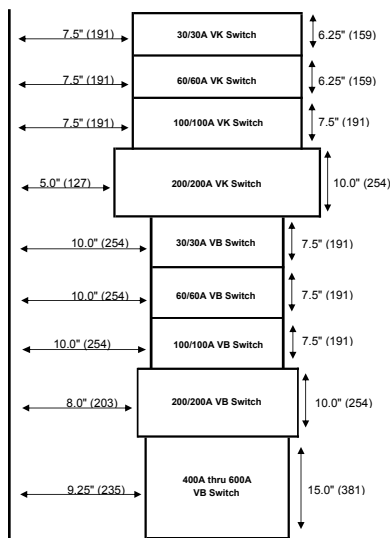

Maximum VK HP Ratings (Table 9)^③

Amp Rating	Volts			
	3 Phase			Single Phase
	240	480	600	
30	7.5	15	20	3
60	1.5	30	50	10
100	30	50	75	15
200	60	125	150	15

Switch Interrupting Ratings

Switch Type	Interrupting Rating (kA)		
	240V	480V	600V
VB	200	100	100
VK	200	200	200

Branch Switches 600V Maximum (Table 11)

Rating Ampere	Max Voltage	Fusing	Mounting Height 38"W
30/30A & 60/60A (VK) ^⑤	600V	Class J	6.25" (159)
100/100A (VK) ^⑤	600V	Class J	7.5" (190)
200/200A (VK) ^⑤	600V	Class J	10.0" (254)
30/30A & 60/60A (VB)	600V	Class J	7.5" (190)
100/100A (VB)	600V	Class J	7.5" (190)
200A (VB)	600V	Class J	10.0" (254)
400A & 600A (VB)	600V	Class J	15.0" (381)

Gutters (Table 12)

Ampere Rating	End Gutters Minimum - Inches (mm)	Side Gutters Minimum - Inches (mm)
400	12" (305)	7.9" (201)
600	12" (305)	7.9" (201)

Switch Accessories (Table 13)

Fuse Pullers (VK)	Cat. No.
30 or 60 Amp	FP2
100 Amp	FP3
200 Amp	FP4

CSA Fuse Classes (Table 14)

Class	Amperes	Volts (AC)	I ² t, Ip (Let-Thru)	Circuits
H	Standard Code	1-600A	250 and 600V or less	Less than 10,000A available
K ^①	Fast Acting (One time)	1-600A	250 and 600V or less	Feeder circuits
J	Fast Acting and Time Delay	1-600A	600V or less	Feeder circuits Motor circuits
RK1	Fast Acting and Time Delay	1/10-600A	600V or less 250V or less	Feeder circuits Motor circuits
RK5	Fast Acting and Time Delay	1/10-600A	600V or less 250V or less	Feeder circuits Motor circuits
C (FORM II)	Moderate Delay	2-600A	600V or less	Motor circuits
T	Fast Acting	1-600A	300 and 600V or less	Non-motor loads
L	Fast Acting and Time Delay	601-5000A	600V or less	Feeder circuits Motor circuits

① Fuse clips do not prohibit the use of Class H type fuse in switch.
② Refer to Siemens for single phase and DC horsepower requirements.

③ Ratings are based on UL test procedure.
④ Connector range applies to VB Switches only.
⑤ Not suitable for use in distribution space in main section.

Sentron® SMP Switchboards

Power and Distribution

Selection

Special Construction, Additions and Accessories

When required, special constructions or additions to standard Switchboards may be specified for all **factory-assembled** Power and Distribution Switchboards. Listed below are those available for Type SMP Switchboards.

1. Enclosure Type

38" Enclosure Types
Type 1
Type 2 (dripproof & sprinklerproof)
Optional: Dripshield

2. Wireway Options

24"W x 90"H x 12.75" Dp	Hinged Door
	Door Covers
24"W x 90"H x 25.5" Dp	Hinged Door
	Door Covers

3. Painted Finish

Touch-Up Paint (ASA61, Light Grey)
12 oz. aerosol can, Cat. #TUP-61

4. Miscellaneous Accessories

Nameplate - laminated and engraved

5. Bus-Link (One Set Per Panel)

Ampere Rating	Unit Space Occupied in MUD - Inches (mm)
400-1200	Consult Factory

6. Grounding of SMP Switchboard

Non-Insulated Equipment Ground Bus Including Ground Lug
Continuous Solid Copper Ground (optional)

7. Main Bus

Standard Main bus and Neutral bus are tin plated aluminum or silver finished copper (option).

8. Lugs

For Main Device and Neutral
For Main Breakers please see SpeedFax section #6
Neutral - please consult factory

9. SPD Modules

Sentron TPS3 05
100KA
150KA
200KA
250KA
300KA
Options: Surge Counter Remote Monitor

10. Circuit Breaker Accessories Handle Blocking Device Blocks handle in either the "ON" or "OFF" position. Available for:

Breaker Type	Cat. Number
BL, BLH, HBL, BQ, BQH, HBQ	ECQL1
All BQD, GB	BQDHBD
All QR	HPLQR
All BQD, NGB, NGB2, HGB2, LGB2	BQDHBD
All ED	E2HBL
All FD	FD6HB1
All JD, LD	JD6HBL
All MD, ND, PD	MN6BL
3VA52/61/62	3VA93780LB10

Padlocking Device — Padlocks in "OFF" position. Available for:

Breaker Type	Cat. Number
BQ, BQH, BL, BLH, HBL	ECQLD3
One Pole BL, BLF, BE, BAF	ECPLD1
Two-Pole BL, BLF, BE	ECPLD2
All QR	HPLQR
All BQD, NGB, NGB2, HGB2, LGB2	BQDPLD
All ED	ED2HPL
All FD	FD6PL1
All JD, LD	JD6HPL
All MD, ND, PD, RD	MN6PLD
3VA41	3VA90380LB11
3VA52/61/62	3VA91380LB11

Handle Extensions - For replacement (one extension shipped with breaker)

Breaker Type	Cat. Number
All MD, ND, PD	EX11

Ground Fault Sensing Relay Kit Equipment Protection (30 mA)

For Use with Breaker Types	Number of Poles	Catalogue Number Description
ED4, ED6, HED4	1, 2, 3	See breaker section of this catalogue.

Shunt Trip on Main or Branch

Description	Cat. Number
BL, BQD6 (branch only) ED2, ED4, HED4 (branch only) All others through 1200A	See breaker portion of this catalogue

A. Scope

Furnish and install, as shown on the plans, a secondary distribution switchboard, as specified herein, for the system indicated below:

- ☐ 120/208V ☐ 3-phase ☐ 3-wire
☐ 347/600V ☐ 4-wire
☐ 600V

B. Configuration

The switchboard enclosure shall be of bolted construction:

- ☐ Type 1 indoor.
☐ Type 1 with dripshield (optional).
☐ Type 2.

Switchboard shall be bolted together to form one metal enclosed rigid switchboard. Switchboard shall include all protective devices and equipment as listed on drawings with necessary interconnections, instrumentation and control wiring.

All groups of control wires leaving the switchboard shall be provided with terminal blocks with suitable numbering strips.

The switchboard shall have space or provisions for future expansion as noted on the plans. Switchboard shall be constructed and certified in accordance with CSA 22.2.31 standards and shall be Siemens type (SMP) or approved equal. Individual sections shall be front accessible, not less than 12.75" (324) deep, and the rear of all sections shall align.

Distribution sections shall be designed to accommodate the intermixing of Molded Case Breakers and Fusible Disconnects in the same distribution interior.

C. Bus Requirements

The bus shall be ☐ tin-finished aluminum ☐ silver-finished copper (option) of sufficient size to limit the temperature rise to 65°C. The bus shall be braced for ☐ 50,000 or ☐ 65,000 (option) amperes symmetrical and supported to withstand mechanical forces exerted during short circuit conditions when directly connected to a power source having the indicated available short circuit current.

D. Incoming Service

☐ Overhead or ☐ Underground Service: Cable Entry

This section shall be bussed and ☐ sealable per local utility requirements.

☐ Screw-type mechanical lugs, ☐ compression lugs to terminate, ☐ aluminum, ☐ copper cable, shall be _____ kcmil, and _____ cables per phase. ☐ Main breaker standard aluminum mechanical lugs suitable for aluminum or copper. (No wireway)

E. Metering Service Section

The service section shall be designed for the system parameters indicated in section "A" above. The metering service section shall have a ☐ Utility Metering compartment per utility requirements.

☐ User metering as indicated below and as shown on plans.

Main (service) section:

Siemens Digital metering with remote display

- ☐ _____ current transformer(s)
☐ _____ /5 or suitable rating

SEM3 Embedded Metering

Ground fault Protection (3-Phase, 4-Wire):

Furnish and install on the service equipment and/or switchboard a Ground Fault protection system and indication equipment as specified herein and as shown on drawings in accordance with CEC Section 14-102.

All new Ground Fault Protection and Indication equipment shall be factory installed, wired and tested by the switchboard manufacturer.

F. Switchboard SMP Guide Specification

The complete switchboard shall be finished with light grey, ASA-61 paint.

Each switchboard main section shall have a metal nameplate permanently affixed to it, listing the following information:

- Name of manufacturer
- System voltage
- Ampacity
- Type
- Manufacturer's shop order number and date
- Each section of switchboard shall bear a CSA certification mark and a short circuit rating label.

The switchboard shall be per the arrangement below.

F1. Switchboard Type Panel-Mounted, Front Accessible.

Switchboard shall be of Siemens SMP type, or approved equal. Individual sections shall be front accessible, floor mounted rear supported, not less than 12.75" (324) deep, and rear, of all sections shall align. Incoming line termination, main device connection and all bolts used to join current-carrying parts shall be installed so as to permit servicing from the front only so that no rear access is required. The branch devices shall be front removable and panel mounted with line and load side connections front accessible.

G. Main Protective Devices

The main protective device, to be installed in the main device section, shall be as indicated below:

G1. Molded Case Circuit Breaker

Molded case circuit breaker shall be of the quick-make, quick-break, trip-free, ☐ (standard) ☐ (High Interrupting) ☐ (Current Limiting) ☐ (solid state Sensitrip III) type.

It shall be _____ frame ☐ (3-pole)

☐ (240V) ☐ (600V) breaker with a trip current rating of:

- ☐ 400A, ☐ 600A, ☐ 800A, ☐ 1000A[®],
☐ 1200 A[®] of an interrupting capacity

of not less than _____ amperes RMS symmetrical at the system voltage. The following accessory options are to be included:

- ☐ Shunt trip
☐ Ground fault relay
☐ Long time (Sensitrip III only)
☐ Long time delay (Sensitrip III only)
☐ Short time (Sensitrip III only)
☐ Short time delay (Sensitrip III only)
☐ Integral ground fault (Sensitrip III only)
☐ Other _____ (list)

H. Branch Protective Devices (Select as necessary)

All molded case circuit breakers, and fusible disconnect units used as a protective device in a branch circuit will meet the requirements of the appropriate paragraph below

H1. Molded Case Circuit Breaker

Molded case circuit breakers shall be of quick-make, quick-break, trip-free ☐ (thermal magnetic type) ☐ (current limiting) ☐ (solid state) with frame, trip and voltage rating, either ☐ 2-pole or ☐ 3-pole, as indicated on the plans. All breakers shall have an interrupting capacity of not less than _____ amperes RMS symmetrical at the system voltage. All breakers shall be removable from the front of the switchboard without distributing adjacent units. The switchboard shall have space or provisions for future units shown on the plans.

H2. Current Limiting Circuit Breaker

Current limiting circuit breakers shall provide inverse time delay, instantaneous circuit protection, and also limit the let-through I^2t to a value less than I^2t of one-half cycle wave of the symmetrical prospective current without any fusible elements. Breakers shall have an interrupting capacity of not less than _____ ampere RMS symmetrical at the system voltage.

H3. Fusible Disconnect

Fusible disconnects shall be quick-make, quick-break units utilizing the double-break principle of circuit rupturing to minimize arcing and pitting and shall conform to the ratings shown on the plans.

Each disconnect shall have an individual door over the front, equipped with a voidable interlock that prevents the door from being opened when the switch is in the ON position unless the interlock is purposely defeated by activation of the voiding mechanism. All disconnects shall have externally operated handles. Disconnects shall be equipped with ☐ Class J (standard), ☐ Class R rejection type, ☐ Class L (standard), ☐ Class T fuse holders as indicated on the plans suitable for application on system with _____ amperes symmetrical available fault current.

© Ground fault protection required, per CEC section 14-102 when "the current is 0 1000A at 600 volts."

Fault-Current Calculation on Low-Voltage AC Systems

In order to determine the maximum interrupting rate of the circuit breakers in a distribution system it is necessary to calculate the current which could flow under a three-phase bolted short circuit condition. For a three-phase system the maximum available fault current at the secondary side of the transformer can be obtained by use of the formula:

$$I_{sc} = \frac{kVA \times 100}{KV \times \sqrt{3} \times \% Z}$$

I_{sc} = Symmetrical RMS amperes of fault current.

kVA = Kilovolt-ampere rating of transformers.

KV = Secondary voltage in kilovolts.

%Z = Percent impedance of primary line and transformer.

Integrated Equipment Short Circuit Ratings

The term "Integrated Equipment Short Circuit Rating" refers to the application of series connected circuit breakers in a combination that allows some breakers to have lower individual interrupting ratings than the available fault current. This is permitted as long as the series combination has been tested and certified by UL & CSA.

Series ratings must be specified on order at time of entry. For more information on series ratings please consult your local Siemens sales representative.

Normal load and Fault Currents of Three Phase Transformers® (Table 18)

Transformer Rating 3 Phase Kva and impedance % ^①	Maximum Short-Circuit Kva Available from Primary System	208 Volts, 3 Phase Rated Load Continuous Current, Amps	3 Phase			240 Volts, 3 Phase			480 Volts, 3 phase			600 Volts, 3 Phase					
			Short-Circuit Current RMS Symmetrical Amps.			Rated Load Continuous Current, Amps	Short-Circuit Current RMS Symmetrical Amps.		Rated Load Continuous Current, Amps	Short-Circuit Current RMS Symmetrical Amps.		Rated Load Continuous Current, Amps	Short-Circuit Current RMS Symmetrical Amps.				
			Transformer Alone	50% Motor Load ②	Combined		Transformer Alone ②	100% Motor Load		Combined	Transformer Alone ②		100% Motor Load	Combined	Transformer Alone ②	100% Motor Load ②	Combined
300 5%	50000	834	14900	1700	16600	722	12900	2900	15800	361	6400	1400	7800	289	5200	1200	6400
	100000		15700		17400		13600		16500		6800		8200		5500		6700
	150000		16000		17700		13900		16800		6900		8300		5600		6800
	250000		16300		18000		14100		17000		7000		8400		5600		6800
	500000		16500		18200		14300		17200		7100		8500		5700		6900
	Unlimited		16700		18400		14400		17300		7200		8600		5800		7000
500 5%	50000	1388	21300	2800	25900	1203	20000	4800	24800	601	10000	2400	12400	481	8000	1900	9900
	100000		25200		28000		21900		26700		10900		13300		8700		10600
	150000		26000		28800		22500		27300		11300		13700		9000		10900
	250000		26700		29500		23100		27900		11600		14000		9300		11200
	500000		27200		30000		23600		28400		11800		14200		9400		11300
	Unlimited		27800		30600		24100		28900		12000		14400		9600		11500
750 5.75%	50000	2080	28700	4200	32900	1804	24900	7200	32100	902	12400	3600	16000	722	10000	1900	12900
	100000		32000		36200		27800		35000		13900		17500		11100		14000
	150000		33300		37500		28900		36100		14400		18000		11600		14500
	250000		34400		38600		29800		37000		14900		18500		11900		14800
	500000		35200		39400		30600		37800		15300		18900		12200		15100
	Unlimited		36200		40400		31400		38600		15700		19300		12600		15500
1000 5.75%	50000	2780	35900	5600	41500	2406	31000	9600	40600	1203	15500	4800	20300	962	12400	3900	16300
	100000		41200		46800		35600		45200		17800		22600		14300		18200
	150000		43300		48900		37500		47100		18700		23500		15000		18900
	250000		45200		50800		39100		48700		19600		24400		15600		19500
	500000		46700		52300		40400		50000		20200		25000		16200		20100
	Unlimited		48300		53900		41800		51400		20900		25700		16700		20600

① Short circuit currents are calculated with impedances and kVA shown in this table.

② Short circuit current contributions are calculated on the basis of motor characteristics that will produce four times normal current. 50% motor load contribution is assumed for 208V and 100% motor load contribution is assumed for 240V, 480V and 600V.

③ This Table has been prepared to list the symmetrical RMS fault current which is available at the secondary terminals of the transformer.

Sentron® SMP Switchboards

SMP Switchboard Replacement Information, Accessories & Modifications

General

11
SWITCHBOARDS

Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections^{④⑦⑧} (Table 15)

Breaker Type	Catalogue Number	Unit Height	Mounting
BQ, BQH, HB, BL, BLH, HBL	6BL2C ^{②③⑤}	3.75" (95)	Twin
ED2, ED4, ED6, HED4	6E62 ^{①②③}	3.75" (95)	Twin
CED6	6CLE2 ^①	3.75" (95)	Twin
3VA41	S3VA41TDCAN	3.75" (95)	Twin
	S3VA41TDHD	7.50" (191)	Twin, High Density
3VA61	S3VA52TDCAN	5" (127)	Twin
QR2, QR2H, HQR2, HQR2H	6QR2CAN ^⑥	5" (127)	Twin
FXD6, FD6, HFD6, HHFD6	6F62 ^①	5" (127)	Twin
CFD6	6CLF1C ^⑤	5" (127)	Single
3VA52, 3VA62	S3VA52TDCAN	5" (127)	Twin
JXD6, JD6, HJD6, HHJD6	6JJ62 ^①	8.75" (222)	Twin
SJD6, SHJD6	6SJJ1C ^⑤	8.75" (222)	Single
CJD6	6CLJ1C ^⑤	8.75" (222)	Single
LXD6, LD6, HLD6, HHLD6, SLD6, SHLD6	6LL61C ^⑤	8.75" (222)	Single
CLD6, SCLD	6CLL1C ^⑤	8.75" (222)	Single
SCJD6	6SCL61C ^⑤	8.75" (222)	Single
MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6	6M61C ^⑤	10" (254)	Single
NXD6, ND6, HND6, CND6, SHND6, SCND6	6N61C ^⑤	10" (254)	Single

Connecting Strap Kits for use with VB, VK or HCP Switches in Distribution Sections^{①②③⑤} (Table 16)

Rating Amperes	VB Switch Cat. No.	VK Switch Cat. No.	HCP Switch Cat. No.
30/30	VB6-71	VK6-57	N/A
60/60		VK6-58	
100/100		N/A	
200		VK6-72	
200/200	N/A	VK6-72	F6162DCAN
400-600	VB6-150	N/A	
800-1200	N/A		

Metering Switch for FCI Metering Switchboards^④ (46"W)

Ampere Rating	600V Metering Switch (c/w Meter Socket)	Height-Inches (mm)
30/30	V7E3611JMC7	10" (254)
60/60	V7E3622JMC7	10" (254)
100/100	V7E3633JMC7	10" (254)
200	V7F3604JMC7	17.5" (444.5)

Blank Filler Plates for Distribution Switch or Circuit Breaker^④ (Table 17)

Height - Inches (mm)	Cat. Number
1.25" (32)	6FPB01
2.50" (64)	6FPB02
3.75" (95)	6FPB03
5.00" (127)	6FPB05
10.00" (254)	6FPB10
15.00" (381)	6FPB15

VB Switch For Use With VB6 Panelboards^⑤

30/30	V7E3611JP	7.5(190)
60/60	V7E3622JP	7.5(190)
100/100	V7E3633JP	7.5(190)
200	V7F3604JP	10(254)
400	V7H3605JP	15(381)
600	V7H3606JP	15(381)

VK Switch For Use With FPP6 Panelboards^⑤

30/30	VK23611JP	6.25 (159)
60/60	VK23622JP	6.25 (159)
100/100	VK33633JP	7.5 (90)
200/200	VK73644JP	10 (254)

① These are aluminum connectors. If copper is required please add suffix C.
 ② 3.75" (95) plate accommodates six 1-pole breakers.
 ③ 10" (254) plate accommodates eighteen 1-pole breakers.
 ④ Connector kits also accommodate S5, F2, CDP6 Panelboards, FCRS, FCI and FCII distribution interiors or CDP6/SPP6 Series Panels.
 ⑤ These connectors are available in copper only.
 ⑥ Blank (Circuit Breaker or Switch) Cover Plates can also be used in all FCI, FCII and cUL SB distribution interiors or CDP6/SPP6 Series Panels.

⑦ Mounting kits include connector straps and covers (breakers or switches are not included).
 ⑧ Connecting strap kits include connecting straps, hardwares, and cover plates for switchboards and power panels. Breakers and switches to be ordered separately.
 ⑨ QR filler plates only: **6QR2FKCAN**. For copper QR kit, use p/n: **6QR2CCAN**.

***S3VA41TDCAN** strap kit can also accommodate xGB2 breakers, reference Installation Instructions.

Sentron® FCI, FCII Switchboards

Construction Details

General

11

SWITCHBOARDS



FCI Switchboard

- Main bus rated up to 2000 ampere.
- Branch Devices—panel mounted.
- Rear of all sections aligned so that switchboard can be installed against wall.
- Front connected and front accessible.
- Main devices—individually mounted or panel mounted. Molded Case Breaker: 400-1200 amps fixed.
- Quick-Make Quick-Break Fusible Switch: 800-1200 amps., fixed.
- Bolted Pressure Fusible Switch: 800–2000 amps., fixed.
- Low Voltage Power Circuit Breaker: 400-2000 amps fixed.
- Branch Devices: panel mounted only. Molded Case Breaker: 15–1200 amp., fixed.
- Quick-Make Quick-Break Fusible Switch: 30–1200 amps., fixed.

FCII Switchboard

- Main bus rated up to 6000A ampere.
- Branch Devices rear connected individually mounted.
- Front and rear of all sections align. Design for mounting away from wall.
- Free Standing
- Rear connected and rear accessible.
- Main Devices—individually mounted. Molded Case Breaker: 400-1200 amps., fixed.
- Quick-Make Quick-Break Vacu-Break Fusible Switch: 400-1200 amps., fixed.
- Bolted Pressure Fusible Switch: 800–4000 amps., fixed.
- Low Voltage Power Circuit Breaker: 800-5000 amps., fixed or drawout.

- Branch Devices: individually mounted Molded Case Breaker: 100–2000 amp., fixed (or plug in).
- Quick-Make Quick-Break Fusible Switch: 100–1200 amp., fixed.
- Bolted Pressure Switch: 800–4000 amp., fixed.
- Low Voltage Power Circuit Breaker: 800–5000 amps., fixed, or drawout. *6000 amps - Consult Sales Office

Whether the design is for a 240V AC, 400 ampere system; a 600V AC, 6000 ampere system; or something in between, Siemens Sentron Switchboards should be considered. Every aspect of design has been aimed at improving layout convenience, reducing installation costs, and minimizing the impact and cost of system changes. These switchboards provide the rugged construction and service flexibility necessary in systems for industrial plants, hi-rise complexes, hospitals, and commercial buildings, and are built to NEMA and CSA, C22.2 #31 and EEMAC, G8.2 standards (up to 4000A).

90°C rated wireway.

The termination temperature for main incoming cables can be sized at 90°C for bussed pull sections.

CSA Certified to: CAN/CSA-22.2 No. 31-18

CSA Certificate No. 70172994

Versatility simplifies system design.

Service Sections

Typical switchboards consist of a service section, and one or more distribution sections. Service sections can be fed directly from overhead by either cable or bus duct.

When fed from underground, a separate pull section is usually added. The service section is then fed from the adjacent pull section.

Low Voltage Power circuit breakers and Vacu-Break Switches equipped for bottom feed will accept cable directly from underground into the service section.

Choose bussed or non-bussed pull sections.

With FCI and FCII switchboards, a non-bussed pull section, or a cross-bussed pull section for underground feed can be selected. The unique cross-bussed section permits cable to be run straight from underground to the bus bars at the top of the section.

Non-bussed pull sections have openings for carrying the underground feed cables to the service section bus.

Main Section house a variety of equipment.

Utility Metering

In addition to the main disconnect, the main section usually contains utility metering provisions. "Cold" metering provisions (CT's on the load side of the main disconnect) are normally furnished. When utility metering is required, the CT's provided by the utility company will be mounted in a completely separate compartment. The compartment will be built to utility company standards, with hinged doors and provision for utility metering equipment.

User Metering

The main section often provides space for many user instrument requirements. Ammeters, voltmeters, and their associated selector switches can be mounted in the main section along with the main disconnect. Only if a very large instrument or an unusual number of instruments are required, would a separate section be required.

Main protective devices can be mounted individually so that they can be located quickly in an emergency. FC switchboards will accommodate different types of main protective devices. Selection depends on the characteristics of your individual electrical system.

① Connector kits also accommodate S5, F2, CDP6 Panelboards, FCRS, FCI and FCII distribution interiors or CDP6/SPP6 Series Panels.

② Mounting kits include connector straps and covers (breakers or switches are not included).

③ Connecting strap kits include connecting straps, hardware, and cover plates for switchboards and power panels. Breakers and switches to be ordered separately.

④ Metering switch kits include metering switches, cover plates, connecting straps, and hardware.

⑤ The fusible switches and connecting strap kits are designed for standard 38"V sections.

Additional covers are required for wider sections. Please consult your local sales contact.

Distribution Sections have expanded wiring room and exceptional accessibility.

Generous top and bottom gutters have been created by locating through-bus in the rear centre of the distribution section. No obstructions are less than 8" (203) above the floor, and no live bus bars are located less than 10" (254) off the floor. So there's plenty of room to run cables into the distribution section to make connections.

Standard bolted gutter covers give complete access to load conductors. As an option, hinged doors can be furnished where quick access to load connectors is desired.

Heavy channels form a rigid ring at the base and top of each section and heavy gauge structural members are used for the vertical corner posts so there's no encroachment of additional bracing into the top and bottom gutter areas.

To provide additional room for load cable routing where needed, pull box extensions are available in heights of 10 (254), 15 (381), 20 (508), 25 (635) and 30 (762) inches to mount on any standard distribution section.

Top plates on all sections are easily removed in the field for drilling, punching, and cutting conduit entry holes.

Distribution sections are designed with the future in mind.

Because all distribution sections can accommodate any combination of panel-mounted branch devices, including molded case circuit breakers, Vacu-Break® fusible switches, future system modifications are easier to handle without adding switchboard sections.

To make additional distribution sections easier to install when they are necessary the through-bus in each distribution section is extended, and the end is pre-drilled to accept splice plate bolts. To add a section to an existing FCI or FCII switchboard, set the new section flush against the side of the existing distribution section, and bolt together the bus bar splice plates.

Operating temperatures are in accordance with CSA Standard C22.2 #31 and UL Standard 891.

Bus cars are available in standard tin-finished aluminum or optional tin-finished copper. Standard bus is sized on the basis of heat rise criteria, in accordance with CSA C22.2 #31 and UL891. All bus bars are sized to limit heat rise to 65°C above an ambient temperature of 40°C.

Modular, bolted frame construction saves labour.

Modular construction of all service and distribution sections allows the switchboard to be designed into the building, rather than designing the building around the switchboard. FCI and FCII switchboards can even be continued around corners where necessary. Rigid, bolted frames can be shipped individually and moved into the building in sections that are easy to maneuver without special equipment, then quickly assembled in place.

Sentron® FCI, FCII Switchboards

FCI, FCII Switchboards

General

Service sections of the FCI and FCII accept a wide range of Sentron Molded Case Circuit Breakers, Vacu-Break® Fusible Switches, or WL Low Voltage Power Circuit Breakers as main disconnect devices.

The FCII switchboard is designed for special configurations. It can be equipped with incoming and outgoing busway connections, automatic transfer schemes and many other custom engineered applications. The FCII can also be supplied with special metering provisions, current transformers, potential transformers, panelboards and many other special features.

The distribution sections of all Sentron Switchboards are designed with improved wiring space and greater accessibility. They're also designed for easier installation and maintenance. Conveniently located through-bus creates useful wiring gutter space, and standard bolted gutter covers offer complete access to load conductors.


Distribution Sections

Switch-board Type	Access	Dimensions - Inches (mm)					
		Height		Width		Depth	
		Std.	Opt.	Std.	Opt.	Std.	Opt.
FCI	Front	90	—	38	—	28 ^①	—
FCII	Rear	90	70	38	32 or 46	38 ^{②③}	28, 48 or 58 ^{②③}

	FCI	FCII
Enclosure Type	Type 1 Type 2 (dripproof & sprinklerproof) Optional: Dripshield, Gaskets	Type 1 Type 2 (dripproof & sprinklerproof) Optional: Dripshield, Gaskets
Section Dimensions	38" W x 90" H x 28" Dp 20", 24", 32", 38" W Pull Box	20", 25", 32", 46", 54" W x 70", 90" H x 28", 38", 48", 58" Dp. 20", 24", 32", 38" W Pull Box
Volts	600V Max	600V Max
Amperes	400-2000A	400-6000A
Entry	Cable only	Cable, Duct Hydro Trough
Main Devices	MCCB 400-1200A VB 800-1200A Pringle 800-2000A WL ICCB 800-2000A	MCCB 400-1200A VB 400-1200A Pringle 800-4000A WL ACB 800-5000A (option) WL ICCB 800-5000A
Branch Devices	S5-22.5", 45", 65" CDP-7, P2 2-21" (MUD)	S5-22.5", 30", 45", 65", 75"
Metering Devices	Siemens Digital Metering with Remote Display SEM3 Embedded Metering	Siemens Digital Metering with Remote Display SEM3 Embedded Metering other manufactures Analog VB Meter centres
Relays	Single Phase, GFR3, MGFR, GFR	All Types
Other Options		Transfer switch provisions, Power Transformer Connections, Dist. Transformer Provisions Bus Duct Connections



① Distribution section with two high 800 or 1200A Vacu-Break is 28 in. deep.

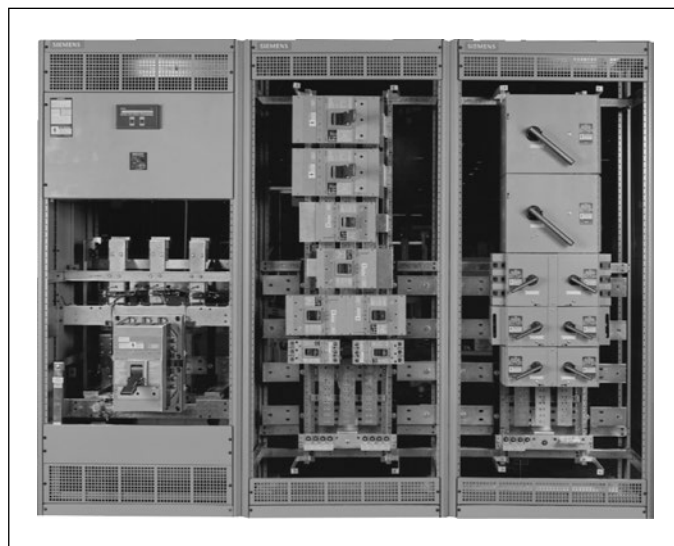

② Distribution section with two high bolted pressure switch is 38 in. deep minimum.

Sentron® FCI, FCII Switchboards

General/Guide

Even the front, back and side covers of the FCI and FCII are light, easy-to-handle, formed steel pieces that fit flush to the cabinet sides. No heavy, unwieldy flat plate must be removed to gain interior access.

Bus location saves wiring time.

All through-bus to adjoining sections are located in the rear centre of distribution section. This design provides large, unobstructed wiring gutters at the top and bottom of each section. Wiring takes less time, and costs less to install.

Splice plates are accessible from the front.

All splice plates can be bolted and unbolted from the front of the switchboard to make connection of adjacent sections easy. Each splice plate is attached by grade 5 bolts to assure solid joints between sections, and to maintain full bus ampacity through the splice joint.

To make installation and servicing of the splice plates easier, all phase and neutral through-busses are stacked one above the other, eliminating the need to stuff bolts in between bus bars that are stacked one behind the other in the same horizontal plane.

Two types of cable terminals are available.

Screw mechanical connectors (lugs) are provided as standard equipment on all devices. However, compression connectors are available as an option on all main lugs, main bolted pressure switches, main power circuit breakers, and main insulated case circuit breakers.

Sentron® FCI, FCII Switchboards

Specifications

General/Guide

A. Scope

Furnish and install, as shown on the plans, a secondary distribution switchboard, as specified herein, for the system indicated below:

- | | | |
|-----------------------------------|----------------------------------|---------------------------------|
| <input type="checkbox"/> 120/208V | <input type="checkbox"/> 3-phase | <input type="checkbox"/> 3-wire |
| <input type="checkbox"/> 277/480V | | <input type="checkbox"/> 4-wire |
| <input type="checkbox"/> 480V | | |
| <input type="checkbox"/> 347/600V | | |
| <input type="checkbox"/> 600V | | |

B. Configuration

The switchboard enclosure shall be:

- | |
|---|
| <input type="checkbox"/> Type 1 indoor of a bolted construction design. |
| <input type="checkbox"/> Sprinkler Proof <input type="checkbox"/> Gasketted |
| <input type="checkbox"/> Type 2 <input type="checkbox"/> Dripshield |

Switchboard shall be of the required number of vertical sections bolted together to form one metal enclosed rigid switchboard. The sides, top and rear shall be covered with removable bolted code gauge steel plates. Switchboard shall include all protective devices and equipment as listed on drawings with necessary interconnections, instrumentation and control wiring. All groups of control wires leaving the switchboard shall be provided with terminal blocks with suitable numbering strips.

The switchboard shall have space or provisions for future expansion as noted on the plans.

Switchboard shall be constructed in accordance with the latest EEMAC G8.2 and CSA 22.2 #31 standards and shall be Siemens type (FCI) (FCII) or approved equal. Individual sections shall be front and rear accessible, not less than 28" deep, and the rear of all sections shall align.

Distribution sections shall be designed to accommodate the intermixing of Molded Case Breakers and fusible devices in the same distribution interior.

C. Bus Requirements

The bus shall be (tin-finished aluminum) (silver-flash copper) of sufficient size to limit the temperature rise to 65°C. The bus shall be braced for (50,000) (75,000) (100,000) (200,000) amperes symmetrical and supported to withstand mechanical forces exerted during short circuit conditions when directly connected to a power source having the indicated available short circuit current.

The through-bus on the end section shall be extended and pre-drilled to allow the addition of future sections with standard splice plates.

Grade 5 bolts will be used at bus joints.

D. Incoming Service

1. Underground Service:

To isolate incoming underground service conductors, an underground cable pull or auxiliary section shall be used. This section shall be of the ☐ non-bussed, ☐ bussed type and shall be sealable per local utility requirements, ☐ screw-type mechanical lugs, ☐ compression lugs to terminate, ☐ aluminum, ☐ copper cable, shall be furnished as detailed on the plans.

2. Overhead Service:

A. Cable Entry

- ☐ screw-type mechanical lugs
- ☐ compression lugs to terminate
- ☐ aluminum ☐ copper cable shall be furnished as detailed on the plans. Where necessary provide top cable pull box which shall be sealable per local utility requirements.

B. Busway Entry

Switchboard to be fed by Siemens Bus duct ☐ copper, ☐ aluminum, _____ ampere as detailed on plans, ☐ and other sections of the specification. The switchboard manufacturer shall be responsible for coordination, proper phasing and internal bussing to the incoming busway.

C. Transformer Coupling ☐

The switchboard shall be directly connected to the adjacent transformer section, including all necessary bus bars and flexible connectors.

E. Metering Service Section

The service section shall be designed for the system parameters indicated in section "A." The metering service section shall have a ☐ metering compartment per utility requirements, ☐ user metering as indicated below and as shown on plans.

Main bus:

- ☐ Voltmeter with _____ -phase transfer switch
- ☐ Ammeter, with _____ -phase transfer switch
- ☐ Digital metering
- ☐ _____ current transformer(s)
- ☐ _____ /5 or suitable rating
- ☐ _____ potential transformer(s), of suitable rating.
- ☐ SEM3 Embedded Metering (Main Breaker/Main Incoming)

Branch circuits:

- ☐ Ammeter(s), with _____ -phase transfer switch
- ☐ SEM3 Embedded Metering

Ground fault Protection:

Furnish and install on the service equipment and/or switchboard a Ground Fault protection system and indication equipment as specified herein and as shown on drawings in accordance with The Canadian Electrical Code Section 14-102.

All new Ground Fault Protection and Indication equipment shall be factory installed, wired and tested by the switchboard manufacturer.

F. Switchboards FCI, FCII Guide Specification

The complete switchboard shall be phosphatized and finished with light grey, ASA-61 paint.

Each switchboard section shall have a metal nameplate permanently affixed to it, listing the following information:

- Name of manufacturer
- System voltage
- Ampacity
- Type
- Manufacturer's shop order number and date
- Each section of switchboard shall bear a CSA listing mark and a short circuit rating label.
- The switchboard shall be per the arrangement below (Select 1 of ITEM F)

F1. Switchboard Type Panel-Mounted, Front Accessible.

Switchboard shall be of Siemens FCI type, or approved equal. Individual sections shall be front accessible, not less than 28" deep, and rear of all sections shall align. Incoming line termination, main device connection and all bolts used to join current-carrying parts shall be installed so as to permit servicing from the front only so that no rear access is required. The branch devices shall be front removable and panel mounted with line and load side connections front accessible.

F2. Switchboard Type Panel-Mounted Rear Accessible

Switchboard shall be of Siemens FCII type, or approved equal. Individual sections shall be front and rear accessible, not less than 38" deep, and both the front and rear of all sections shall align. The branch devices shall be front removable and panel mounted with line and load side connections front accessible. The bus and main device connections shall be rear accessible.

F3. Switchboard Type Individually Mounted, Rear Accessible (Fixed mounted devices).

Switchboard shall be of Siemens FCII type, or approved equal. All sections shall align front and rear. All disconnect devices, main and feeders, shall be mounted individually at the front of the switchboard and shall be rear accessible. The load terminals of each feeder device shall be extended by means of insulated bus bars through the bus compartment in to the rear cable compartment.

Optional

- ☐ barriers shall be provided between bus and cable compartment.
- ☐ barriers shall be provided between vertical sections.
- ☐ barriers shall be provided between devices and bus compartment.
- ☐ barriers shall be provided between individual devices.

F4. Switchboard Type Individually Mounted Rear Accessible (Drawout Power Circuit Breaker).

Switchboard shall be of Siemens FCII type or approved equal. All sections shall be aligned front and rear. Each vertical section forming part of switchboard lineup shall have one or more individual breakers or instrument compartments, a centralized main bus compartment and a rear cabling compartment. Drawout power circuit breakers shall be individually mounted in their own compartments. Metal barriers shall be provided at the sides and rear of each compartment and a horizontal metal barrier between breakers in the same vertical section. The breaker shall be accessible through a hinged metal door on each breaker compartment.

The drawout mechanism of power circuit breaker shall be such that it can be moved from connect through test to disconnect position without opening the door. In the "connect" position, both the

primary and secondary disconnects are engaged. In the "test" position, the primary disconnect terminals are disengaged; however, the secondary disconnects are maintained to permit the operation of the circuit breaker. In the "disconnect" position, the primary and secondary disconnects are disengaged and separated a safe distance from the corresponding stationary terminals. In the "fully withdrawn" position, both primary and secondary contacts are disconnected and the circuit breaker may be inspected as it can be removed for more complete accessibility.

The load side of each feeder breaker shall have bus bars extending from the rear of the primary disconnect through the bus compartment in to the rear cable compartment.

Optional

- ☐ barriers shall be provided between bus and cable compartment.
- ☐ barriers shall be provided between vertical sections.
- ☐ barriers shall be provided between devices and bus compartment.
- ☐ barriers shall be provided between individual devices.

G. Main Protective Devices (Select one of Item G)

The main protective device, to be installed in the main device section, shall be as indicated below:

G1. Molded Case Circuit Breaker

Molded case circuit breaker shall be of the quick-make, quick-break, trip-free, (standard) (High Interrupting) (Current Limiting) (solid state Sensitrip III) type. It shall be _____ frame (2-pole) (3-pole) 600-volt breaker with a trip current rating of:

- | | |
|---------------------------------|---------------------------------|
| <input type="checkbox"/> 400 A | <input type="checkbox"/> 1600 A |
| <input type="checkbox"/> 600 A | <input type="checkbox"/> 2000 A |
| <input type="checkbox"/> 800 A | |
| <input type="checkbox"/> 1000 A | |
| <input type="checkbox"/> 1200 A | |

of an interrupting capacity of not less than _____ amperes RMS symmetrical at the system voltage.

The following accessory features are to be included:

- ☐ Shunt trip
- ☐ Electrical Operator
- ☐ Ground fault relay
- ☐ Long time (Sensitrip III only)
- ☐ Long time delay (Sensitrip III only)
- ☐ Short time (Sensitrip III only)
- ☐ Short time delay (Sensitrip III only)
- ☐ Integral ground fault (Sensitrip III only)
- ☐ Other _____ (list)

G2. Fusible Switch

Fusible switch of the quick-make, quick-break type. It shall be a (2-pole) (3-pole) (240V) (600V) Vacu-Break unit with a continuous current rating of (400) (600) (800) (1200) amperes and with _____ ampere Class _____ fuses, suitable for application on a system with _____ amperes symmetrical available fault current.

G3. Bolted Pressure Switch

Bolted pressure switch of the quick-make, quick-break type. It shall be a (2-pole) (3-pole) (240V) (600V) unit with a continuous current rating of:

- | | |
|---------------------------------|----------------------------------|
| <input type="checkbox"/> 800 A | <input type="checkbox"/> 2500 A |
| <input type="checkbox"/> 1200 A | <input type="checkbox"/> 3000 A |
| <input type="checkbox"/> 1600 A | <input type="checkbox"/> 4000 A |
| <input type="checkbox"/> 2000 A | <input type="checkbox"/> _____ A |

and with _____ ampere Class L fuses suitable for application on a system with _____ amperes symmetrical available fault current.

The following accessory features are to be included:

- ☐ Shunt trip
- ☐ Ground fault relay
- ☐ Other _____ (list)

G4. Insulated Case Circuit Breaker

Insulated case circuit breaker with a stationary frame. Frame size to be _____ ampere 3-pole, 600-volt with a trip current rating of:

- | | |
|---------------------------------|----------------------------------|
| <input type="checkbox"/> 400 A | <input type="checkbox"/> 2000 A |
| <input type="checkbox"/> 600 A | <input type="checkbox"/> 2500 A |
| <input type="checkbox"/> 800 A | <input type="checkbox"/> 3000 A |
| <input type="checkbox"/> 1000 A | <input type="checkbox"/> _____ A |
| <input type="checkbox"/> 1200 A | |
| <input type="checkbox"/> 1600 A | |

It shall be a manually operated breaker with a solid state trip device, and an interrupting capacity of not less than _____ amperes RMS symmetrical at the system voltage.

The following accessory features are to be included:

- ☐ Short time delay
- ☐ Integral ground fault trip
- ☐ Fault trip indicator
- ☐ Other _____ (list)

G5. Low Voltage Power Circuit Breaker

Low voltage power circuit breaker with a (stationary) (drawout) frame and a current rating of:

- | | |
|---------------------------------|----------------------------------|
| <input type="checkbox"/> 800 A | <input type="checkbox"/> 3200 A |
| <input type="checkbox"/> 1600 A | <input type="checkbox"/> 4000 A |
| <input type="checkbox"/> 2000 A | <input type="checkbox"/> _____ A |

It shall be (manually) (electrically) operated power circuit breaker with a Electronic Trip Unit and an interrupting capacity of _____ amperes RMS symmetrical at the system voltage.

The following accessory features are to be included:

- ☐ Short time delay
- ☐ Integral ground fault trip
- ☐ Fault trip indicator
- ☐ Other _____ (list)

H. Branch Protective Devices (Select as necessary)

All molded case circuit breakers, fusible switches, insulated case circuit breakers, bolted pressure switches, low voltage power circuit breaker, and/or motor starter units used as a protective device in a branch circuit will meet the requirements of the appropriate paragraph below.

H1. Molded Case Circuit Breaker

Molded case circuit breakers shall be of quick-make, quick-break, trip-free (thermal magnetic type) (current limiting) (solid state) with frame, trip and voltage rating, either 2-pole or 3-pole, as indicated on the plans. All breakers shall have an interrupting capacity of not less than _____ amperes RMS symmetrical at the system voltage. All breakers shall be removable from the front of the

switchboard without distributing adjacent units. The switchboard shall have space or provisions for future units shown on the plans.

H2. Current Limiting Circuit Breaker

Current limiting circuit breakers shall provide inverse time delay, instantaneous circuit protection, and also limit the let-through I^2t to a value less than I^2t of one-half cycle wave of the symmetrical prospective current without any fusible elements. Breakers shall have an interrupting capacity of not less than _____ ampere RMS symmetrical at the system voltage.

H3. Fusible Switch

Fusible switches shall be quick-make, quick-break units utilizing the double-break principle of circuit rupturing to minimize arcing and pitting and shall conform to the ratings shown on the plans.

Each switch shall have an individual door over the front, equipped with a voidable interlock that prevents the door from being opened when the switch is in the ON position unless the interlock is purposely defeated by activation of the voiding mechanism. All switches shall have externally operated handles. Switches shall be equipped with (Class R rejection type) fuse holders and Class (J) (R) or (L) fuses of ampere rating and type as indicated on the plans suitable for application on system with _____ amperes symmetrical available fault current.

H4. Bolted Pressure Switch

Each bolted pressure switch shall be the quick-make, quick-break type, equipped with Class L fuses suitable for application on a system with _____ amperes symmetrical available fault current. Ampere rating to be as shown on the plans.

H5. Insulated Case Circuit Breaker

FCII Switchboards only
Each insulated case circuit breaker shall be manually operated with solid state trip device. Frame sizes and trip ratings to be as shown on the plans. All breakers to have an interrupting capacity of not less than _____ amperes symmetrical at the rated voltage.

H6. Low Voltage Power Air Circuit Breaker

FCII Switchboards only
Each low voltage power air circuit breaker shall be (stationary mounted) (drawout mounted) stored energy type, trip free, (manually operated) (electrically operated) with solid-state trip device. Frame sizes and trip ratings to be as shown on the plans. All breakers to have an interrupting capacity of no less than _____ amperes symmetrical at the rated voltage.

Sentron® FCI, FCII Switchboards

FCI and FCII Switchboard Replacement Information, Accessories & Modifications

General

Connecting 3VA Strap Kits For Use With cUL FCI and FCII Switchboards^③

Max. Amp Rating	Breaker Family	Breaker Type	Catalogue Number	Unit Height (in)	Min. Box Width	Mounting
125	3VA	3VA41	S3VA41TD	3.75	32	Twin
		3V41 High Density	S3VA41TDHD	7.5	32	Twin
150	3VA	3VA61	S3VA52TD	5	32	Twin
250	3VA	3VA52, 3VA62	S3VA52TD	5	32	Twin
400	3VA	3VA53, 3VA63	S3VA53TD	6.25	32	Single
			S3VA53T2D	6.25	38	Twin
600	3VA	3VA54, 3VA64	S3VA54TD	6.25	32	Single
			S3VA54T2D	6.25	46	Twin
800	3VA	3VA55, 3VA65	S3VA55TD	6.25	32	Single
1000	3VA	3VA66	S3VA55TD	8.75	32	Single
1200	3VA	3VA57, 3VA67	S3VA57TD	10	38	Single

Connecting Strap Kits for use with Circuit Breakers in CSA FCI and FCII SWBD Distribution Sections^{④⑦⑧} (Table 15)

Breaker Type	Catalogue Number	Unit Height	Mounting
BQ, BQH, HB, BL, BLH, HBL	6BL2C ^{②③⑤}	3.75" (95)	Twin
ED2, ED4, ED6, HED4	6E62 ^{②③⑤}	3.75" (95)	Twin
CED6	6CLE2 ^①	3.75" (95)	Twin
3VA41	S3VA41TDCAN	3.75" (95)	Twin
	S3VA41TDHD	7.50" (191)	Twin, High Density
3VA61	S3VA52TDCAN	5" (127)	Twin
QR2, QR2H, HQR2, HQR2H	6QR2CAN ^⑤	5" (127)	Twin
FXD6, FD6, HFD6, HHFD6	6F62 ^①	5" (127)	Twin
CFD6	6CLF1C ^⑤	5" (127)	Single
3VA52, 3VA62	S3VA52TDCAN	5" (127)	Twin
JXD6, JD6, HJD6, HHJD6	6JJ62 ^①	8.75" (222)	Twin
SJD6, SHJD6	6SJL1C ^⑤	8.75" (222)	Single
CJD6	6CLJ1C ^⑤	8.75" (222)	Single
LXD6, LD6, HLD6, HHLD6, SLD6, SHLD6	6LL61C ^⑤	8.75" (222)	Single
CLD6, SCLD	6CLL1C ^⑤	8.75" (222)	Single
SCJD6	6SCL61C ^⑤	8.75" (222)	Single
MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6	6M61C ^⑤	10" (254)	Single
NXD6, ND6, HND6, CND6, SHND6, SCND6	6N61C ^⑤	10" (254)	Single

3VA Breaker Provision Kits

Breaker Type	Cat. Number	Description
3VA52, 3VA61 or 3VA62 Breaker	S3VA52PRCAN	Contains the necessary hardware to land breaker on an existing scrap kit (CSA applications).
Twin Mount 3VA52 / 3VA61 / 3VA62	S3VA52PR	These kits include (3) Bus Extensions, (3) 3VA5 N. Keepers, (3) 3VA6 Nut Keepers and hardware (cUL applications).
Single Mount 3VA53 / 3VA63 / 3VA54 / 3VA64	S3VA53PR	

3VA Padlocking and Handle Blocking Devices — Padlocks in "OFF", Handle Blocking in either the "ON" or "OFF" position

Breaker Type	Amp.	Handle Block	Padlocking Device
3VA52	250A	3VA93780LB10	3VA91380LB11
3VA53	400A	3VA93780LB10	3VA93380LB11
3VA54	600A	3VA93780LB10	3VA93380LB11
3VA55	800A	N/A	3VA95780LB10
3VA57	1200A	3VA98770LB10	3VA98770LB11
3VA61	150A	3VA93780LB10	3VA91380LB11
3VA62	250A	3VA93780LB10	3VA91380LB11
3VA63	400A	3VA93780LB10	3VA93380LB11
3VA64	600A	3VA93780LB10	3VA93380LB11
3VA65	800A	N/A	3VA95780LB10
3VA66	1000A	N/A	3VA95780LB10
3VA67	1200A	3VA98770LB10	3VA98770LB11

- ① These are aluminum connectors. If copper is required please add suffix C.
 ② 3.75" (95) plate accommodates six 1-pole breakers.
 ③ 10" (254) plate accommodates eighteen 1-pole breakers.
 ④ Connector kits also accommodate S5, F2, CDP6 Panelboards, FCRS, FCI and FCII distribution interiors or CDP6/SPP6 Series Panels.
 ⑤ These connectors are available in copper only.
 ⑥ Blank (Circuit Breaker or Switch) Cover Plates can also be used in CI, FCII and cUL SB distribution interiors or CDP6/SPP6 Series Panels.

- ⑦ Mounting kits include connector straps and covers (breakers or switches are not included).
 ⑧ Connecting strap kits include connecting straps, hardware, and cover plates for switchboards and power panels. Breakers and switches to be ordered separately.
 ⑨ QR filler plates only: 6QR2FKCAN. For copper QR kit, use p/n: 6QR2CCAN.

*S3VA41TD and S3VA41TDCAN strap kit can also accommodate xGB2 breakers, reference Installation Instructions.

Blank Filler Plates for Distribution Switch or Circuit Breaker^⑥ (Table 17)

Height - Inches (mm)	Cat. Number
1.25" (32)	6FPB01
2.50" (64)	6FPB02
3.75" (95)	6FPB03
5.00" (127)	6FPB05
10.00" (254)	6FPB10
15.00" (381)	6FPB15

Sentron Handle Blocking Device Blocks handle in either the "ON" or "OFF" position. Available for:

Breaker Type	Cat. Number
BL, BLH, HBL, BQ, BQH, HBQ	ECQL1
All BQD, GB	BQDHBD
All QR	HPLQR
All BQD, NGB, NGB2, HGB2, LGB2	BQDHBD
All ED	E2HBL
All FD	FD6HB1
All JD, LD	JD6HBL
All MD, ND, PD	MN6BL

Sentron Padlocking Device — Padlocks in "OFF" position. Available for:

Breaker Type	Cat. Number
BQ, BQH, BL, BLH, HBL	ECQLD3
One Pole BL, BLF, BE, BAF	ECPLD1
Two-Pole BL, BLF, BE	ECPLD2
All QR	HPLQR
All BQD, NGB, NGB2, HGB2, LGB2	BQDPLD
All ED	ED2HPL
All FD	FD6PL1
All JD, LD	JD6HPL
All MD, ND, PD, RD	MN6PLD

Sentron Handle Extensions - For replacement (one extension shipped with breaker)

Breaker Types	Cat. Number
All MD, ND, PD	EX11

Sentron Ground Fault Sensing Relay Kit Equipment Protection (30 mA)

For Use with Breaker Types	Number of Poles	Cat. Number Description
ED4, ED6, HED4	1, 2, 3	See breaker portion of this catalogue

Shunt Trip on Main or Branch

Description	Cat. Number
BL, BQD6 (branch only) ED2, ED4, HED4 (branch only) All others through 1200A	1 to 6 poles may be mounted in 3.75" (95) of unit space. Accessories such as shunt trips on three pole breakers require 6.25" (159) of unit space.

Filler Plates^①

For use with CSA FCI, FCII, CDP-6 & VB-6 switchboards or series 5 or 6 CDP circuit breaker panelboards.

Breaker Frame	Filler Plate Catalog Number	Notes
BL, BQD, ED, xGB, xGB2	DFFP1A	Per Pole

Note: When a front filler plate is not completely filled with breakers, the openings in the unused space must be closed with 1-pole filler plates from table. With shunt trip mounting, add shunt trip cover plate part number #12-B-3011-01 in your purchase order.

Connecting Strap Kits for use with VB, VK or HCP Switches in Distribution Sections^{①②③⑤} (Table 16)

Rating Amperes	VB Switch Cat. No.	VK Switch Cat. No.	HCP Switch Cat. No.
30/30	VB6-71	VK6-57	N/A
60/60		VK6-58	
100/100		N/A	
200		VK6-72	
200/200	N/A	N/A	F6162DCAN
400-600	VB6-150		
800-1200	N/A		

Metering Switch for FCI Metering Switchboards^④ (46"W)

Ampere Rating	600V Metering Switch (c/w Meter Socket)	Height-Inches (mm)
30/30	V7E3611JMC7	10" (254)
60/60	V7E3622JMC7	10" (254)
100/100	V7E3633JMC7	10" (254)
200	V7F3604JMC7	17.5" (444.5)

VK Switch For Use With FPP6 Switchboards^⑤

30/30	VK23611JP	6.25 (159)
60/60	VK23622JP	6.25 (159)
100/100	VK33633JP	7.5 (90)
200/200	VK73644JP	10 (254)

VB Switch For Use With VB6 Switchboards^⑤

30/30	V7E3611JP	7.5(190)
60/60	V7E3622JP	7.5(190)
100/100	V7E3633JP	7.5(190)
200	V7F3604JP	10(254)
400	V7H3605JP	15(381)
600	V7H3606JP	15(381)

① Connector kits also accommodate S5, F2, CDP6 Panelboards, FCRS, FCI and FCII distribution interiors or CDP6/SPP6 Series Panels.

② Mounting kits include connector straps and covers (breakers or switches are not included).

③ Connecting strap kits include connecting straps, hardware, and cover plates for switchboards and power panels. Breakers and switches to be ordered separately.

④ Metering switch kits include metering switches, cover plates, connecting straps, and hardware.

⑤ The fusible switches and connecting strap kits are designed for standard 38"W sections. Additional covers are required for wider sections. Please consult your local sales contact.

Sentron® FCI, FCII Switchboards

Protective Devices - Fusible Switches

General

VK and VB (Vacu-Break) Fusible Switches

All VK and Vacu-Break fusible switches include voidable cover interlock; quick-make, quick-break operation; positive ON-OFF action; padlockable (at ON or OFF) handle design; Vacu-Break arc control (i.e., enclosed arc chamber, double-break magnetic arc blowout); clamping pressure spring force on closed contacts; spring-reinforced fuse holders. The VK switch is a true visible contact design.

Accessory devices and modifications available for 250-volt switches (30 amps to 600 amps): Class R and class J rejection type fuse holders are available for all units. For 600-volt switches (30 amps to 600 amps): Class R rejection type fuse holders, Class J fuse holders; (100 amps to 600 amps) Class T fuse holders.

Bolted Pressure Switches

These switches are suitable for use on systems capable of delivering fault current up to 200,000 amps symmetrical RMS when equipped with Class L fuses. All bolted pressure switches include fuse door interlock; quick-make, quick-break operation; bolted pressure force on closed contact; padlockable (in the "open" position only) handle.

Accessories and modifications available: shunt trip (electrical open-manual close). 120V ac standard control voltage: electrical operator (electrical open and close), specify system voltage; ground fault relay (requires shunt trip); blown fuse trip (switch opens when any one fuse blows-requires shunt trip); blown fuse indicating lights; phase failure relay with capacitor trip (detects failure of any one phase and opens switch-requires shunt trip) specify system voltage; auxiliary contacts.

CSA Fuse Classes

Class	Amperes	Volts (AC)	Interrupting Ratings	I^2t , Ip (Let-Thru)	Circuits
H	Standard Code	1-600A	250 and 600V or less	10,000A	Less than 10,000A available
K ^①	Fast Acting (One time)	1-600A	250 and 600V or less	50,000A	Feeder circuits
J	Fast Acting and Time Delay	1-600A	600V or less	To 200,000A	Ip and I^2t -Low (motor load small %)
RK1	Fast Acting and Time Delay	1/10-600A	600V or less 250V or less	To 200,000A	I^2t -Slightly > J Ip-Slightly > J
RK5	Fast Acting and Time Delay	1/10-600A	600V or less 250V or less	To 200,000A	I^2t > RK-1 Ip > RK-1
C (FORM II)	Moderate Delay	2-600A	600V or less	To 200,000A	I^2t < RK-5 Ip < RK-5
T	Fast Acting	1-600A	300 and 600V or less	To 200,000A	I^2t -Low Ip-Low
L	Fast Acting and Time Delay	601-5000A	600V or less	To 200,000A Ip-Low	I^2t -Low motor loads

Branch Switches 600V Maximum

Switch Type	Ampere Rating	Maximum Voltage	Fusing
VB/VK	30 / 30A	600V	Class J
VB/VK	60 / 60A		
VB/VK	100 / 100A		
VB	200A		
VK	200 / 200A		
VB	400A, 600A		

① Refer to Siemens for Form II Class C applications.

Interrupting Ratings of Bolted Pressure Switches

Max. System Voltage	Ampere Rating	Class L Fuse Rating (Amps)	Fuse Interrupting Rating (Sym. RMS Amps)
240 to 600	800	601, 700, 800	200,000
	1200 1600	1000, 1200 1500, 1600	
	2000 2500	1800, 2000 2500	
	3000 4000	3000 3500, 4000	

Application Note: Lower rated fuses may be installed within any switch rating i.e.: 2000-amp fuse in 4000-amp switch.

Sentron® FCI, FCII Switchboards

Protective Devices - HCP Switchboard Unit Disconnect Switches

General

Features

- CSA Certified / UL Listed under file number E6849
- 800A-1200A switch design.
- Visible contacts.
- Field installable shunt trip and auxiliary switch accessory kits.
- Installs in existing Siemens switchboards and power panelboards.
- Suitable for use on systems with up to 200,000A available fault current, RMS symmetrical when equipped with Class J or Class L fuses.
- Mixes with other 30A through 600A switches, and 100 through 1200 amp frame breakers.
- Allows 800A and 1200A switches in standard 38" wide distribution sections in either main or branch configurations.
- 16¼" mounting height is the smallest 1200A design in the industry, allowing up to 4 units in one vertical section.
- Field reversible horizontal mounting design for left or right hand cabling.



3-Pole, Horizontal Mount^①

Catalogue Number	Maximum Ampere Rating	Maximum Voltage Rating	Fuse Class	Dimensions (inches)			Horsepower Rating						
							240V		480V		600V		250V DC
				H	L	D	Std	Max	Std	Max	Std	Max	
HCP327HT	800	240	T	16.25	17.22	7.38	100	250	—	—	—	—	50
HCP367H	800	600	L	16.25	17.22	7.38	100	250	200	500	250	500	50
HCP328HT	1200	240	T	16.25	17.22	7.38	100	250	—	—	—	—	50
HCP368H	1200	600	L	16.25	17.22	7.38	100	250	200	500	250	500	50

3-Pole, Vertical Mount

HCP327VT	800	240	T	17.00	16.25	7.38	100	250	—	—	—	—	50
HCP367V	800	600	L	17.00	16.25	7.38	100	250	200	500	250	500	50
HCP328VT	1200	240	T	17.00	16.25	7.38	100	250	—	—	—	—	50
HCP368V	1200	600	L	17.00	16.25	7.38	100	250	200	500	250	500	50

Accessories

Terminal Connectors (one lug per kit)^②

Ampere Rating	Catalogue Number	Connector Wire Range
800A	TA3K500	(3) #1 AWG–500 kcmil (Cu or Al)
800A	TC3K350	(3) #1 AWG–350 kcmil (Cu only)
800-1200A	TA4H500	(4) #1 AWG–500 kcmil (Cu or Al)
800-1200A	TA3H750	(3) 250–750 kcmil (Cu or Al)

T Fuse Adapter Kits

Catalogue Number	Description
TFAK72	800A, 300V AC
TFAK75	800A, 600V AC
TFAK82	1200A, 300V AC

Auxiliary Switch Kits

Contact Ampere Rating	Maximum Voltage		Switch Mounting	Contacts	Catalogue Number
	AC	DC			
15A	480	125	Left Pole	1NO/1NC	A01HCPL4
15A	480	125	Right Pole	1NO/1NC	A01HCPR4
10A	240	125	Left Pole	2NO/2NC	A01HCPL2

Shunt Trip Kit

Control Voltage		Catalogue Number
AC	DC	
120	—	HCPST120
240	—	HCPST240
277	—	HCPST277
480	—	HCPST480
—	48	HCPST48
—	125	HCPST125

Switchboard Connection Strap Kit^①

Switch Ampere Rating	Catalogue Number
800–1200A	F6162DCAN

Compression Lug Adapter Kit

The use of this kit provides for the mounting of up to four lugs per phase. Each kit accepts lugs with (2) 3/8" diameter mounting holes on 1" centres. One kit per pole line or load is required. Lugs are not provided.

Ampere Rating	Catalogue Number
800–1200A	HCPCLP

For inches / millimeters conversion, see Technical Section.

① For horizontal mounting only in either 38" wide min switchboards or S5/F2 power panelboards.

② 3 kits required for 3 phase switch

Sentron® FCI, FCII Switchboards

Metering Data

Selection

User Metering

A full complement of switchboard instruments with appropriate current transformers, potential transformers and selector switches are available in all Siemens switchboards.

The meters and instrument switches are mounted on hinged panels with potential transformers and fuses located behind the door. Current transformers are mounted on the main bus or, in the case of branch feeder metering, at the load terminals of the branch protective device and normally do not require additional unit space.

Siemens Digital Power Meters

The Siemens Digital Power Meters are provided as an option for FCI & FCII switchboards. Please refer to the Power Monitoring Section in this catalogue for more information.

Ammeters and Voltmeters (Analog)

Ammeters are switchboard type with $\pm 1\%$ accuracy, 0 to 6000 amperes maximum. The included instrument switch will provide positions to read each phase and will include an OFF position. Panel type ammeters with $\pm 3\%$ accuracy, 800 ampere maximum, can be furnished for branch feeder metering to conserve panel space.

Voltmeters are switchboard type with $\pm 1\%$ accuracy, 0 to 600V AC. The included instrument switch provides positions to read each phase-to-phase voltage and each phase-to-neutral voltage and has an OFF position.

Current Transformers / Potential Transformers

Potential transformers are recommended wherever the system voltage exceeds 150 volts AC phase-to-neutral to lower voltage levels for instrument switches and meters mounted on the switchboard front panel.

Available CT Ratios — Ampere Rating

100:5	600:5	2500:5
150:5	800:5	3000:5
200:5	1000:5	4000:5
300:5	1200:5	5000:5
400:5	1500:5	6000:5
500:5	2000:5	

Number of CT's and or PT's required for Typical Meters Applied on Selected System Voltages

System	Volts AC	Ammeter			Watt-hour Meter						Wattmeter		Varmeter		Power Factor Meter		Frequency Meter	Synchroscope
		C/T	P/T	Scale	2 Element		2.5 Element		3 Element		C/T	P/T	C/T	P/T	C/T	P/T	PT	P/T
1Ø3W	120/240	2	—	0-300	2	—	—	—	—	—	2	—	2	—	1	—	—	—
3Ø3W	240	2	—	0-300	2	—	—	—	—	—	2	2	2	2	1	2	—	2
	600	2	2	0-750	2	2	—	—	—	—	2	2	2	2	1	2	1	2
3Ø4W	120/240	3	—	0-300	—	—	3	—	—	—	3	2	3	2	1	2	—	—
	120/208	3	—	0-300	—	—	3	—	3	—	3	—	3	—	1	2	—	—
	347/600	3	3	0-750	—	—	3	2	3	3	3	2	3	2	1	2	1	2

Integrated Power Systems Switchboards

Type IPS

General

Product Description

Siemens integrated power systems (IPS) switchboards integrate multiple pieces of electrical distribution equipment into a single assembly. The design results in reduced installation time, a reduced footprint and reduced labour risk for installation.

The modular design of the IPS switchboard allows it to be combined with standard service entrance or distribution switchboards if needed. Also, the IPS switchboard can be added to an existing switchboard lineup.

IPS switchboards have a wide range of applications and are commonly used in retail stores, offices, health care facilities and retrofits.

Features & Benefits

Features


- All standard FCI, FCII & SMP Switchboard features
- Lighting panelboards
- Distribution transformers
- Half high distribution switchboard chassis
- Individually mounted breakers (cable in & cable out)
- Auxiliary sections for surge devices, ACCESS power monitoring, contactors, relays, time clocks
- Customer equipment, etc.

Integrated Power Systems Switchboard Commonly Mounted Equipment



Distribution sections

- Up to 2000A (full height)
- Up to 1200A (half height)




Transformers

- Up to 300kVA (full height)
- Up to 112.5kVA (half height)



Panelboards

- P1 up to 250A
- P2 up to 600A

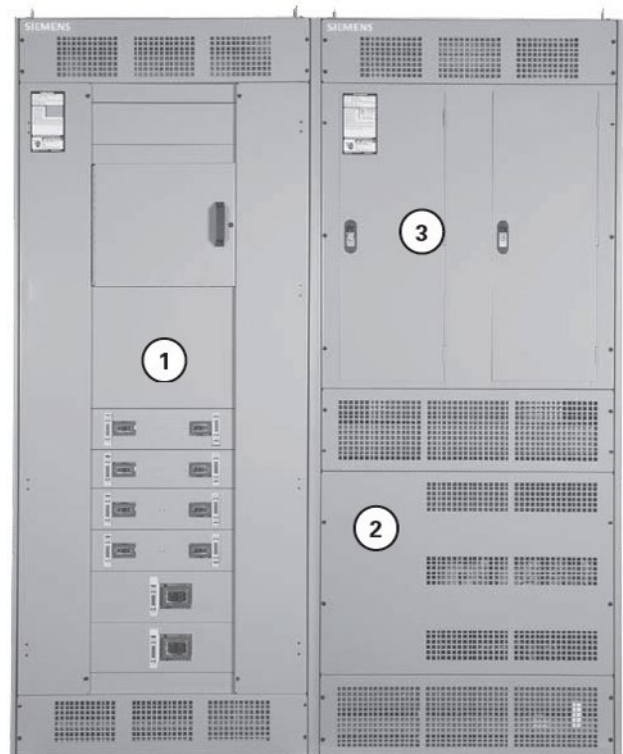

Integrated Power Systems Switchboards

Type IPS

General

Features & Benefits (continued)

Reduced Installation Time

IPS switchboards arrive at a jobsite with the components factory installed and wired. The result is significantly reduced installation time. The realized savings on installation result in lower labour costs which drops directly to the bottom line.

Reduced Space Requirements

By integrating components that are typically individually mounted, the IPS switchboard can reduce the space requirements for typical electrical equipment installation by up to 40%. This smaller footprint frees up valuable square footage that can be utilized by the building owner for other profitable uses.

Reduced Installation Risk.

IPS switchboards are assembled at Siemens manufacturing plants with meticulous attention to details reinforced with strict testing procedures. This focus on quality ensures that problems encountered with traditional installations such as misinterpretation of drawings or field installation errors are eliminated. Utilizing IPS switchboards eliminates risks, enabling projects to come in on time and on budget.


Standards and Certifications

- CSA C22.2 No.31
- Mounted panelboards built to UL67, NEMA PB-1 and CSA C22.2 No. 29
- Other equipment is CSA listed as applicable

Additional Information

For complete application and pricing information contact your local Siemens sales office.

Integrated Power Systems Switchboard Optimized Electrical Room Layout

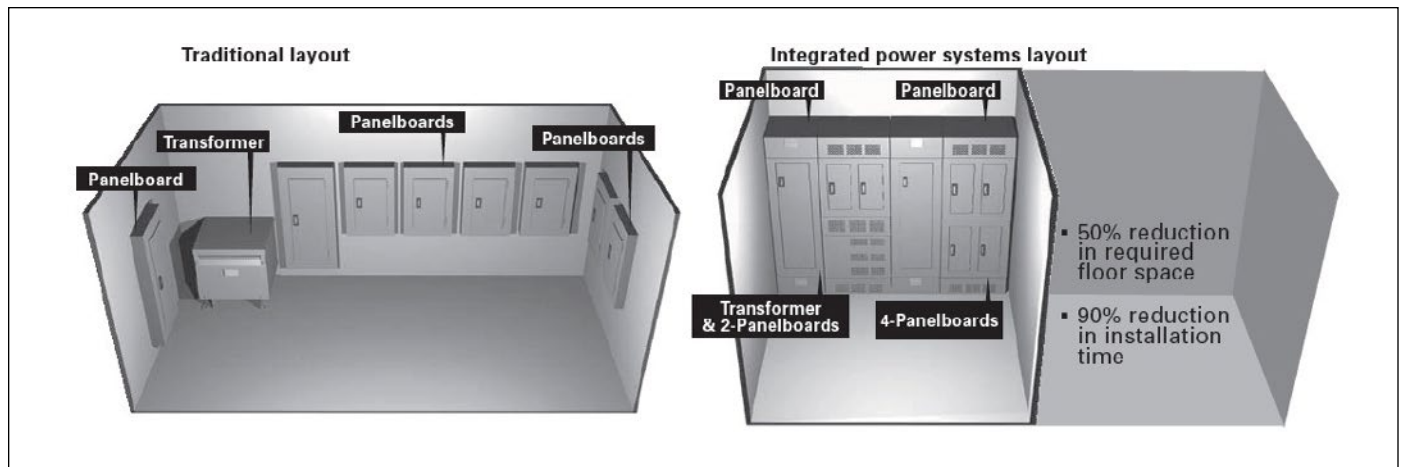

SEM3 System configured in Distribution Panels and Switchboards

The information below pertains to panelboard types S5 and switchboard types SMP, FCI, and FCII. SEM3 specifics to S5, SMP, FCI, and FCII are:

SEM3 for use in Siemens Switchboards



Controller

SEM3 controller is mounted in a low voltage compartment. Each controller can monitor up to 45 circuits. Applications that require monitoring more than 45 circuits will require additional controllers.



Current Transformers (CTs)

Six sizes of CTs are available for use in S5, SMP, FCI and FCII applications: 50, 125, 250, 400, 600, and 1200 amp. All CTs are pre-mounted to a support bracket that attaches to the interior. Each bracket supports a maximum of 3 CTs and is designed for the breaker selected (brackets are not interchangeable between breaker frames). Each CT will be attached to a data module that is placed in the meter racks.



Meter Racks

All meter racks will be installed next to the SEM3 controller in unit space. The 21 space meter rack is used as a default option where possible.

NOTE: Monitoring of 45 circuits will require two 21 position racks and one 3 position rack

Other Considerations

Configuration: Data modules from CTs monitoring a circuit breaker must be mounted adjacent to one another in the meter rack. Any field changes to the factory configuration must take this into account.

Start-up & Commissioning: Siemens can provide these services. Contact your local SIEMENS Sales office for more details.