

**SIEMENS**

SENTRON • SIVACON • ALPHA

# Low-Voltage Power Distribution and Electrical Installation Technology

Air Circuit Breakers

Catalog  
Extract  
LV 10

Edition  
10/2020

[siemens.com/lowvoltage](https://www.siemens.com/lowvoltage)



# Making sure power makes its way

Consistent, safe and intelligent low-voltage power distribution and electrical installation technology

Whether industries, infrastructures or buildings: Each environment depends on a reliable power supply.

Which is why products and systems featuring maximum safety and optimum efficiency are in demand. This comprehensive portfolio for low-voltage power distribution and electrical installation technology covers every requirement – from the switchboard to the socket outlet.

We are there when you need us

Your personal contact can be found at  
[www.siemens.com/lowvoltage/contact](http://www.siemens.com/lowvoltage/contact)

## Catalog LV 10 · 10/2020

You will find the latest edition and all future editions in the Siemens Industry Online Support at  
[www.siemens.com/lowvoltage/catalogs](http://www.siemens.com/lowvoltage/catalogs)

Refer to the Industry Mall for current prices  
[www.siemens.com/industrymall](http://www.siemens.com/industrymall)

The products and systems listed in this catalog are developed and manufactured using a certified quality management system in accordance with DIN EN ISO 9001:2008.

### Technical data

The technical specifications are for general information purposes only. Always heed the operating instructions and notices on individual products during assembly, operation and maintenance.

All illustrations are not binding.

© Siemens 2020



# Low-Voltage Power Distribution and Electrical Installation Technology

	Introduction	I/2
Protecting	Air Circuit Breakers	1/1
	Molded Case Circuit Breakers	2/1
	Miniature Circuit Breakers	3/1
	Residual Current Protective Devices / Arc Fault Detection Devices (AFDDs)	4/1
	Switching Devices	5/1
	Overvoltage Protection Devices	6/1
	Fuse Systems	7/1
Protecting, Switching and Isolating	Switch Disconnectors	8/1
Switching and Isolating	Transfer Switching Equipment and Load Transfer Switches	9/1
Measuring and Monitoring	Measuring Devices, Power Monitoring and Digitalization Solutions	10/1
	Monitoring Devices	11/1
Distribution	Transformers, Power Supply Units and Socket Outlets	12/1
	Busbar Systems	13/1
	Terminal Blocks	14/1
	Power Distribution Boards, Motor Control Centers and Distribution Boards	15/1
	Busbar Trunking Systems	16/1
	System Cubicles, System Lighting and System Air-Conditioning	17/1
	Appendix	A/1

E

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

A





## Made for makers. Simply reliable.

All power distribution systems rely on a secure infeed of electrical energy. The 3WA air circuit breaker combines all of the functions which are required of power distribution equipment in the digital companies of today: from reliably protecting people and equipment from electrical accidents and damage, to flexible application and retrofit options, a long service life and low maintenance, to innovative features for integrated e-engineering, reliable energy data recording and seamless integration into digital environments. As the central component of the electrical power distribution, the 3WA air circuit breaker provides the basis for a holistic energy system in the digital age.

## Reliable, versatile and perfectly integrated

The 3WL air circuit breakers reliably protect electrical equipment from damage or fire resulting from short circuit, ground fault or overload failures.



# Air Circuit Breakers



All the information you need	1/2
Quick selection guide 3WA <b>new</b>	1/4
Switching devices for AC and DC	1/4
Switching devices for AC	1/8
Switching devices for DC	1/14
Electronic trip unit ETU600	1/17
Connection	1/22
Communication	1/23
3WA11 – 3WA13 <b>new</b>	1/24
System overview	1/24
Online configurator highlights	1/26
Structure of the article numbers	1/28
Accessory options	1/38
Guide frames for AC	1/41
Guide frames for DC	1/43
Accessories and spare parts	1/44
Quick selection guide 3WL	1/56
Switching devices for AC and DC	1/56
Switching devices for AC	1/58
Switching devices for DC	1/62
Electronic trip unit ETU	1/66
Connection	1/70
Operating mechanism, auxiliary release, auxiliary switch	1/71
3WL11 – 3WL13	1/72
System overview	1/72
Online configurator highlights	1/74
Structure of the article numbers	1/76
Accessory options	1/80
Guide frames for AC	1/91
Guide frames for DC	1/92
Accessories and spare parts	1/93
3WL10	1/108
System overview	1/108
Online configurator highlights	1/110
Structure of the article numbers	1/112
Accessory options	1/114
Guide frames	1/116
Electronic trip units ETU and accessories	1/117
Accessories and spare parts	1/120

# A multitude of additional information ...

## Information + ordering

1

### All the important things at a glance

#### Information to get you started

For information about air circuit breakers, please visit our website

[www.siemens.com/3WA](http://www.siemens.com/3WA)

[www.siemens.com/3WL](http://www.siemens.com/3WL)

### Contact persons in your region

#### We are there when you need us

You can find your local contacts at

[www.siemens.com/lowvoltage/contact](http://www.siemens.com/lowvoltage/contact)

### Your product in detail

The Siemens Industry Online Support portal provides comprehensive information

[www.siemens.com/lowvoltage/product-support](http://www.siemens.com/lowvoltage/product-support)

- Quick selection guide – 3WA air circuit breakers ([109781967](#))
- Brochure – 3WA air circuit breakers ([109781968](#))
- Quick selection guide – 3WL air circuit breakers ([109751638](#))
- Technical basic information – 3WL air circuit breakers ([109767789](#))

The relevant tender specifications can be found at

[www.siemens.com/lowvoltage/tenderspecifications](http://www.siemens.com/lowvoltage/tenderspecifications)

Use our conversion tool for quick and easy conversion to Siemens products [www.siemens.com/conversion-tool](http://www.siemens.com/conversion-tool)

### Our video range

#### Siemens YouTube channel

- Power Distribution Low Voltage (EN) [bit.ly/3iuhXS](https://bit.ly/3iuhXS)
- 3WL air circuit breakers (general) [bit.ly/2ZH1rXH](https://bit.ly/2ZH1rXH)

### Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Air circuit breakers [sie.ag/2IXiZjB](https://sie.ag/2IXiZjB)

Direct forwarding to the individual products in the Industry Mall by clicking on the Article No. in the catalog or by entering this web address incl. Article No.

[www.siemens.com/product?Article No.](http://www.siemens.com/product?Article No.)

### Configurators

#### Exactly the right circuit breaker for your application

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations. Configure your 3WL air circuit breaker at [www.siemens.com/lowvoltage/3wa-configurator](http://www.siemens.com/lowvoltage/3wa-configurator)  
[www.siemens.com/lowvoltage/3wl-configurator](http://www.siemens.com/lowvoltage/3wl-configurator)  
[www.siemens.com/lowvoltage/3wl10-configurator](http://www.siemens.com/lowvoltage/3wl10-configurator)

For your configured 3WL air circuit breaker, you can additionally find

- 3D views
- CAD data
- Unit wiring diagrams
- Dimension drawings



# ... can be found in our online services

## Commissioning + operation

### Configuration software

#### SENTRON powerconfig

The combined commissioning and service tool for communication-capable measuring devices and circuit breakers from the SENTRON portfolio.

[www.siemens.com/powerconfig](http://www.siemens.com/powerconfig)

Free download SENTRON powerconfig mobile via:  
[App Store](#) and [Play Store](#)

### Your product in detail

The Siemens Industry Online Support portal provides detailed technical information

[www.siemens.com/lowvoltage/product-support](http://www.siemens.com/lowvoltage/product-support)

- Operating instructions
- Characteristic curves
- Certificates

Engineering data for CAD or CAE systems are available in the CAx Download Manager at

[www.siemens.com/lowvoltage/cax](http://www.siemens.com/lowvoltage/cax)

### The fast track to the experts

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at  
[www.siemens.com/lowvoltage/support-request](http://www.siemens.com/lowvoltage/support-request)

We offer a comprehensive portfolio of services. You can find your local contacts at  
[www.siemens.com/lowvoltage/contact](http://www.siemens.com/lowvoltage/contact)

You can find further information on services at  
[www.siemens.com/service-catalog](http://www.siemens.com/service-catalog)

### Training and tutorials

Our training courses can be found at  
[www.siemens.com/sitrain-lowvoltage](http://www.siemens.com/sitrain-lowvoltage)

- Protection systems in low-voltage power distribution (WT-LVAPS)
- 3WL air circuit breakers (WT-LVA3WL)
- Communication with SENTRON components (LV-COM)
- Maintenance and operation of 3WL circuit breakers (LV-CBMAIN)
- Project planning and selection of SENTRON circuit breakers (LV-CBPROJ)

Video tutorial on the 3WL air circuit breaker – descriptive supplement to Operating Instructions

[www.lowvoltage.siemens.com/wcms/3wl-tutorial](http://www.lowvoltage.siemens.com/wcms/3wl-tutorial)

### Manuals

Manuals are available for downloading in Siemens Industry Online Support at  
[www.siemens.com/lowvoltage/manuals](http://www.siemens.com/lowvoltage/manuals)

- Equipment manual – 3WA air circuit breakers ([109763061](#))
- Configuration manual – 3WL1 air circuit breakers ([35681108](#))
- Configuration manual – Low-voltage protection devices selectivity tables ([109748621](#))
- System manual – 3WL/3VL circuit breakers with communication capability – Modbus ([39850157](#))
- System manual – 3WL/3VL circuit breakers with communication capability – PROFIBUS ([12560390](#))
- Equipment manual – 3VA27 molded case circuit breakers & 3WL10 air circuit breakers ([109753821](#))
- Communications manual – 3WL air circuit breakers via COM35 – PROFINET IO, Modbus TCP ([109757987](#))
- Communication manual – 3WL10 air circuit breakers & 3VA27 molded case circuit breakers ([109760220](#))

### Technical overview – Air circuit breakers

3WA



3WL



## The fast way to get you to our online services

This page provides you with comprehensive information and links on air circuit breakers

3WA: [www.siemens.com/lowvoltage/product-support](http://www.siemens.com/lowvoltage/product-support) ([109781188](#))

3WL: [www.siemens.com/lowvoltage/product-support](http://www.siemens.com/lowvoltage/product-support) ([109766020](#))

# Switching devices for AC and DC

IEC 60947-2

1

AC



3WA11



3WA12

## Basic data

Rated operational voltage $U_e$	V	$\leq 1000$		$\leq 1150$	
Rated current $I_n$	A	630 ... 2500		2000 ... 4000	
Size		1		2	
Type of mounting		Withdrawable	Fixed-mounted	Withdrawable	Fixed-mounted
Number of poles		3/4-pole	3/4-pole	3/4-pole	3/4-pole

## Dimensions

Width (3-pole   4-pole)	mm	320 410	320 410	460 590	460 590
Height (for breaking capacity N, S, M, H and D   C and E)	mm	468 518	437 462	468 518	437 462
Depth	mm	471	357	471	357

## Approvals

General product approvals	VDE, EAC, CCC, CE, C-Tick	VDE, EAC, CCC, CE, C-Tick
Marine / shipbuilding	ABS, DNV, GL, LRS, BV, PRS, CCS, RMRS	ABS, DNV, GL, LRS, BV, PRS, CCS, RMRS

## Breaking capacity

Rated short-circuit breaking capacity		N	S	M	E	S	M	H	C	E
$I_{cu}   I_{cs}$ at $U_e$ up to 415/440 V AC	kA	55 55	66 66	85 85	— —	66 66	85 85	100 100	130 130	— —
$I_{cu}   I_{cs}$ at $U_e$ up to 500 V AC	kA	55 55	66 66	85 85	— —	66 66	85 85	100 100	130 130	— —
$I_{cu}   I_{cs}$ at $U_e$ up to 690 V AC	kA	42 42	50 50	66 66	85 85	50 50	66 66	85 85	100 100	85 85
$I_{cu}   I_{cs}$ at $U_e$ up to 1000 V AC	kA	— —	— —	— —	50 50	— —	— —	— —	— —	85 85
$I_{cu}   I_{cs}$ at $U_e$ up to 1150 V AC	kA	— —	— —	— —	— —	— —	— —	— —	— —	50 50

## Rated short-circuit making capacity $U_e$

$I_{cm}$ at $U_e$ up to 415 V AC	kA	121	145	187	—	145	187	220	286	—
$I_{cm}$ at $U_e$ up to 500 V AC	kA	121	145	187	—	145	187	220	286	—
$I_{cm}$ at $U_e$ up to 690 V AC	kA	88	105	145	187	105	145	187	220	187
$I_{cm}$ at $U_e$ up to 1000 V AC	kA	—	—	—	105	—	—	—	—	187
$I_{cm}$ at $U_e$ up to 1150 V AC	kA	—	—	—	—	—	—	—	—	105

## Rated short-time withstand current $I_{cw}$ <sup>1)</sup>

$I_{cw}$ at $U_e$ up to 500 V AC	0.5 s	kA	55	66	85	—	66	85	100	—
	1 s	kA	50	66	85	—	66	85	85	—
	2 s	kA	35 <sup>2)</sup> /45 <sup>3)</sup>	45	70	—	66	66 <sup>4)</sup> /85 <sup>5)</sup>	66 <sup>4)</sup> /85 <sup>5)</sup>	85
	3 s	kA	30 <sup>2)</sup> /35 <sup>3)</sup>	35	60	—	55 <sup>4)</sup> /66 <sup>5)</sup>	55 <sup>4)</sup> /75 <sup>5)</sup>	55 <sup>4)</sup> /75 <sup>5)</sup>	75
$I_{cw}$ at $U_e$ up to 690 V AC	0.5 s	kA	42	50	66	85	50	66	85	100
	1 s	kA	42	50	66	85	50	66	85	100
	2 s	kA	35 <sup>2)</sup> /42 <sup>3)</sup>	45	66	70	50	66	66 <sup>4)</sup> /85 <sup>5)</sup>	85
	3 s	kA	30 <sup>2)</sup> /35 <sup>3)</sup>	35	60	60	50	55 <sup>4)</sup> /66 <sup>5)</sup>	55 <sup>4)</sup> /75 <sup>5)</sup>	75
$I_{cw}$ at $U_e$ up to 1000 V AC	0.5 s	kA	—	—	—	50	—	—	—	85
	1 s	kA	—	—	—	50	—	—	—	85
	2 s	kA	—	—	—	50	—	—	—	66 <sup>4)</sup> /85 <sup>5)</sup>
	3 s	kA	—	—	—	50	—	—	—	55 <sup>4)</sup> /75 <sup>5)</sup>
$I_{cw}$ at $U_e$ up to 1150 V AC	0.5 s	kA	—	—	—	—	—	—	—	50
	1 s	kA	—	—	—	—	—	—	—	50
	2 s	kA	—	—	—	—	—	—	—	50
	3 s	kA	—	—	—	—	—	—	—	50
$I_{cw}$ at $U_e$ up to 220 V DC	1 s	kA	—	—	—	—	—	—	—	—
$I_{cw}$ at $U_e$ up to 300 V DC	1 s	kA	—	—	—	—	—	—	—	—
$I_{cw}$ at $U_e$ up to 600 V DC	1 s	kA	—	—	—	—	—	—	—	—
$I_{cw}$ at $U_e$ up to 1000 V DC	1 s	kA	—	—	—	—	—	—	—	—

<sup>1)</sup> At rated operational voltage  $U_e \geq 690$  V, the  $I_{cw}$  value of the circuit breaker corresponds to the  $I_{cu}$  or  $I_{cs}$  value

<sup>2)</sup> Size 1 with  $I_{n \max} \leq 1250$  A  
<sup>3)</sup> Size 1 with  $I_{n \max} \geq 1600$  A

<sup>4)</sup>  $I_{n \max} \leq 2500$  A  
<sup>5)</sup>  $I_{n \max} \geq 3200$  A



AC



3WA13

DC



3WA12

1

≤1150			≤600 / 1000			
4000 ... 6300			1000 ... 4000			
3			2			
Withdrawable		Fixed-mounted	Withdrawable		Fixed-mounted	
3/4-pole		3/4-pole	3/4-pole		3/4-pole	
704 914		704 914	460 590		460 590	
468 518		437 462	468 518		437 462	
471		357	471		357	
VDE, EAC, CCC, CE, C-Tick			VDE, EAC, CCC, CE, C-Tick			
ABS, DNV, GL, LRS, BV, PRS, CCS, RMRS			ABS, DNV, GL, LRS, BV, PRS, CCS, RMRS			
H	C	E	D	E	D	E
– –	– –	– –	– –	– –	– –	– –
100 100	150 150 (3-pole); 130 130 (4-pole)	– –	– –	– –	– –	– –
85 85	150 150 (3-pole); 130 130 (4-pole)	150 150 (3-pole); 130 130 (4-pole)	– –	– –	– –	– –
– –	– –	125 125	– –	– –	– –	– –
– –	– –	70 70	– –	– –	– –	– –
220	330 (3-pole); 286 (4-pole)	–	–	–	–	–
220	330 (3-pole); 286 (4-pole)	–	–	–	–	–
187	330 (3-pole); 286 (4-pole)	330 (3-pole); 286 (4-pole)	–	–	–	–
–	–	275	–	–	–	–
–	–	154	–	–	–	–
100	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–	–	–
100	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–	–	–
100	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–	–	–
100	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–	–	–
–	–	70 70	–	–	–	–
–	–	70 70	–	–	–	–
–	–	70 70	–	–	–	–
–	–	70 70	–	–	–	–
–	–	–	35	–	35	–
–	–	–	30	–	30	–
–	–	–	25	–	25	–
–	–	–	–	20	–	20

# Switching devices for AC and DC

IEC 60947-2 (continued)

1

AC



3WA11

3WA12

Breaking capacity		N	S	M	E	S	M	H	C	E
Rated conditional short-circuit current $I_{cc}$ of the non-automatic air circuit breakers										
Up to 500 V AC	kA	55	66	85	–	66	85	100	100	–
Up to 690 V AC	kA	42	50	66	85	50	66	85	100	85
Up to 1000 V AC	kA	–	–	–	50	–	–	–	–	85
Up to 1150 V AC	kA	–	–	–	–	–	–	–	–	50
Up to 220 V/300 V DC	kA	–	–	–	–	–	–	–	–	–
Up to 600 V/1000 V DC	kA	–	–	–	–	–	–	–	–	–
IT system capability										
1-pole short-circuit breaking capacity $I_{IT}$ acc to.	≤500 V kA	50	50	50	–	50	50	50	50	–
IEC 60947-2 Annex H	≤690 V kA	–	–	–	50	–	–	–	–	50
	1000 V kA	–	–	–	–	–	–	–	–	–



AC

**3WA13**

DC

**3WA12**

1

H	C	E	D	E	D	E
100	130 (3-pole); 120 (4-pole)	–	–	–	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–	–	–
–	–	70	–	–	–	–
–	–	–	35/30	–/–	35/30	–/–
–	–	–	25/–	–/20	25/–	–/20
50	50	–	–	–	–	–
–	–	50	–	–	–	–
–	–	–	–	–	–	–

# Switching devices for AC

IEC 60947-2

3WA11



## Rated current $I_n$

630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A
-------	-------	--------	--------	--------	--------	--------

## General data

Isolating function acc. to EN 60947-2

Yes

Utilization category

B

Permissible ambient temperature

Operation

°C


-40 ... +70

Storage

°C

-40 ... +80

Mounting position

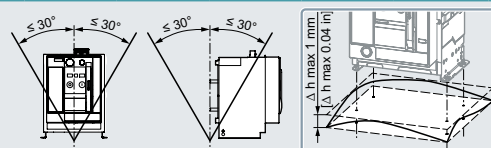

Degree of protection

IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover

## Voltage

Rated operational voltage  $U_e$  at 50/60 Hz

1000 V version

V AC

≤1000

Rated insulation voltage  $U_i$ 

V AC

1000

Rated impulse withstand voltage

Main conducting paths

kV

12

 $U_{imp}$ 

Auxiliary circuits

kV

4

Control circuits

kV

2.5

## Permissible load

### Permissible load for withdrawable versions

For all connection types (except rear vertical main connections)	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	1930	–
	Up to 70 °C (Cu bare)	A	630	800	1000	1210	1490	1780	–
With rear vertical connections	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500
	Up to 70 °C (Cu bare)	A	630	800	1000	1250	1545	1855	2215

### Permissible load for fixed-mounted versions

For all connection types (except rear vertical main connections)	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
	Up to 70 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
With rear vertical connections	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500
	Up to 70 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500

## Power loss at $I_n$

With three-phase symmetrical load with maximum rated current, complete device (3/4p)

Fixed-mounted circuit breaker

W

30

45

70

105

135

240

360

Withdrawable circuit breaker

W

55

85

130

205

310

440

600





## 3WA12



## 3WA13



1

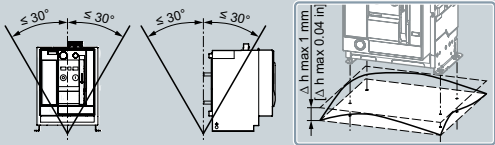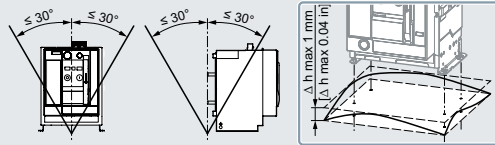2000 A				2500 A				3200 A				4000 A				4000 A				5000 A				6300 A							
Yes																Yes															
B																B															
-40 ... +70																-40 ... +70															
-40 ... +80																-40 ... +80															
																															
IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover																IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover															
≤1150																≤1150															
≤1150																≤1150															
12																12															
4																4															
2.5																2.5															
2000	2500	3200	–	4000	5000	–	2000	2500	3200	–	4000	5000	–	2000	2500	3200	–	4000	5000	–	6300										
2000	2500	3020	–	4000	5000	–	2000	2500	3020	–	4000	5000	–	2000	2500	3020	–	4000	5000	–	6300										
2000	2280	2870	–	4000	5000	–	2000	2280	2870	–	4000	5000	–	2000	2280	2870	–	4000	5000	–	6300										
2000	2500	3200	4000	4000	5000	5920	2000	2500	3200	4000	4000	5000	5920	2000	2500	3200	4000	4000	5000	5920	6300										
2000	2500	3200	3910	4000	5000	5810	2000	2500	3200	3910	4000	5000	5810	2000	2500	3200	3910	4000	5000	5810	6300										
2000	2390	2945	3645	4000	5000	5500	2000	2390	2945	3645	4000	5000	5500	2000	2390	2945	3645	4000	5000	5500	6300										
2000	2500	3200	–	4000	5000	–	2000	2500	3200	–	4000	5000	–	2000	2500	3200	–	4000	5000	–	6300										
2000	2500	3200	–	4000	5000	–	2000	2500	3200	–	4000	5000	–	2000	2500	3200	–	4000	5000	–	6300										
2000	2500	3200	–	4000	5000	–	2000	2500	3200	–	4000	5000	–	2000	2500	3200	–	4000	5000	–	6300										
2000	2500	3200	4000	4000	5000	6300	2000	2500	3200	4000	4000	5000	6300	2000	2500	3200	4000	4000	5000	6300	6300										
2000	2500	3200	4000	4000	5000	6300	2000	2500	3200	4000	4000	5000	6300	2000	2500	3200	4000	4000	5000	6300	6300										
2000	2500	3200	4000	4000	5000	5920	2000	2500	3200	4000	4000	5000	5920	2000	2500	3200	4000	4000	5000	5920	6300										
180	270	410	750	520	630	900	180	270	410	750	520	630	900	180	270	410	750	520	630	900	900										
320	520	710	1040	810	1050	1600	320	520	710	1040	810	1050	1600	320	520	710	1040	810	1050	1600	1600										

# Switching devices for AC

IEC 60947-2 (continued)

3WA11



Rated current $I_n$			630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A
<b>Switching times</b>									
Closing time	ms					35			
Opening time	ms					38			
Electrical closing time (through closing coil)	ms					80 / 50 <sup>1)</sup>			
Electrical opening time (through shunt trip)	ms					73			
Electrical opening time (instantaneous undervoltage release)	ms					73			
Opening time due to ETU, instantaneous short-circuit release	ms					50			
<b>Service life/endurance</b>									
<b>Breaking capacity N, 3/4-pole</b>									
Mechanical	Without maintenance	Operating cycles				15000			
	With maintenance <sup>2)</sup>	Operating cycles				30000			
Electrical	Without maintenance 690 V	Operating cycles				10000			
	With maintenance <sup>2)</sup>	Operating cycles				30000			
<b>Breaking capacity S, 3/4-pole</b>									
Mechanical	Without maintenance	Operating cycles				15000			
	With maintenance <sup>2)</sup>	Operating cycles				30000			
Electrical	Without maintenance 690 V	Operating cycles				15000			
	With maintenance <sup>2)</sup>	Operating cycles				30000			
<b>Breaking capacity M, 3/4-pole</b>									
Mechanical	Without maintenance	Operating cycles				10000			
	With maintenance <sup>2)</sup>	Operating cycles				15000			
Electrical	Without maintenance 690 V	Operating cycles				7500			
	With maintenance <sup>2)</sup>	Operating cycles				15000			
<b>Breaking capacity E, 3/4-pole</b>									
Mechanical	Without maintenance	Operating cycles				10000			
	With maintenance <sup>2)</sup>	Operating cycles				15000			
Electrical	Without maintenance 690 V	Operating cycles				7500			
	Without maintenance 1000 V	Operating cycles				1000			
	Without maintenance 1150 V	Operating cycles				–			
	With maintenance <sup>2)</sup>	Operating cycles				15000			
<b>Breaking capacity H, 3/4-pole</b>									
Mechanical	Without maintenance	Operating cycles				–			
	With maintenance <sup>2)</sup>	Operating cycles				–			
Electrical	Without maintenance 690 V	Operating cycles				–			
	With maintenance <sup>2)</sup>	Operating cycles				–			
<b>Breaking capacity C, 3/4-pole</b>									
Mechanical	Without maintenance	Operating cycles				–			
	With maintenance <sup>2)</sup>	Operating cycles				–			
Electrical	Without maintenance 690 V	Operating cycles				–			
	With maintenance 690 V <sup>2)</sup>	Operating cycles				–			
<b>Operating frequency</b>									
<b>Breaking capacity N and S</b>									
Electrical	3-pole	1/h				45			
	4-pole	1/h				60			
<b>Breaking capacity M, H and C</b>									
Electrical	3/4-pole	1/h				60 / 60			
<b>Breaking capacity E</b>									
Electrical	3/4-pole	1/h				20 / 20			

<sup>1)</sup> Closing time through closing coil for momentary duty for synchronization purposes = 50 ms<sup>2)</sup> Maintenance means: Replacing main contact elements and arc chutes  
(see Operating Manual: [www.siemens.com/lowvoltage/manuals](http://www.siemens.com/lowvoltage/manuals)).

## 3WA12



## 3WA13



1

2000 A		2500 A		3200 A		4000 A		4000 A		5000 A		6300 A	
				35						35			
				34						34			
				100						100			
				73						73			
				73						73			
				50						50			
				—						—			
				—						—			
				—						—			
				—						—			
				10000						—			
				20000						—			
7500		7500		4000		2000				—			
				20000						—			
				10000						—			
				20000						—			
7500		7500		4000		2000				—			
				20000						—			
				10000						7500			
				20000						15000			
7500		7500		4000		2000				2000			
				1000						1000			
				500						500			
				20000						10000			
				10000						7500			
				20000						15000			
7500		7500		4000		2000				2000			
20000		20000		20000		20000				15000			
				5000						5000			
				10000						10000			
5000		5000		4000		2000				1000			
10000		10000		8000		8000				10000			
				45						—			
				60						—			
				60 / 60						60 / 60			
				20 / 20						20 / 20			



# Switching devices for AC

IEC 60947-2 (continued)

3WA11



Rated current I <sub>n</sub>			630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A
Connection									
Main conductor minimum cross-sections									
Copper bars, bare		Unit, mm²	1× 40× 10	1× 50× 10	1× 60× 10	2× 40× 10	2× 50× 10	3× 50× 10	4× 50× 10
Copper bars, painted black		Unit, mm²	1× 40× 10	1× 50× 10	1× 60× 10	2× 40× 10	2× 50× 10	3× 50× 10	4× 50× 10
Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)									
Standard connection = push-in	Without end sleeve					2× 0.5 ... 2.5 mm² (AWG 20 ... 14)			
	With end sleeve acc. to DIN 46228 Part 2					2× 0.5 ... 2.5 mm² (AWG 20 ... 14)			
	With twin end sleeve					2× 0.5 ... 1.5 mm² (AWG 20 ... 16)			
	Stripped length					10 ... 12 mm (0.39 ... 0.47 inch)			
Optional connection with screw connection	Without end sleeve					2× 0.5 ... 2.5 mm² (AWG 20 ... 14)			
	With end sleeve acc. to DIN 46228 Part 2					1× 0.5 ... 1.5 mm² (AWG 20 ... 16)			
	With twin end sleeve					1× 0.5 ... 1.5 mm² (AWG 20 ... 16)			
	Stripped length					7 ... 8 mm (0.28 ... 0.31 inch)			
Position signaling switch									
Spring-loaded terminals for standard signaling contacts	Without end sleeve					0.08 ... 2.5 mm² (AWG 20 ... 12)			
	With end sleeve acc. to DIN 46228 Part 2					0.25 ... 1.5 mm²			
	Stripped length					5 ... 6 mm (0.2 ... 0.24 inch)			
Push-in connection for communication signaling contacts	Without end sleeve					0.14 ... 1.5 mm² (AWG 20 ... 16)			
	With end sleeve acc. to DIN 46228 Part 2					0.25 ... 1.5 mm² (AWG 20 ... 16)			
	Stripped length					9 mm (0.35 inch)			
Weights									
3-pole	Fixed-mounted circuit breaker	kg	43	43	43	43	43	43	43
	Withdrawable circuit breaker	kg	45	45	45	45	45	45	45
	Guide frames	kg	25	25	25	25	25	25	25
4-pole	Fixed-mounted circuit breaker	kg	50	50	50	50	50	50	50
	Withdrawable circuit breaker	kg	54	54	54	54	54	54	54
	Guide frames	kg	30	30	30	30	30	30	30

## 3WA12



## 3WA13



1


2000 A	2500 A	3200 A	4000 A	4000 A	5000 A	6300 A
3 × 50 × 10	2 × 100 × 10	3 × 100 × 10	4 × 120 × 10	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10
3 × 50 × 10	2 × 100 × 10	3 × 100 × 10	4 × 120 × 10	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10
	2 × 0.5 ... 2.5 mm <sup>2</sup> (AWG 20 ... 14)				2 × 0.5 ... 2.5 mm <sup>2</sup> (AWG 20 ... 14)	
	2 × 0.5 ... 2.5 mm <sup>2</sup> (AWG 20 ... 14)				2 × 0.5 ... 2.5 mm <sup>2</sup> (AWG 20 ... 14)	
	2 × 0.5 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)				2 × 0.5 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)	
	10 ... 12 mm (0.39 ... 0.47 inch)				10 ... 12 mm (0.39 ... 0.47 inch)	
	2 × 0.5 ... 2.5 mm <sup>2</sup> (AWG 20 ... 14)				2 × 0.5 ... 2.5 mm <sup>2</sup> (AWG 20 ... 14)	
	1 × 0.5 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)				1 × 0.5 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)	
	1 × 0.5 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)				1 × 0.5 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)	
	7 ... 8 mm (0.28 ... 0.31 inch)				7 ... 8 mm (0.28 ... 0.31 inch)	
	0.08 ... 2.5 mm <sup>2</sup> (AWG 20 ... 12)				0.08 ... 2.5 mm <sup>2</sup> (AWG 20 ... 12)	
	0.25 ... 1.5 mm <sup>2</sup>				0.25 ... 1.5 mm <sup>2</sup>	
	5 ... 6 mm (0.2 ... 0.24 inch)				5 ... 6 mm (0.2 ... 0.24 inch)	
	0.14 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)				0.14 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)	
	0.25 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)				0.25 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)	
	9 mm (0.35 inch)				9 mm (0.35 inch)	
56	59	64	85	82	82	90
60	63	68	121	88	88	96
31	39	45	52	60	60	70
67	71	77	103	99	99	108
72	76	82	146	106	106	108
37	47	54	62	84	84	119

# Switching devices for DC

IEC 60947-2

3WA12

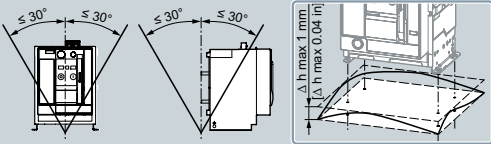

Rated current I <sub>n</sub>			1000 A	2000 A	4000 A
General data					
Isolating function acc. to EN 60947-2			Yes		
Utilization category			B		
Permissible ambient temperature	During operation (in operation with LCD max. 55 °C)	°C	-40 ... +70		
	Storage	°C	-40 ... +80		
Mounting position					
Degree of protection			IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover		
Voltage					
Rated operational voltage U <sub>e</sub>	1000 V version	V DC	1000		
Rated insulation voltage U <sub>i</sub>		V DC	1000		
Rated impulse withstand voltage U <sub>imp</sub>	Main conducting paths	kV	12		
	Auxiliary circuits	kV	4		
	Control circuits	kV	2.5		
Permissible load					
Permissible load for withdrawable versions					
For all connection types (except rear vertical main connections)	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	3640
	Up to 60 °C (Cu bare)	A	1000	2000	3500
	Up to 70 °C (Cu bare)	A	1000	1950	3250
With rear vertical connections	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	3640
	Up to 70 °C (Cu bare)	A	1000	2000	3400
Permissible load for fixed-mounted versions					
For all connection types (except rear vertical main connections)	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	4000
	Up to 70 °C (Cu bare)	A	1000	2000	3900
With rear vertical connections	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	4000
	Up to 70 °C (Cu bare)	A	1000	2000	4000
Power loss at I <sub>n</sub>					
With three-phase symmetrical load, complete device (3/4p)	Withdrawable circuit breaker	W	280	770	1640
	Fixed-mounted circuit breaker	W	140	390	820
Switching times					
Closing time		ms	35	35	35
Opening time		ms	34	34	34
Electrical closing time (through closing coil)		ms	100	100	100
Electrical opening time (through shunt trip)		ms	73	73	73
Electrical opening time (instantaneous undervoltage release)		ms	73	73	73



## 3WA12



1

Rated current I <sub>n</sub>			1000 A	2000 A	4000 A
Service life/endurance					
Breaking capacity D, 3/4-pole					
Mechanical	Without maintenance	Operating cycles	10000	10000	10000
	With maintenance <sup>1)</sup>	Operating cycles	20000	20000	20000
Electrical	Without maintenance 600 V	Operating cycles	6000	6000	4000
	With maintenance <sup>1)</sup>	Operating cycles	20000	20000	20000
Breaking capacity E, 3/4-pole					
Mechanical	Without maintenance	Operating cycles	10000	10000	10000
	With maintenance <sup>1)</sup>	Operating cycles	20000	20000	20000
Electrical	Without maintenance 1000 V	Operating cycles	1000	1000	1000
	With maintenance <sup>1)</sup>	Operating cycles	20000	20000	20000
Operating frequency					
Breaking capacity D					
Electrical	3/4-pole	1/h	60 / 60	60 / 60	60 / 60
Breaking capacity E					
Electrical	3/4-pole	1/h	20 / 20	20 / 20	20 / 20
Connection					
Main conductor minimum cross-sections					
Copper bars, bare	Unit, mm <sup>2</sup>		1× 50 x 10	2× 50 x 10	3 x 100 x 10 on the infeed and outgoing side; 6 x 250 x 500 x 5 for jumpers
Copper bars, painted black	Unit, mm <sup>2</sup>		1× 50 x 10	2× 50 x 10	3 x 100 x 10 on the infeed and outgoing side; 6 x 250 x 500 x 5 for jumpers
Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)					
Standard connection = push-in	Without end sleeve		2× 0.5 ... 2.5 mm <sup>2</sup> (AWG 20 ... 14)		
	With end sleeve acc. to DIN 46228 Part 2		2× 0.5 ... 2.5 mm <sup>2</sup> (AWG 20 ... 14)		
	With twin end sleeve		2× 0.5 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)		
	Stripped length		10 ... 12 mm (0.39 ... 0.47 inch)		
Optional connection with screw connection	Without end sleeve		2× 0.5 ... 2.5 mm <sup>2</sup> (AWG 20 ... 14)		
	With end sleeve acc. to DIN 46228 Part 2		1× 0.5 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)		
	With twin end sleeve		1× 0.5 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)		
	Stripped length		7 ... 8 mm (0.28 ... 0.31 inch)		
Position signaling switch					
Spring-loaded terminals for standard signaling contacts	Without end sleeve		0.08 ... 2.5 mm <sup>2</sup> (AWG 20 ... 12)		
	With end sleeve acc. to DIN 46228 Part 2		0.25 ... 1.5 mm <sup>2</sup>		
	Stripped length		5 ... 6 mm (0.2 ... 0.24 inch)		
Push-in connection for communication signaling contacts	Without end sleeve		0.14 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)		
	With end sleeve acc. to DIN 46228 Part 2		0.25 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)		
	Stripped length		9 mm (0.35 inch)		
Weights					
3-pole	Fixed-mounted circuit breaker	kg	56	56	64
	Withdrawable circuit breaker	kg	60	60	68
	Guide frames	kg	31	31	45
4-pole	Fixed-mounted circuit breaker	kg	67	67	77
	Withdrawable circuit breaker	kg	72	72	82
	Guide frames	kg	37	37	54

<sup>1)</sup> Maintenance means: Replacing main contact elements and arc chutes (see Operating Manual: [www.siemens.com/lowvoltage/manuals](http://www.siemens.com/lowvoltage/manuals)).




# Switching devices for DC

## Application examples




The connection to the circuit breakers is not dependent on direction and polarity; the circuit diagrams can be adapted accordingly. If the parallel or series connections are made directly to the connecting bars, for thermal reasons the continuous load on the circuit breakers must only be 80% of the permissible operational current. If the parallel or series connection is made at a distance of 1 m from the connecting bars, the circuit breaker can be used at full operational current load.

Required contact gaps at rated voltage	DC 1-pole disconnection Grounded system	DC 2-pole (all-pole) disconnection Grounded system	Non-grounded system
--	--	---	---------------------




Rated operational voltage <300 V



Rated operational voltage >300 V ... 600 V



Rated operational voltage >600 V ... 1000 V



### Note:

#### DC 2-pole (all-pole) disconnection; grounded system

The grounded pole is always assigned to the individual conducting path, so that, in the event of a ground fault, there are always 2 conducting paths in series in a circuit with 3-pole circuit breakers and 3 conducting paths in series in a circuit with 4-pole circuit breakers.

# Electronic trip unit ETU600

## Protective functions

			Current metering	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
ETU600 LSI, ETU600 LSIG, ETU600 LSIG Hi-Z						
Protective function	Setting range	Setting values with rotary switch				
<b>L: Overload protection LT</b>						
Tripping operation	Can be switched on/off		■	■	■	■
Current setting $I_r$	0.4 ... 1.0 × $I_n$	0.5 / 0.6 / 0.7 / 0.75 / 0.8 / 0.85 / 0.9 / 0.95 / 1.0 × $I_n$	■	■	■	■
Tripping time $t_r$ at $6 \times I_r$	For $I^2t$ : 0.5 ... 30 s and at $I^4t$ : 1 ... 5 s	1 / 2 / 5 / 8 / 10 / 14 / 17 / 21 / 25 s	■	■	■	■
Characteristic LT curve	$I^2t$ and $I^4t$		■	■	■	■
Thermal memory	Can be switched on/off		■	■	■	■
Cooling time constant	10 and 18 × $t_r$		■	■	■	■
Phase failure detection	Can be switched on/off		■	■	■	■
Overload pre-alarm PAL	Can be switched on/off		■	■	■	■
Current setting $I_{r\text{ PAL}}$	0.7 ... 1.0 × $I_r$		■	■	■	■
Delay time $t_{r\text{ PAL}}$	0.5 ... 1.0 × $t_r$		■	■	■	■
<b>L: Overload protection LT, neutral conductor</b>						
Tripping	Can be switched on/off		■	■	■	■
Current setting $I_N$	0.2 ... 2.0 × $I_n$ for 4-pole circuit breakers max. $I_{n\text{ max}}$		■	■	■	■
Current setting $I_{N\text{ PAL}}$	0.7 ... 1.0 × $I_N$		■	■	■	■
<b>S: Delayed short-circuit protection ST</b>						
Tripping	Can be switched on/off		■	■	■	■
Current setting $I_{sd}$	0.6 × $I_n$ ... 0.8 × $I_{cw}$	1.5 / 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 × $I_r$	■	■	■	■
Tripping time $t_{sd}$	0.02 ... 0.4 s	For Fix: 0.08 / 0.15 / 0.22 / 0.3 / 0.4 s For $I^2t$ : 0.1 / 0.2 / 0.3 / 0.4 s	■	■	■	■
Characteristic ST curve	$I^0t$ and $I^2t$		■	■	■	■
Reference point $I_{ST\text{ ref}}$	6-12 × $I_r$		■	■	■	■
Intermittent acquisition	Can be switched on/off		■	■	■	■
<b>S: Directed delayed short-circuit protection dST</b>						
Tripping	Can be switched on/off		□	□	■	■
Current setting $I_{sd\text{ FW}}$	0.6 × $I_n$ ... 0.8 × $I_{cw}$		□	□	■	■
Current setting $I_{sd\text{ REV}}$	0.6 × $I_n$ ... 0.8 × $I_{cw}$		□	□	■	■
Tripping time $t_{sd\text{ FW}}$	0.05 ... 0.4 s		□	□	■	■
Tripping time $t_{sd\text{ REV}}$	0.05 ... 0.4 s		□	□	■	■
<b>I: instantaneous short-circuit protection INST</b>						
Tripping	Can be switched on/off		■	■	■	■
Current setting $I_i$	1.5 × $I_n$ ... 0.8 × $I_{cs}$	1.5 / 2 / 3 / 4 / 6 / 8 / 10 / 12 / 15 × $I_n$	■	■	■	■
<b>Reverse power protection RP</b>						
Tripping	Can be switched on/off		□	□	■	■
Setting value $P_{RP}$	0.05 ... 0.5 × $P_n$		□	□	■	■
Tripping time $t_{RP}$	0.01 ... 25 s		□	□	■	■
<b>Enhanced protective functions EPF</b>						
Unbalance (voltage, current)			□	□	■	■
Harmonic distortion			□	□	■	■
Voltage			□	□	■	■
Active power			□	□	■	■
Frequency			□	□	■	■
Phase rotation			□	□	■	■
<b>DAS+ dynamic arc sentry</b>						
Current setting $I_{DAS+}$	1.5 ... 10 × $I_n$		■	■	■	■
Current setting $I_{g\text{ DAS+}}$	With LSIG GFx option plug Residual: - Sizes 1 and 2: 100 ... 2000 A and - Size 3: 400 ... 2000 A Direct: 15 ... 2000 A		■	■	■	■
Tripping time $t_{g\text{ DAS+}}$	0 ... 5 s		■	■	■	■
<b>Second parameter set</b>						
Parameter set changeover	Switchable between parameter set A and B		□	□	■	■

- Available, feature of the application package  
□ Can be retrofitted



# Electronic trip unit ETU600

## Protective functions

1

ETU600 LSiG			Current metering	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
Protective function	Setting range					
G: Ground fault GF						
Tripping	Can be switched on/off		■	■	■	■
Method of ground fault detection	Residual	Detection of ground-fault current via summation current formation in all phases and the N-conductor	■	■	■	■
	Direct	Direct metering of the ground-fault cur- rent with a current transformer	■	■	■	■
	Dual	Protection zone UREF: Detection of the ground-fault current by means of summation current formation, Protection zone REF: Measurement of the ground-fault current with an external current transformer	■	■	■	■
Characteristic GF curve	With LSiG GFx option plug	For Fix ( $I^0t$ ) / $I^2t$ / $I^4t$ / $I^6t$	■	■	■	■
Current setting $I_g$ with LSiG GFx option plug	Detection method Residual	Sizes 1 and 2: 100 ... 2000 A Size 3: 400 ... 2000 A	■	■	■	■
	Detection method Direct	15 ... 2000 A	■	■	■	■
Tripping time $t_g$	For Fix ( $I^0t$ )	0 ... 5 s	■	■	■	■
	For $I^2t$ at $3 \times I_g$	0 ... 30 s	■	■	■	■
Intermittent acquisition	Can be switched on/off		■	■	■	■
G: ground fault GF alarm						
Alarm	Can be switched on/off		■	■	■	■
Current setting $I_{g \text{ alarm}}$ with LSiG GFx option plug	Detection method Residual	Sizes 1 and 2: 100 ... 5000 A Size 3: 400 ... 5000 A	■	■	■	■
	Detection method Direct	15 ... 5000 A	■	■	■	■
Alarm time $t_{n \text{ alarm}}$	0 ... 0.5 s		■	■	■	■

■ Available, feature of the application package

			Current metering	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
ETU600 LSIG Hi-Z						
Protective function	Setting range					
G: Ground fault GF Hi-Z						
Tripping	Can be switched on/off		■	■	■	■
Method of ground fault detection	Residual	Detection of ground-fault current via summation current formation in all phases and the N-conductor	■	■	■	■
	Dual Hi-Z, For high-impedance connection of the external current transformers	Protection zone UREF: Detection of the ground-fault current by means of summation current formation, Protection zone REF: Measurement of the ground-fault current with an external current transformer combination	■	■	■	■
Characteristic GF curve	With LSIG GFx option plug	For Fix (I <sup>0</sup> t) / I <sup>2</sup> t / I <sup>4</sup> t / I <sup>6</sup> t	■	■	■	■
Current setting I <sub>g</sub> with LSIG GFx option plug	Protection zone UREF	Size 2: 100 ... 2000 A and Size 3: 400 ... 2000 A	■	■	■	■
	Protection zone REF	15 ... 2000 A	■	■	■	■
Tripping time t <sub>g</sub>	For Fix (I <sup>0</sup> t)	0 ... 5 s	■	■	■	■
	For I <sup>4</sup> t 3 x I <sub>g</sub> in protec- tion zone UREF	0 ... 30 s	■	■	■	■
Intermittent acquisition	Can be switched on/off		■	■	■	■
G: ground fault GF alarm						
Alarm	Can be switched on/off		■	■	■	■
Current setting I <sub>g alarm</sub> with LSIG GFx option plug	Protection zone UREF	Size 2: 100 ... 5000 A and Size 3: 400 ... 5000 A	■	■	■	■
Alarm time t <sub>g alarm</sub>	0 ... 0.5 s		■	■	■	■

■ Available, feature of the application package

# Electronic trip unit ETU600

## Operation, interfaces and metering function

1

ETU600		Current metering	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring	Non-automatic circuit breakers
<b>Operation and interfaces</b>						
Rotary switch		■	■	■	■	–
Display and operating keys		■	■	■	■	–
SETRON powerconfig configuration software		■	■	■	■	–
Fieldbus communication		■	■	■	■	–
Color display		■	■	■	■	–
Bluetooth and USB interface		■	■	■	■	–
<b>Communication</b>						
Prepared for connection of a communication module (ready4COM feature)	Status messages of the circuit breaker	□	■	■	■	□
	Status messages of the electronic trip unit ETU600	□	■	■	■	–
	Remote operation, requires a communication module, closing coil, shunt trip	□	■	■	■	□
Communication module COM190 PROFINET-IO/Modbus-TCP		□	□	□	□	□
<b>Digital input and output on the electronic trip unit ETU600</b>						
Parameterizable input	For activating DAS+ dynamic arc sentry or can be used for parameter set changeover	■	■	■	■	–
Parameterizable output	Can be used as a "life contact" and for display of "Parameter set B active" or "DAS+ dynamic arc sentry active".	■	■	■	■	–
<b>IOM230 digital input and output module</b>						
Two parameterizable inputs	For controlling the circuit breaker and transmitting information from the switchboard via communication.	□	□	□	□	□
Three parameterizable outputs	For signaling events, states, tripping operations or alarms of the switching device	□	□	□	□	□

– Not available

■ Available, feature of the application package

□ Can be retrofitted

## ETU600

		Current metering	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
<b>Metering function</b>					
Integrated voltage tap at top/bottom		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Voltage tap module VTM		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Type acc. to IEC 61557-12	PMF-I	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	PMF-II	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	PMF-III	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
<b>Metering values acc. to IEC61557-12</b>					
Phase current $I_{L1}, I_{L2}, I_{L3}$	Class 1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Neutral conductor current $I_N$	Class 1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Voltage $U_{LN}$	Class 1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Voltage $U_{LL}$	Class 1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Active energy $E_a$	Class 2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Reactive energy $E_r$		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Apparent energy $E_{ap}$		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Active power P	Class 2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Reactive power Q		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Apparent power S		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Power totals S, P, Q		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Power factor PF		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
$\cos \varphi$		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Frequency f		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Current unbalance		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Voltage unbalance		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Total harmonic distortion THD-I		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Total harmonic distortion THD-U		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

- ☒ Available, feature of the application package  
☐ Can be retrofitted
















# Connection

## Main circuit connection

### 3WA11 – 3WA13

#### Fixed-mounted



#### Withdrawable



## Secondary disconnect terminal


The auxiliary and control cables are connected at the manual connectors using the push-in technology of the auxiliary conductor connections of the circuit breaker.

Coding pins on the manual connectors prevent them being inserted in the wrong slots.



# Communication

1

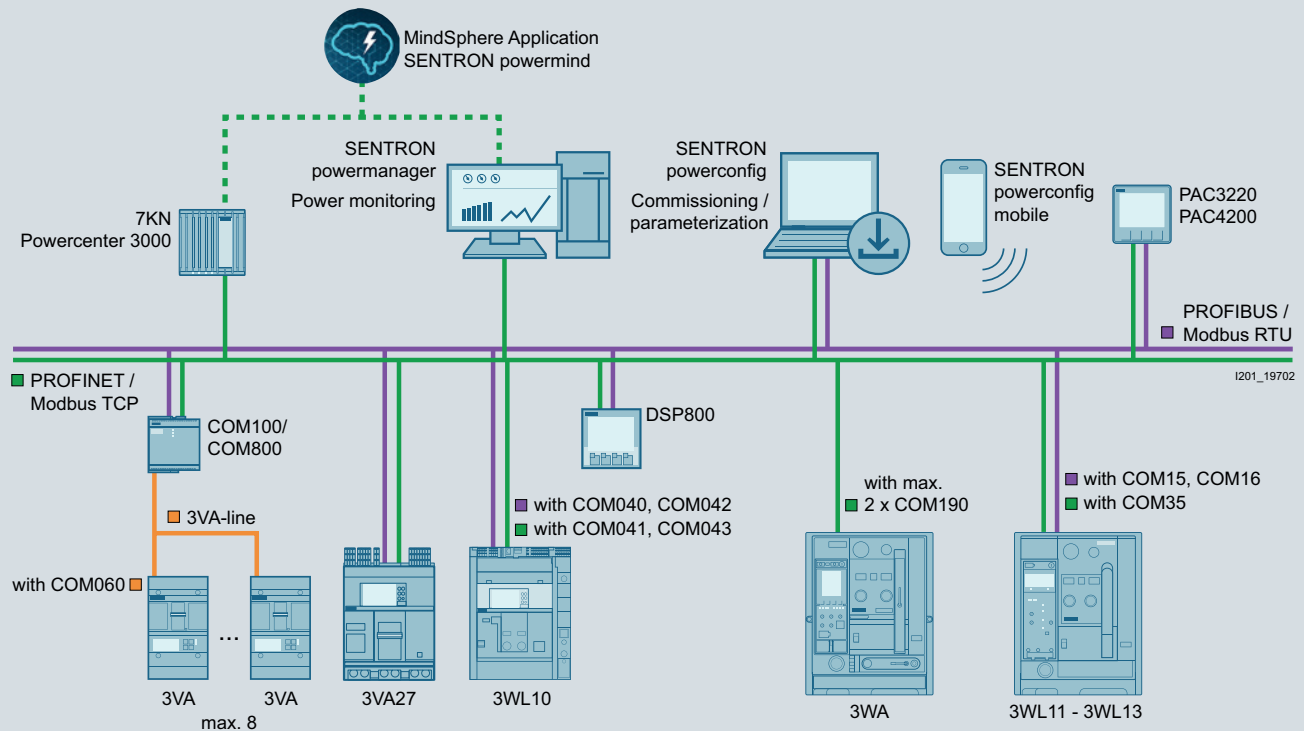

The 3WA can be equipped with up to two PROFINET IO / Modbus TCP COM190 communication modules and up to five IOM230 digital input/output modules.

For the optional communications interface with COM190 communication module, a "ready4COM" must be selected as the switching device. The first COM190 communication module must be selected via a Z option. If you want to use a further COM190 communication module, this must be ordered separately as an accessory. Both COM190 communication modules can be run in parallel.

The first IOM230 digital input/output module can be selected via a Z option.

The up to four further digital input/output modules must be ordered separately as accessories.

You will find further information on the COM190 in the equipment manual – 3WA air circuit breakers ([109763061](#))

Technical specifications	COM190
<b>Operating values</b>	
$U_s$	24 V DC $\pm 20\%$
Rated power dissipation	1 W
Switched Ethernet Ports	2
Protocol	PROFINET IO (CC-C) and Modbus TCP
Security functions	Yes
Number	Up to 2

Technical specifications	IOM230
<b>Operating values</b>	
$U_s$	24 V DC $\pm 20\%$
Rated power dissipation	1 W
Inputs	2
Outputs	3
Maximum switching current	24 V DC, 4 A 250 V AC, 5 A
Maximum continuous current	24 V DC, 0.2 A 250 V AC, 0.2 A
Number	Up to 5

# System overview 3WA11 – 3WA13

## Switching devices for AC and DC

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wa-configurator](http://www.siemens.com/lowvoltage/3wa-configurator)

1

### Switching devices



Sizes 1 to 3


### Main circuit connection



Front double hole



Flange



Main connection  
vertical, horizontal

### Electronic trip unit and metering function



ETU600

### Operating mechanisms and auxiliary switches



Spring charging motor

### Closing coil and remote trip alarm reset coil



Closing coil (CC)




Remote trip alarm reset coil

#### Note:

You will find a detailed range of accessories in the Accessories and spare parts section.

## Auxiliary releases



Closing coil (CC)



Shunt trip (ST)



Undervoltage release (UVR)

## Accessories for electronics



Communication module



Digital input/output module



Sealable and lockable cover



Internal current sensors

## Accessories for auxiliary circuit



Trip alarm switch



Motor disconnect switch



Local electric close



Emergency OPEN button

## Interlocks and locking provisions



Locking provision for charging handle



Locking provision against unauthorized closing



Mutual mechanical interlockings




Locking mechanisms

## Other accessories



Door sealing frame



Arc chute cover



Automatic reset of the reclosing lockout

### Note:


You will find a detailed range of accessories in the Accessories section.

# Online configurator highlights


[www.siemens.com/lowvoltage/3wa-configurator](http://www.siemens.com/lowvoltage/3wa-configurator)

## Graphical display


- Integration of the legend as a color system
  - Orange: still to be selected
  - Petrol: already selected
  - Gray: preselected (default)
- Graphical highlighting of the individual configuration steps: "What you see is what you get"

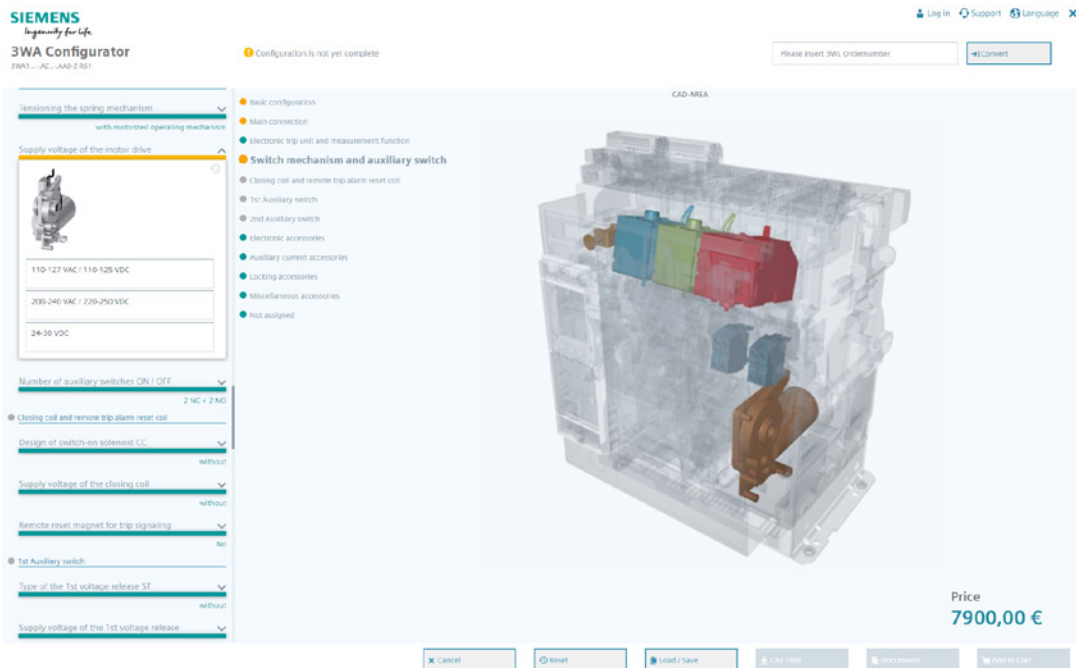

## Splitting function (Frame and circuit breaker can be ordered separately)

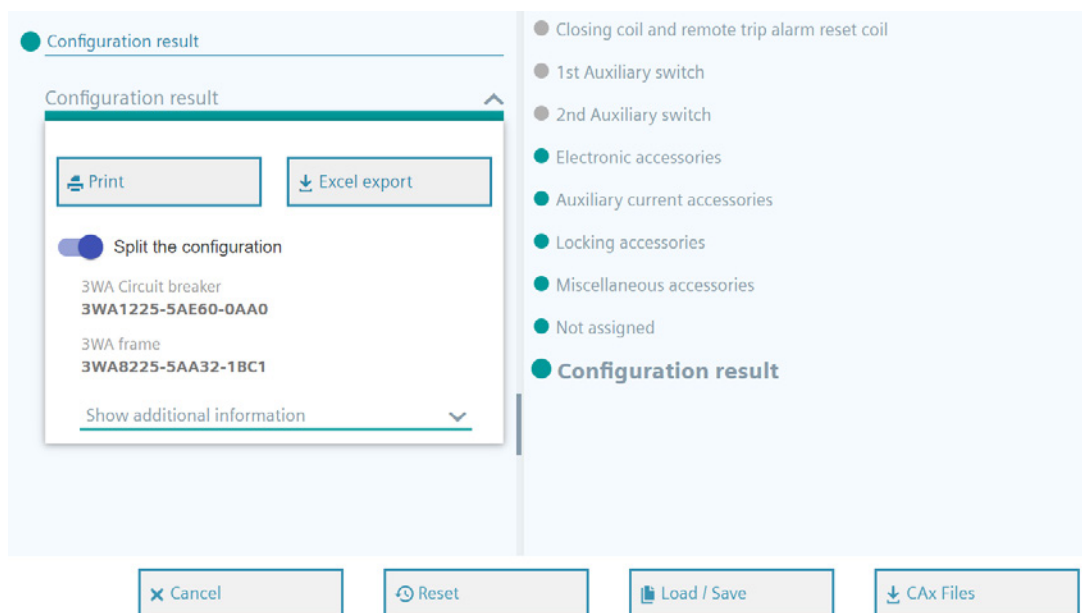

## Direct conversion of a 3WL article number to a 3WA article number in the configurator

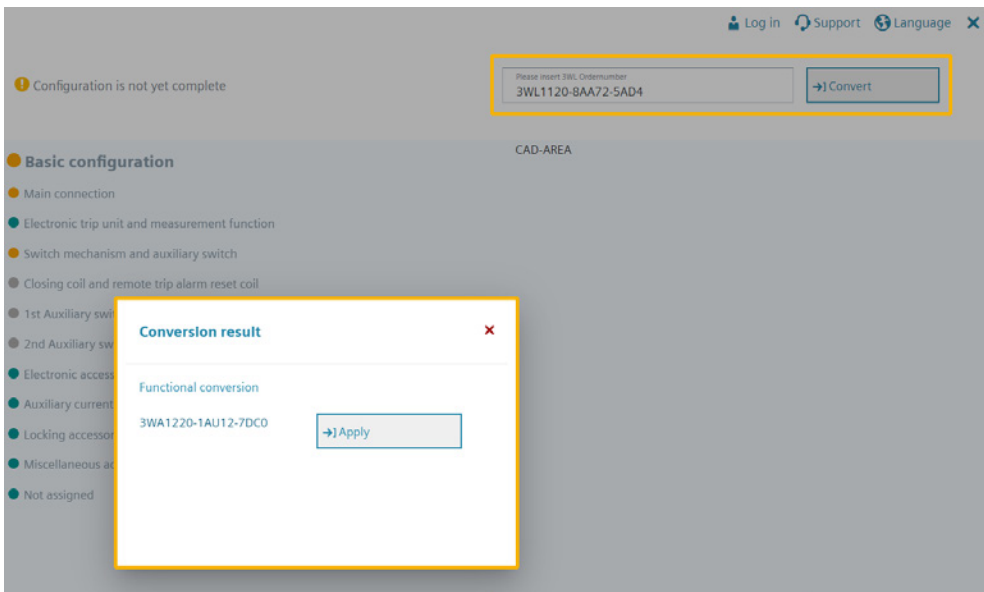


1

## Responsive design (adapted to the differing requirements of the displaying devices)



## Dynamic customer price during configuration

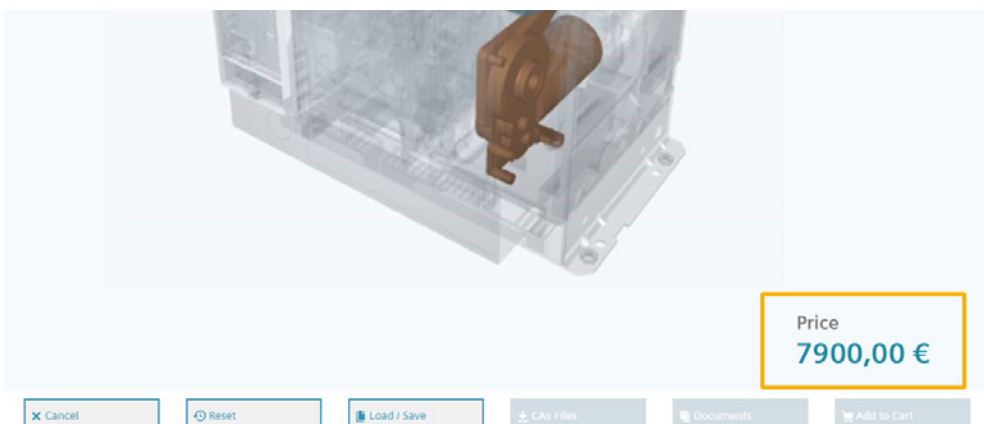



## 1

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wa-configurator](http://www.siemens.com/lowvoltage/3wa-configurator)

<sup>1)</sup> Not available for breaking capacity C

**3WA1**

5	6	7	8	9	10	11	12	13	14	15	16
			—					—			

**Connection**

		SZ 1	SZ 2	SZ 3		
Type of mounting	Fixed-mounted	■	■ <sup>1)</sup>	■	Vertical	1
		■ <sup>2)</sup>	■ <sup>3)</sup>	■ <sup>4)</sup>	Horizontal	2
		■ <sup>2)</sup>	■ <sup>5)</sup>	■ <sup>6)</sup>	Front	3
		■ <sup>2)</sup>	■ <sup>3)</sup>	■ <sup>4)</sup>	Vertical / horizontal	5
		■ <sup>2)</sup>	■ <sup>3)</sup>	■ <sup>4)</sup>	Horizontal / vertical	6
		■	■	■	Without guide frame	0
	Withdrawable	■	■ <sup>1)</sup>	■	Vertical	1
		■ <sup>2)</sup>	■ <sup>3)</sup>	■ <sup>4)</sup>	Horizontal	2
		■ <sup>2)</sup>	■ <sup>5)</sup>	■ <sup>6)</sup>	Front	3
		■ <sup>2)</sup>	■ <sup>5)</sup>	■ <sup>6)</sup>	Flange	4
		■ <sup>2)</sup>	■ <sup>3)</sup>	■ <sup>4)</sup>	Vertical / horizontal	5
		■ <sup>2)</sup>	■ <sup>3)</sup>	■ <sup>4)</sup>	Horizontal / vertical	6
		■ <sup>2)</sup>	■ <sup>5)</sup>	■ <sup>6)</sup>	Flange / horizontal	7
		■ <sup>2)</sup>	■ <sup>5)</sup>	■ <sup>6)</sup>	Horizontal / flange	8

<sup>1)</sup> The 4000 A vertical connections for the 3WA1 have different dimensions from the 3WL1.  
Dimensionally compatible connections can be ordered with the additional Z option D01.

<sup>2)</sup> Not available for 2500 A

<sup>3)</sup> Not available for 4000 A

<sup>4)</sup> Not available for 6300 A

<sup>5)</sup> Not available for 4000 A and for breaking capacity C

<sup>6)</sup> Not available for 5000 A and 6300 A and for breaking capacity C

# Structure of the article numbers

Basic configuration for AC circuit breakers and AC non-automatic circuit breakers up to 690 V

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wa-configurator](http://www.siemens.com/lowvoltage/3wa-configurator)

1

3WA1 5 6 7 8 – 9 10 11 12 – 13 14 15 16

## Operating mechanism, auxiliary switch and auxiliary release

Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO contacts, 2 NC contacts	0
			4 NO contacts, 4 NC contacts	1
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO contacts, 2 NC contacts	2
			4 NO contacts, 4 NC contacts	5
		48 ... 60 V DC	4 NO contacts, 4 NC contacts	6
		110 ... 127 V AC / 110 ... 125 V DC	2 NO contacts, 2 NC contacts	3
			4 NO contacts, 4 NC contacts	7
		208 ... 240 V AC / 220 ... 250 V DC	2 NO contacts, 2 NC contacts	4
			4 NO contacts, 4 NC contacts	8

Closing coil and remote trip alarm reset coil <sup>1)2)</sup>	Without closing coil	Without remote trip alarm reset coil		A
				B
				C
				D
	With closing coil (CC) for continuous duty, 100% OP	Without remote trip alarm reset coil	24 ... 30 V DC	E
			48 ... 60 V DC	F
			110 ... 127 V AC / 110 ... 125 V DC	G
			208 ... 240 V AC / 220 ... 250 V DC	H
	With closing coil (CC) for momentary duty, 5% OP	Without remote trip alarm reset coil	24 ... 30 V DC	J
			48 ... 60 V DC	K
			110 ... 127 V AC / 110 ... 125 V DC	L
			208 ... 240 V AC / 220 ... 250 V DC	M
	With remote trip alarm reset coil (RR) for momentary duty 1% OP	Without remote trip alarm reset coil	24 ... 30 V DC	N
			48 ... 60 V DC	P
			110 ... 127 V AC / 110 ... 125 V DC	Q
			208 ... 240 V AC / 220 ... 250 V DC	R

2nd auxiliary release	Without 2nd auxiliary release			A
				B
				C
				D
	With shunt trip (ST), continuous duty 100% OP		24 ... 30 V DC	E
			48 ... 60 V DC	F
			110 ... 127 V AC / 110 ... 125 V DC	G
			208 ... 240 V AC / 220 ... 250 V DC	H
	With shunt trip (ST), momentary duty 5% OP		24 ... 30 V DC	J
			48 ... 60 V DC	K
			110 ... 127 V AC / 110 ... 125 V DC	L
			208 ... 240 V AC / 220 ... 250 V DC	M
	With undervoltage release (UVR), instantaneous ( $\leq 0.08$ s) and short-time delayed ( $\leq 0.2$ s)		24 ... 30 V DC	N
			48 ... 60 V DC	P
			110 ... 127 V AC / 110 ... 125 V DC	Q
			208 ... 240 V AC / 220 ... 250 V DC	R

<sup>1)</sup> Remote trip alarm reset coil is not available for non-automatic circuit breakers

<sup>2)</sup> When using the remote trip alarm reset coil, the reclosing lockout is generally deactivated. The circuit breaker can be closed again immediately if the conditions for closing are fulfilled.

**3WA1**

5	6	7	8	–	9	10	11	12	–	13	14	15	16
---	---	---	---	---	---	----	----	----	---	----	----	----	----

## Auxiliary releases

<b>1st auxiliary release</b>	Without 1st auxiliary release		0
	With shunt trip (ST), continuous duty 100% OP	24 ... 30 V DC	1
		48 ... 60 V DC	2
		110 ... 127 V AC / 110 ... 125 V DC	3
		208 ... 240 V AC / 220 ... 250 V DC	4
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	5
		48 ... 60 V DC	6
		110 ... 127 V AC / 110 ... 125 V DC	7
		208 ... 240 V AC / 220 ... 250 V DC	8

## 1

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wa-configurator](http://www.siemens.com/lowvoltage/3wa-configurator)

Quick selection guide, pages 1/4 and 1/8

**3WA1**

5	6	7	8	9	10	11	12	13	14	15	16
			–					–			

## Connection

		SZ 1	SZ 2	SZ 3		
Type of mounting	Fixed-mounted	■	■ <sup>3)</sup>	■	Vertical	1
		■ <sup>1)</sup>	■ <sup>2)</sup>	■ <sup>4)</sup>	Horizontal	2
		■ <sup>1)</sup>	■ <sup>2)</sup>	■ <sup>5)</sup>	Front double hole	3
		■ <sup>1)</sup>	■ <sup>2)</sup>	■ <sup>4)</sup>	Vertical on top / horizontal at the bottom	5
		■ <sup>1)</sup>	■ <sup>2)</sup>	■ <sup>4)</sup>	Horizontal on top / vertical at the bottom	6
		■	■	■	Without guide frame	0
	Withdrawable	■	■ <sup>3)</sup>	■	Vertical	1
		■ <sup>1)</sup>	■ <sup>2)</sup>	■ <sup>4)</sup>	Horizontal	2
		■ <sup>1)</sup>	■ <sup>2)</sup>	■ <sup>5)</sup>	Front double hole	3
		■ <sup>1)</sup>	■ <sup>2)</sup>	■ <sup>5)</sup>	Flange	4
		■ <sup>1)</sup>	■ <sup>2)</sup>	■ <sup>4)</sup>	Vertical on top / horizontal at the bottom	5
		■ <sup>1)</sup>	■ <sup>2)</sup>	■ <sup>4)</sup>	Horizontal on top / vertical at the bottom	6
		■ <sup>1)</sup>	■ <sup>2)</sup>	■ <sup>5)</sup>	Flange on top / horizontal at the bottom	7
		■ <sup>1)</sup>	■ <sup>2)</sup>	■ <sup>5)</sup>	Horizontal on top / flange at the bottom	8

<sup>1)</sup> Only ≤2000 A is available for size 1<sup>2)</sup> Only ≤3200 A is available for size 2<sup>3)</sup> Vertical connection for 3WA size 2 for 4000 A has different dimensions than for the 3WL.

With Z option D01, vertical connection can be changed to the connection compatible with 3WL.

<sup>4)</sup> Only ≤5000 A is available for size 3<sup>5)</sup> Only for 4000 A is available for size 3



# Structure of the article numbers

Basic configuration for AC circuit breakers and AC non-automatic circuit breakers in a 690 V IT system and for higher voltages

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wa-configurator](http://www.siemens.com/lowvoltage/3wa-configurator)

1

3WA1 5 6 7 8 – 9 10 11 12 – 13 14 15 16

## Operating mechanism, auxiliary switch and auxiliary release

Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO contacts, 2 NC contacts	0
			4 NO contacts, 4 NC contacts	1
				2
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO contacts, 2 NC contacts	5
			4 NO contacts, 4 NC contacts	6
		48 ... 60 V DC	4 NO contacts, 4 NC contacts	3
		110 ... 127 V AC / 110 ... 125 V DC	2 NO contacts, 2 NC contacts	7
			4 NO contacts, 4 NC contacts	4
		208 ... 240 V AC / 220 ... 250 V DC	2 NO contacts, 2 NC contacts	8
Closing coil and remote trip alarm reset coil <sup>1)</sup>	Without closing coil	Without remote trip alarm reset coil		A
				B
				C
				D
				E
	With closing coil (CC) for continuous duty, 100% OP	Without remote trip alarm reset coil	24 ... 30 V DC	F
			48 ... 60 V DC	G
			110 ... 127 V AC / 110 ... 125 V DC	H
			208 ... 240 V AC / 220 ... 250 V DC	J
				K
	With closing coil (CC) for momentary duty, 5% OP	Without remote trip alarm reset coil	24 ... 30 V DC	L
			48 ... 60 V DC	M
			110 ... 127 V AC / 110 ... 125 V DC	N
			208 ... 240 V AC / 220 ... 250 V DC	P
				Q
	With remote trip alarm reset coil (RR) for momentary duty 1% OP	With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC	R
			48 ... 60 V DC	S
			110 ... 127 V AC / 110 ... 125 V DC	
			208 ... 240 V AC / 220 ... 250 V DC	
2nd auxiliary release	Without 2nd auxiliary release			A
				B
				C
				D
				E
	With shunt trip (ST), continuous duty 100% OP		24 ... 30 V DC	F
			48 ... 60 V DC	G
			110 ... 127 V AC / 110 ... 125 V DC	H
			208 ... 240 V AC / 220 ... 250 V DC	J
				L
	With shunt trip (ST), momentary duty 5% OP		24 ... 30 V DC	N
			48 ... 60 V DC	P
			110 ... 127 V AC / 110 ... 125 V DC	Q
			208 ... 240 V AC / 220 ... 250 V DC	R
				S
	With undervoltage release (UVR), instantaneous ( $\leq 0.08$ s) and short-time delayed ( $\leq 0.2$ s)		24 ... 30 V DC	T
			48 ... 60 V DC	U
			110 ... 127 V AC / 110 ... 125 V DC	V
			208 ... 240 V AC / 220 ... 250 V DC	W
	With undervoltage release (UVR-t), adjustable delay 0.2 ... 3.2 s		380 ... 415 V AC	
			48 V DC	
			60 V DC	
			110 ... 127 V AC / 110 ... 125 V DC	
			208 ... 240 V AC / 220 ... 250 V DC	

<sup>1)</sup> Remote trip alarm reset coil is not available for non-automatic circuit breakers

**3WA1**

5	6	7	8	–	9	10	11	12	–	13	14	15	16
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

## Auxiliary releases

1st auxiliary release	Without 1st auxiliary release		0
	With shunt trip (ST), continuous duty 100% OP	24 ... 30 V DC	1
		48 ... 60 V DC	2
		110 ... 127 V AC / 110 ... 125 V DC	3
		208 ... 240 V AC / 220 ... 250 V DC	4
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	5
		48 ... 60 V DC	6
		110 ... 127 V AC / 110 ... 125 V DC	7
		208 ... 240 V AC / 220 ... 250 V DC	8

# Structure of the article numbers

## Basic configuration for DC non-automatic circuit breakers

The structure shown below is intended as an overview of each position and its meaning.  
For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wa-configurator](http://www.siemens.com/lowvoltage/3wa-configurator)

				3WA1												5	6	7	—	8	9	10	11	12	—	13	14	15	16
Switching device																													
Size (SZ)		2		2																									
				SZ 2																									
Max. rated current I <sub>n max</sub>	1000 A	■						1		0																			
	2000 A	■						2		0																			
	4000 A	■						4		0																			
Short-circuit breaking capacity I <sub>cc</sub>	D	■		25 kA, 600 V DC				1																					
	E	■		20 kA, 1000 V DC				8																					
Non-automatic circuit breakers																		A		U									
Non-automatic circuit breaker, ready4COM feature																		C		U									
Number of poles <sup>1)</sup>	Fixed-mounted							3-pole										0											
								4-pole										1											
	Withdrawable	Without position signaling switch							3-pole										3										
									4-pole										4										
		With position signaling switch							3-pole										6										
									4-pole										7										
Connection				SZ 2																									
Type of mounting	Fixed-mounted	■	Vertical																1										
			Horizontal																2										
			Front double hole																3										
			Vertical on top / horizontal at the bottom																5										
			Horizontal on top / vertical at the bottom																6										
			Without guide frame																0										
	Withdrawable	■	Vertical																1										
			Horizontal																2										
			Front double hole																3										
			Flange																4										
			Vertical on top / horizontal at the bottom																5										
			Horizontal on top / vertical at the bottom																6										
			Flange on top / horizontal at the bottom																7										
			Horizontal on top / flange at the bottom																8										

3WA1

5	6	7	8	9	10	11	12	13	14	15	16
				–				–			

## Operating mechanism, auxiliary switch and auxiliary release

Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO contacts, 2 NC contacts	0
			4 NO contacts, 4 NC contacts	1
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO contacts, 2 NC contacts	2
			4 NO contacts, 4 NC contacts	5
		48 ... 60 V DC	4 NO contacts, 4 NC contacts	6
		110 ... 127 V AC / 110 ... 125 V DC	2 NO contacts, 2 NC contacts	3
			4 NO contacts, 4 NC contacts	7
		208 ... 240 V AC / 220 ... 250 V DC	2 NO contacts, 2 NC contacts	4
			4 NO contacts, 4 NC contacts	8
Closing coil	Without closing coil			A
	With closing coil (CC) for continuous duty, 100% OP	24 ... 30 V DC		B
		48 ... 60 V DC		C
		110 ... 127 V AC / 110 ... 125 V DC		D
		208 ... 240 V AC / 220 ... 250 V DC		E
	With closing coil (CC) for momentary duty, 5% OP	24 ... 30 V DC		K
		48 ... 60 V DC		L
		110 ... 127 V AC / 110 ... 125 V DC		M
		208 ... 240 V AC / 220 ... 250 V DC		N
2nd auxiliary release	Without 2nd auxiliary release			A
	With shunt trip (ST), continuous duty 100% OP	24 ... 30 V DC		B
		48 ... 60 V DC		C
		110 ... 127 V AC / 110 ... 125 V DC		D
		208 ... 240 V AC / 220 ... 250 V DC		E
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC		F
		48 ... 60 V DC		G
		110 ... 127 V AC / 110 ... 125 V DC		H
		208 ... 240 V AC / 220 ... 250 V DC		J
	With undervoltage release (UVR), instantaneous ( $\leq 0.08$ s) and short-time delayed ( $\leq 0.2$ s)	24 ... 30 V DC		L
		48 ... 60 V DC		N
		110 ... 127 V AC / 110 ... 125 V DC		P
		208 ... 240 V AC / 220 ... 250 V DC		Q
		380 ... 415 V AC		R
	With undervoltage release (UVR-t), adjustable delay 0.2 ... 3.2 s	48 V DC		S
		60 V DC		T
		110 ... 127 V AC / 110 ... 125 V DC		U
		208 ... 240 V AC / 220 ... 250 V DC		V
		380 ... 415 V AC		W
1st auxiliary release	Without 1st auxiliary release			0
	With shunt trip (ST), continuous duty 100% OP	24 ... 30 V DC		1
		48 ... 60 V DC		2
		110 ... 127 V AC / 110 ... 125 V DC		3
		208 ... 240 V AC / 220 ... 250 V DC		4
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC		5
		48 ... 60 V DC		6
		110 ... 127 V AC / 110 ... 125 V DC		7
		208 ... 240 V AC / 220 ... 250 V DC		8

# Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wa-configurator](http://www.siemens.com/lowvoltage/3wa-configurator)

1

To specify the options, add "-Z" to the complete Article No. and indicate the appropriate order code(s).

3WA....-.....-.... -Z

Order code

## Option plug for electronic trip unit

- To reduce the rated current of the circuit breaker
- Only one module is possible per circuit breaker. As standard, the electronic trip unit is equipped with an option plug which is equal to the maximum rated breaker current ( $I_{n\max}$ ). The rated current of the selected option plug must be less than  $I_{n\max}$ .

		SZ1	SZ2	SZ3			
Option plug	250 A	■	■	–	B	0	2
	315 A	■	■	–	B	0	3
	400 A	■	■	–	B	0	4
	500 A	■	■	–	B	0	5
	630 A	■	■	–	B	0	6
	800 A	■	■	–	B	0	8
	1000 A	■	■	–	B	1	0
	1250 A	■	■	–	B	1	2
	1600 A	■	■	■	B	1	6
	2000 A	■	■	■	B	2	0
	2500 A	–	■	■	B	2	5
	3200 A	–	■	■	B	3	2
	4000 A	–	–	■	B	4	0
	5000 A	–	–	■	B	5	0

## IOM230 digital input/output module

### Module with 2 inputs and 3 outputs

A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **CubicleBUS**<sup>2</sup> terminating resistor; five modules can be operated at the same time. Further modules must be ordered separately as 3WA9111-0EC11, which includes the adapter for mounting on the secondary disconnect terminal system of the circuit breaker and the adapter for external mounting on a standard mounting rail.

F 2 3

## COM190 communication module

- The precondition for connection is a circuit breaker or non-automatic circuit breaker with the "ready4COM" feature

### PROFINET IO / Modbus TCP

A module including 2 Switched Ethernet ports, circuit breaker internal. A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **CubicleBUS**<sup>2</sup> terminating resistor; two communication modules can be run at the same time. The second communication module must be ordered separately as 3WA9111-0EC13.

F 1 9

## Automatic reset

- Only possible for circuit breakers with an electronic trip unit

### Automatic reset

Automatic reset of the reclosing lockout after ETU tripping; this option is not required when ordering a circuit breaker with a remote trip alarm reset coil RR.

K 0 1

## Tinned version of the main connections on the guide frame

- Only for switching devices in withdrawable version with horizontal connection or flange connection.
- Cannot be ordered for circuit breakers without a guide frame
- The normal delivery time increases to 15 work days

### Tinned connections

Sizes 1, 2, 3

D 0 8

To specify the options, add "-Z" to the complete Article No. and indicate the appropriate order code(s).

3WA....-.....-.... -Z

Order code

### Broadened vertical main connection

- Only possible on complete order for a withdrawable switching device or when ordering the guide frame separately

Main circuit connection	For 3WA1, 4000 A, size 2	Compatible with 3WL1240 for retrofit	D	0	1
-------------------------	--------------------------	--------------------------------------	---	---	---

### Secondary disconnect terminal system

- Cannot be ordered for circuit breakers without a guide frame

Secondary disconnect terminal system	With screw connection instead of push-in connection (standard)		N	0	3
--------------------------------------	--	--	---	---	---

### Mechanical operating cycles counter

Mechanical operating cycles counter, 5-digit	Can be used with all circuit breakers and non-automatic circuit breakers including those without a spring charging motor		C	0	1
--	--	--	---	---	---

### Signaling switch

Tripped signaling switch	2nd tripped signaling switch (S25) 1st tripped signaling switch included as standard. Can only be used with circuit breakers with an electronic trip unit	1 NO contact	K	0	6
--------------------------	--	--------------	---	---	---

### Pushbuttons / shutdown switches / closing lockouts / special packaging / Arc chute cover

Emergency OPEN button	Mushroom pushbutton instead of the mechanical OFF pushbutton		C	2	5
Local electrical close on the operator panel (S10)	This prevents unauthorized electrical closing from the operator panel. Mechanical closing and remote closing remain possible. Only possible in combination with a closing coil (CC)	With sealing cap	C	1	1
		With CES lock	C	1	2
Motor disconnect switch on operator panel (S12)	This prevents automatic charging of the stored energy mechanism by the spring charging motor		C	2	4
Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)			P	6	1
Arc chute cover mounted on the guide frame	Not available for: – Fixed-mounted – Breaking capacity C, E and D – 4000 A size 2		R	1	0
Sealable and lockable cover	For electronic trip unit		F	4	0

### Internal current sensors (without energy core) for applications with frequency converters

- Used in converter applications with high harmonic components; can only be used for circuit breakers with an electronic trip unit
  - External 24 V DC supply required
  - Undervoltage release required
  - Additionally contains a relay for monitoring the 24 V DC and warning labels

Internal current sensors	Sizes 2, 3		K	6	0
--------------------------	------------	--	---	---	---

### Mutual mechanical interlockings

- Interlocking module with Bowden cable 2 m

Mutual mechanical interlockings	For fixed-mounted breakers		S	5	5
	For withdrawable circuit breakers with guide frame		R	5	5
	For guide frames (ordered separately)		R	5	6
	For withdrawable circuit breakers (ordered separately)		R	5	7



# Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wa-configurator](http://www.siemens.com/lowvoltage/3wa-configurator)

1

To specify the options, add "-Z" to the complete Article No. and indicate the appropriate order code(s).

3WA....-.....-.... -Z

Order code

## Locking provisions (for fixed-mounted and withdrawable circuit breakers)

Locking provision	To prevent unauthorized activation in the operator panel of the circuit breaker. The disconnecter unit fulfills the requirements for main circuit breakers according to EN 60204-1	Made by CES	S	0	1
		Made by IKON	S	0	3
		Assembly kit FORTRESS or CASTELL <sup>1)</sup>	S	0	5
		Assembly kit for padlocks <sup>2)</sup>	S	0	7
		Made by RONIS	S	0	8
		Made by PROFALUX	S	0	9
Locking provision	For charging handle with padlock <sup>2)</sup>		S	3	3

## Locking provisions (for withdrawable circuit breakers)

Locking provision to prevent movement of the withdrawable circuit breakers	Safety lock for mounting onto the circuit breaker	Made by CES	S	7	1
		Made by PROFALUX	S	7	5
		Made by RONIS	S	7	6

## Locking provisions against unauthorized closing, for withdrawable circuit breakers

- The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1, consisting of a lock in the guide frame, active in the connected position, function is retained when circuit breaker is replaced.
- Not available in combination with order code "R81", "R85" or "R86".
- Only possible on complete order for a withdrawable switching device or when ordering the guide frame separately

Made by CES	R	6	1
Made by RONIS	R	6	8
Made by PROFALUX	R	6	0

## Locking mechanisms

- Not available in combination with order code "R81", "R85" or "R86".
- R30 and R50 only possible on complete order for a circuit breaker with a guide frame or when ordering the guide frame separately
- R40 can only be ordered with the circuit breaker

For fixed-mounted circuit breakers	To prevent opening of the control cabinet door in ON position	S	3	0
For withdrawable circuit breakers	To prevent opening of the control cabinet door in connected position	R	3	0
	To prevent activation when the control cabinet door is open <sup>3)</sup>	R	4	0
	To prevent movement when the control cabinet door is open <sup>4)</sup>	R	5	0

## Locking provisions to prevent movement of the withdrawable circuit breaker in disconnected position

- Consisting of Bowden cable and lock in the control cabinet door
- Not available in combination with order code "R30", "R40", "R50", "R61", "R68" or "R60"
- Only possible for a complete order for a circuit breaker with a guide frame or when ordering the guide frame separately

Made by CES	R	8	1
Made by PROFALUX	R	8	5
Made by RONIS	R	8	6

## Increased degree of protection for installation in a control cabinet

Door sealing frame for degree of protection IP41	T	4	0
--	---	---	---

<sup>1)</sup> Locks must be ordered from the manufacturer.

<sup>2)</sup> Padlock not included in the scope of supply

<sup>3)</sup> Not available in combination with R50

<sup>4)</sup> Not available in combination with R40

# Guide frames for AC

The structure shown below is intended as an overview of each position and its meaning.  
For a complete and valid configuration of your guide frame, please use our online configurator at  
[www.siemens.com/lowvoltage/3wa-configurator](http://www.siemens.com/lowvoltage/3wa-configurator)

		5	6	7	8	9	10	11	12	13	14	15	16
<b>3WA8</b>					–	A	A			–			
<b>Guide frames</b>													
<b>Size</b>	1	1											
	2	2											
	3	3											
		SZ 1	SZ 2	SZ 3									
<b>Max. rated current <math>I_{n \max}^{1)}</math></b>	630 ... 1000 A	■	–	–	1	0							
	1250 ... 1600 A	■	–	–	1	6							
	630 ... 2000 A	■	■	–	2	0							
	2500 A	■	■	–	2	5							
	2000 ... 3200 A	–	■	–	3	2							
	4000 A	–	■	■	4	0							
	4000 ... 5000 A	–	–	■	5	0							
	6300 A	–	–	■	6	3							
<b>Short-circuit breaking capacity <math>I_{cu}</math></b>	At 500 V <sup>1)</sup>	N	■	–	–	55 kA			2				
		S	■	■	–	66 kA			3				
		M	■	■	–	85 kA			4				
		H	–	■	■	100 kA			5				
		C	–	■	■	150 kA			6				
	At 690 V / 1000 V / 1150 V	E	■	–	–	80 / 50 kA / –			8				
		–	■	–	–	85 / 85 / 50 kA			8				
		–	–	■	–	3-pole: 150 / 125 / 70 kA 4-pole: 130 / 125 / 70 kA			8				
<b>Number of poles</b>	3-pole								3				
	4-pole, Neutral left								4				
<b>Main connection</b>	■ ■ <sup>6)</sup> ■	Vertical							1				
	■ <sup>2)</sup> ■ <sup>3)</sup> ■ <sup>4)</sup>	Horizontal							2				
	■ <sup>2)</sup> ■ <sup>3)</sup> ■ <sup>5)</sup>	Front double hole							3				
	■ <sup>2)</sup> ■ <sup>3)</sup> ■ <sup>5)</sup>	Flange							4				
	■ <sup>2)</sup> ■ <sup>3)</sup> ■ <sup>4)</sup>	Vertical on top / horizontal at the bottom							5				
	■ <sup>2)</sup> ■ <sup>3)</sup> ■ <sup>4)</sup>	Horizontal on top / vertical at the bottom							6				
	■ <sup>2)</sup> ■ <sup>3)</sup> ■ <sup>5)</sup>	Flange on top / horizontal at the bottom							7				
	■ <sup>2)</sup> ■ <sup>3)</sup> ■ <sup>5)</sup>	Horizontal on top / flange at the bottom							8				

<sup>1)</sup> Generate the selection of positions 6, 7 and 8 according to the list below

<sup>2)</sup> Only ≤2000 A is available for size 1

<sup>3)</sup> Only ≤3200 A is available for size 2

<sup>4)</sup> Only ≤5000 A is available for size 3

<sup>5)</sup> Only for 4000 A is available for size 3

<sup>6)</sup> Vertical connection for 3WA size 2 for 4000 A has different dimensions than for the 3WL.

With Z option D01, vertical connection can be changed to the connection compatible with 3WL.

The following combinations of positions 6, 7 and 8 are technically possible

		Max. rated current $I_{n \max}$ (positions 6 and 7)											
Size	Short-circuit breaking capacity $I_{cu}$ at 500 V AC (position 8)	630 A		800 A		1000 A		1250 A		1600 A		2000 A	
		3P	4P	3P	4P	3P	4P	3P	4P	3P	4P	3P	4P
1	N 2 55 kA	10-2	10-2	10-2	16-2	16-2	16-2	20-3	25-3	–	–	–	–
	S 3 66 kA	10-3	10-3	10-3	16-3	16-3	16-3	20-3	25-3	–	–	–	–
	M 4 85 kA	20-4	20-4	20-4	20-4	20-4	20-4	20-4	25-4	–	–	–	–
	E 8 50 kA at 1000 V	20-8	20-8	20-8	20-8	20-8	20-8	20-8	25-8	–	–	–	–
2	S 3 66 kA	–	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	M 4 85 kA	–	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	H 5 100 kA	–	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	E 8 85 kA at 1000 V	–	–	–	–	–	–	20-8	25-8	32-8	40-8	–	–
	C 6 150 kA	–	–	–	–	–	–	32-6	32-6	32-6	–	–	–
3	H 5 100 kA	–	–	–	–	–	–	–	–	–	40-5	50-5	63-5
	E 8 125 kA at 1000 V	–	–	–	–	–	–	–	–	–	50-8	50-8	63-8
	C 6 150 kA	–	–	–	–	–	–	–	–	–	50-8	50-8	63-8



# Guide frames for DC

The structure shown below is intended as an overview of each position and its meaning.  
For a complete and valid configuration of your guide frame, please use our online configurator at  
[www.siemens.com/lowvoltage/3wa-configurator](http://www.siemens.com/lowvoltage/3wa-configurator)

				5	6	7	8	9	10	11	12	13	14	15	16	
							—	A	U			1			1	
3WA8																
Guide frames																
Size (SZ)	2			2												
Max. rated current I <sub>n max</sub>	2000 A			2	0											
	4000 A			4	0											
Short-circuit breaking capacity	D	≤ 600 V DC	25 kA at 600 V DC				1									
	E	≤ 1000 V DC	20 kA at 1000 V DC				8									
Number of poles	3-pole									3						
	4-pole									4						
Connection	Withdrawable	Vertical									1					
		Horizontal									2					
		Front double hole									3					
		Flange									4					
		Vertical on top / horizontal at the bottom									5					
		Horizontal on top / vertical at the bottom									6					
		Flange on top / horizontal at the bottom									7					
		Horizontal on top / flange at the bottom									8					
Secondary disconnect terminal	Push-in connection	X7, X6, X5					Non-automatic circuit breakers					A				
		X8, X7, X6, X5					Non-automatic circuit breakers with ready4COM					B				
Position signaling switch	Without position signaling switch														A	
	Position signaling switch PSS (3x connected position, 2x test position, 1x disconnected position)														C	
	Position signaling switch PSS-COM (1x connected position, 1x test position, 1x disconnected position) for connection to a communication module														G	

1

# Accessories and spare parts

## Accessories for electronic trip unit

### Electronic trip unit ETU600



Basic protective functions	Article No.
LSI / LSIG	3WA9111-0EE62
LSIG Hi-Z	3WA9111-0EE63

### Replacement battery for ETU600



Article No.
3WA9111-0EE81

### Option plug




Basic configuration	Size	Rated current I <sub>n</sub>	Article No.
Protective function LSI, LT, ST, INST			3WA9111-0EB ..
Protective function LSIG, LT, ST, INST, GF (ground-fault protection with extended setting range)			3WA9111-0EX ..
	1, 2	250 A	02
		315 A	03
		400 A	04
		500 A	05
		630 A	06
		800 A	08
		1000 A	10
	1, 2, 3	1250 A	12
		1600 A	16
		2000 A	20
		2500 A	25
	2, 3	3200 A	32
		4000 A	40
	3	5000 A	50
		6300 A	63

### Function packages for ETU600



Protective and alarm functions	Article No.
Ground fault alarm (GF alarm)	3WA9111-0ES01
Directed short-time-delayed short-circuit protection (dST) and reverse power protection (RP) (requires an optional voltage tap module)	3WA9111-0ES05
Enhanced protective functions (EPF)	Article No.
Full package with unbalance, voltage, active power, frequency, THD and phase sequence detection	3WA9111-0ES11
Phase unbalance current and phase unbalance voltage	3WA9111-0ES12
Undervoltage and overvoltage	3WA9111-0ES13
Active power import and active power export	3WA9111-0ES14
Under-frequency and over-frequency	3WA9111-0ES15
Total harmonic distortion for current and voltage	3WA9111-0ES16
Phase sequence detection	3WA9111-0ES17
Functional expansions	Article No.
Second protection parameter set	3WA9111-0ES21
Extended metering function	Article No.
Upgrade to metering function PMF-II Basic Power Monitoring (metering values, see catalog page 1/21)	3WA9111-0ES52
Upgrade to metering function PMF-III Advanced Power Monitoring (metering values, see catalog page 1/21)	3WA9111-0ES53

### External current sensors for the N-conductor



Version	Size	Article No.
For mounting on busbar	1	3WA9111-0AA21
	2	3WA9111-0AA22
	3	3WA9111-0AA23
For busbar connection	1	3WA9111-0AA31
	2	3WA9111-0AA32
	3	3WA9111-0AA33

## Accessories for electronic trip unit

### Internal current sensors (without energy core) for applications with frequency converters


**Note:** Used in converter applications with high harmonic components

- External 24 V DC supply required
- Undervoltage release required




Scope of supply	Size	Article No.
All parts for 3-pole breaker	2	3WA9111-0AA43
	3	3WA9111-0AA44
All parts for 4-pole breaker	2	3WA9111-0AA46
	3	3WA9111-0AA47

### Sealable and lockable cover



Accessory for	Article No.
ETU600	3WA9111-0EM22



### Automatic reset of the reclosing lockout



Version	Article No.
Spare part for option K01 or for retrofitting	3WA9111-0EM31


### Remote trip alarm reset coil



- For mechanical tripped indicator
- Including automatic reset of the reclosing lockout 3WA9111-0EM31

Voltage	Article No.
24 ... 30 V DC	3WA9111-0EM42
48 ... 60 V DC	3WA9111-0EM44
110 ... 127 V AC / 110 ... 125 V DC	3WA9111-0EM45
208 ... 240 V AC / 220 ... 250 V DC	3WA9111-0EM46

### Second tripping solenoid (F6) with reclose lockout



Version	Article No.
For external control via the external trip controller ETC600, including the necessary parts for the secondary disconnect terminal	3WA9111-0EM61

### External trip controller ETC600



Version	Article No.
Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on standard mounting rail	3WA9111-0EM62



# Accessories and spare parts

## Locking provisions and interlocks

### Interlocking sets for mechanical Close/Open



- Consisting of two transparent covers each for sealing or for attaching padlocks (padlocks not included in scope of supply)
- Cover with 6.35 mm hole (for tool actuation)
- Lock mount for safety lock for key operation



Version	Article No.
Without safety lock	3WA9111-0BA21
Made by CES	3WA9111-0BA22
Made by IKON	3WA9111-0BA23

### Locking provision against unauthorized closing, in the operator panels



- The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Spare part for options S01 to S09

Variant	Scope of supply	Article No.
Assembly kit FORTRESS or CASTELL <sup>1)</sup>	Without locks, cylinders or keys	3WA9111-0BA31
Made by RONIS	Locks, cylinders and keys included	3WA9111-0BA32
Made by KIRK-Key <sup>1)</sup>	Without locks, cylinders or keys	3WA9111-0BA33
Made by PROFALUX	Locks, cylinders and keys included	3WA9111-0BA34
Made by CES	Locks, cylinders and keys included	3WA9111-0BA35
Made by IKON	Locks, cylinders and keys included	3WA9111-0BA36
Assembly kit for padlocks	Without padlock	3WA9111-0BA37

### Locking provision against unauthorized closing of the withdrawable circuit breaker



- The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Consisting of lock in the guide frame, active in connected position, function is retained when circuit breaker is replaced
- Spare part for option R60, R61, R68

Variant	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WA9111-0BA51
Made by IKON	Locks, cylinders and keys included	3WA9111-0BA53
Made by KIRK-Key <sup>1)</sup>	Without locks, cylinders or keys	3WA9111-0BA57
Made by RONIS	Locks, cylinders and keys included	3WA9111-0BA58
Made by PROFALUX	Locks, cylinders and keys included	3WA9111-0BA50

### Locking provision for charging handle with padlock



Version	Scope of supply	Article No.
Spare part for S33	Without padlock	3WA9111-0BA71

### Locking provision to prevent movement of the withdrawable circuit breaker










- Safety lock for mounting onto the circuit breaker
- Spare part for option S71, S75, S76

Variant	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WA9111-0BA73
Made by IKON	Locks, cylinders and keys included	3WA9111-0BA75
Made by PROFALUX	Locks, cylinders and keys included	3WA9111-0BA76
Made by RONIS	Locks, cylinders and keys included	3WA9111-0BA77
Made by KIRK-Key <sup>1)</sup>	Without locks, cylinders or keys	3WA9111-0BA80

<sup>1)</sup> Locks, cylinders and keys must be ordered from the manufacturer.  
 Suitable cylinder lock KIRK Key C 900-301.  
 Suitable lock FORTRESS CLIS X005.  
 Suitable lock CASTELL FS2.

## Locking provisions and interlocks

Interlock systems				
	<ul style="list-style-type: none"><li>• 2 of the same keys for 3 circuit breakers</li><li>• Locking provision in OFF position</li><li>• Lock in the operator panel</li><li>• A maximum of 2 circuit breakers can be switched on</li></ul>			
	<b>Variant</b>			<b>Article No.</b>
	Made by CES			3WA9111-0BA43
Locking mechanisms to prevent movement of the withdrawable circuit breakers in disconnected position				
	<ul style="list-style-type: none"><li>• Consisting of Bowden cable and breaker mechanism in the control cabinet door</li><li>• Spare part for option R81, R85, R86</li><li>• <b>Note:</b> Not possible in combination with "Locking mechanism to prevent opening of the control cabinet door" (order code "R30") or "Locking mechanism to prevent movement with the control cabinet door open" (order code "R50")</li></ul>			
	<b>Variant</b>			<b>Article No.</b>
	Made by CES			3WA9111-0BA81
	Made by IKON			3WA9111-0BA82
	Made by PROFALUX			3WA9111-0BA83
	Made by RONIS			3WA9111-0BA84
Locking mechanisms to prevent opening of the control cabinet door when the circuit breaker is closed				
	<ul style="list-style-type: none"><li>• Defeatable</li><li>• <b>Note:</b> Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").</li></ul>			
	<b>Version</b>			<b>Article No.</b>
	Spare part for option S30		Fixed-mounted circuit breaker	3WA9111-0BB12
	Spare part for option R30		Guide frames	3WA9111-0BB13
Locking mechanisms to prevent movement when the control cabinet door is open				
	<ul style="list-style-type: none"><li>• Mounted on guide frame</li><li>• <b>Note:</b> Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").</li></ul>			
	<b>Version</b>			<b>Article No.</b>
	Spare part for option R50			3WA9111-0BB15
Mutual mechanical interlockings				
	<ul style="list-style-type: none"><li>• With Bowden cable 2000 mm (one required for each circuit breaker)</li></ul>			
	<b>Type</b>	<b>Circuit breaker and guide frame when ordered separately</b>	<b>Spare part for</b>	<b>Article No.</b>
	Fixed-mounted circuit breaker	–	Option S55	3WA9111-0BB21
	Module for withdrawable circuit breakers with guide frame	–	Option R55	3WA9111-0BB22
	Module for guide frame	✓	Option R56	3WA9111-0BB23
	Module for withdrawable circuit breaker	✓	Option R57	3WA9111-0BB24
	Adapter for size 3 withdrawable circuit breaker	✓	–	3WA9111-0BB25
Coupling on the circuit breaker for mutual interlocking with Bowden cable				
	<ul style="list-style-type: none"><li>• Can be used in all circuit breakers</li></ul>			
				<b>Article No.</b>
				3WA9111-0BB31
Bowden cable for mutual mechanical interlocking				
	<b>Length</b>			<b>Article No.</b>
	2000 mm			3WA9111-0BB41
	3000 mm			3WA9111-0BB42
	4500 mm			3WA9111-0BB43

<sup>1)</sup> Locks, cylinders and keys must be ordered from the manufacturer.

# Accessories and spare parts

## Indicators and control elements

### 2nd trip alarm switch (S25)



- Can only be used with a circuit breaker with an electronic trip unit
- The 1st trip alarm switch (1 changeover contact) is installed in every circuit breaker with a trip unit as standard

Version	Contacts	Article No.
Spare part for option K06	1 NO contact	3WA9111-0AH03

### Mechanical operating cycles counter (5-digit)



Version	For circuit breakers / non-automatic circuit breakers	Article No.
Spare part for option C01	With manual operating mechanism	3WA9111-0AH04
	With spring charging motor	3WA9111-0AH05

### Spring charged signaling switch (S21)



- Standard when a spring charging motor is installed to charge the stored energy mechanism
- When a spring charging motor is retrofitted, the spring charged signaling switch can also be retrofitted

Contacts	Article No.
1 NO contact	3WA9111-0AH06

### Position signaling switch for withdrawable circuit breakers



Contacts	Article No.
PSS: 6 changeover contacts; 3× connected position, 2× test position, 1× disconnected position	3WA9111-0AH11
PSS-COM: 3 changeover contacts; 1× connected position, 1× test position, 1× disconnected position and option for connection to a communication module	3WA9111-0AH12

### Local electric close (S10) for operator panel



- Scope of supply: Button + wiring
- Not available with motor disconnect switch
- **Note:** Possible only for circuit breakers with closing coil

Version	Variant	Article No.
Spare part for option C11	With sealing cap	3WA9111-0AH21
	With CES assembly kit	3WA9111-0AH22
Spare part for option C12	With IKON assembly kit	3WA9111-0AH23

### Motor disconnect switch (S12)



- Mounting onto operator panel
- Only in combination with the spring charging motor for charging the stored energy mechanism
- Not available in combination with local electric close

Version	Article No.
Spare part for option S25	3WA9111-0AH24

### Emergency OPEN button



- Mushroom pushbutton instead of local mechanical open


Variant	Article No.
Spare part for option S24	3WA9111-0AH25



# Accessories and spare parts

## Auxiliary releases

### Shunt trip (ST)



- For momentary duty, with cut-off switch S14

Version	Voltage	Article No.
5% OP	24 ... 30 V DC	3WA9111-0AD22
Switching time 50 ms	48 ... 60 V DC	3WA9111-0AD24
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AD25
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AD26

### Capacitor trip device



- For shunt trips
- Storage time 5 min
- Also suitable for 3VL, 3VA, 3WL and 3WN circuit breakers
- Note:** Rated control supply voltage must match the rated control supply voltage of the shunt trip

Rated control supply voltage/rated operational voltage		Article No.
AC 50/60 Hz	DC	
220 ... 240 V	220 ... 250 V	3WA9111-0AD81

### Undervoltage release (UVR)



Version	Voltage	Article No.
Instantaneous $\leq 0.08$ s (UVR) and short-time delayed $\leq 0.2$ s	24 ... 30 V DC	3WA9111-0AE02
	48 ... 60 V DC	3WA9111-0AE04
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AE05
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AE06
	380 ... 415 V AC	3WA9111-0AE07
Delayed (UVR-t), adjustable delay 0.2 ... 3.2 s	48 V DC	3WA9111-0AE13
	60 V DC	3WA9111-0AE14
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AE15
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AE16
	380 ... 415 V AC	3WA9111-0AE17

## Operating mechanism

### Spring charging motor to charge the stored energy mechanism



Voltage	Article No.
24 ... 30 V DC	3WA9111-0AF02
48 ... 60 V DC	3WA9111-0AF04
110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AF05
220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AF06

## Auxiliary contacts

### Auxiliary switches (AUX)



Contacts	Article No.
2 NO contacts + 2 NC contacts	3WA9111-0AG01
2 NO contacts	3WA9111-0AG02
1 NO contact + 1 NC contact	3WA9111-0AG03

## Door sealing frame, protective cover

### Door sealing frame



Version	Article No.
Spare part for option T40	3WA9111-0AP01

### Protective cover IP55



- Cannot be used in conjunction with door sealing frames
- Hood removable and can be opened on both sides

Article No.
3WA9111-0AP03

## Arc chute, arc chute cover


### Arc chute



Voltage	Size	Breaking capacity	Article No.
690 V AC	1	N, S	3WA9111-0AS01
		M	3WA9111-0AS02
	2	S, M, H	3WA9111-0AS10
		C	3WA9111-0AS11
	3	H	3WA9111-0AS17
		C	3WA9111-0AS18
1000 V AC	1	E	3WA9111-0AS04
			3WA9111-0AS05
			3WA9111-0AS12
	2	E	3WA9111-0AS12
	3	E	3WA9111-0AS18
600 V DC	2	D	3WA9111-0AS13
1000 V DC	1	E	3WA9111-0AS06
	2	E	3WA9111-0AS14

### Arc chute cover

- Parts kit for guide frame
- Spare part for option R10
- Not available for:
  - Breaking capacity C, D and E
  - 4000 A size 2



Number of poles	Size	Article No.
3-pole	1	3WA9111-0AS31
	2	3WA9111-0AS32
	3	3WA9111-0AS33
4-pole	1	3WA9111-0AS41
	2	3WA9111-0AS42
	3	3WA9111-0AS43

## Coding for withdrawable version

### Coding for withdrawable version



- Variant coding by the customer with 36 coding options

Size	Article No.
1, 2	3WA9111-0AR11
3	3WA9111-0AR12

# Accessories and spare parts

## Grounding connections

### Grounding connection between the guide frame and the circuit breaker



- For 30 kA and 60 kA ground short-circuit current
- For 60 kA ground short-circuit current, order 2x contact modules for guide frame

Contact module	Size	Number of poles	Article No.
For guide frames	1, 2 <sup>1)</sup>		3WA9111-0BG01
	3		3WA9111-0BG02
For withdrawable circuit breakers	1	3-pole	3WA9111-0BG11
		4-pole	3WA9111-0BG21
	2	3-pole <sup>1)</sup>	3WA9111-0BG12
		3-pole <sup>2)</sup>	3WA9111-0BG13
		4-pole <sup>1)</sup>	3WA9111-0BG22
		4-pole <sup>2)</sup>	3WA9111-0BG23

<sup>1)</sup> Cannot be used for size 2 with breaking capacity C and size 2, 4000 A.

<sup>2)</sup> Not for breaking capacity E

## Support brackets

### Support brackets



- For mounting fixed-mounted circuit breakers on vertical plane
- Only for sizes 1 and 2 (1 set = 2 units)

#### Article No.

3WA9111-0BB50

## Modules of the CubicleBUS<sup>2</sup>

### COM190 Modbus TCP PROFINET IO communication module




#### Version

Circuit breaker internal or on standard mounting rail, including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on standard mounting rail, connecting cables and CubicleBUS<sup>2</sup> terminating resistor

#### Article No.

3WA9111-0EC13

### IOM230 digital input/output module (2 inputs and 3 outputs)




#### Version

Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on standard mounting rail, connecting cables and terminating resistor for CubicleBUS<sup>2</sup>

#### Article No.

3WA9111-0EC11

### Terminating resistor for CubicleBUS<sup>2</sup>




#### Version

For CubicleBUS<sup>2</sup> on the last module

#### Article No.

3WA9111-0EC50

### Adapters



#### Version

For mounting the modules of the CubicleBUS<sup>2</sup> on the secondary disconnect terminal system of the circuit breaker

#### Article No.

3WA9111-0EC60

For mounting the modules of the CubicleBUS<sup>2</sup> on standard mounting rail

3WA9111-0EC61

## Internal voltage tap

### Set of components for conversion of an existing internal voltage tap



Conversion of internal voltage tap on main contact	Circuit breaker	Size	Article No.
From bottom to top	3-pole	1	3WA9111-0EK11
		2	3WA9111-0EK12
		3	3WA9111-0EK13
	4-pole	1	3WA9111-0EK21
		2	3WA9111-0EK22
		3	3WA9111-0EK23
From top to bottom	3-pole	1	3WA9111-0EK31
		2	3WA9111-0EK32
		3	3WA9111-0EK33
	4-pole	1	3WA9111-0EK41
		2	3WA9111-0EK42
		3	3WA9111-0EK43

### Retrofit of the internal voltage tap on the lower main conducting paths



For breaking capacity	All parts for circuit breaker	Size	Article No.
N, S, M, H, C with VTM680 voltage tap module	3-pole	1	3WA9111-0EK51
		2	3WA9111-0EK52
		3	3WA9111-0EK53
	4-pole	1	3WA9111-0EK61
		2	3WA9111-0EK62
		3	3WA9111-0EK63
E with VTM640 voltage tap module	3-pole	1	3WA9111-0EK55
		2	3WA9111-0EK56
		3	3WA9111-0EK57
	4-pole	1	3WA9111-0EK65
		2	3WA9111-0EK66
		3	3WA9111-0EK67

### Retrofit kit to connect an external voltage transformer



Size	Article No.
2, 3 including VTM640 voltage tap module and the necessary connection components	3WA9111-0EK81

## Main conductor connections, fixed-mounted versions

### Front-accessible main connections according to DIN 43673, double hole for main connection at top



Size	Breaking capacity   Rated current $I_n$	Article No.
1	N, S   $\leq 1000$ A AC	3WA9111-0AL11
	N, S   1250 ... 2000 A AC; M, E   $\leq 2000$ A AC	3WA9111-0AL12
2	S, M, H, E   2000 A AC; D, E   $\leq 2000$ A DC	3WA9111-0AL21
	S, M, H, E   2500 A AC	3WA9111-0AL22
	S, M, H, E   3200 A AC; D, E   4000 A DC	3WA9111-0AL23
	H   4000 A AC	3WA9111-0AL31

### Front-accessible main connections according to DIN 43673, double hole for main connection at bottom




Size	Breaking capacity   Rated current $I_n$	Article No.
1	N, S   $\leq 1000$ A AC	3WA9111-0AL13
	N, S   1250 ... 2000 A AC; M, E   $\leq 2000$ A AC	3WA9111-0AL14
2	S, M, H, E   2000 A AC; D, E   $\leq 2000$ A DC	3WA9111-0AL24
	S, M, H, E   2500 A AC	3WA9111-0AL25
	S, M, H, E   3200 A AC; D, E   4000 A DC	3WA9111-0AL26
	H   4000 A AC	3WA9111-0AL32



# Accessories and spare parts

## Main conductor connections, fixed-mounted versions

### Rear vertical main connections



Size	Breaking capacity   Rated current $I_n$	Article No.
1	N, S, M, E   $\leq 2000$ A AC <sup>1)</sup>	3WA9111-0AM11
	N, S, M, E   2500 A AC	3WA9111-0AM12
2	S, M, H, C, E   $\leq 3200$ A AC <sup>2)</sup>	3WA9111-0AM21
3	H, C, E   $\leq 6300$ A AC	3WA9111-0AM33

<sup>1)</sup> In the case of vertical connection size 1 with breaking capacity N and S, up to 1000 A one 3WA9111-0AM11 vertical connection is required for each connection, from 1250 A to 2000 A or with breaking capacity M or E two 3WA9111-0AM11 vertical connections are required for each connection.

<sup>2)</sup> In the case of vertical connection size 2, up to 2500 A one 3WA9111-0AM21 vertical connection is required for each connection for breaking capacity S, M, H, E, D, for 3200 A and always for breaking capacity C, two 3WA9111-0AM21 vertical connections are required for each connection

## Main conductor connections for withdrawable units

### Front-accessible main connections, according to DIN 43673, double hole at top or at bottom <sup>1)</sup>



Size	Breaking capacity   Rated current $I_n$	Article No.
1	N, S   $\leq 1000$ A AC	3WA9111-0AN11
	N, S   1250 ... 2000 A AC; M, E   $\leq 2000$ A AC	3WA9111-0AN12
2	N, S   1250 ... 2000 A AC; M, E   $\leq 2000$ A AC	3WA9111-0AN21
	S, M, H, E   2500 A AC	3WA9111-0AN22
	S, M, H, E   3200 A AC; D, E   4000 A DC	3WA9111-0AN23
	H   4000 A AC	3WA9111-0AN31
3	H   4000 A AC	3WA9111-0AN31

### Supports for front-accessible main connections according to DIN 43673




Number of poles	Size	Article No.
3-pole, set for 3 bars, top or bottom	1	3WA9111-0AN81
	2	3WA9111-0AN82
	3	3WA9111-0AN83
4-pole, set for 4 bars, top or bottom	1	3WA9111-0AN84
	2	3WA9111-0AN85
	3	3WA9111-0AN86

### Rear vertical main connections



Size	Breaking capacity   Rated current $I_n$	Article No.
1	N, S   $\leq 1000$ A AC	3WA9111-0AV11
	N, S   1250 ... 2000 A AC; M, E   $\leq 2000$ A AC	3WA9111-0AV12
2	S, M, H, E   2000 A AC; D, E   $\leq 2000$ A DC <sup>2)</sup>	3WA9111-0AV21
	S, M, H, E   2500 A AC <sup>2)</sup>	3WA9111-0AV22
	S, M, H, E   3200 A AC; D, E   4000 A DC <sup>2)</sup>	3WA9111-0AV23
	C   2000 ... 3200 A AC	3WA9111-0AV24
3	H, C, E   $\leq 5000$ A AC	3WA9111-0AV31

### Rear horizontal main connections



Size	Breaking capacity   Rated current $I_n$	Article No.
1	N, S   $\leq 1000$ A AC	3WA9111-0AX11
	N, S   1250 ... 2000 A AC; M, E   $\leq 2000$ A AC	3WA9111-0AX12
2	S, M, H, E   2000 A AC; D, E   $\leq 2000$ A DC <sup>2)</sup>	3WA9111-0AX21
	S, M, H, E   2500 A AC <sup>2)</sup>	3WA9111-0AX22
	S, M, H, E   3200 A AC; D, E   4000 A DC <sup>2)</sup>	3WA9111-0AX23
	C   2000 ... 3200 A AC	3WA9111-0AX24
3	H, C, E   $\leq 5000$ A AC	3WA9111-0AX31

<sup>1)</sup> When using front-accessible main connections (withdrawable circuit breakers) supports are required.

<sup>2)</sup> Not for circuit breakers with very high breaking capacity C.

### Connecting flange



Size	Breaking capacity   Rated current $I_n$	Article No.
1	N, S   $\leq 1000$ A AC	3WA9111-0AW11
	N, S   1250 ... 2000 A AC; M, E   $\leq 2000$ A AC	3WA9111-0AW12
2	S, M, H, E   2000 A AC; D, E   $\leq 2000$ A DC	3WA9111-0AW21
	S, M, H, E   2500 A AC	3WA9111-0AW22
	S, M, H, E   3200 A AC; D, E   4000 A DC	3WA9111-0AW23
	C   2000 ... 3200 A AC	3WA9111-0AW24
3	H   4000 A AC	3WA9111-0AW31

## Conversion kit

### Conversion kit for converting fixed-mounted circuit breakers into withdrawable circuit breakers




- Guide frames and sliding contact modules must be ordered separately.
- Conversion from fixed-mounted to withdrawable circuit breakers is not possible for 3WA circuit breakers with breaking capacity C and size 3 with breaking capacity E

Number of poles	Size	Article No.
3-pole	1	3WA9111-0BC11
	2	3WA9111-0BC12
	3	3WA9111-0BC13
4-pole	1	3WA9111-0BC14
	2	3WA9111-0BC15
	3	3WA9111-0BC16

## Main contact elements

### Main contact elements for AC circuit breakers



- **Notes:**
  - To be ordered only once for each circuit breaker
  - On the following circuit breakers, the main contact elements can only be replaced in the factory:  
3WA1 size 1 breaking capacity M and E  
3WA1 size 2 breaking capacity C  
3WA1 size 3 breaking capacity C and E

Number of poles	Size	Breaking capacity	Rated current $I_n$	Article No.
3	1	N	$\leq 1000$ A	3WA9111-0AQ01
			1250 A	3WA9111-0AQ02
			1600 A	3WA9111-0AQ04
		S	$\leq 1000$ A	3WA9111-0AQ03
			1250 ... 1600 A	3WA9111-0AQ04
		N, S	2000 ... 2500 A	3WA9111-0AQ05
	2	S, M, H, E	2000 A	3WA9111-0AQ08
			2500 A	3WA9111-0AQ11
			3200 A	3WA9111-0AQ13
		S, M, H, E	4000 A	3WA9111-0AQ15
			4000 A	3WA9111-0AQ20
			5000 ... 6300 A	3WA9111-0AQ22
4	1	N	$\leq 1000$ A	3WA9111-0AQ51
			1250 A	3WA9111-0AQ52
			1600 A	3WA9111-0AQ54
		S	$\leq 1000$ A	3WA9111-0AQ53
			1250 ... 1600 A	3WA9111-0AQ54
		N, S	2000 ... 2500 A	3WA9111-0AQ55
	2	S, M, H, E	2000 A	3WA9111-0AQ58
			2500 A	3WA9111-0AQ61
			3200 A	3WA9111-0AQ63
		S, M, H, E	4000 A	3WA9111-0AQ65
			4000 A	3WA9111-0AQ70
			5000 ... 6300 A	3WA9111-0AQ72

### Main contact elements for DC non-automatic circuit breakers



- **Note:** To be ordered only once for each circuit breaker

Number of poles	Size	Breaking capacity	Rated current $I_n$	Article No.
3	2	D, E	1000 / 2000 A	3WA9111-0AQ17
			4000 A	3WA9111-0AQ18
4	2	D, E	1000 / 2000 A	3WA9111-0AQ67
			4000 A	3WA9111-0AQ68

# Switching devices for AC and DC

IEC 60947-2

1

AC



3WL10

3WL11

## Basic data

Rated operational voltage $U_e$	V	$\leq 690$		$\leq 1000$	
Rated current $I_n$	A	630 ... 1250		630 ... 2000	
Size		0		1	
Installation type		Withdrawable	Fixed-mounted	Withdrawable	Fixed-mounted
Number of poles		3/4-pole	3/4-pole	3/4-pole	3/4-pole

## Dimensions

Width (3-pole   4-pole)	mm	278 348	210 280	320 410	320 410
Height (standard)   A05, A15, A16, DC greater than 600 V	mm	363.5	296	468 518	462
Depth	mm	271	183	471	357

## Approvals

General product approvals	VDE, EAC, CCC, CE, C-Tick			VDE, EAC, CCC, CE, C-Tick	
Marine / shipbuilding	RMRS			ABS, DNV, LR, BV, GL, PRS, RMRS	

## Breaking capacity

		B	N	S	N	S	H
<b>Rated short-circuit breaking capacity</b>							
Rated operational voltage $U_e$ up to 415 V AC $I_{cu}$   $I_{cs}$	kA	42 42	55 50	66 50	55 55	66 66	85 85
Rated operational voltage $U_e$ up to 500 V AC $I_{cu}$   $I_{cs}$	kA	42 42	50 50	50 50	55 55	66 66	85 85
Rated operational voltage $U_e$ up to 690 V AC $I_{cu}$   $I_{cs}$	kA	– –	42 42	50 50	42 42	50 50	66 66
Rated operational voltage up to 690 V AC +20% <sup>6)</sup> , with Z option: A16 $I_{cu}$   $I_{cs}$	kA	– –	– –	– –	– –	– –	50 50
Rated operational voltage $U_e$ up to 1000 V AC, with Z option: A05 $I_{cu}$   $I_{cs}$	kA	– –	– –	– –	– –	– –	50 50
Rated operational voltage $U_e$ up to 1150 V AC, with Z option: A15 $I_{cu}$   $I_{cs}$	kA	– –	– –	– –	– –	– –	– –

## Rated short-time withstand current $I_{cw}$ <sup>5)</sup>

Rated short-time withstand current $I_{cw}$ at $U_e$ up to 500 V AC	0.5 s	kA	–	–	–	55	66	85
	1 s	kA	42	42	50	50	66	85
	2 s	kA	–	–	–	35 <sup>1)</sup> /45 <sup>2)</sup>	45	70
	3 s	kA	24	24	36	35 <sup>1)</sup> /45 <sup>2)</sup>	35	60
Rated short-time withstand current $I_{cw}$ at $U_e$ up to 690 V AC	0.5 s	kA	–	–	–	42	50	66
	1 s	kA	42	42	50	42	50	66
	2 s	kA	–	–	–	35 <sup>1)</sup> /42 <sup>2)</sup>	45	66
	3 s	kA	24	24	36	30 <sup>1)</sup> /45 <sup>2)</sup>	35	60
Rated short-time withstand current $I_{cw}$ at DC	1 s	kA	–	–	–	–	–	–

## Rated conditional short-circuit current $I_{cc}$ of the non-automatic air circuit breakers

Up to 500 V AC	kA	–	42	50	55	66	85
Up to 690 V AC	kA	–	42	50	42	50	66
Up to 1000 V/1150 V AC, with Z option: A05	kA	–	–	–	–	–	50/–
Up to 1000 V/1150 V AC, with Z option: A15	kA	–	–	–	–	–	–
Up to 220 V/300 V DC	kA	–	–	–	–	–	–
Up to 600 V/1000 V DC	kA	–	–	–	–	–	–

## Rated short-circuit breaking capacity $I_{cm}$

$I_{cm}$ at 415 V AC	kA	88	121	145	121	145	187
$I_{cm}$ at 500 V AC	kA	88	105	105	121	145	187
$I_{cm}$ at 690 V AC	kA	–	88	105	88	105	145
$I_{cm}$ at 1000 V AC	kA	–	–	–	–	–	105
$I_{cm}$ at 1150 V AC	kA	–	–	–	–	–	–

<sup>1)</sup> Size 1 with  $I_{n \max} \leq 1250$  A  
<sup>2)</sup> Size 1 with  $I_{n \max} \geq 1600$  A

<sup>3)</sup> Size 2 with  $I_{n \max} \leq 2500$  A  
<sup>4)</sup> Size 2 with  $I_{n \max} \leq 3200$  A

<sup>5)</sup> At a rated voltage  $\geq 690$  V the  $I_{cw}$  value of the circuit breaker corresponds with the  $I_{cu}$  or  $I_{cs}$  value

AC

DC



3WL12

3WL13

3WL11

3WL12

≤1150				≤1150			1000 DC	≤600/1000 DC	
800 ... 4000				4000 ... 6300			2000	1000 ... 4000	
2				3			1	2	
Withdrawable 3/4-pole	Fixed-mounted 3/4-pole			Withdrawable 3/4-pole	Fixed-mounted 3/4-pole		Fixed-mounted 4-pole	Withdrawable 3/4-pole	Fixed-mounted 3/4-pole
460 590		460 590		704 914		704 914		410	
468 518		462		468 518		462		462	
471		357		471		357		357	
VDE, EAC, CCC, CE, C-Tick				VDE, EAC, CCC, VDE, CE, C-Tick			VDE, EAC, CCC, CE, C-Tick	VDE, EAC, CCC, CE, C-Tick	
ABS, DNV, LR, BV, GL, PRS, RMRS				ABS, DNV, LR, BV, GL, PRS, RMRS			ABS, DNV, LR, BV, GL, PRS, RMRS	ABS, DNV, LR, BV, GL, PRS, RMRS	
N	S	H	C <sup>7)</sup>	H	C 3p	C 4p	DC	DC	
66 66	85 85	100 100	130 130	100 100	150 150	130 130	–	–	
66 66	85 85	100 100	130 130	100 100	150 150	130 130	–	–	
50 50	75 75	85 85	100 100	85 85	150 150	130 130	–	–	
– –	– –	– –	– –	– –	– –	– –	–	–	
– –	– –	85 85	– –	85 85	125 125	125 125	–	–	
– –	– –	50 50	– –	70 70	– –	– –	–	–	
66	85	100	100	100	130	120	–	–	
66	85	85	100	100	130	120	–	–	
66	66 <sup>3)</sup> /85 <sup>4)</sup>	66 <sup>3)</sup> /85 <sup>4)</sup>	85	100	130	120	–	–	
55 <sup>3)</sup> /66 <sup>4)</sup>	55 <sup>3)</sup> /75 <sup>4)</sup>	55 <sup>3)</sup> /75 <sup>4)</sup>	75	100	130	120	–	–	
50	75	85	100	85	130	120	–	–	
50	75	85	100	85	130	120	–	–	
50	66 <sup>3)</sup> /75 <sup>4)</sup>	66 <sup>3)</sup> /85 <sup>4)</sup>	85	85	130	120	–	–	
50	55 <sup>3)</sup> /75 <sup>4)</sup>	55 <sup>3)</sup> /75 <sup>4)</sup>	75	85	130	120	–	–	
–	–	–	–	–	–	–	20	35 <sup>8)</sup> /30 <sup>9)</sup> /25 <sup>10)</sup> /20 <sup>11)</sup>	
66	85	100	130	100	130	120	–	–	
50	75	85	100	85	130	120	–	–	
–	–	85/85	–	85/85	–	–	–	–	
–	–	–/50	–	70/70	–	–	–	–	
–	–	–	–	–	–	–	20/20	35/30	
–	–	–	–	–	–	–	20/20	25/20	
145	187	220	286	220	330	286	–	–	
145	187	220	286	220	330	286	–	–	
105	165	187	220	187	330	286	–	–	
–	–	105	–	187	267	267	–	–	
–	–	105	–	147	–	–	–	–	

<sup>6)</sup> At 690 V AC +5% the  $I_{cu} = I_{cs} = 85$  kA<sup>7)</sup> Up to 3200 A<sup>8)</sup> At  $U_e = 220$  V DC<sup>9)</sup> At  $U_e = 300$  V DC<sup>10)</sup> At  $U_e = 600$  V DC<sup>11)</sup> At  $U_e = 1000$  V DC

# Switching devices for AC

IEC 60947-2

1

3WL10



3WL11

Rated current  $I_n$ 

630 A   800 A   1000 A   1250 A   1000 A   1250 A

## General data

Isolating function acc. to EN 60947-2

Yes

Utilization category

B

Permissible ambient temperature During operation (in operation with LCD max. 55 °C)<sup>1)</sup> °C

-25 ... +70


-40 ... +70

Storage °C


-40 ... +70

-40 ... +80

Mounting position



NSE0\_00061a



NSE0\_00062a

Degree of protection

IP20 without cabinet door, IP30 with door sealing frame, IP54 with cover

IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover

## Voltage

Rated operational voltage  $U_e$  at 50/60 Hz

1000 V version

V AC

≤690

690/1000

Rated insulation voltage  $U_i$ 

V AC

1000

1000

Rated impulse withstand voltage  $U_{imp}$ 

Main conducting paths

kV

12

12

Auxiliary circuits

kV

4

4

Control circuits<sup>9)</sup>

kV

2.5

2.5

Rated rotor operational voltage  $U_{er}$ 

V

2000

## Permissible load for withdrawable versions<sup>2) 4) 10)</sup>

At rear horizontal main connections

Up to 55 °C (Cu bare)

A

630

800

1000

1250

1000

1250

Up to 60 °C (Cu bare)

A

630

800

1000

1250

1000

1250

Up to 70 °C

A

630

800

1000

1250

1000<sup>8)</sup>1210<sup>8)</sup>

## Power loss at $I_n$

With three-phase symmetrical load, complete device (3/4p)

Fixed-mounted circuit breaker

W

31

50

78

122

100

105

Withdrawable circuit breaker

W

62

100

156

244

195

205

## Switching times

Make time

ms

&lt;20

&lt;20

&lt;20

&lt;20

35

Opening time

ms

&lt;20

&lt;20

&lt;20

&lt;20

38

Electrical make time (through closing coil)<sup>5)</sup>

ms

&lt;50

&lt;50

&lt;50

&lt;50

80

Electrical opening time (through shunt trip)

ms

&lt;35

&lt;35

&lt;35

&lt;35

73

Electrical opening time (instantaneous undervoltage release)

ms

&lt;50

&lt;50

&lt;50

&lt;50

73

Opening time due to ETU, instantaneous short-circuit release

ms

25

25

25

25

50

## Service life/endurance

### Breaking capacity N and S, 3/4-pole

Mechanical

Without maintenance

Operating cycles

20000

20000

20000

20000

15000

15000

With maintenance<sup>6)</sup>

Operating cycles

—

—

—

—

25000

25000

Electrical

Without maintenance 440 V

Operating cycles

8000<sup>7)</sup>8000<sup>7)</sup>8000<sup>7)</sup>8000<sup>7)</sup>

—

—

Without maintenance 690 V

Operating cycles

8000<sup>7)</sup>8000<sup>7)</sup>8000<sup>7)</sup>6500<sup>7)</sup>

10000

10000

With maintenance<sup>6)</sup>

Operating cycles

—<sup>7)</sup>—<sup>7)</sup>—<sup>7)</sup>—<sup>7)</sup>

25000

25000

### Breaking capacity H, 3-pole

Mechanical

Without maintenance

Operating cycles

—

—

—

—

10000

10000

With maintenance<sup>6)</sup>

Operating cycles

—

—

—

—

15000

15000

Electrical

Without maintenance 690 V

Operating cycles

—

—

—

—

7500

7500

Without maintenance 1000 V, with Z option: A05

Operating cycles

—

—

—

—

1000

1000

Without maintenance 1150 V, with Z option: A15

Operating cycles

—

—

—

—

—

—

With maintenance<sup>6)</sup>

Operating cycles

—

—

—

—

15000

15000

<sup>1)</sup> The LCD on the 3WL10 is always active.<sup>2)</sup> 4000 A, size 2 in fixed-mounted version, 3-pole<sup>4)</sup> ETU76B with graphics display can be used up to max. 55 °C.<sup>5)</sup> Make time through closing coil for synchronization purposes (short-time excited) 50 ms.<sup>6)</sup> Maintenance means: Replacing main contact elements and arc chutes (see Operating Manual). Greasing the breaker mechanism on the 3WL10, no replacement of components.

## 3WL11



## 3WL12



## 3WL13



1600 A 2000 A 800 A 1000 A 1250 A 1600 A 2000 A 2500 A 3200 A 4000 A 4000 A 5000 A 6300 A

Yes

B

-40 ... +70



-40 ... +70

-40 ... +70

-40 ... +80

-40 ... +80

-40 ... +80



IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover

IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover

IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover

690/1000

690/1000

690/1000

1000

1000

1000

12

12

12

4

4

4

2.5

2.5

2.5

2000

2000

2000

1600	2000	800	1000	1250	1600	2000	2500	3200	3950	4000	5000	5920
1600	1930	800	1000	1250	1600	2000	2500	3020	3810	4000	5000	5810
1490 <sup>8)</sup>	1780 <sup>8)</sup>	800 <sup>8)</sup>	1000 <sup>8)</sup>	1250 <sup>8)</sup>	1600 <sup>8)</sup>	2000 <sup>8)</sup>	2280 <sup>8)</sup>	2870 <sup>8)</sup>	3600 <sup>8)</sup>	4000 <sup>8)</sup>	5000 <sup>8)</sup>	5500 <sup>8)</sup>

150	240	40	45	80	85	180	270	410	750	520	630	900
350	440	85	95	165	175	320	520	710	925	810	1050	1600

35

35

35

38

34

34

80

100

100

73

73

73

73

73

73

50

50

50

15000	15000	10000	10000	10000	10000	10000	10000	10000	10000	10000	—	—	—
25000	25000	17500	17500	17500	17500	17500	17500	17500	17500	17500	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—
10000	10000	7500	7500	7500	7500	7500	7500	4000	2000	—	—	—	—
25000	25000	17500	17500	17500	17500	17500	17500	17500	17500	—	—	—	—

10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	5000	5000	5000
15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000
7500	7500	7500	7500	7500	7500	7500	7500	4000	2000	2000	2000	2000	2000
1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000

<sup>7)</sup> Periodic greasing of breaker mechanism on 3WL10 (see Manual), components not to be replaced

<sup>8)</sup> Cu painted black

<sup>9)</sup> Motorized operating mechanism  $U_{imp}=1.2$  kV

<sup>10)</sup> For 3WL size 2 4000A and size 3 6300A with rear vertical main connections.

# Switching devices for AC

IEC 60947-2 (continued)

1

3WL10



3WL11

Rated current  $I_n$ 

630 A 800 A 1000 A 1250 A 1000 A 1250 A

**Service life/endurance****Breaking capacity H, 4-pole**

Mechanical	Without maintenance	Operating cycles	–	–	–	–	10000	10000
	With maintenance <sup>6)</sup>	Operating cycles	–	–	–	–	15000	15000
Electrical	Without maintenance 690 V	Operating cycles	–	–	–	–	7500	7500
	Without maintenance 1000 V	Operating cycles	–	–	–	–	1000	1000
	Without maintenance 1150 V <sup>7)</sup>	Operating cycles	–	–	–	–	–	–
	With maintenance <sup>6)</sup>	Operating cycles	–	–	–	–	10000	10000

**Breaking capacity C**

Mechanical	Without maintenance	Operating cycles	–	–	–	–	–	–
	With maintenance <sup>6)</sup>	Operating cycles	–	–	–	–	–	–
Electrical	Without maintenance 690 V	Operating cycles	–	–	–	–	–	–
	With maintenance 690 V <sup>6)</sup>	Operating cycles	–	–	–	–	–	–

**Switching frequency<sup>8)</sup>**

Mechanical / electrical	690 V version	1/h	60/30	60/30	60/30	60/30	–	–
	1000 V / 1150 V version	1/h	–	–	–	–	–	–

**Connection****Minimum phase size**

Copper bars, bare	Unit, mm <sup>2</sup>	2× 40× 5	2× 50× 5	2× 50× 10 <sup>12)</sup> 2× 50× 8 <sup>13)</sup>	2× 50× 10 <sup>12)</sup> 2× 50× 8 <sup>12)</sup>	1× 60× 10	2× 40× 10
Copper bars, painted black	Unit, mm <sup>2</sup>	–	–	–	–	1× 60× 10	2× 40× 10

**Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)**

Standard connection = screw	Without end sleeve	–	–	–	–	2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16); 1× 2.5 mm <sup>2</sup> (AWG 14)
	With end sleeve acc. to DIN 46228 Part 2	–	–	–	–	1× 0.5 ... 1× 1.5 mm <sup>2</sup> (AWG 20 ... 16)
	With twin end sleeve	–	–	–	–	2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16)
Screwless connection technology	Without end sleeve	–	0.5 ... 2.5 mm <sup>2</sup> (AWG 20 ... 14)	–	–	2× 0.5 ... 2× 2.5 mm <sup>2</sup> (AWG 20 ... 14)
	With end sleeve acc. to DIN 46228 Part 2	–	0.5 ... 1.5 mm <sup>2</sup> (AWG 20 ... 16)	–	–	2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16)

**Position signaling switches**

Screwless connection technology	–	1× 0.5 ... 1× 2.5 mm <sup>2</sup> (AWG 20 ... 14)	–	–	–	1× 0.5 ... 1× 2.5 mm <sup>2</sup> (AWG 20 ... 14)
---------------------------------	---	--	---	---	---	--

**Weights**

3-pole	Fixed-mounted circuit breaker	kg	–	14	–	43	43
	Withdrawable circuit breaker	kg	–	17.3	–	45	45
	Guide frames	kg	–	21	–	25	25
4-pole	Fixed-mounted circuit breaker	kg	–	16	–	50	50
	Withdrawable circuit breaker	kg	–	19.3	–	54	54
	Guide frames	kg	–	25	–	30	30

<sup>6)</sup> Maintenance means: Replacing main contact elements and arc chutes (see Operating Manual).

<sup>7)</sup> Size 2 with order code "A15" and size 3. Data for very high breaking capacity.

<sup>8)</sup> Minimum interval time between 2 tripping operations  
<sup>9)</sup> 3-pole switching with breaking capacity N and S: 45/h.

## 3WL11



## 3WL12



## 3WL13



1

1600 A	2000 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A	3200 A	4000 A	4000 A	5000 A	6300 A
10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	5000	5000	5000
15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000
7500	7500	7500	7500	7500	7500	7500	7500	4000	2000	2000	2000	2000
1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
–	–	500	500	500	500	500	500	500	500	500	500	500
10000	10000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000
–	–	5000	5000	5000	5000	5000	5000	5000	–	5000	5000	5000
–	–	10000	10000	10000	10000	10000	10000	10000	–	10000	10000	10000
–	–	5000	5000	5000	5000	5000	5000	4000	–	1000	1000	1000
–	–	10000	10000	10000	10000	10000	10000	8000	–	–	–	–
–	20/20	60/60 <sup>12)</sup>	60/60 <sup>12)</sup>	60/60 <sup>12)</sup>	60/60 <sup>12)</sup>	60/60 <sup>12)</sup>	60/60 <sup>12)</sup>	60/60 <sup>12)</sup>	60/60 <sup>12)</sup>	60/60 <sup>12)</sup>	60/60 <sup>12)</sup>	60/60 <sup>12)</sup>
–	–	20/20	20/20	20/20	20/20	20/20	20/20	20/20	20/20	20/20	20/20	20/20
2× 50× 10	3× 50× 10	1× 50× 10	1× 60× 10	2× 40× 10	2× 50× 10	3× 50× 10	2× 100× 10	3× 100× 10	4× 120× 10	4× 100× 10	6× 100× 10	6× 120× 10
2× 50× 10	3× 50× 10	1× 50× 10	1× 60× 10	2× 40× 10	2× 50× 10	3× 50× 10	2× 100× 10	3× 100× 10	4× 100× 10	4× 100× 10	6× 100× 10	6× 120× 10
2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16); 1× 2.5 mm <sup>2</sup> (AWG 14)					2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16); 1× 2.5 mm <sup>2</sup> (AWG 14)					2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16); 1× 2.5 mm <sup>2</sup> (AWG 14)		
1× 0.5 ... 1× 1.5 mm <sup>2</sup> (AWG 20 ... 16)					1× 0.5 ... 1× 1.5 mm <sup>2</sup> (AWG 20 ... 16)					1× 0.5 ... 1× 1.5 mm <sup>2</sup> (AWG 20 ... 16)		
2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16)					2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16)					2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16)		
2× 0.5 ... 2× 2.5 mm <sup>2</sup> (AWG 20 ... 14)					2× 0.5 ... 2× 2.5 mm <sup>2</sup> (AWG 20 ... 14)					2× 0.5 ... 2× 2.5 mm <sup>2</sup> (AWG 20 ... 14)		
2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16)					2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16)					2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16)		
1× 0.5 ... 1× 2.5 mm <sup>2</sup> (AWG 20 ... 14)					1× 0.5 ... 1× 2.5 mm <sup>2</sup> (AWG 20 ... 14)					1× 0.5 ... 1× 2.5 mm <sup>2</sup> (AWG 20 ... 14)		
43	43	56	56	56	56	56	59	64	85	82	82	90
45	45	60	60	60	60	60	63	68	121	88	88	96
25	25	31	31	31	31	31	39	45	52	60	60	70
50	50	67	67	67	67	67	71	77	103	99	99	108
54	54	72	72	72	72	72	76	82	146	106	106	108
30	30	37	37	37	37	37	47	54	62	84	84	119

<sup>12)</sup> Horizontal<sup>13)</sup> Vertical



# Switching devices for DC

IEC 60947-2

1

3WL11

3WL12

Rated current  $I_n$ 

2000 A

1000 A

2000 A

4000 A

## General data

Size	1	2
Isolating function acc. to EN 60947-2	Yes	
Utilization category	B	
Permissible ambient temperature	Operation	°C
	Storage	°C
Mounting position		
Degree of protection	IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover	

## Voltage

Rated operational voltage $U_e$ at 50/60 Hz	1000 V version	V DC	1000	600/1000
Rated insulation voltage $U_i$		V DC	1000	1000
Rated impulse withstand voltage $U_{imp}$	Main conducting paths	kV	12	12
	Auxiliary circuits	kV	4	4
	Control circuits	kV	2.5	2.5

## Permissible load

At rear horizontal main connections	Up to 40 °C (Cu black painted)	A	2000	1000	2000	4000
	Up to 55 °C (Cu black painted)	A	1910	1000	2000	3640
	Up to 60 °C (Cu black painted)	A	1850	1000	2000	3500
	Up to 70 °C (Cu black painted)	A	1710	1000	1950	3250

## Power loss at $I_n$

With symmetrical load	Withdrawable circuit breaker	W	150	280	770	1640
-----------------------	------------------------------	---	-----	-----	-----	------

## Switching times

Make time	ms	35	35
Opening time	ms	38	34
Electrical make time (through activation solenoid) <sup>1)</sup>	ms	100	100
Electrical opening time (through shunt trip)	ms	73	73
Electrical opening time (instantaneous undervoltage release)	ms	73	73

## Service life/endurance<sup>3)</sup>

Mechanical	Without maintenance	Operating cycles	10000	10000	10000	10000
	With maintenance <sup>2)</sup>	Operating cycles	15000	17500	17500	17500
Electrical	Without maintenance	Operating cycles	1000	6000	6000	4000
	Without maintenance 1000 V	Operating cycles	1000	1000	1000	1000
	With maintenance <sup>2)</sup>	Operating cycles	2000	17500	17500	17500

<sup>1)</sup> Make time through activation solenoid for synchronization purposes (short-time excited) 50 ms.


<sup>2)</sup> Maintenance means: Replace main contact elements and arc chutes (see Operating Manual).

<sup>3)</sup> Further technical specifications on request.

<sup>4)</sup> At  $U_e = 220$  V DC

# 3WL11

# 3WL12



Rated current I <sub>n</sub>		2000 A	1000 A	2000 A	4000 A	
Short-circuit breaking capacity I <sub>cc</sub>						
Up to 220 V DC	kA	20		35		
Up to 300 V DC	kA	20		30		
Up to 600 V DC	kA	20		25		
Up to 1000 V DC	kA	20		20		
Rated short-time withstand current I <sub>cw</sub>						
0.5 s	kA	–		–		
1 s	kA	20		35 <sup>4)</sup> / 30 <sup>5)</sup> / 25 <sup>6)</sup> / 20 <sup>7)</sup>		
2 s	kA	–		–		
3 s	kA	–		–		
Switching frequency						
690 V version	1/h	–	60	60	60	
1000 V version	1/h	20	20	20	20	
Connection						
Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)						
Standard connection = strain-relief clamp	Without end sleeve	2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16); 1× 2.5 mm <sup>2</sup> (AWG 14)				
	With end sleeve acc. to DIN 46228 Part 2	1× 0.5 ... 1× 1.5 mm <sup>2</sup> (AWG 20 ... 16)				
	With twin end sleeve	2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16)				
Optional connection = tension spring	Without end sleeve	2× 0.5 ... 2× 2.5 mm <sup>2</sup> (AWG 20 ... 14)				
	With end sleeve acc. to DIN 46228 Part 2	2× 0.5 ... 2× 1.5 mm <sup>2</sup> (AWG 20 ... 16)				
Weights						
3-pole	Fixed-mounted circuit breaker	kg	43	56	56	64
	Withdrawable circuit breaker	kg	–	60	60	68
	Guide frames	kg	–	31	31	45
4-pole	Fixed-mounted circuit breaker	kg	50	67	67	77
	Withdrawable circuit breaker	kg	–	72	72	82
	Guide frames	kg	–	37	37	54

<sup>5)</sup> At  $U_e = 300$  V DC


<sup>7)</sup> At  $U_e = 1000$  V DC.

<sup>6)</sup> At  $U_e = 600$  V DC

# Switching devices for DC














## Application examples size 1

Permissible interconnection circuit diagrams for size 1,  
1000 V DC non-automatic air circuit breakers

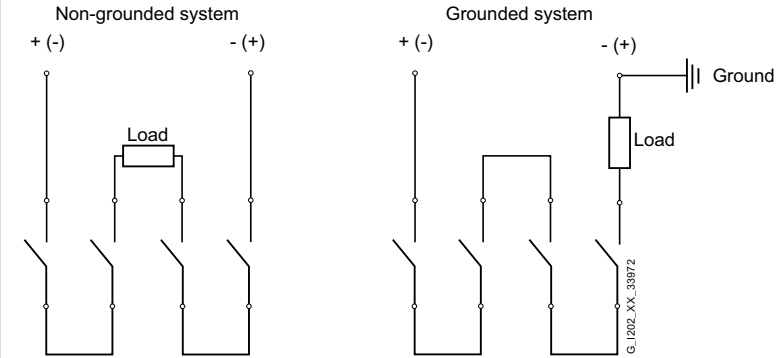**1**

## Application examples size 2

The connection to the circuit breakers is not dependent on direction and polarity; the circuit diagrams can be adapted accordingly. If the parallel or series connections are made directly to the connecting bars, for thermal reasons the continuous load on the circuit breakers must only be 80% of the permissible operational current. If the parallel or series connection is made at a distance of 1 m from the connecting bars, the circuit breaker can be used at full operational current load.

Required contact gaps at rated voltage	For 3-pole non-automatic air circuit breakers		For 4-pole non-automatic air circuit breakers	
	1-pole	2-pole	1-pole	2-pole
Rated operational voltage <300 V + 10%				
	 NSS0_00539			
	only with grounded system <sup>2)</sup>		only with grounded system <sup>3)</sup>	
Rated operational voltage >300 V + 10% ... 600 V + 10%				
				
		only with grounded system	only with grounded system <sup>2)</sup>	
Rated operational voltage >600 V + 10% ... 1000 V + 10% <sup>4)</sup>				
			 NSS0_00595	
	only with grounded system		only with grounded system	only with grounded system

<sup>1)</sup> Conducting paths series-connected

<sup>2)</sup> 2 parallel conducting paths

<sup>3)</sup> 3 parallel conducting paths

<sup>4)</sup> Version for 1000 V required, order with "-Z" and order code A05

—|— Grounded system

▬ Load

# Electronic trip unit ETU

With watchdog monitoring

3WL10




		ETU320 (LI)	ETU350 (LSI)	ETU360 (LSIG)
<b>Basic protection functions</b>				
<b>L</b> Overload protection (L tripping operation)	Setting range of operating value $I_r = I_n \times \dots$	0.4   0.5   0.6   0.7   0.75   0.8   0.85   0.9   0.95   1   Default 0.4	0.4   0.5   0.6   0.7   0.75   0.8   0.85   0.9   0.95   1   Default 0.4	0.4   0.5   0.6   0.7   0.75   0.8   0.85   0.9   0.95   1   Default 0.4
	Switchable overload protection (from $I^2t$ - to $I^4t$ -dependent function)	—	—	—
	Setting range of delay $t_r$ at $I^2t$ (Reference point $6 \times I_n$ )	0.75   1   2   5   8   10   14   17   21   25 s   Default 0.75 s	0.75   1   2   5   8   10   14   17   21   25 s   Default 0.75 s	0.75   1   2   5   8   10   14   17   21   25 s   Default 0.75 s
	Setting range of delay $t_r$ at $I^4t$ (Reference point $6 \times I_n$ )	—	—	—
	Thermal memory can be switched on/off	Permanently switched on	Permanently switched on	Permanently switched on
	Phase failure sensitivity / asymmetry	—	—	—
<b>S</b> Short-time delay short-circuit protection (ST tripping)	Setting range of operating value $I_{sd} = I_n \times \dots$	—	1   1.5   2   2.5   3   4   6   8   10   Default OFF	1   1.5   2   2.5   3   4   6   8   10   Default OFF
	Setting range of delay time $t_{sd}$ at $I^2t$	—	0.1   0.2   0.3   0.4   0.5   (Ref. $10 \times I_n$ )	0.1   0.2   0.3   0.4   0.5   (Ref. $10 \times I_n$ )
	Setting range of delay time $t_{sd}$ ( $t = \text{const.}$ )	—	0.08   0.15   0.22   0.3   0.4 s	0.08   0.15   0.22   0.3   0.4 s
	ZSI function	—	—	—
<b>I</b> Instantaneous short-circuit protection (INST tripping operation)	Setting range $2 = I_n \times \dots$	OFF   1.5   2   3   4   6   8   10   12   15	OFF   1.5   2   3   4   6   8   10   12   15	OFF   1.5   2   3   4   6   8   10   12   15
<b>N</b> Neutral conductor protection	Neutral conductor setting range $I_N = I_n \times \dots$	OFF   50%   100%   200%	OFF   50%   100%   200%	OFF   50%   100%   200%
<b>G</b> Ground-fault tripping (GF tripping) Detection of ground-fault current through summation current formation with internal or external N conductor transformer	Tripping function can be switched on/off	—	—	■
	Alarm function can be switched on/off	—	—	Permanently switched on
	Detection of ground-fault current through external current transformer	—	—	—
	Setting range of the operating current $I_g = I_n \times \dots$	—	—	0.1   0.2   0.3   0.4   0.5   0.6   0.7   0.8   1
	Setting range of the operating current $I_g$ for alarm	—	—	—
	Setting range of the delay time $t_g$	—	—	0.1   0.2   0.4   0.6   0.8 s   (fixed delay)
	Switchable grounding protection characteristic ( $I^2t$ -dependent function)	—	—	$t = \text{const.} / I^2t$   Default $I^2t$
	Setting range of delay time $t_g$ at $I^2t$	—	—	0.1   0.2   0.4   0.6   0.8 s (Ref. $2 \times I_n$ ) ( $I^2t$ dependent)   Default 0.1 ( $I^2t$ )
	ZSI-G function	—	—	—

<sup>1)</sup> Sizes 1 and 2 / size 3

■ Available

— Not available/not present

## 3WL10



## 3WL11 – 3WL13




1

ETU650 (LSI)	ETU660 (LSIG)	ETU15B (LI)	ETU25B (LSI)	ETU27B (LSIG)	ETU45B (LSIG)	ETU76B (LSIG)
0.4 ... 1   Default 1 (in steps of 0.001)	0.4 ... 1   Default 1 (in steps of 0.001)	0.5   0.55   0.6   0.65   0.7   0.75   0.8   0.85   0.9   1	0.4   0.45   0.5   0.55   0.6   0.65   0.7   0.8   0.9   1	0.4   0.45   0.5   0.55   0.6   0.65   0.7   0.8   0.9   1	0.4   0.45   0.5   0.55   0.6   0.65   0.7   0.8   0.9   1	0.4 ... 1
■	■	–	–	–	■	■
0.75 ... 36 s   (in steps of 0.25 s)   Default 36 s	0.75 ... 36 s   (in steps of 0.25 s)   Default 36 s	10 s fixed	10 s fixed	10 s fixed	2   3.5   5.5   8   10   14   17   21   25   30 s	2 ... 30 s
0.75 ... 5 s   (in steps of 0.25 s)   Default 5 s	0.75 ... 5 s   (in steps of 0.25 s)   Default 5 s	–	–	–	1   2   3   4   5 s	1 ... 5 s
■	■	–	–	–	■	■
2% ... 90% (default 50%)	2% ... 90% (default 50%)	–	At $t_{sd} = 20$ ms (M)	At $t_{sd} = 20$ ms (M)	At $t_{sd} = 20$ ms (M)	■ (on/off)
0.6 ... 10   OFF   (in steps of 0.1)	0.6 ... 10   OFF   (in steps of 0.1)	–	1.25   1.5   2   2.5   3   4   6   8   10   12	1.25   1.5   2   2.5   3   4   6   8   10   12	1.25   1.5   2   2.5   3   4   6   8   10   12   OFF	1.25 × $I_n$ ... 0.8 × $I_{cw}$ OFF
0.05 ... 0.5 s (Ref. 10 × $I_n$ )	0.05 ... 0.5 s (Ref. 10 × $I_n$ )	–	–	–	100   200   300   400 ms	100 ... 400 ms
0.05 ... 0.4 s	0.05 ... 0.4 s	–	M (0.02 ms)   100   200   300   400 ms	M (0.02 ms)   100   200   300   400 ms	M (0.02 ms)   100   200   300   400 ms	M (0.02 ms)   80 ... 4000 ms
–	–	–	–	–	Via module of the CubicleBUS	Via module of the CubicleBUS
OFF   1.5 ... 15   (in steps of 0.1)	OFF   1.5 ... 15   (in steps of 0.1)	2   3   4   5   6   7   8	Fixed at $2 \geq 20 \times I_{nr}$ max. 50 kA	Fixed at $2 \geq 20 \times I_{nr}$ max. 50 kA	OFF   1.5   2.2   3   4   6   8   10   12   $0.8 \times I_{cs}$	OFF   1.5 × $I_n$ ... 0.8 × $I_{cs}$
OFF   50%   100%   150%   200%	OFF   50%   100%   200%	–	–	100%	OFF   50%   100%	OFF   20% ... 200%
–	■	–	–	■	■	■
–	■	–	–	–	–	■
–	Alternative Rc or G-ret ground-fault monitoring	–	–	–	■	■
–	0.1 ... 1   (in steps of 0.001) $I_g = I_n \times$	–	–	A <sup>1)</sup> (100/400 A)   B <sup>1)</sup> (300/600 A); C <sup>1)</sup> (600/800 A)   D <sup>1)</sup> (900/1000 A); E <sup>1)</sup> (1200/1200 A)	A <sup>1)</sup> (100/400 A)   B <sup>1)</sup> (300/600 A); C <sup>1)</sup> (600/800 A)   D <sup>1)</sup> (900/1000 A); E <sup>1)</sup> (1200/1200 A)	SZ 1, 2: 100 ... 1200 A SZ 3: 400 ... 1200 A
–	50% ... 90% × $I_g$   (in steps of 1%) PreAlarm	–	–	–	A <sup>1)</sup> (100/400 A); B <sup>1)</sup> (300/600 A); C <sup>1)</sup> (600/800 A); D <sup>1)</sup> (900/1000 A); E <sup>1)</sup> (1200/1200 A)	SZ 1, 2: 100 ... 1200 A SZ 3: 400 ... 1200 A
–	0.1 ... 1 s   Default 0.1 s   (in steps of 0.05 s)	–	–	100   200   300   400   500 ms	100   200   300   400   500 ms	100 ... 500 ms
–	$t = \text{const.} / I^2 t$   Default const.	–	–	–	■	■
–	0.1 ... 1 s   (in steps of 0.05 s) (Ref. 2 × $I_n$ )	–	–	–	100   200   300   400   500 ms	100 ... 500 ms
–	–	–	–	–	Via module of the CubicleBUS	Via module of the CubicleBUS

# Electronic trip unit ETU

## With watchdog monitoring (continued)

3WL10



		ETU320 (LI)	ETU350 (LSI)	ETU360 (LSIG)
Parameter set changeover	Switchable between parameter set A and B	—	—	—
LCD		—	—	—
Voltage tap on top/bottom		—	—	—
Metering function		—	—	—
Tripping operation as a result of extended protection function: (including: phase asymmetry current/voltage, harmonic distortion current/voltage, under/overvoltage, phase rotation direction, active power in/opposite to normal direction, under/over-frequency, protection functions dependent on direction of power flow)				
<b>Mode of communication</b>				
Communication PROFIBUS   PROFINET   Modbus RTU   Modbus TCP		—	—	—
<b>Output modules</b>				
Signals via relay: Overload warning, load shedding / load carrying, leading signal, overload tripping 200 ms, temperature alarm, phase asymmetry, instantaneous short-circuit release, short time-delayed short-circuit release, overload trip, neutral conductor trip, auxiliary relay, ETU faults, grounding protection tripping and grounding protection alarm (only with grounding protection module)		IOM300	IOM300	IOM300

### Increment size when settings are made for the ETU76B using the menu

From ... to	Increment size
0 ... 1	0.1
1 ... 100	1
100 ... 500	5
500 ... 1000	10
1000 ... 1600	50
1600 ... 10000	100
10000 ... max.	1000

## 3WL10



## 3WL11 – 3WL13



1

ETU650 (LSI)

ETU660 (LSIG)

ETU15B (LI)

ETU25B (LSI)

ETU27B (LSIG)

ETU45B (LSIG)





















ETU76B (LSIG)

■	■	–	–	–	–	■
Integrated	Integrated	–	–	–	Optional	Integrated
Optional	Optional	–	–	–	Optional	Optional
Basic/Advanced	Basic/Advanced	–	–	–	Metering function Plus	Metering function Plus
■	■	–	–	–	■	■
■	■	–	–	–	■	■
IOM040/IOM300	IOM040/IOM300	–	–	–	■	■



# Connection

## Main circuit connection

		3WL10		3WL11 – 3WL13			
Connection		Fixed-mounted	Withdrawable	Fixed-mounted		Withdrawable	
Front							
	Direct						
	Extended						
Rear							
	Broadened						
	Vertical						
	Vertical						
cable	Horizontal						
	Horizontal						
	Broadened						
	Cable terminals						
	Cable lug						

## Auxiliary circuit connections

### 3WL 10: Withdrawable / fixed-mounted version

- Direct engagement of the auxiliary conductor vertically onto the circuit breaker or horizontally in the guide frame



Screwless connection technology (push in)


### 3WL11 – 3WL13: Withdrawable version

- Connection of the internal auxiliary switches to the male connector on the switch side
- When fully inserted, connection with the sliding contact module in the guide frame


### 3WL11 – 3WL13: Fixed-mounted version

- Engagement of the auxiliary supply connectors directly onto the circuit breaker

Coding pins on the connectors prevent them being inserted in the wrong slots



Screw connection (standard)



Screwless connection (tension spring) (optional)

# Operating mechanism, auxiliary release, auxiliary switch

## Operating mechanism

The circuit breakers are available with various optional operating mechanisms:

- Manual operating mechanism with mechanical closing (standard design)
- Manual operating mechanism with mechanical and electrical closing
- Motorized operating mechanism with mechanical and electrical closing

The operating mechanisms with electrical closing are suitable for synchronization tasks.

	Available for air circuit breakers	
	3WL10	3WL11 – 3WL13
Closing coils (CC)	■	■
Undervoltage releases (UVR) / shunt trips (ST)	■	■
Shunt trips (ST)	■	■
Remote reset magnets (RR)	■	■
Spring charging motor (MO)	■	■
Mechanical operating cycles counters	■	■

# System overview 3WL11 – 3WL13

IEC AC 630 – 6300 A, IEC DC ..

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wl-configurator](http://www.siemens.com/lowvoltage/3wl-configurator)

1

## Switching devices



Sizes 1 to 3

### ETU



LI



LSI



LSING



LSIN, LSING



LSIN, LSING

### Accessories



Communi-  
cation  
modules



Rating plugs



Remote reset  
magnets




Breaker status  
sensors (BSS)



Ground-fault  
modules

## Connection



Fixed-mounted,  
withdrawable versions




Main connection vertical,  
horizontal, front, flange

### Accessories




Auxiliary conductor plug-in system

## Operating mechanisms and auxiliary releases



Motorized operating mechanisms



Auxiliary releases

### Accessories



Closing coils


#### Note:

You will find a detailed range of accessories in the Accessories and spare parts section.


## Auxiliary switches



Auxiliary switches



Position signaling switches



Signaling switches

## Accessories




Position signaling switches

## Further accessories



Door sealing frames



Shutters

EMERGENCY-OFF  
pushbuttonsOperating cycle  
counters

Support brackets



Grounding connections


## Interlocking



Interlocking sets



Key operation



Locking mechanisms

### Note:

You will find a detailed range of accessories in the Accessories and spare parts section.

# Online configurator highlights

[www.siemens.com/lowvoltage/3wl-configurator](http://www.siemens.com/lowvoltage/3wl-configurator)

## Ungroup into individual components: Divides the finished complete article number into single article numbers

1

**SIEMENS**  
legende für life

on request  
Recommended retail price

The configuration is complete. You can order this product.

Back breaker ETU Connection Motor and auxiliary releases Auxiliary switches Accessories Locking Result CAD/CAE 13.7

Ordering individual components

☒ Yes ☐ No

Print | Export as Excel

Name	Order number	Properties
Basic breaker	3WL1216-3FG62-1AA2	Order quantity: 1 ST
Motorized operating mechanism	3WL9111-0AW01-0AA0	Order quantity: 1 ST
Closing lensload	3WL9111-0AX01-0AA0	Order quantity: 1 ST
Mutual mechanical interlocking	3WL9111-0BB21-0AA0	Order quantity: 1 ST

## Automatic generation of the 3D model, 2D dimension drawing and the internal circuit diagram according to IEC

The configuration is complete. You can order this product.

Filter (e.g. "power", ...)

Basic breaker ETU Connection Motor and auxiliary releases Auxiliary switches Accessories Locking Result CAD/CAE 13.7

Basic breaker

Preview

Area Model View | Wire frame view | Unit Wiring Diagram IEC | 3D view | Dimension drawing



Download – quick links

Basic breaker  
Click2CAD

Download – all CAD formats

View: Area Model View

View option: Isometric

File type: Joint Photography Experts Group (\*.jpg)

Start generation

Download – all documents

open documents dialog


## Direct entry of an already known article number or parts of an article number

### 3WL Air Circuit Breakers

Product Information Configurators

Select a Configurator: 3WL Upgrade Air Circuit Breakers

3WL Upgrade Air Circuit Breakers



Selection - Tool for air circuit breakers (ACB) SENTRON 3WL from 630 A to 1250 A

- for selective line protection
- for motor protection
- non-automatic circuit breaker

Using this configurator, you can precisely select the optimum circuit breaker configuration for your application. Comprehensive CAx-data support of the device is provided after successful configuration.

To start the configurator with a preallocation use the direct input e.g. 3WL1116-3EB66-4FG4-Z K07+507+C01+T40

Start

MLFB direct input (complete): 3WL Start



# Structure of the article numbers

## Basic configuration for AC circuit breakers

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wl-configurator](http://www.siemens.com/lowvoltage/3wl-configurator)

3WL1			5	6	7	8	9	10	11	12	13	14	15	16
						–					–			
Basic unit and ETU														
Size (SZ)	1		1											
	2		2											
	3		3											
		SZ 1	SZ 2	SZ 3										
Max. rated current	630 A	■	–	–	0	6								
$I_n$	800 A	■	■ <sup>6)</sup>	–	0	8								
	1000 A	■	■ <sup>6)</sup>	–	1	0								
	1250 A	■	■ <sup>6)</sup>	–	1	2								
	1600 A	■	■	–	1	6								
	2000 A	■	■	–	2	0								
	2500 A	–	■	–	2	5								
	3200 A	–	■	–	3	2								
	4000 A	–	■ <sup>6)</sup>	■	4	0								
	5000 A	–	–	■	5	0								
	6300 A	–	–	■	6	3								
Short-circuit breaking capacity	N	ECO	■	–	–	55 kA	2							
$I_{cu}$ at 500 V			–	■	–	66 kA	2							
	S	Standard	■	–	–	66 kA	3							
			–	■	–	85 kA	3							
	H	High	■	–	–	85 kA	4							
			–	■	■	100 kA	4							
	C	Very high	–	■	■ <sup>8)</sup>	130 kA	5							
			–	–	■ <sup>9)</sup>	150 kA	5							
Trip units	Without trip unit				–		A	A						
	With trip unit, without ground-fault tripping	ETU15B <sup>7)</sup>			LI		B	B						
		ETU25B			LSI		C	B						
		ETU45B (without display)			LSIN		E	B						
		ETU45B (with display)			LSIN		F	B						
		ETU76B			LSIN		N	B						
	With trip unit, with ground-fault tripping	ETU27B (without display)			LSING		D	G						
		ETU45B (without display)			LSING		E	G						
		ETU45B (with display)			LSING		F	G						
		ETU76B			LSING		N	G						
Number of poles	3-pole (3WL upgrade)						6							
	4-pole (3WL upgrade)						7							
Connection			SZ 1	SZ 2	SZ 3									
Installation type	Fixed-mounted	■	■	■	Vertical									1
		■	■ <sup>2)</sup>	■ <sup>3)</sup>	Horizontal									2
		■ <sup>4)</sup>	■ <sup>1)</sup>	■ <sup>5)</sup>	Front single hole									3
		■	■ <sup>1)</sup>	■ <sup>5)</sup>	Front double hole									4
	Withdrawable	■	■	■	Without guide frame									5
		■	■ <sup>2)</sup>	■ <sup>3)</sup>	Horizontal									6
		■	■	■	Vertical									7
		■	■ <sup>1)</sup>	■ <sup>5)</sup>	Flanges									8

<sup>1)</sup> Not available for 4000 A and breaking capacity C

<sup>2)</sup> Not available for 4000 A

<sup>3)</sup> Not available for 6300 A

<sup>4)</sup> Not available for 2000 A and breaking capacity H

<sup>5)</sup> Not available for 5000 A, 6300 A and breaking capacity C

<sup>6)</sup> Not available for breaking capacity C

<sup>7)</sup> Not available for size 3

<sup>8)</sup> Not available for 3-pole

<sup>9)</sup> Not available for 4-pole

3WL1

5	6	7	8	9	10	11	12	13	14	15	16
				–				–			

## Operating mechanisms and auxiliary releases

<b>Stored energy mechanism</b>	Manual recharging of the stored energy mechanism	With mechanical operation	1
		With mechanical and electrical operation	2
		110 V AC 50/60 Hz / 110 V DC 230 V AC 50/60 Hz / 220 V DC	3
	Motorized operating mechanisms	With mechanical and electrical operation	4
		208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC 110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	5
		24 V DC	6
<b>1st auxiliary release</b>	Without 1st auxiliary release		A
	With shunt trip 100% OP	24 V DC	B
		30 V DC	C
		48 V DC	D
		60 V DC	E
		110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	F
		208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC	G
<b>2nd auxiliary release</b>	Without 2nd auxiliary release		A
	With shunt trip 100% OP	24 V DC	B
		30 V DC	C
		48 V DC	D
		60 V DC	E
		110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	F
		208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC	G
	With undervoltage release, instantaneous	24 V DC	J
		30 V DC	K
		48 V DC	L
		60 V DC	U
		110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	M
		208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC	N
		380 ... 415 V AC 50/60 Hz	P
	With undervoltage release, delay 0.2 ... 3.2 s	48 V DC	Q
		110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	R
		208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC	S
		380 ... 415 V AC 50/60 Hz	T

## Auxiliary switches

<b>1st auxiliary switch block</b>	2 NO + 2 NC	2
<b>1st + 2nd auxiliary switch block</b>	4 NO + 4 NC	4
	6 NO + 2 NC	7
	5 NO + 3 NC	8



# Structure of the article numbers

## Basic configuration for DC circuit breakers

The structure shown below is intended as an overview of each position and its meaning.  
For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wl-configurator](http://www.siemens.com/lowvoltage/3wl-configurator)

				5	6	7	—	8	9	10	11	12	—	13	14	15	16
3WL1																	
Basic unit and ETU																	
Size (SZ)	1			1													
	2			2													
				SZ 1	SZ 2												
Max. rated current $I_n$	1000 A	—	■		1	0											
	2000 A	■	■		2	0											
	4000 A	—	■		4	0											
Short-circuit breaking capacity $I_{cu}$	1000 V DC 20 kA	■	—					8									
	600 V DC 25 kA	—	■					8									
Non-automatic air circuit breakers				Without trip unit								A	A				
Number of poles	3-pole (3WL upgrade)	—	■								6						
	4-pole (3WL upgrade)	■	■								7						
Connection				SZ 1	SZ 2												
Installation type	Fixed-mounted	■	■	Vertical							1						
		■	■	Horizontal							2						
		—	■ <sup>1)</sup>	Front single hole							3						
		—	■ <sup>1)</sup>	Front double hole							4						
	Withdrawable	—	■	Without guide frame							5						
		—	■	Horizontal							6						
		—	■	Vertical							7						
		—	■	Flanges							8						

<sup>1)</sup> Not available for 4000 A

3WL1

5	6	7	8	9	10	11	12	13	14	15	16
				–				–			

## Operating mechanisms and auxiliary releases

<b>Stored energy mechanism</b>	Manual recharging of the stored energy mechanism	With mechanical operation	1
		With mechanical and electrical closing, closing coil suitable for uninterrupted duty, 100% ED	2
		110 V AC 50/60 Hz / 110 V DC	3
	Motorized recharging	230 V AC 50/60 Hz / 220 V DC	4
		208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC	5
		110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	6
<b>1st auxiliary release</b>	Without 1st auxiliary release		A
	With shunt trip 100% OP	24 V DC	B
		30 V DC	C
		48 V DC	D
		60 V DC	E
		110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	F
		208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC	G
<b>2nd auxiliary release</b>	Without 2nd auxiliary release		A
	With shunt trip 100% OP	24 V DC	B
		30 V DC	C
		48 V DC	D
		60 V DC	E
		110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	F
		208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC	G
	With undervoltage release, instantaneous ( $\leq 80$ ms), short-delay ( $\leq 200$ ms)	24 V DC	J
		30 V DC	K
		48 V DC	L
		60 V DC	U
		110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	M
		208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC	N
		380 ... 415 V AC 50/60 Hz	P
	With undervoltage release, delay 0.2 ... 3.2 s	48 V DC	Q
		110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	R
		208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC	S
		380 ... 415 V AC 50/60 Hz	T

## Auxiliary switches

<b>1st auxiliary switch block</b>	2 NO + 2 NC	2
<b>1st + 2nd auxiliary switch block</b>	4 NO + 4 NC	4
	6 NO + 2 NC	7
	5 NO + 3 NC	8

# Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wl-configurator](http://www.siemens.com/lowvoltage/3wl-configurator)

1

To specify the options, add "-Z" to the complete Article No. and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

## Accessories for basic configuration

### Rated voltage 1000 V AC and 690 V IT networks

- Only for circuit breakers of size 1 - 3 with high breaking capacity H and of size 3 C class.
- Cannot be combined with rated voltage 1150 V AC, order code "A15".

Rated voltage	Size 1 <sup>1)</sup>	≤2000 A	A	0	5
	Size 2 <sup>1) 2)</sup>	≤4000 A	A	0	5
	Size 3 <sup>1)</sup>	≤6300 A	A	0	5

### Rated voltage 1150 V AC

- Only for circuit breakers with high breaking capacity H (8th digit of the Article No. is a "4").
- Cannot be combined with rated voltage 1000 V AC, order code "A05".

Rated voltage	Size 2 <sup>1) 2)</sup>	≤4000 A	A	1	5
	Size 3 <sup>1) 3)</sup>	≤6300 A	A	1	5

### Rated voltage 690 V AC (+ 20%)

- Only for 3WL11 circuit breakers, size 1, with high breaking capacity H (8th digit of the Article No. is a "4").

Rated voltage	Size 1	≤ 2000 A	A	1	6
---------------	--------	----------	---	---	---

<sup>1)</sup> When ordering withdrawable circuit breaker and guide frame separately, specify order code "A05" for withdrawable circuit breaker and guide frame.

<sup>2)</sup> Not possible for circuit breakers with very high breaking capacity C.

<sup>3)</sup> Front connections are tinned as standard.

To specify the options, add "-Z" to the complete Article No. and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

--	--	--

## Accessories for electronic trip units ETU

### Rating plugs

- Only one module is possible per circuit breaker (not in conjunction with electronic trip unit ETU15B).
- As standard, the electronic trip units are equipped with a rating plug which is equal to the maximum rated circuit breaker current ( $I_{n \max}$ ).  
The rated current of the selected rating plug must be less than  $I_{n \max}$ .

Module	Sizes 1, 2	250 A	B	0	2
		315 A	B	0	3
		400 A	B	0	4
		500 A	B	0	5
		630 A	B	0	6
		800 A	B	0	8
		1000 A	B	1	0
	Sizes 1, 2, 3	1250 A	B	1	2
		1600 A	B	1	6
		2000 A	B	2	0
	Sizes 2, 3	2500 A	B	2	5
		3200 A	B	3	2
		4000 A	B	4	0
	Size 3	5000 A	B	5	0
		6300 A	B	6	3

### Communication <sup>1)</sup>

Breaker status sensor (BSS)	For determining the statuses ON / OFF / Tripped	F	0	1
PROFIBUS DP communication port <sup>2)</sup>	Including COM15 and breaker status sensor (BSS)	F	0	2
MODBUS RTU communication port <sup>2)</sup>	Including COM16 and breaker status sensor (BSS)	F	1	2
PROFINET IO / Modbus TCP communication port <sup>2)</sup> <b>new</b>	Including COM35 and breaker status sensor (BSS)	F	3	5

### Metering function (communication modules not included) <sup>1)</sup>

Metering function Plus	With internal voltage tap on the lower main conducting paths <sup>2)</sup>	F	3	6
	With internal voltage tap on the upper main conducting paths <sup>2)</sup>	F	3	7
	For combination with external voltage transformer	F	3	8

### EMC filter

- Common-mode interference suppressor filters (e.g. in converter applications)
- Insertion loss (asymmetric) in the range 40 kHz to 10 MHz >40 dB.

EMC filter		F	3	1
------------	--	---	---	---

### Overload and short-circuit protection for neutral conductors

- Only possible with 4-pole circuit breaker with ETU27B to ETU76B

Internal current transformer for N conductor	Size 1	F	2	3
	Size 2	F	2	3
	Size 3	F	2	3

<sup>1)</sup> The precondition is an ETU45b or ETU76b

<sup>2)</sup> When ordering withdrawable circuit breaker and guide frame separately, specify order code "F02", "F12" or "F35" only for withdrawable circuit breaker.

<sup>3)</sup> Can only be used for rated voltages up to 690 V AC.

# Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wl-configurator](http://www.siemens.com/lowvoltage/3wl-configurator)

1

To specify the options, add "-Z" to the complete Article No. and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

## Accessories for electronic trip units ETU

### Remote resetting

#### Automatic reset of the reclosing lockout

- Remote reset for displays and reset buttons including automatic reset of the reclosing lockout

Remote reset magnets	24 V DC	K	0	1
	48 V DC	K	1	1
	110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	K	1	2
	208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC	K	1	3

## Connection

### Tinned version of the customer's connections on the guide frame

- Only for circuit breakers in withdrawable version with horizontal connection or flange connection.
- The normal delivery time increases to 15 work days.

Customer's connections <sup>1) 2)</sup>	Size 1	A	0	8
	Size 2	A	0	8
	Size 3	A	0	8

### Connection technology for main connections (fixed mounting)

Top: <sup>3)</sup> horizontal	Size 1	≤1600 A	N	1	1
Bottom: accessible from front, single hole	Size 2	≤3200 A	N	1	1
	Size 3 <sup>4)</sup>	≤4000 A	N	1	1
Top: vertical	Size 1	≤2000 A	N	2	0
Bottom: horizontal	Size 2	≤3200 A	N	2	0
	Size 3	≤5000 A	N	2	0
Top: horizontal	Size 1	≤2000 A	N	2	4
Bottom: vertical	Size 2	≤3200 A	N	2	4
	Size 3	≤5000 A	N	2	4

### Connection technology for main connections (withdrawable versions)

Top and bottom: <sup>5) 6)</sup> accessible from front, single hole	Size 1	≤1600 A	P	0	0
	Size 2	≤3200 A	P	0	0
	Size 3	≤4000 A	P	0	0
Top and bottom: <sup>5)</sup> accessible from front, double hole	Size 1	≤1600 A	P	0	1
	Size 2	≤3200 A	P	0	1
	Size 3	≤4000 A	P	0	1
Top: <sup>5) 6)</sup> horizontal	Size 1	≤1600 A	P	0	7
Bottom: accessible from front, single hole	Size 2	≤3200 A	P	0	7
	Size 3	≤4000 A	P	0	7

<sup>1)</sup> Front connections are tinned as standard.

<sup>2)</sup> The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.

<sup>3)</sup> Not for 3WL1 size 1 with high breaking capacity H and circuit breakers with very high breaking capacity C.

<sup>4)</sup> Not for size 3 with very high breaking capacity C.

<sup>5)</sup> Not for size 2, 3 circuit breakers with very high breaking capacity C.

<sup>6)</sup> Not for 3WL1 size 1 with high breaking capacity H

To specify the options, add "-Z" to the complete Article No. and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

--	--	--

## Connection

### Connection technology for main connections (withdrawable versions)

Top: vertical Bottom: horizontal	Size 1	≤2000 A	P	1	8
	Size 2	≤3200 A	P	1	8
	Size 3	≤5000 A	P	1	8
Top: <sup>1)</sup> connecting flange Bottom: horizontal	Size 1	≤2000 A	P	1	9
	Size 2	≤3200 A	P	1	9
	Size 3	≤4000 A	P	1	9
Top: horizontal Bottom: vertical	Size 1	≤2000 A	P	2	3
	Size 2	≤3200 A	P	2	3
	Size 3	≤5000 A	P	2	3
Top: <sup>1)</sup> horizontal Bottom: connecting flange	Size 1	≤2000 A	P	2	8
	Size 2	≤3200 A	P	2	8
	Size 3	≤4000 A	P	2	8

### Connection technology for auxiliary conductors (for fixed-mounted and withdrawable versions)

Connection technology for screwless terminals (tension spring)	Fixed-mounted	N	6	1
	Withdrawable	P	6	1

## Operating mechanisms and auxiliary releases

Motorized operating mechanisms	Only possible if the 13th digit of the Article No. = "1"	24 ... 30 V DC	M	0	1
		48 ... 60 V DC	M	0	3
		110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	M	0	5
		208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC	M	0	6
Mechanical operating cycles counter, 5-digit <sup>2)</sup>		C	0	1	
Closing coils	<ul style="list-style-type: none"><li>• Suitable for uninterrupted duty, 100% OP</li><li>• Only possible if the 13th digit of the Article No. = "1"</li></ul>	24 V DC	M	2	1
		30 V DC	M	2	2
		48 V DC	M	2	3
		60 V DC	M	2	4
		110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	M	2	5
		208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC	M	2	6
	<ul style="list-style-type: none"><li>• Not suitable for uninterrupted duty, 5% OP, synchronizable <sup>3)</sup></li><li>• Only possible if the 13th digit of the Article No. = "1"</li></ul>	24 V DC	M	3	1
		48 V DC	M	3	3
		110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	M	3	5
		208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC	M	3	6
Opening coils (shunt trips) <sup>3)4)</sup>	Not suitable for uninterrupted duty, 5% OP, synchronizable	24 V DC	M	4	1
		48 V DC	M	4	3
		110 ... 127 V AC 50/60 Hz / 110 ... 125 V DC	M	4	5
		208 ... 240 V AC 50/60 Hz / 220 ... 250 V DC	M	4	6

<sup>1)</sup> Not for size 2, 3 circuit breakers with very high breaking capacity C.

<sup>2)</sup> Only possible with motorized operating mechanism.

<sup>3)</sup> Overexcited, i.e. switching time 50 ms (standard >80 ms).

<sup>4)</sup> Only possible if the 14th digit of the Article No. for the circuit breaker is "A", i.e. "without 1st auxiliary release".

# Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wl-configurator](http://www.siemens.com/lowvoltage/3wl-configurator)

1

To specify the options, add "-Z" to the complete Article No. and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

## Auxiliary switches and signaling switches

Position signaling switches for guide frames	1 CO   1 CO   1 CO (connected   test   disconnected position)	R	1	5	
	3 CO   2 CO   1 CO (connected   test   disconnected position)	R	1	6	
Signaling switches	Ready-to-close signaling switches (S20)	1 NO contact	C	2	2
	Spring charged signaling switch <sup>1)</sup> (S21)	1 NO contact	C	2	0
	For the first auxiliary release <sup>1)</sup> (S22)	1 CO contact	C	2	6
	For the second auxiliary release <sup>1)</sup> (S23)	1 CO contact	C	2	7
	1st tripped signaling switch <sup>1) 2)</sup> (S24)	1 CO contact	K	0	7
	2nd tripped signaling switch <sup>1) 2) 3)</sup> (S25)	1 NO contact	K	0	6

## Further accessories

### Pushbuttons / shutdown switches / closing lockouts

EMERGENCY-OFF pushbuttons	Mushroom pushbutton instead of the mechanical OFF pushbutton		S	2	4
Electrical ON button S10 in the operator panel <sup>1)</sup>	This prevents unauthorized electrical closing from the operator panel. Mechanical closing and remote closing remain possible. Possible only for circuit breakers with closing coil (CC)	With sealing cap	C	1	1
		With CES lock	C	1	2
Motor shutdown switch on control panel <sup>4)</sup> (S12)	This prevents automatic charging of the stored energy mechanism by the spring charging motor		S	2	5

### Special packaging for increased transport requirements (moisture protection)

Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)	A	6	1
--	---	---	---

### Arc chute covers

- Not available for
  - 1000 V version (order code "A05"),
  - DC version
  - 4000 A size 2
  - 1150 V version (order code "A15")
  - 130 kA version, size 2
  - 150 kA version, size 3

Arc chute covers	3-pole, 4-pole	R	1	0
------------------	----------------	---	---	---

### Shutters

Shutter: 2-part, lockable, with padlocks <sup>5)</sup>	3-pole, 4-pole	R	2	1
--	----------------	---	---	---

<sup>1)</sup> Not possible with "communications interface" option, order code "F02", "F12" or "F35".

<sup>2)</sup> Not available for non-automatic air circuit breakers.

<sup>3)</sup> Only possible with option "K07".

<sup>4)</sup> Only for breakers with motorized operating mechanism, not possible with order codes "C11", "C12".

<sup>5)</sup> Padlock not included in the scope of supply.

To specify the options, add "-Z" to the complete Article No. and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

## Further accessories

### Measuring transformers (without energy transformers), for powering the ETU

- Used in converter applications with high harmonic components; can only be used with ETU45B or ETU76B
  - External 24 V DC supply required
  - Undervoltage release required
- Comprises:
  - 3 (3-pole) or 4 (4-pole) transformers
  - 24 V DC relay
  - Warning signs
  - Manual

Transformer	3-pole, 4-pole	Size 2, 3	K	6	0
-------------	----------------	-----------	---	---	---

### Operating manual, printed version

French/Italian	A	1	1
Spanish/Portuguese	A	1	2

## Interlocking

### Mechanical interlocks

- Interlocking module with Bowden cable 2 m

Mutual mechanical interlockings	For fixed-mounted breakers	S	5	5
	For withdrawable circuit breakers with guide frame	R	5	5
	For guide frames (ordered separately)	R	5	6
	For withdrawable circuit breakers (ordered separately)	R	5	7

### Locking devices (for fixed-mounted and withdrawable versions)

- The disconnecter unit fulfills the requirements for main circuit breakers according to EN 60204-1

Locking devices	To prevent unauthorized activation in the operator panel	Made by CES	S	0	1
		Made by IKON	S	0	3
		Assembly kit FORTRESS or CASTELL <sup>1)</sup>	S	0	5
		Assembly kit for padlocks <sup>2)</sup>	S	0	7
		Made by RONIS	S	0	8
		Made by PROFALUX	S	0	9

### Locking devices (for fixed-mounted and withdrawable versions)

Locking devices	For operating mechanism handle with padlock <sup>2)</sup>	S	3	3
-----------------	---	---	---	---

<sup>1)</sup> Locks must be ordered from the manufacturer.

<sup>2)</sup> Padlock not included in the scope of supply.



# Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wl-configurator](http://www.siemens.com/lowvoltage/3wl-configurator)

1

To specify the options, add "-Z" to the complete Article No. and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

## Interlocking

### Locking devices (for withdrawable version)

- The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1, consisting of a lock in the guide frame, active in the connected position, function is retained when circuit breaker is replaced
- Not possible in combination with order code "R81", "R85" or "R86"

Locking devices	To prevent unauthorized activation in the operator panel	Made by CES	R	6	1
		Made by RONIS	R	6	8
		Made by PROFALUX	R	6	0

### Locking devices (for withdrawable version)

- Safety lock for mounting onto the circuit breaker

Locking devices	To prevent movement of withdrawable circuit breaker	Made by CES	S	7	1
		Made by PROFALUX	S	7	5
		Made by RONIS	S	7	6

### Locking mechanisms

- Not possible in combination with order code "R81", "R85" or "R86"

For fixed-mounted circuit breakers	To prevent opening of the cabinet door in ON position	S	3	0
For withdrawable circuit breakers	To prevent opening of the cabinet door in connected position	R	3	0
	To prevent activation when the cabinet door is open <sup>1) 3)</sup>	R	4	0
	To prevent movement when the cabinet door is open <sup>2)</sup>	R	5	0

### Locking mechanisms to prevent movement of the withdrawable circuit breaker in disconnected position

- Consisting of Bowden cable and lock in the cabinet door
- Not possible in combination with order code "R30", "R50", "R61", "R68" or "R60"

Made by CES	R	8	1
Made by PROFALUX	R	8	5
Made by RONIS	R	8	6

### Seals

Door sealing frame for degree of protection IP41	T	4	0
--	---	---	---

## Accessories from current catalog

### Use of the withdrawable circuit breaker in combination with an older guide frame

- Reduction of the technical specifications for withdrawable circuit breakers 3WL1 for use in combination with older guide frames supplied
  - as complete circuit breaker with 3WL1....-...3-.... or 3WL1....-...4-.... or
  - as 3WL92...-A-.... or
  - as 3WL92...-B-.... or
  - as 3WL92...-D-.... or
  - as 3WL92...-E-.... or
- for sizes 1, 2, 3.

Use of the circuit breaker in older guide frames, including the appropriate guide frame coding	A	4	1
--	---	---	---

<sup>1)</sup> Not available in combination with R50

<sup>2)</sup> Not available in combination with R40

<sup>3)</sup> Combination with R81, R85 and R86 on request

## Further technical specifications

### Manual operating mechanism

3WL11 – 3WL13

#### Switching on/charging the stored-energy operating mechanism

Maximum force required to operate the hand lever	≤230 N
Required number of strokes on the hand lever	9

### Closing coils

3WL11 – 3WL13

#### Primary operating range

Primary operating range	0.85 ... 1.1 × U <sub>s</sub>
Extended operating range for battery operation	At 24 V DC, 48 V DC 60 V DC, 110 V DC 220 V DC 0.7 ... 1.26 × U <sub>s</sub>

#### Rated voltage

Rated control supply voltage U <sub>s</sub>	50/60 Hz AC	110 ... 127 V, 208 ... 240 V
	DC	24 V, 30 V, 48 V, 60 V, 110 ... 125 V, 220 ... 250 V

#### Operation

Power consumption	AC/DC	15 VA/15 W
Min. command duration at U <sub>s</sub> for the closing coil		60 ms

#### Short-circuit protection

Smallest permissible DIAZED fuse (operational class gL)/ automatic circuit breaker with C characteristic; manual operating mechanism with mechanical and electrical closing		1 A TDz (slow)/1 A
Smallest permissible DIAZED fuse (operational class gL)/ automatic circuit breaker with C characteristic; motor and closing coil for the same rated control supply voltages; motorized operating mechanism with mechanical and electrical closing		6 A TDz (slow)/2 A
Smallest permissible DIAZED fuse (operational class gL)/ automatic circuit breaker with C characteristic (for different rated control supply voltages)	At U <sub>s</sub> = 24 ... 30 V	6 A
	At U <sub>s</sub> = 48 ... 60 V	6 A
	At U <sub>s</sub> = 110 ... 125 V DC/ 110 ... 127 V AC	2 A
	At U <sub>s</sub> = 220 ... 250 V DC/ 208 ... 240 V AC	2 A

### Motor

3WL11 – 3WL13

#### Primary operating range

Primary operating range	0.85 ... 1.1 × U <sub>s</sub>
Extended operating range for battery operation	At 24 V DC, 48 V DC 60 V DC, 110 V DC 220 V DC 0.7 ... 1.26 × U <sub>s</sub>

#### Operation

Power consumption of motor	AC/DC	24/30 V DC, 110 W; 48/60 V DC, 120 W; 110 ... 127 V AC/110 ... 125 V DC, 150 W; 200 ... 240 V AC/220 ... 250 V DC, 130 W
Time required to charge the spring energy store at 1 × U <sub>s</sub>		≤10 s

#### Short-circuit protection

Smallest permissible DIAZED fuse (operational class gL)/ automatic circuit breaker with C characteristic; motor and closing coil for the same rated control supply voltages		6 A TDz (slow)/2 A
Smallest permissible DIAZED fuse (operational class gL)/ automatic circuit breaker with C characteristic (for different rated control supply voltages)	At U <sub>s</sub> = 24 ... 30 V	6 A
	At U <sub>s</sub> = 48 ... 60 V	6 A
	At U <sub>s</sub> = 110 ... 125 V DC/ 110 ... 127 V AC	2 A
	At U <sub>s</sub> = 220 ... 250 V DC/ 208 ... 240 V AC	2 A

### Signals of the electronic trip unit

3WL11 – 3WL13

#### Signals of the electronic trip unit

Measuring accuracy of the electronic trip unit	Protection functions acc. to EN 60947; current indication ≤10%; metering function for base quantities ≤1%; metering function for derived quantities ≤4%
--	---

# Accessory options

## Further technical specifications

### Undervoltage releases UVR (F3) and UVR-t<sub>d</sub> (F4)

3WL11 – 3WL13

Primary operating range		
Response values	Pickup	$\geq 0.85 \times U_s$ (circuit breaker can be closed)
	Dropout	$0.35 \dots 0.7 \times U_s$ (circuit breaker is tripped)
Primary operating range		$0.85 \dots 1.1 \times U_s$
Extended operating range for battery operation		$0.85 \dots 1.26 \times U_s$
At 24 V DC, 30 V DC, 48 V DC, 110 V DC, 220 V DC		
Rated voltage		
Rated control supply voltage $U_s$	Instantaneous 50/60 Hz AC	110 ... 127 V, 208 ... 240 V, 380 ... 415 V
	Instantaneous DC	24 V, 30 V, 48 V, 60 V, 110 ... 125 V, 220 ... 250 V <sup>1)</sup>
	Delayed 50/60 Hz AC	110 ... 127 V, 208 ... 240 V, 380 ... 415 V
	Delayed DC	48 V, 110 ... 125 V, 220 ... 250 V
Operation		
Power consumption (pickup/uninterrupted duty)	AC	20/5 VA
	DC	20/5 W
Opening time of the circuit breaker		
Opening time of the circuit breaker at $U_s = 0$		200 ms
Version UVR (F3)	Instantaneous	73 ms
	With delay	200 ms
Version UVR-t <sub>d</sub> (F8)	With delay, $t_d = 0.2$ to $3.2$ s	$0.2 \dots 3.2$ s
	Reset through additional NC contact – direct tripping	$\leq 100$ ms
Short-circuit protection		
Smallest permissible DIAZED fuse (operational class gL)/miniature circuit breaker with C characteristic		1 A TDz (slow) / 1 A

### Shunt trip (ST) (F1, F2)

3WL11 – 3WL13

Primary operating range		
Version		For continuous command (100% OP), locks out on momentary-contact commands
Response values		5% OP
Primary operating range		With spring energy store consisting of shunt trip and capacitor storage device
Extended operating range for battery operation		
At 24 V DC, 48 V DC, 60 V DC, 110 V DC, 220 V DC	Pickup	$> 0.7 \times U_s$ (circuit breaker is tripped)
		$> 0.7 \times U_s$ (circuit breaker is tripped)
Primary operating range		$0.7 \dots 1.1 \times U_s$
Extended operating range for battery operation		$0.7 \dots 1.26 \times U_s$
At 24 V DC, 48 V DC, 60 V DC, 110 V DC, 220 V DC		$0.85 \dots 1.1 \times U_s$
Rated voltage		
Rated control supply voltage $U_s$	50/60 Hz AC	110 ... 127 V, 208 ... 240 V
	DC	24 V, 30 V, 48 V, 60 V, 110 ... 125 V, 220 ... 250 V
Operation		110 V, 230 V
Power consumption		15 VA/15 W
Min. command duration at $U_s$		15 VA/15 W
Storage time at $U_s/2$ / Recharging time at $U_s$		60 ms
Opening time of the circuit breaker		25 ms
Opening time of the circuit breaker at $U_s = 100\%$		–
Short-circuit protection		max. 5 min / min. 5 s
Smallest permissible DIAZED fuse (operational class gL)/automatic circuit breaker with C characteristic		1 A TDz (slow) / 1 A

<sup>1)</sup> 24 V and 30 V only with undervoltage release UVR (F3)

## Remote reset magnet for mechanical tripped indicator (F7)

3WL11 – 3WL13

Primary operating range		
Primary operating range		0.85 ... $1.1 \times U_s$
Extended operating range for battery operation	At 24 V DC, 48 V DC 110 V DC 220 V DC	0.7 ... $1.26 \times U_s$
Operation		
Power consumption	AC/DC	50 VA/50 W
Min. command duration at $U_s$ for the remote reset magnet		60 ms
Short-circuit protection		
Smallest permissible DIAZED fuse (operational class gL)/ automatic circuit breaker with C characteristic		2 A TDz (slow)/1 A at 24 V DC and 48 V DC, 1 A TDz (slow)/1 A at 110 V and 208 ... 250 V

## Contact position-driven auxiliary switches (S1, S2, S3, S4, S7, S8)

3WL11 – 3WL13

Rated voltage		
Rated insulation voltage $U_i$	AC/DC	500 V
Rated operational voltage $U_e$	AC/DC	500 V
Rated impulse withstand voltage $U_{imp}$		4 kV
Contact reliability		From 1 mA at 5 V DC
Breaking capacity		
Alternating current 50/60 Hz	Rated operational voltage $U_e$	24 ... 230 V      380 V, 400 V
	Rated operational current $I_e$ /AC-12	10 A      10 A
	Rated operational current $I_e$ /AC-15	4 A      3 A
Direct current	Rated operational voltage $U_e$	24 V      48 V      110 V      220 V
	Rated operational current $I_e$ /DC-12	10 A      8 A      3.5 A      1 A
	Rated operational current $I_e$ /DC-13	8 A      4 A      1.2 A      0.4 A
Short-circuit protection		
Largest permissible DIAZED fuse (operational class gL)		10 A TDz, 10 A Dz
Largest permissible miniature circuit breaker with C characteristic		10 A

## Ready-to-close signaling switches (S20) (acc. to DIN VDE 0630)

3WL11 – 3WL13

Breaking capacity		
Alternating current 50/60 Hz	Rated operational voltage $U_e$	250 V
	Rated operational current $I_e$	8 A
Direct current	Rated operational voltage $U_e$	125 V      250 V
	Rated operational current $I_e$	0.4 A      0.2 A
	Contact reliability	From 1 mA at 5 V DC
Short-circuit protection		
Largest permissible DIAZED fuse (operational class gL)		2 A Dz (quick)

# Accessory options

## Further technical specifications

### Tripped signaling switches (S24) and signaling switches for auxiliary releases (S22, S23) (acc. to DIN VDE 0630)

3WL11 – 3WL13

#### Breaking capacity

Alternating current 50/60 Hz	Rated operational voltage $U_e$	250 V		
	Rated operational current $I_e/AC-12$	8 A		
Direct current	Rated operational voltage $U_e$	24 V	125 V	250 V
	Rated operational current $I_e/DC-12$	6 A	0.4 A	0.2 A
	Contact reliability	From 1 mA at 5 V DC		

#### Short-circuit protection

Largest permissible DIAZED fuse (operational class gL)	6 A Dz (quick)
--	----------------

#### Tripped signaling switches

Signal duration after tripping	Until manual or electrical remote reset (option)
--------------------------------	--

### Position signaling switches on guide frame

3WL11 – 3WL13

#### Type of contacts

Message	"Circuit breaker in connected position"	3 CO	or	1 CO
	"Circuit breaker in test position"	2 CO	or	1 CO
	"Circuit breaker in disconnected position"	1 CO	or	1 CO

Contact reliability (valid from April 1, 2020)	From 1 mA at 5 V DC
--	---------------------

#### Rated voltage

Rated insulation voltage $U_i$	50/60 Hz AC	440 V
	DC	250 V
Rated operational voltage $U_e$		250 V
Rated impulse withstand voltage $U_{imp}$		4 kV

#### Breaking capacity

Rated operational current $I_e$	$I_e/AC-12$	24 V 10 A, 110/127 V 10 A, 220/240 V 10 A, 320/440 V 10 A
	$I_e/AC-15$	220/240 V 4 A, 320/440 V 3 A
	$I_e/DC-12$	24 V 10 A, 48 V 2.5 A, 220/240 V 0.2 A
	$I_e/DC-13$	24 V 3.0 A, 220/240 V 0.1 A
	A 300 (AC)	120 V 6 A, 240 V 3 A
	R 300 (DC)	125 V 0.22 A, 250 V 0.11 A

#### Short-circuit protection

Largest permissible DIAZED fuse (operational class gL)	8 A TDz (slow)
Largest permissible automatic circuit breaker with C characteristic	8 A TDz (slow)

# Guide frames for AC

The structure shown below is intended as an overview of each position and its meaning.  
For a complete and valid configuration of your Guide frame, please use our online configurator at  
[www.siemens.com/lowvoltage/3wl-configurator](http://www.siemens.com/lowvoltage/3wl-configurator)

3WL9		5	6	7	8	9	10	11	12	13	14	15	16
		2	1		–					–			1
Size (SZ)	1			1									
	2			2									
	3			3									
		SZ 1	SZ 2	SZ 3									
Max. rated current $I_n$	1000 A <sup>6)</sup>	■	–	–	1								
	1600 A <sup>6)</sup>	■	–	–	2								
	2000 A <sup>6)</sup>	■	■	–	3								
	2500 A <sup>6)</sup>	–	■	–	4								
	3200 A	–	■	–	5								
	4000 A <sup>6)</sup>	–	■	■	6								
	5000 A	–	–	■	7								
	6300 A	–	–	■	8								
Number of poles	3-pole					F							
	4-pole					G							
Main connection	Front, single hole	■ <sup>1)</sup>	■ <sup>2)</sup>	■ <sup>3)</sup>			A						
	Front, double hole	■	■ <sup>2)</sup>	■ <sup>3)</sup>			B						
	Horizontal	■	■ <sup>2)</sup>	■ <sup>4)</sup>			C						
	Vertical	■	■	■			D						
	Connecting flange	■	■ <sup>2)</sup>	■ <sup>3)</sup>			E						
Breaking capacity $I_{cu} = I_{cs}$	N, 55 kA	■	–	–								N	
	S, 66 kA	■	–	–								S	
	H, 85 kA	■ <sup>5)</sup>	–	–								H	
	N, S and H ≤100 kA	–	■	■								H	
	C, 130 kA	–	■	–								C	
	C, 150 kA	–	–	■								C	

<sup>1)</sup> Not available for rated circuit breaker current 2000 A and breaking capacity H

<sup>2)</sup> Not available for rated circuit breaker current 4000 A and breaking capacity C

<sup>3)</sup> Not available for rated circuit breaker current 5000 A+6300A+breaking capacity C

<sup>4)</sup> Not available for rated circuit breaker current 6300 A

<sup>5)</sup> Not available for rated circuit breaker current 1000 A + 1600 A

<sup>6)</sup> Not available for breaking capacity C

## Options

3WL9		5	6	7	8	9	10	11	12	13	14	15	16
		2	1		–					–			1
Number of auxiliary supply connectors	Without <sup>2)</sup>							0					
	1 connector							1					
	2 connectors							2					
	3 connectors							3					
	4 connectors							4					
Type of auxiliary circuit connections	Without <sup>2)</sup>							0					
	With screw terminals (SIGUT, standard)							1					
	With screwless terminals (tension spring)							2					
Position signaling switches	Without									0			
	1 CO   1 CO   1 CO (connected   test   isolated position)									1			
	3 CO   2 CO   1 CO (connected   test   isolated position)									2			
Shutters	Without										A		
	With shutter, 2-part, lockable										B		

<sup>2)</sup> Can only be selected if the number of the auxiliary supply connector is zero.

# Guide frames for DC

The structure shown below is intended as an overview of each position and its meaning.  
For a complete and valid configuration of your Guide frame, please use our online configurator at [www.siemens.com/lowvoltage/3wl-configurator](http://www.siemens.com/lowvoltage/3wl-configurator)

		5	6	7	8	9	10	11	12	13	14	15	16
<b>3WL9</b>		2	1	2	–					–		0	1
Max. rated current $I_n$	2000 A				3								
	4000 A				6								
Number of poles	3-pole					H							
	4-pole					J							
Main connection	Front, single hole <sup>1)</sup>						A						
	Front, double hole <sup>1)</sup>						B						
	Horizontal						C						
	Vertical						D						
	Connecting flange						E						

<sup>1)</sup> Not available for rated circuit breaker current 4000 A

## Optionen

		5	6	7	8	9	10	11	12	13	14	15	16
<b>3WL9</b>		2	1	2	–					–		0	1
Number of auxiliary supply connectors	Without							0					
	1 connector							1					
	2 connectors							2					
	3 connectors							3					
	4 connectors							4					
Type of auxiliary circuit connections	Without <sup>2)</sup>								0				
	With screw terminals (SIGUT, standard)								1				
	With screwless terminals (tension spring)								2				
Position signaling switches	Without									0			
	1 CO   1 CO   1 CO (connected   test   isolated position)									1			
	3 CO   2 CO   1 CO (connected   test   isolated position)									2			
Shutters	Without										A		
	With shutter, 2-part, lockable										B		

<sup>2)</sup> Can only be selected if the number of the auxiliary supply connector is zero.

# Accessories and spare parts

## Accessories for electronic trip units ETU


### Protective devices with device holder and optional metering function



- For replacement in existing circuit breakers, please specify the circuit breaker ID No. when ordering.

Type	With protection function	Metering function	Article No.
ETU15B	LI	Without	3WL9311-5AA00-0AA2
ETU25B	LSI	Without	3WL9312-5AA00-0AA2
ETU27B	LSING	Without	3WL9312-7AA00-0AA2
ETU45B (without display)	LSIN(G)	Without	3WL9314-5AA00-0AA2
		With metering function Plus	3WL9314-5AA30-0AA2
ETU76B	LSIN(G)	Without	3WL9317-6AA00-0AA2
		With metering function Plus	3WL9317-6AA30-0AA2

### Rating plugs



- With the rating plug selected, the maximum rated current  $I_{n,max}$  of the circuit breaker must not be exceeded. The following applies:  $I_n \leq I_{n,max}$ .

Size	Rated current $I_n$	Article No.
1, 2	250 A	3WL9111-0AA51-0AA0
	315 A	3WL9111-0AA52-0AA0
	400 A	3WL9111-0AA53-0AA0
	500 A	3WL9111-0AA54-0AA0
	630 A	3WL9111-0AA55-0AA0
	800 A	3WL9111-0AA56-0AA0
1, 2, 3	1000 A	3WL9111-0AA57-0AA0
	1250 A	3WL9111-0AA58-0AA0
	1600 A	3WL9111-0AA61-0AA0
2, 3	2000 A	3WL9111-0AA62-0AA0
	2500 A	3WL9111-0AA63-0AA0
	3200 A	3WL9111-0AA64-0AA0
3	4000 A	3WL9111-0AA65-0AA0
	5000 A	3WL9111-0AA66-0AA0
	6300 A	3WL9111-0AA67-0AA0

### Ground-fault modules



- Alarm and tripping
- For direct metering of the ground-fault current, e.g. in the star point of the transformer, a 1200 A/1 A current transformer, class 1, is required. The internal load of the 3WL circuit breaker is 0.11  $\Omega$ . If the ground-fault current is to be determined using the vectorial sum of the phases, a transformer must be installed in the neutral conductor.

Type	Accessory for	Article No.
GFM AT 45B	ETU45B	3WL9111-0AT53-0AA0
GFM AT 55B – 76B	ETU76B	3WL9111-0AT56-0AA0

### Display



Accessory for	Version	Article No.
ETU45B	4-line	3WL9111-0AT81-0AA0

### Internal current transformers, for N conductor including wiring kit

ETU Release 2	Size	Article No.
–	1	3WL9111-0AA11-0AA0
	2	3WL9111-0AA12-0AA0
	3	3WL9111-0AA13-0AA0
✓	1	3WL9111-0AA14-0AA0
	2	3WL9111-0AA15-0AA0
	3	3WL9111-0AA16-0AA0

### External current transformers for N conductor

Copper connection pieces	Size	Article No.
–	1	3WL9111-0AA21-0AA0
	2	3WL9111-0AA22-0AA0
	3	3WL9111-0AA23-0AA0
✓	1	3WL9111-0AA31-0AA0
	2	3WL9111-0AA32-0AA0
	3	3WL9111-0AA33-0AA0





# Accessories and spare parts

## Accessories for electronic trip units ETU

### EMC filter

- Common-mode interference suppressor filters (e.g. in IT networks, caused by frequency converters)
- Insertion loss (asymmetric) in the range 40 kHz to 10 MHz >40 dB.

#### Variants

Only for ETU Release 2

#### Article No.

3WL9111-0AK34-0AA0

### Sealable and lockable covers



#### Accessory for

ETU15B to ETU45B

#### Article No.

3WL9111-0AT45-0AA0

ETU76

3WL9111-0AT46-0AA0

### Automatic reset of the reclosing lockout


#### Version

Spare part for option K01

#### Article No.

3WL9111-0AK21-0AA0

### Remote reset magnets



- For mechanical tripped indicator
- Spare part for options K10 to K13
- **Note:** Automatic reset of the reclosing lockout 3WL9111-0AK21-0AA0 is also required

#### Voltage

24 V DC

#### Article No.

3WL9111-0AK03-0AA0

48 V DC

3WL9111-0AK04-0AA0

120 V AC / 125 V DC

3WL9111-0AK05-0AA0

208 ... 250 V AC / 208 ... 250 V DC

3WL9111-0AK06-0AA0

### Retrofittable internal wiring

#### Purpose

Internal CubicleBUS wiring for connection to terminal X8

#### Male connector

Without male connector for retrofitting the communication

#### Accessory for

ETU45B and ETU76B

#### Article No.

3WL9111-0AK30-0AA0

For connection of the external N and G transformers to terminal X8

Without male connector


Not for ETU Release 2  
ETU Release 2

3WL9111-0AK31-0AA0

3WL9111-0AK33-0AA0

## Locking devices and interlocks

### Padlockable protective cover ON / OFF



- Consisting of two transparent covers each for sealing or for attaching padlocks (padlocks not included in scope of supply)
- Cover with 6.35 mm hole (for tool actuation)
- Lock mount for safety lock for key operation

#### Version

Without safety lock

#### Article No.

3WL9111-0BA21-0AA0


Made by CES

3WL9111-0BA22-0AA0

Made by IKON

3WL9111-0BA24-0AA0

### Locking devices against unauthorized closing, in the operator panels



- The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Spare part for options S01 to S09

#### Variant

#### Scope of supply

#### Article No.

Assembly kit FORTRESS or Castell

Without locks, cylinders or keys

3WL9111-0BA31-0AA0

Made by RONIS

Locks, cylinders and keys included

3WL9111-0BA33-0AA0

Made by KIRK-Key

Without locks, cylinders or keys

3WL9111-0BA34-0AA0

Made by PROFALUX

Locks, cylinders and keys included

3WL9111-0BA35-0AA0

Made by CES

Locks, cylinders and keys included

3WL9111-0BA36-0AA0

Made by IKON

Locks, cylinders and keys included

3WL9111-0BA38-0AA0


Assembly kit for padlocks

Without padlock

3WL9111-0BA41-0AA0

## Locking devices and interlocks

### Locking devices against unauthorized closing, for withdrawable circuit breakers



- The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Consisting of lock in the guide frame, active in connected position, function is retained when circuit breaker is replaced
- Spare part for option R60, R61, R68


Variant	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WL9111-0BA51-0AA0
Made by IKON	Locks, cylinders and keys included	3WL9111-0BA53-0AA0
Made by KIRK-Key <sup>1)</sup>	Without locks, cylinders or keys	3WL9111-0BA57-0AA0
Made by RONIS	Locks, cylinders and keys included	3WL9111-0BA58-0AA0
Made by PROFALUX	Locks, cylinders and keys included	3WL9111-0BA50-0AA0

### Locking devices for operating mechanism handle with padlock



Version	Scope of supply	Article No.
Spare part for S33	Without padlock	3WL9111-0BA71-0AA0

### Locking device against movement of the withdrawable circuit breaker



- Safety lock for mounting onto the circuit breaker
- Spare part for option S71, S75, S76


Variant	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WL9111-0BA73-0AA0
Made by IKON	Locks, cylinders and keys included	3WL9111-0BA75-0AA0
Made by PROFALUX	Locks, cylinders and keys included	3WL9111-0BA76-0AA0
Made by RONIS	Locks, cylinders and keys included	3WL9111-0BA77-0AA0
Made by KIRK-Key <sup>1)</sup>	Without locks, cylinders or keys	3WL9111-0BA80-0AA0

### Interlocking systems

- 2 of the same keys for 3 circuit breakers
- Locking device in OFF position
- Lock in the operator panel
- A maximum of 2 circuit breakers can be switched on

Variant	Article No.
Made by CES	3WL9111-0BA43-0AA0

### Locking devices to prevent movement of the withdrawable circuit breakers in disconnected position



- Consisting of Bowden cable and lock in the cabinet door on the circuit breaker
- Spare part for option R81, R85, R86
- **Note:** Not possible in combination with "Locking mechanism to prevent opening of the cabinet door" (order code "R30") or "Locking mechanism to prevent movement with the cabinet door open" (order code "R50")

Variant	Article No.
Made by CES	3WL9111-0BA81-0AA0
Made by IKON	3WL9111-0BA83-0AA0
Made by PROFALUX	3WL9111-0BA85-0AA0
Made by RONIS	3WL9111-0BA86-0AA0

### Locking devices to prevent opening of the cabinet door in ON position



- Fixed-mounted
- Defeatable
- **Note:** Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").

Version	Article No.
Spare part for option S30	3WL9111-0BB12-0AA0

<sup>1)</sup> Locks, cylinders and keys must be ordered from the manufacturer.

# Accessories and spare parts

## Locking devices and interlocks

### Locking devices to prevent opening of the cabinet door

- Guide frames
- Defeatable
- **Note:** Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").

#### Version

Spare part for option R30

#### Article No.

3WL9111-0BB13-0AA0

### Locking devices to prevent movement with the cabinet door open

- Guide frames
- **Note:** Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").


#### Version

Spare part for option R50

#### Article No.

3WL9111-0BB15-0AA0

### Mutual mechanical interlockings



- With Bowden cable 2000 mm (one required for each circuit breaker)

Type	When ordered separately	Spare part for	Article No.
Fixed-mounted circuit breaker	–	Option S55	3WL9111-0BB21-0AA0
Module for withdrawable circuit breakers with guide frame	–	Option R55	3WL9111-0BB24-0AA0
Module for guide frame	✓	Option R56	3WL9111-0BB22-0AA0
Module for withdrawable circuit breaker	✓	Option R57	3WL9111-0BB23-0AA0
Adapter for size 3 withdrawable circuit breaker	✓	–	3WL9111-0BB30-0AA0

### Couplings on the circuit breaker (with ring) for mutual interlocking



- Can be used in all circuit breakers

#### Article No.

3WL9112-8AH47-0AA0

### Bowden cables

Length	Article No.
2000 mm	3WL9111-0BB45-0AA0
3000 mm	3WL9111-0BB46-0AA0
4500 mm	3WL9111-0BB47-0AA0

## Test devices

### Manual tester, Release 2 for electronic trip units ETU15B to ETU76B



- For testing the electronic trip unit functions of all 3WL ETUs (Release 1 and Release 2)

#### Article No.

3WL9111-0AT32-0AA0

### Function test unit

- For testing the tripping characteristics for electronic trip units ETU15B to ETU76B (Release 1 and Release 2)

#### Article No.

3WL9111-0AT44-0AA0

### TD400 Kit IEC

- Commissioning /Service Tool for IEC 3WL (ETU Release 2) and 3VA
- With adapter, cable and case

#### Article No.


3VW9011-0AT40

### TD400 adapter (spare part)

Version	Article No.
for 3VA	3VW9011-0AT43
for 3WL ETU Release 1	3VW9011-0AT44
for 3WL ETU Release 2	3VW9011-0AT45

## Indicators and control elements


### Ready-to-close signaling switches (S20)



NSE0\_00993a

Version	Contacts	Article No.
Spare part for option C22	1 NO contact	3WL9111-0AH01-0AA0

### Signaling switch (S22 or S23).



NSE0\_00994a

- Not possible with communication port, order code "F02", "F12" or "F35"
- Auxiliary supply connection X7 required for circuit breakers or guide frames.  
If this is not already available, please order additionally

Version	Contacts	Article No.
Spare part for options C26 to C27	1st or 2nd auxiliary release	3WL9111-0AH02-0AA0

### 1st tripped signaling switch (S24)

- Not possible with communication port, order code "F02", "F12" or "F35"
- Auxiliary supply connection X7 required for circuit breakers or guide frames.  
If this is not already available, please order additionally


Version	Contacts	Article No.
Spare part for option K07	1 CO contact	3WL9111-0AH14-0AA0

### 2nd tripped signaling switch (S25)

- Not possible with communication port, order code "F02", "F12" or "F35"
- Auxiliary supply connection X7 required for circuit breakers or guide frames.  
If this is not already available, please order additionally
- Can only be used in combination with 1st tripped signaling switch

Version	Contacts	Article No.
Spare part for option K06	1 NO contact	3WL9111-0AH17-0AA0

### Operating cycle counters



NSE0\_00995a

- Only in conjunction with motorized operating mechanism.


Variant	Version	Article No.
Spare part for option C01	Mechanical	3WL9111-0AH07-0AA0

### Spring charged signaling switch

- Not possible with communication port, order code "F02", "F12" or "F35".
- Auxiliary supply connection X7 required for circuit breakers or guide frames.  
If this is not already available, please order additionally

Version	Contacts	Article No.
Spare part for option C20	1 NO contact	3WL9111-0AH08-0AA0


### Position signaling switches for guide frames



NSE0\_00996a

Version	Contacts	Article No.
Spare part for options R15 to R16	1st block (3 CO contacts)	3WL9111-0AH11-0AA0
	2nd block (6 CO contacts)	3WL9111-0AH12-0AA0

### Electrical ON button (S10) for operator panel



NSE0\_00997a

- Not possible with communication port, order code "F02", "F12" or "F35"
- Not possible with motor shutdown switch
- Button + wiring (Auxiliary supply connection X7 required for circuit breakers or guide frames.  
If this is not already available, please order additionally)
- **Note:** Possible only for circuit breakers with closing coil.

Version	Variant	Article No.
Spare part for options C11 to C12	With sealing cap C11	3WL9111-0AJ02-0AA0
	With CES assembly kit C12	3WL9111-0AJ03-0AA0
	With IKON assembly kit	3WL9111-0AJ05-0AA0

# Accessories and spare parts

## Indicators and control elements

### Motor cutout switch (S12)

- Mounting onto operator panel
- Not possible with electrical ON button


#### Version

Spare part for option S25

#### Article No.

3WL9111-0AJ06-0AA0

### EMERGENCY-OFF pushbuttons



- Mushroom pushbutton instead of the mechanical OFF pushbutton

#### Variant


Spare part for option S24

#### Article No.

3WL9111-0BA72-0AA0

## Auxiliary conductor connections

### Male connectors for circuit breakers ①



#### Article No.

3WL9111-0AB01-0AA0

### Extension for male connector

- Male connector must be ordered separately

#### Version

1000 V

#### Article No.

3WL9111-0AB02-0AA0

### Male connectors and extension

#### Version

1000 V

#### Article No.

3WL9111-0AB10-0AA0


### Auxiliary supply connection for circuit breakers or guide frames ②

#### Version

Screw connection (SIGUT)


#### Article No.

3WL9111-0AB03-0AA0



Screwless connection (tension spring)

3WL9111-0AB04-0AA0



### Coding kits ③




#### Version

For fixed-mounted X5 to X8

#### Article No.

3WL9111-0AB07-0AA0


### Sliding contact modules for guide frames ④



#### Article No.

3WL9111-0AB08-0AA0

### One-part sliding contact modules for guide frames ⑤



#### Version

Screw terminals (SIGUT)

#### Article No.

3WL9111-0AB18-0AA0

### Blanking blocks for circuit breakers

#### Article No.


3WL9111-0AB12-0AA0

For a complete auxiliary current connection you must order:

Fixed-mounted version: ① + ② + ③  
 Withdrawable version: ① + ④ + ② and ① + ⑤

## Auxiliary releases

### Closing coils / shunt trips



Version	Voltage	Article No.
100% OP	24 V DC	3WL9111-0AD01-0AA0
	30 V DC	3WL9111-0AD02-0AA0
	48 V DC	3WL9111-0AD03-0AA0
	60 V DC	3WL9111-0AD04-0AA0
	110 ... 125 V DC/110 ... 127 V AC	3WL9111-0AD05-0AA0
	220 ... 250 V DC/208 ... 240 V AC	3WL9111-0AD06-0AA0
5% OP Switching time 50 ms (standard >80 ms).	24 V DC	3WL9111-0AD11-0AA0
	48 V DC	3WL9111-0AD12-0AA0
	110 ... 125 V DC/110 ... 127 V AC	3WL9111-0AD13-0AA0
	220 ... 250 V DC/208 ... 240 V AC	3WL9111-0AD14-0AA0

### Undervoltage release




Version	Voltage	Article No.
Instantaneous	24 V DC	3WL9111-0AE01-0AA0
	30 V DC	3WL9111-0AE02-0AA0
	48 V DC	3WL9111-0AE03-0AA0
	60 V DC	3WL9111-0AE07-0AA0
	110 ... 125 V DC/110 ... 127 V AC	3WL9111-0AE04-0AA0
	220 ... 250 V DC/208 ... 240 V AC	3WL9111-0AE05-0AA0
Delayed	380 ... 415 V AC	3WL9111-0AE06-0AA0
	48 V DC	3WL9111-0AE11-0AA0
	110 ... 125 V DC/110 ... 127 V AC	3WL9111-0AE12-0AA0
	220 ... 250 V DC/208 ... 240 V AC	3WL9111-0AE13-0AA0



380 ... 415 V AC 3WL9111-0AE14-0AA0

## Operating mechanism

### Motorized operating mechanisms




- Auxiliary supply connection X5 required for circuit breakers or guide frames.  
If this is not already available, please order additionally

Voltage	Article No.
24 ... 30 V DC	3WL9111-0AF01-0AA0
48 ... 60 V DC	3WL9111-0AF02-0AA0
110 ... 125 V DC/110 ... 127 V AC	3WL9111-0AF03-0AA0
220 ... 250 V DC/208 ... 240 V AC	3WL9111-0AF04-0AA0

## Auxiliary contacts

### Auxiliary switch blocks



Contacts	Article No.
2 NO contacts + 2 NC contacts	3WL9111-0AG01-0AA0
2 NO contacts	3WL9111-0AG02-0AA0
1 NO contact + 1 NC contact	3WL9111-0AG03-0AA0

# Accessories and spare parts

## Door sealing frames, hoods, shutters

### Door sealing frames



#### Version

Spare part for option T40

#### Article No.

3WL9111-0AP01-0AA0

### Protective cover IP55



- Cannot be used in conjunction with door sealing frames
- Hood removable and can be opened on both sides

#### Article No.

3WL9111-0AP02-0AA0

### Shutters

#### Version

Spare part for option R21

#### Number of poles

3-pole

#### Size

1

2

3

4-pole

1

2

3

#### Breaking capacity

N, S, H

N, S, H

C

H, C

N, S, H

N, S, H

C

H, C

3WL9111-0AP04-0AA0

3WL9111-0AP06-0AA0

3WL9111-0AP43-0AA0

3WL9111-0AP07-0AA0

3WL9111-0AP08-0AA0

3WL9111-0AP11-0AA0

3WL9111-0AP44-0AA0

3WL9111-0AP12-0AA0

## Arc chute

### Arc chute



#### Voltage

690 V

1000 V/1150 V

#### Size

1

2

3

2

3

#### Breaking capacity

N, S, H

N, S, H

C

H, C

H, C

H, C

#### Article No.

3WL9111-0AS01-0AA0

3WL9111-0AS02-0AA0

3WL9111-0AS10-0AA0


3WL9111-0AS03-0AA0

3WL9111-0AS05-0AA0

3WL9111-0AS06-0AA0

### Arc chute covers

- Parts kit for guide frame
- Spare part for option R10
- Not available for
  - 1000 V version (order code "A05"),
  - 1150 V version (order code "A15")
  - DC version,
  - 4000 A size 2,
  - Circuit breakers with very high breaking capacity C.



#### Number of poles

3-pole

4-pole

#### Size

1

2

3

1

2

3

#### Article No.

3WL9111-0AS32-0AA0

3WL9111-0AS36-0AA0

3WL9111-0AS38-0AA0


3WL9111-0AS42-0AA0

3WL9111-0AS44-0AA0

3WL9111-0AS46-0AA0

## Coding for withdrawable version

### Coding for withdrawable version



- By customer, for 36 coding variants

Size	Article No.
1, 2	3WL9111-OAR12-OAA0
3	3WL9111-OAR13-OAA0

## Grounding connections


### Grounding connection between the guide frame and the withdrawable circuit breaker



- Order 2x for 30 kA ground short-circuit current
- Contacting modules for guide frame

Size	Article No.
1 and 2 <sup>1)</sup>	3WL9111-OBA01-OAA0
3	3WL9111-OBA02-OAA0

### Contacting modules for withdrawable circuit breakers



Number of poles	Size	Article No.
3-pole	1	3WL9111-OBA05-OAA0
	2 <sup>1)</sup>	3WL9111-OBA06-OAA0
	3	3WL9111-OBA07-OAA0
4-pole	1	3WL9111-OBA08-OAA0
	2 <sup>1)</sup>	3WL9111-OBA04-OAA0
	3	3WL9111-OBA10-OAA0

<sup>1)</sup> Cannot be used for size 2 with very high breaking capacity C and size 2, 4000 A.

## Support brackets

### Support brackets




- For mounting fixed-mounted circuit breakers on vertical plane
- Only for sizes 1 and 2 (1 set = 2 units)

Article No.
3WL9111-0BB50-OAA0

## Modules of the CubicleBUS

- Each module of the **CubicleBUS** is supplied with a 0.2 m pre-assembled cable to connect the modules with each other. A longer pre-assembled cable is required for connection to the circuit breaker.
- All communication components, modules of the **CubicleBUS** and metering functions are available for the electronic trip units ETU45B and ETU76B.

### CubicleBUS modules



Type	Article No.
Digital output modules with rotary coding switch, relay outputs	3WL9111-OAT26-OAA0
Digital output modules, configurable, relay outputs	3WL9111-OAT20-OAA0
Digital input module	3WL9111-OAT27-OAA0
Analog output module	3WL9111-OAT23-OAA0
ZSI module	3WL9111-OAT21-OAA0

### Preassembled cables for Modules of the CubicleBUS

For connection to 3WL	Length	Article No.
With COM15/COM16/COM35	0.5 m	3WL9111-0BC04-OAA0
	1 m	3WL9111-0BC02-OAA0
	2 m	3WL9111-0BC03-OAA0
Without COM15/COM16/COM35	2 m	3WL9111-0BC05-OAA0

### Voltage transformers

- Required for 3WL circuit breakers with metering function Plus, if no direct voltage tap is available.
- 380 ... 690 V/100 V, class 0.5

Number of poles	Metering function	Article No.
3-pole	With metering function Plus	3WL9111-0BB68-OAA0



# Accessories and spare parts

## Retrofitting and spare parts

- For retrofitting the COM15, COM16 or COM35 communication modules in withdrawable 3WL circuit breakers with Z options A05 (1000 V AC), A15 (1150 V AC) or A16 (690 V + 20%), the following additional assembly kits are required: 3WL9111-0AT62-0AA0 for circuit breakers size 1 or 3WL9111-0AT63-0AA0 for circuit breakers size 2/3

### COM35 PROFINET IO / Modbus TCP modules **new**



#### Version

For electronic trip units ETU45B and ETU76B

#### Article No.

3WL9111-0AT65-0AA0

### PROFINET IO / Modbus TCP retrofit kits

- Retrofit kit for the PROFINET IO / Modbus TCP communication including COM35, BSS and set of cables for all 3WL air circuit breakers with ETU45B and ETU76B electronic trip units

#### Article No.

3WL9111-0AT66-0AA0

### PROFIBUS retrofit kits

- Retrofit kit for the PROFIBUS communication including COM15, BSS and set of cables for all 3WL air circuit breakers with ETU45B and ETU76B electronic trip units

#### Article No.

3WL9111-0AT12-0AA0

### COM15 PROFIBUS modules



#### Version

For electronic trip units ETU45B and ETU76B

#### Article No.

3WL9111-0AT15-0AA0

### COM16 Modbus RTU modules

#### Version

For electronic trip units ETU45B and ETU76B

#### Article No.

3WL9111-0AT17-0AA0

### Modbus RTU retrofit kits IEC

- Retrofit kit for the Modbus communication including COM16, BSS and set of cables for all 3WL air circuit breakers with ETU45B and ETU76B electronic trip units

#### Article No.

3WL9111-0AT18-0AA0

### Additional parts for retrofitting the COM15/COM16/COM35 communication modules

- In withdrawable 3WL circuit breakers with Z options:
  - A05 (1000 V AC) or
  - A15 (1150 V AC) or
  - A16 (690 V + 20%)

#### Size

1

#### Article No.

3WL9111-0AT62-0AA0

2, 3

3WL9111-0AT63-0AA0

### Breaker status sensors (BSS)



#### Version

- For acquisition via communication of the circuit breaker states ON / OFF / tripped
- For electronic trip units ETU45B and ETU76B

#### Article No.

3WL9111-0AT16-0AA0

## Interfaces

### Interface to the IEC 61850

- The SICAM A8000 as an intelligent data concentrator ensures the connection of the circuit breakers from the SENTRON portfolio via the MODBUS TCP/IP protocol and the forwarding of the data via communication protocols (such as IEC61850, IEC60870-5-104, IEC60870-5-101, MODBUS and DNP) to higher-level systems.

Type	Operating voltage	Article No.
SICAM CP-8021 <sup>1)</sup>	–	6MF28021AA00
SICAM CP-8050 <sup>2)</sup>	–	6MF2805-0AA00 <b>new</b>
SICAM PS-8620	24 ... 60 V DC (12 W)	6MF28620AA00
SICAM PS-8622	110 ... 220 V DC (12 W)	6MF28622AA00



<sup>1)</sup> Designed for maximum data volumes of 20 devices each with 50 data points


<sup>2)</sup> Dimensioned for device quantities of 3 × 3WL and 8 × 3VA

You will find further information at:

[www.siemens.com/sicam-a8000](http://www.siemens.com/sicam-a8000)

For the SICAM CP-8021 and SICAM CP-8050, predefined modules were created to reduce commissioning work to a minimum. The modules can be obtained free of charge from the following link.

<https://support.industry.siemens.com/cs/ww/de/ps/24618/ae>

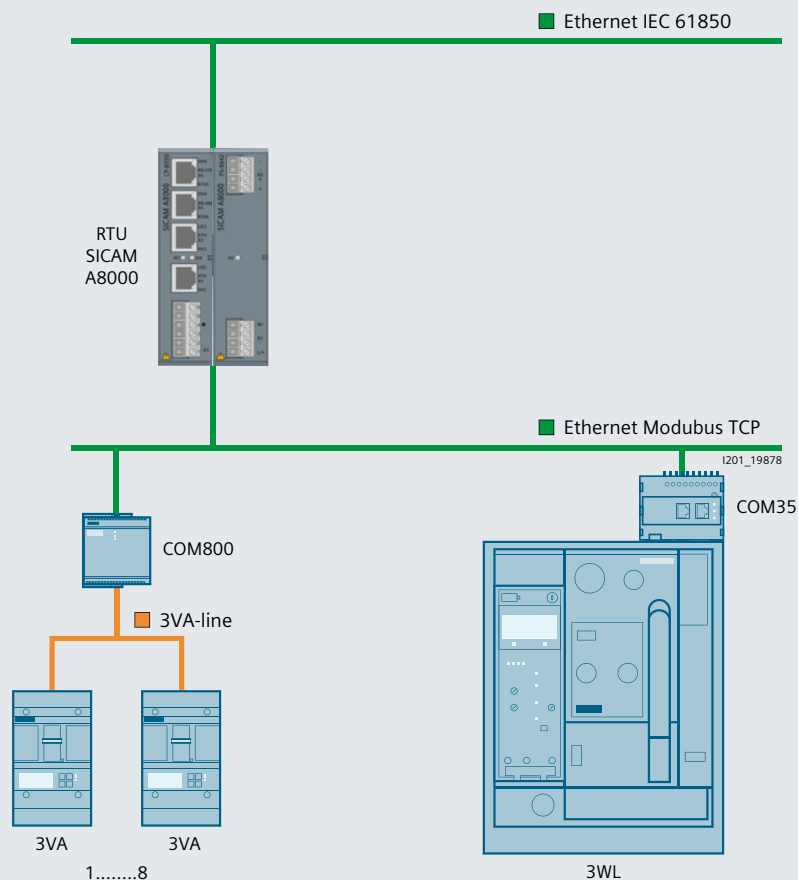

# Accessories and spare parts

## Storage devices

### Capacitor storage devices

- For shunt trips
- Storage time 5 min
- Also suitable for 3VL, 3VA and 3WN circuit breakers
- **Note:** Rated control supply voltage must match the rated control supply voltage of the shunt trip.

#### Rated control supply voltage/rated operational voltage

50/60 Hz AC

DC

220 ... 240 V

220 ... 250 V

#### Article No.

3WL9111-0BA14-0AA0

## Spare parts new

### Metering function Plus for retrofitting

- As spare part or for retrofitting the metering function Plus with an external voltage transformer
  - For ETU45B or ETU76B Release 2
  - Voltage transformer required
  - Voltage converter required
  - A measuring accuracy of 3% is achieved if retrofitted.

#### Article No.

3WL9111-0AT05-0AA0

### Voltage converter

#### Version

As spare part or for retrofitting the metering function Plus

#### Article No.

3WL9111-0AT06-0AA0

### Components for conversion of an existing internal voltage tap <sup>2)</sup>

- Conversion requires 3 components for 3-pole 3WL
- Conversion requires 4 components for 4-pole 3WL
- Conversion of a metering function (Z option A05) is not possible.

#### Conversion of internal voltage tap Size to main contact

#### Article No.

From bottom to top

1

3WL9111-0AT71-0AA0

2

3WL9111-0AT72-0AA0

3

3WL9111-0AT73-0AA0

From top to bottom

1

3WL9111-0AT74-0AA0

2

3WL9111-0AT75-0AA0

3

3WL9111-0AT76-0AA0

### Transformers (without iron core), Rogowski coil only (instrument transformer for the protection function)

- Used in converter applications with high harmonic components; can only be used with ETU45B or ETU76B
  - External 24 V DC supply required
  - Undervoltage release required (e.g. 3WL9111-0AE01-0AA0)
- As retrofit kit or as spare part. With new circuit breakers, please use the Z option K60
- **Scope of supply:**
  - Transformer
  - Warning signs
  - Manual

#### Number of poles

#### Size

#### Article No.

3-pole

1

3WL9111-0AA42-0AA0

2

3WL9111-0AA43-0AA0

3

3WL9111-0AA44-0AA0

4-pole

1

3WL9111-0AA45-0AA0

2


3WL9111-0AA46-0AA0

3

3WL9111-0AA47-0AA0

## Main conductor connections, fixed-mounted versions (essential accessory)


### Front-accessible main connections, single hole at top



- Not for 3WL1 size 1 with high breaking capacity H

Size	Rated current $I_n$	Article No.
1	≤1000 A	3WL9111-0AL01-0AA0
	1250 ... 1600 A	3WL9111-0AL02-0AA0
2 <sup>4)</sup>	≤2000 A	3WL9111-0AL03-0AA0
	≤2500 A	3WL9111-0AL04-0AA0
	≤3200 A	3WL9111-0AL05-0AA0
3	≤4000 A	3WL9111-0AL06-0AA0


### Front-accessible main connections, single hole at bottom



- Not for 3WL1 size 1 with high breaking capacity H


Size	Rated current $I_n$	Article No.
1	≤1000 A	3WL9111-0AL51-0AA0
	1250 ... 1600 A	3WL9111-0AL52-0AA0
2 <sup>4)</sup>	≤2000 A	3WL9111-0AL53-0AA0
	≤2500 A	3WL9111-0AL54-0AA0
	≤3200 A	3WL9111-0AL55-0AA0
3	≤4000 A	3WL9111-0AL56-0AA0

### Front-accessible main connections according to DIN 43673, double hole at top




Size	Rated current $I_n$	Article No.
1	≤1000 A <sup>1)</sup>	3WL9111-0AL07-0AA0
	1250 ... 2000 A <sup>5)</sup>	3WL9111-0AL08-0AA0
2 <sup>4)</sup>	≤2000 A	3WL9111-0AL11-0AA0
	≤2500 A	3WL9111-0AL12-0AA0
	≤3200 A	3WL9111-0AL13-0AA0
3	≤4000 A	3WL9111-0AL14-0AA0

### Front-accessible main connections according to DIN 43673, double hole at bottom



Size	Rated current $I_n$	Article No.
1	≤1000 A <sup>1)</sup>	3WL9111-0AL57-0AA0
	1250 ... 2000 A <sup>5)</sup>	3WL9111-0AL58-0AA0
2 <sup>4)</sup>	≤2000 A	3WL9111-0AL61-0AA0
	≤2500 A	3WL9111-0AL62-0AA0
	≤3200 A	3WL9111-0AL63-0AA0
3	≤4000 A	3WL9111-0AL64-0AA0

### Rear vertical main connections



Size	Rated current $I_n$	Article No.
1 <sup>2)</sup>	≤2000 A	3WL9111-0AM01-0AA0
2 <sup>3)</sup>	≤3200 A	3WL9111-0AM02-0AA0
3	≤6300 A	3WL9111-0AM03-0AA0

<sup>1)</sup> Not for 3WL1 size 1 with high breaking capacity H

<sup>2)</sup> In the case of vertical connection size 1 with breaking capacity N and S, up to 1000 A one 3WL9 111-0AM01-0AA0 vertical connection is required, up to 2000 A or with breaking capacity H two 3WL9 111-0AM01-0AA0 vertical connections are required.

<sup>3)</sup> In the case of vertical connection size 2, up to 2500 A one 3WL9 111-0AM02-0AA0 vertical connection is required, up to 3200 A two 3WL9 111-0AM02-0AA0 vertical connections are required.


<sup>4)</sup> Not for circuit breakers with very high breaking capacity C.

<sup>5)</sup> Can be used for size 1 with H breaking capacity of 630 A ... 2000 A.

# Accessories and spare parts


## Main conductor connections, withdrawable versions (essential accessory)

### Front-accessible main connections, single hole at top or at bottom <sup>1) 2)</sup>




Size	Rated current $I_n$	Article No.
1	≤1000 A	3WL9111-0AN01-0AA0
	1250 ... 1600 A	3WL9111-0AN02-0AA0
2 <sup>3)</sup>	≤2000 A	3WL9111-0AN03-0AA0
	≤2500 A	3WL9111-0AN04-0AA0
	≤3200 A	3WL9111-0AN05-0AA0
3	≤4000 A	3WL9111-0AN06-0AA0

### Front-accessible main circuit connections, according to DIN 43673, double hole at top or at bottom <sup>1)</sup>



Size	Rated current $I_n$	Article No.
1	≤1000 A <sup>2)</sup>	3WL9111-0AN07-0AA0
	1250 ... 2000 A <sup>5)</sup>	3WL9111-0AN08-0AA0
2 <sup>3)</sup>	≤2000 A	3WL9111-0AN11-0AA0
	≤2500 A	3WL9111-0AN12-0AA0
	≤3200 A	3WL9111-0AN13-0AA0
3	≤4000 A	3WL9111-0AN14-0AA0

### Supports for front and DIN connecting bars



Number of poles	Size	Article No.
3-pole for 3 bars	1	3WL9111-0AN41-0AA0
	2	3WL9111-0AN42-0AA0
	3	3WL9111-0AN43-0AA0
4-pole for 4 bars	1	3WL9111-0AN44-0AA0
	2	3WL9111-0AN45-0AA0
	3	3WL9111-0AN46-0AA0

### Rear vertical main connections




Size	Rated current $I_n$	Terminal pieces	Article No.
1	≤1000 A <sup>2)</sup>		3WL9111-0AN15-0AA0
	1250 ... 2000 A <sup>5)</sup>		3WL9111-0AN16-0AA0
2	≤2000 A <sup>3)</sup>		3WL9111-0AN17-0AA0
	≤2500 A <sup>3)</sup>		3WL9111-0AN18-0AA0
	≤3200 A <sup>3)</sup>		3WL9111-0AN21-0AA0
	1600 ... 3200 A <sup>4)</sup>		3WL9111-0AN38-0AA0
3	≤5000 A		3WL9111-0AN22-0AA0
	≤6300 A	3 units for 3-pole switches	3WL9111-0AN23-0AA0
	≤6300 A, top	4 units for 4-pole switches	3WL9111-0AN20-0AA0
	≤6300 A, bottom	4 units for 4-pole switches	3WL9111-0AN10-0AA0

### Rear horizontal main connections

Size	Rated current $I_n$	Article No.
1	≤1000 A <sup>2)</sup>	3WL9111-0AN32-0AA0
	1250 ... 2000 A <sup>5)</sup>	3WL9111-0AN33-0AA0
2	≤2000 A <sup>3)</sup>	3WL9111-0AN34-0AA0
	≤2500 A <sup>3)</sup>	3WL9111-0AN35-0AA0
	≤3200 A <sup>3)</sup>	3WL9111-0AN36-0AA0
	1600 ... 3200 A <sup>4)</sup>	3WL9111-0AN47-0AA0
3	≤5000 A	3WL9111-0AN37-0AA0

### Connecting flange



Size	Rated current $I_n$	Article No.
1	≤1000 A <sup>2)</sup>	3WL9111-0AN24-0AA0
	1250 ... 2000 A <sup>5)</sup>	3WL9111-0AN25-0AA0
2 <sup>3)</sup>	≤2000 A	3WL9111-0AN26-0AA0
	≤2500 A	3WL9111-0AN27-0AA0
	≤3200 A	3WL9111-0AN28-0AA0
3	≤4000 A	3WL9111-0AN31-0AA0

<sup>1)</sup> When using front-accessible main connections (withdrawable circuit breakers) supports are required.

<sup>2)</sup> Not for 3WL1 size 1 with high breaking capacity H

<sup>3)</sup> Not for circuit breakers with very high breaking capacity C.

<sup>4)</sup> Only for circuit breakers with very high breaking capacity C.

<sup>5)</sup> Can be used for size 1 with H breaking capacity of 630 A ... 2000 A.

## Conversion kit


### Conversion kit for converting fixed-mounted circuit breakers into withdrawable circuit breakers

- Guide frames and sliding contact modules must be ordered separately.
- Conversion from fixed-mounted to withdrawable is not possible for 3WL1 circuit breakers with very high breaking capacity C

Number of poles	Size	Article No.
3-pole	1	3WL9111-0BC11-0AA0
	2	3WL9111-0BC12-0AA0
	3	3WL9111-0BC13-0AA0
4-pole	1	3WL9111-0BC14-0AA0
	2	3WL9111-0BC15-0AA0
	3	3WL9111-0BC16-0AA0

## Main contact elements

### Main contact elements<sup>2) 4)</sup>



- **Notes:**
  - The circuit breaker ID No. must be specified when ordering<sup>3)</sup>
  - Specified for each connection (depending on the number of poles on the circuit breaker, order 3 or 4 units)
  - Article No. is automatically adapted to the circuit breaker ID No.

Size	Rated current $I_n$	Article No.
1	$\leq 1600 \text{ A}$ <sup>1)</sup>	3WL9111-0AM90 L1Y
2	$\leq 2500 \text{ A}$	3WL9111-0AM91 L1Y
	$\leq 4000 \text{ A}$	3WL9111-0AM92 L1Y
3	$\leq 6300 \text{ A}$	3WL9111-0AM93 L1Y

<sup>1)</sup> Not for circuit breakers with very high breaking capacity C.

<sup>2)</sup> Replacement of the main contact elements for 3WL1 circuit breakers with very high breaking capacity C is only possible at the factory.

<sup>3)</sup> Please specify the circuit breaker ID No. in plain text when ordering.

<sup>4)</sup> Not for size 1 circuit breakers with breaking capacity H and circuit breakers with  $I_n=2000\text{A}$ .

# 3WL10 system overview

IEC AC ..

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wl10-configurator](http://www.siemens.com/lowvoltage/3wl10-configurator)

1

## Switching devices



Size 0

### Trip units

Electronic trip units ETU  
(LI, LSI, LSIG)Electronic trip units ETU  
(LSI, LSIG)

### Accessories

Communi-  
cation and  
I/O modules

Rating plugs

Breaker  
Connect  
modulesMetering  
function (Basic/  
Advanced)External ground  
fault transformers

## Main conductor connections

Fixed-mounted,  
withdrawable  
versionsRear vertical/horizontal  
connections

Front connections

Front connections,  
extendedTerminals for CU/AL  
cable connection

### Motors



Spring charging motor

### Accessories



Remote reset magnets



Mechanical operating cycles counters

#### Note:

You will find a detailed range of accessories in the Accessories and spare parts section.

## Auxiliary releases / closing coils



Shunt trips,  
undervoltage releases



Closing coils

## Auxiliary switches and signaling switches



Auxiliary, alarm, and  
signaling switches



Position signaling switches

## Interlocking



Interlocking sets



Locking devices



Locking mechanisms



Door sealing frames



Protective covers

### Note:

You will find a detailed range of accessories in the Accessories and spare parts section.



# Online configurator highlights

[www.siemens.com/lowvoltage/configurators](http://www.siemens.com/lowvoltage/configurators)

## Search function with global direct input

Searches for specific terms and jumps to MLFB based on input to the correct configurator

**SIEMENS**  
Ingenuity for Life

Log in Additional actions Support Language

Configurators for Low-voltage List of products

Search for (e.g. 3WL1110-4EB36-6EQ8-Z A05+R0...

1 Select Type of Product

2 Select Category

## Product list stores multiple configurations and can transfer them collectively to the shopping cart

List of products

Projectdata		Load product list	
Actions			
No.	Article	Quantity	Unit price: Documents
1	3WL1106-2EB62-1AA2 Fixed-mounted circuit breaker 3-pole, Size 1, IEC In=630 A to 690 V, 50/60 Hz AC Icu=55 kA at 500 V Rear horizontal connection Overcurrent release ETU 45 LSIN protection adjustable 0.4-1 in with cubicle bus Opt.... Further details	1 Piece	on request > all documents for position
2	3VA2450-6KP32-0AA0 3VA molded case circuit breaker circuit breaker 3VA2 IEC frame 630 breaking capacity class H Icu=85kA @ 415V 3-pole, line protection ETU850, LSI, In=500A overload protection In=200A...500A short-circuit protection Ird=0.6...10x In,... Further details	1 Piece	on request > all documents for position

## Recall of completed configurations for modification or additional configuration

List of products

Projectdata		Load product list	
Actions			
No.	Article	Quantity	Unit price: Documents
1	3WL1106-2EB62-1AA2 Fixed-mounted circuit breaker 3-pole, Size 1, IEC In=630 A to 690 V, 50/60 Hz AC Icu=55 kA at 500 V Rear horizontal connection Overcurrent release ETU 45 LSIN protection adjustable 0.4-1 in with cubicle bus Opt.... Further details	1 Piece	on request > all documents for position
2	3VA2450-6KP32-0AA0 3VA molded case circuit breaker circuit breaker 3VA2 IEC frame 630 breaking capacity class H Icu=85kA @ 415V 3-pole, line protection ETU850, LSI, In=500A overload protection In=200A...500A short-circuit protection Ird=0.6...10x In,... Further details	1 Piece	on request > all documents for position

Duplicate  
Configure

## Responsive Design

**SIEMENS**  
Ingenuity for Life

Log in Additional actions Support Language

Configurators for Low-voltage List of products

Search for (e.g. 3WL1110-4EB36-6EQ8-Z A05+R0...

1 Select Type of Prod...

2 Select Category



[www.siemens.com/lowvoltage/3wl10-configurator](http://www.siemens.com/lowvoltage/3wl10-configurator)

## Download an ePlan Selector for 3WL10

The configuration is complete. You can order this product.

Basic configuration | Trip units | Main connection | Motor | Auxiliary release / Closing coil | Result | CAD/CAE

3WL1010-2CE41-0AA0

Preview  
Area Model View | Wire frame view | 3D view | Unit Wiring Diagram IEC  
1. Parameters drawing

Documentation and reporting

Choose languages for the data sheet: deutsch

Project data for the datasheet

Download selection of document types

☐ Datasheets (PDF)

Selection of download format

☐ All in a ZIP file

Start generation

Component documentation

☐ 3WL1010-2CE41-0AA0

☐ Datasheet (PDF)

☐ EPLAN Macro (EDZ)

© Siemens AG | Application information

Download – quick links

3WL1010-2CE41-0AA0

Click2CAD

Download – all CAD formats

View: Area Model View

View option: Isometric

File type: Joint Photography Experts Group (\*.jpg)

Start generation

Download – all documents

open documents dialog

## Mouseover display of characteristic curves to show the protection function

The configuration is not complete, please set all orange values.

Basic configuration | Trip units | Main connection | Motor | Auxiliary release / Closing coil

Choose value...

Trip units	Protective function	Communication capability	Metering capability	Display
Non-automatic breaker	-	-	-	-
ETU120	LI	-	-	-
ETU150	LI	-	-	-
ETU160	LI	-	-	-
ETU165	LI	-	-	-
ETU166	LI	-	-	-

Mouseover tooltip:

ETU120

LI

Graph showing characteristic curves (I<sub>t</sub>, I<sub>n</sub>)

## Direct entry of an already known Article No. or parts of an Article No.

### 3WL Air Circuit Breakers

Product Information | Configurators

Select a Configurator: 3WL10 Air Circuit-Breakers, FS0

3WL10 Air Circuit-Breakers, FS0

Selection - Tool for air circuit breakers (ACB) SENTRON 3WL10 from 630 A to 1250 A

- for selective line protection
- for motor protection
- non-automatic circuit breaker

Using this configurator, you can precisely select the optimum circuit breaker configuration for your application. Comprehensive CAx-data support of the device is provided after successful configuration.



Start

MLFB direct input (complete): 3WL1010-2CE41-0AA0

Start



3WL10

6	7	8	9	10	11	12	13	14	15	16
		—								

## Motor

Operating mechanisms	Manual operating mechanism	0
	Spring charging motor	1
	24 ... 30 V AC/DC	2
	48 ... 60 V AC/DC	3
	110 V AC/DC	4

## Auxiliary releases, closing coils

Closing coil (CC), remote reset magnet (RR)	Without closing coil, without remote reset magnet	A
	Closing coils (CC)	B
	24 V AC/DC	C
	30 V AC/DC	D
	48 V AC/DC	E
	60 V AC/DC	F
	110 ... 120 V AC/DC	G
	120 ... 127 V AC/DC	H
	220 ... 240 V AC/DC	J
	240 ... 250 V AC/DC	K
	Closing coil (CC) and additionally a remote reset magnet (RR)	L
	24 V AC/DC	M
	110 V AC/DC	
	220 V AC/DC	

2nd auxiliary release	Without 2nd auxiliary release	A
	With undervoltage release (UVR)	B
	24 V AC/DC	C
	30 V AC/DC	D
	48 V AC/DC	E
	60 V AC/DC	F
	110 ... 120 V AC/DC	G
	120 ... 127 V AC/DC	H
	220 ... 240 V AC/DC	J
	240 ... 250 V AC/DC	K
	380 ... 400 V AC/DC	L
	415 ... 440 V AC/DC	M
	With undervoltage release (UVR), delayable with external time-delay device; Scope of supply: UVR + time-delay device	N
	24 ... 30 V AC/DC	P
	110 ... 127 V AC/DC	Q
	220 ... 250 V AC/DC	R
	With 2nd shunt trip (ST2)	S
	24 V AC/DC	T
	30 V AC/DC	U
	48 V AC/DC	V

1st auxiliary release	Without 1st auxiliary release	0
	Shunt trip (ST)	1
	24 V AC/DC	2
	30 V AC/DC	3
	48 V AC/DC	4
	60 V AC/DC	5
	110 ... 120 V AC/DC	6
	120 ... 127 V AC/DC	7
	220 ... 240 V AC/DC	8

# Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at [www.siemens.com/lowvoltage/3wl10-configurator](http://www.siemens.com/lowvoltage/3wl10-configurator)

1

To specify the options, add "-Z" to the complete Article No. and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

## Accessories for basic configuration

### Mounting options for fixed mounting

- In the basic configuration, the fixed-mounted circuit breaker is mounted onto the rear panel; floor mounting is an option; in addition, the device must be modified if it is to be extended with functionalities such as external auxiliary switches or mechanical interlocks.<sup>1)</sup>

Mounting options for fixed mounting <sup>1)</sup>	Floor mounting	Mounting support standard	A	0	7
		Mounting support extended <sup>2)</sup>	S	5	6
	Rear panel mounting onto mounting plate	Side wall extended <sup>2)</sup>	S	5	7

## Accessories for electronic trip units ETU

### Rating plugs

- As standard, the electronic trip units are equipped with a rating plug for setting the rated current  $I_n$ , which is equal to the maximum rated circuit breaker current ( $<I_{n\max}$ ). The rated current of the selected rating plug must be less than or equal to  $I_{n\max}$ .
- To downrate the circuit breaker, the rated current of less than  $I_{n\max}$  is selected for the rating plug by means of a Z option.
- Other functions can also be activated using rating plugs (L = OFF or Rc protection).

Rating plug	For setting the rated current $I_n$	For all ETU	400 A	B	0	4
			630 A	B	0	6
			800 A	B	0	8
			1000 A	B	1	0
	For setting the rated current $I_n$ , with overload protection L = OFF	For ETU 6-series	400 A	L	0	4
			630 A	L	0	6
			800 A	L	0	8
			1000 A	L	1	0
			1250 A	L	1	2
	For setting the rated current $I_n$ , For enabling of the residual current protection function. The residual current function is only possible with the MF Advanced metering function.	For ETU660 only	400 A	G	0	4
			630 A	G	0	6
			800 A	G	0	8
			1250 A	G	1	2

### Communication modules

- No more than two different communication modules can be used at the same time.
- When using an IOM040 digital I/O module (Z option K56), only one communication module can be used.

Communication modules	COM040	PROFIBUS	F	0	2
	COM041	PROFINET	F	0	3
	COM043	Modbus TCP	F	1	1
	COM042	Modbus RTU	F	1	2

### Breaker Connect modules

- When a circuit breaker with a communications interface is ordered, a Breaker Connect module for external 24 V DC power supply of the electronic components is also supplied ready installed.
- By means of this Z option, the Breaker Connect module for 24 V DC is replaced by a Breaker Connect module for 110 ... 240 V AC/DC.

Breaker Connect modules	110 ... 240 V AC/DC	F	2	6
-------------------------	---------------------	---	---	---

### I/O modules internal

I/O modules internal	Digital I/O module IOM040	2 inputs, 2 outputs	K	5	6
----------------------	---------------------------	---------------------	---	---	---

<sup>1)</sup> These functionalities can be applied directly to the frame of the withdrawable circuit breaker, without any modification of the side wall.

<sup>2)</sup> Not possible in connection with or as an alternative to the mounting support, standard (A07)

To specify the options, add "-Z" to the complete Article No. and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

--	--	--

## Accessories for the motor

Mechanical operating cycles counter, 5-digit

C 0 1

## Auxiliary switches and signaling switches

- Auxiliary and signaling switches for currents >100 mA and up to 400 V AC are installed as standard.
- For currents <100 mA for PLC connections, these auxiliary and signaling switches can be replaced.
- The auxiliary/signaling switches for 24 V DC digital signals are designed for a
  - minimum load above 1 mA at 5 V DC and a
  - maximum breaking capacity of 100 mA at 24 V DC.

Position signaling switches for guide frames<sup>1)</sup> 2 CO | 2 CO | 2 CO (connected | test | disconnected position)

K 5 5

Signaling switches	Ready-to-close signaling switches	1 CO digital, 24 V DC	K	5	0
	Tripped signaling switches (S24)	1 CO digital, 24 V DC	K	5	3
	Spring charged signaling switches (S21)	1 CO digital, 24 V DC	K	5	4

Auxiliary switches	ON / OFF AUX	4 CO digital, 24 V DC	K	5	1
		2 CO 400 V AC + 2 CO digital, 24 V DC	K	5	2

## Locking, blocking and interlocking

Locking devices <sup>1)</sup>	To prevent movement of withdrawable circuit breaker	Cylinder lock	Made by RONIS	R	7	8
		For no more than 3 padlocks, 8 mm		R	6	5

Locking mechanisms To prevent movement to disconnected position

R 7 9

Locking devices	To prevent unauthorized activation in the operator panel (safe OFF)	Cylinder lock, made by RONIS	S	0	8
		For no more than 3 padlocks, plastic 4 mm	S	2	2
		For no more than 1 padlock, metal 7 mm	S	2	3
		For no more than 2 padlocks, metal 8 mm	S	0	7

Interlocking sets	For mechanical ON and/or OFF on the operator panel	For no more than 3 padlocks, plastic 4 mm	S	4	2
		For no more than 1 padlock, metal 7 mm	S	4	3
		For no more than 2 padlocks, metal 8 mm	S	4	4

Protective covers For mechanical ON/OFF, not lockable

S 4 1


Door sealing frame IP30 IP3x

T 3 0

<sup>1)</sup> Can be used not only when guide frame is ordered separately, but also with complete order (breaker + guide frame).

# Guide frames

## Guide frames for ordering separately without circuit breakers



- Guide frames without breakers up to 1250 A
- **Note:** All CB bus modules for communication COM04x / IOM300 / Breaker Connect module, as well as COMPSS signaling switches are configured without frames in the withdrawable circuit breaker and defined there by means of Z options, and are included with the switching device. The PSS standard is always included in the frame and can be changed to an electronics-capable signal by means of a Z option.

Number of poles	Connection type	Article No.
3-pole	Rear vertical	3VW8112-0AA01
	Rear horizontal	3VW8112-0AB01
	4× 240 mm <sup>2</sup> Cu/Al cable connection, for compression lugs	3VW8112-0AD01
	Front connection bars, extended	3VW8112-0AE01
4-pole	Rear vertical	3VW8112-0BA01
	Rear horizontal	3VW8112-0BB01
	4× 240 mm <sup>2</sup> Cu/Al cable connection, for compression lugs	3VW8112-0BD01
	Front connection bars, extended	3VW8112-0BE01

To specify the options, add "-Z" to the complete Article No. and indicate the appropriate order code(s).

3VW8....-.....-Z

Order code

--	--	--

## Locking, blocking and interlocking

Locking devices	To prevent movement of withdrawable circuit breaker	Cylinder lock, made by RONIS	R	7	8
		For no more than 3 padlocks, 8 mm	R	6	5
Locking mechanisms	To prevent movement to disconnected position (only in combination with R78 or R65)		R	7	9

## Auxiliary/signaling switches


Position signaling switch PSS for guide frame	For 24 V DC digital signals, for minimum currents	2 CO   2 CO   2 CO (connected   test   disconnected position)	K	5	5
---	---	---	---	---	---

Auxiliary and signaling switches for currents >100 mA and up to 400 V AC are installed as standard. For currents <100 mA for PLC connections, these auxiliary and signaling switches can be modified. The auxiliary/signaling switches for 24 V DC digital signals are designed for

- a minimal load from 1 mA at 5 V DC and
- a maximum breaking capacity of 100 mA at 24 V DC.

# Electronic trip units ETU and accessories

## Electronic trip units (ETU)



Version	With communications / metering function / enhanced protection functions	Type	Protective function	Article No.
With rotary coding switches	No	ETU320	LIN	3VW9011-5AA00
		ETU350	LSIN	3VW9012-5AA00
		ETU360	LSING	3VW9012-7AA00
With display	Yes	ETU650	LSIN	3VW9017-5AA00
		ETU660	LSING	3VW9017-7AA00

## Metering functions for ETU650 or ETU660




Description	Protective function / version	Arrangement	Article No.
Metering function	MF Basic	–	3VW9011-0AT01
	MF Advanced	–	3VW9011-0AT04
Set of cables for voltage tap for MF	For 4-pole circuit breakers with neutral right	Top or bottom	3VW9011-0AT08
	For 4-pole circuit breakers with neutral left	Top	3VW9011-0AT75
		Bottom	3VW9011-0AT76
	For 3-pole circuit breakers	Top	3VW9011-0AT72
		Bottom	3VW9011-0AT73

## External current transformers for N conductor




Accessory for	Purpose	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	For 3-pole circuit breakers only	3VW9011-0AA30

## External current transformers for grounded transformer star point



Accessory for	G <sub>ret</sub> (ground return)	Article No.
ETU660	100 A	3VW9011-0GF30
	250 A	3VW9011-0GF31

## Summation current transformers external Rc-CT for residual current measurement



- Only with MF Advanced metering function and Rc rating plug

Accessory for	Purpose	Article No.
ETU660	For external residual current measurement	3VW9011-0RC30

## Remote reset magnets RR for the circuit breakers including tripped signal



- Remote reset magnet (RR) for resetting the circuit breaker after tripping as a result of overcurrent conditions

Accessory for	Voltage	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	24 V DC	3VW9011-0AK03
	110 V AC/DC	3VW9011-0AK05
	250 V AC/DC	3VW9011-0AK06

## Replacement batteries for electronic trip units ETU



Accessory for	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	3VW9011-0AT38



# Electronic trip units ETU and accessories

## Rated current module / rating plug



- Only one module is possible per circuit breaker

Accessory for	Version	Rated current $I_n$	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	Rating plugs for setting ( $< I_{n\max}$ ) the rated current $I_n$	400 A	3VW9011-0AA53
		630 A	3VW9011-0AA55
		800 A	3VW9011-0AA56
		1000 A	3VW9011-0AA57
		1250 A	3VW9011-0AA58
ETU 6-series	Rating plugs without overload protection (L = OFF) and for setting ( $< I_{n\max}$ ) the rated current $I_n$	400 A	3VW9011-0LF53
		630 A	3VW9011-0LF55
		800 A	3VW9011-0LF56
		1000 A	3VW9011-0LF57
		1250 A	3VW9011-0LF58
ETU660	Rating plug Rc for ETU660, for enabling the residual current protection function and setting ( $< I_{n\max}$ ) of the rated current $I_n$ . The residual current function is only possible with the MF Advanced metering function.	400 A	3VW9011-0RC53
		630 A	3VW9011-0RC55
		800 A	3VW9011-0RC56
		1250 A	3VW9011-0RC58


## CB bus modules - communication modules



- Contains the communication module
- No more than two different communication modules can be used at the same time
- When using a digital I/O module IOM040 (Z option K56) only one communication module can be used
- Can only be used with ETUs of the 6-series and a Breaker Connect module for connection to the circuit breaker. This can also be configured directly on the device by means of a Z option if the communications interface to the ETU 6-series is selected

Communication modules	Protocol	Article No.
COM040	PROFIBUS	3VW9011-0AT15
COM041	PROFINET	3VW9011-0AT14
COM043	Modbus TCP	3VW9011-0AT16
COM042	Modbus RTU	3VW9011-0AT17


## CB bus modules - I/O modules external IOM300



- For snapping onto standard mounting rail

Accessory for	Maximum switching current per contact	Inputs	Outputs	Article No.
ETU 6-series	<ul style="list-style-type: none"> <li>2 A at <math>\leq</math> DC 30 V</li> <li>0.8 A at 50 V DC</li> <li>0.2 A at 150 V DC</li> <li>4 A at 250 V AC</li> </ul>	11	10	3VW9011-0AT20

## CB bus modules - I/O modules internal IOM040



- When using a digital I/O module IOM040, only one communication module can be used

Accessory for	Maximum switching current per contact	Inputs	Outputs	Article No.
ETU 6-series	<ul style="list-style-type: none"> <li>2 A at <math>\leq</math> DC 30 V</li> <li>0.8 A at 50 V DC</li> <li>0.2 A at 150 V DC</li> <li>4 A at 250 V AC</li> </ul>	2	2	3VW9011-0AT30


## Actuator module COM ACT



- For switching the circuit breaker on/off remotely via communication
- Actuation of the closing coil (CC) and the 1st shunt trip (ST)
- Can only be used in combination with a communication module, spring charging motor, closing coil and 1st shunt trip
- Automatically included if the communications interface of the ETU 6-series is selected in the basic circuit breaker configuration

Accessory for	Article No.
ETU 6-series	3VW9011-0AT10

## Breaker Connect modules



- For the external power supply for the electronics components

**Voltage**

110 ... 240 V AC/DC

24 ... 48 V DC

**Article No.**

3VW9011-0AT06

3VW9011-0AT07

## Auxiliary contact signaling switch for communications interface



- Auxiliary contacts for signaling the readiness to close or for position signaling switches of the withdrawable positions.
- Can only be used in combination with communication module.
- Can be combined with standard position signaling switches or ready-to-close signaling contacts.
- **Note:** Both signaling switches are automatically included in the basic circuit breaker if the communications interface of the ETU 6-series is selected (COM PSS only with withdrawable versions).

**Function**

Ready-to-close signaling switch for communication COM RTC

Position signaling switch COM PSS (for withdrawable breakers only)

**Article No.**

3VW9011-0AT11

3VW9011-0AT12

## Test devices and Breaker Data Adapters



- Can be used for all ETU 3-series and 6-series

**Function**

Test device

- For the trip test via ETU and tripping solenoid including release
- The ETU and the tripping solenoids are activated by means of a battery built into the test device.
- On activation in the ETU 6-series, the parameters can be configured on the display

**Type**

TD310

**Article No.**

3VW9011-0AT32

Breaker Data Adapter

- As gateway for parameterization of the ETU with SENTRON powerconfig
- For generation of a report of the set parameters with powerservice

TD410

3VW9011-0AT34

Test devices and Breaker Data Adapters

- As gateway for parameterization of the ETU with SENTRON powerconfig
  - Testing a tripping operation using SENTRON powerconfig
- For use with the powerservice software
  - Testing of the basic protection functions LSING
  - Testing of the enhanced protection functions
  - Test data storage
  - Readout of ETU buffer
  - Generation of a report of the set parameters

TD420






3VW9011-0AT33

# Accessories and spare parts

## Accessories for connection




### Front terminals for main circuit connections acc. to IEC 60947-2

- To be ordered separately for top and bottom

Fixing	Version	Mounted onto	Number of poles / quantity	Article No.
  	Fixed-mounted	Front terminals for main circuit connection	3-pole / 3 units	3VW9011-0AL01
			4-pole / 4 units	3VW9011-0AL02
	Extended main terminals, including insulating plate and phase barriers, standard	Front terminals for main circuit connection	3-pole / 3 units	3VW9011-0AL77
			4-pole / 4 units	3VW9011-0AL78
		Broadened main terminals, including insulating plate and extended phase barriers	3-pole / 3 units	3VW9011-0AL73
 	Withdrawable	Front terminals for main circuit connection, top	3-pole / 3 units	3VW9011-0AL75
			4-pole / 4 units	3VW9011-0AL74
		Front terminals for main circuit connection, bottom	3-pole / 3 units	3VW9011-0AL75
	Front-accessible terminals for main circuit connection	Flange of the guide frame	3-pole / 3 units	3VW9011-0AN01
			4-pole / 4 units	3VW9011-0AN02
		Broadened main circuit connections	3-pole / 3 units	3VW9011-0AN73
		Front-accessible terminals for main circuit connection	4-pole / 4 units	3VW9011-0AN74



### Rear terminals for main circuit connections acc. to IEC 60947-2

- To be ordered separately for top and bottom

Fixing	Version	Mounted onto	Number of poles / quantity	Article No.
	Fixed-mounted	Rear terminals for main circuit connection; rotatable for horizontal / vertical connection, including terminal cover	3-pole / 3 units	3VW9011-0AL32
			4-pole / 4 units	3VW9011-0AL33
	Withdrawable	Rear terminals for main circuit connection; rotatable for horizontal / vertical connection, including terminal cover	3-pole / 3 units	3VW9011-0AN32
			4-pole / 4 units	3VW9011-0AN33
	Broadened main circuit connections	Rear horizontal main connections	3-pole / 3 units	3VW9011-0AN75
			4-pole / 4 units	3VW9011-0AN76

### Cu-/Al cable connections

- To be ordered separately for top and bottom

Fixing	Version	Mounted onto	Number of poles / quantity	Article No.
	Fixed-mounted	Circular conductor terminals 4 x 240 mm <sup>2</sup> for front cable connection, including insulating plate and high, extended terminal cover	3-pole / 3 units	3VW9011-0AL71
			4-pole / 4 units	3VW9011-0AL72
	Withdrawable	Set of circular conductor connection pieces 4 x 240 mm <sup>2</sup> for compression lugs, rear cable connection	3-pole / 3 units	3VW9011-0AN71
			4-pole / 4 units	3VW9011-0AN72


### Auxiliary supply connectors in push-in version

- Auxiliary conductor terminal in push-in version for upgrading fixed-mounted breakers and guide frames.
- The device is always fitted at the factory with the exact number of auxiliary conductor terminals required.

Version	Article No.
Push-in	3VW9011-0AB11

## Accessories for connection

### Terminal covers for fixed circuit breakers



- Finger-proof for front main circuit connection for fixed-mounting
- Necessary isolation measures are always supplied with the corresponding connection technology and do not need to be ordered separately.

Version	Number of poles / quantity	Article No.
Standard	3-pole / 2 units	3VW9723-OWD30
	4-pole / 2 units	3VW9724-OWD40
Extended	3-pole / 2 units	3VW9723-OWF30
	4-pole / 2 units	3VW9724-OWF40

### Phase barriers for fixed breakers



- Necessary isolation measures are always supplied with the corresponding connection technology and do not need to be ordered separately.
- For operating voltages >440 V AC the use of phase barriers is mandatory; up to 440 V AC their use is optional.

Height	Number of poles / quantity	Article No.
100 mm (Standard)	3-pole / 4 units	3VW9723-OWA00
	4-pole / 6 units	3VW9724-OWA10
200 mm (extended)	3-pole / 4 units	3VW9723-OWA01
	4-pole / 6 units	3VW9724-OWA11

### Support for mounting the fixed-mounted breaker on the floor



- For fixed-mounted versions

Version	Purpose	Article No.
Mounting support standard (circuit breaker feet) (= Z option A07)		3VW9011-0BB51
Mounting support extended (circuit breaker feet), including mechanical transmission of switch position on circuit breaker side panel (= Z option S56)	<ul style="list-style-type: none"> <li>• Fixation for external auxiliary switches AUX 15 W (3VW9011-0AG15)</li> <li>• Locking mechanism for control cabinet door, direct (for 3VW9011-0BB10)</li> <li>• Locking mechanism for control cabinet door, Bowden cable (for 3VW9011-0BB16)</li> <li>• Mutual mechanical interlockings for 3WL/3VA (for 3VW9011-0BB21)</li> </ul>	3VW9011-0BB52

### Extension kit for modification of the side wall of the fixed-mounted breaker



- For fixed-mounted versions
- Rear wall fixing on mounting plate
- For modification for mechanical transmission of switch position on circuit breaker side panel (= Z option S57)

Version	Purpose	Article No.
Extension kit for side wall	<ul style="list-style-type: none"> <li>• Fixation for external auxiliary switches AUX 15 W (3VW9011-0AG15)</li> <li>• Locking mechanism for control cabinet door, direct (for 3VW9011-0BB10)</li> <li>• Locking mechanism for control cabinet door, Bowden cable (for 3VW9011-0BB16)</li> <li>• Mutual mechanical interlockings for 3WL/3VA (for 3VW9011-0BB21)</li> </ul>	3VW9011-0BB53

# Accessories and spare parts

## Motor

### Spring charging motor (MO)



Description	Voltage	Article No.
For automatic charging of the stored-energy operating mechanism	24 ... 30 V AC/DC	3VW9011-0AF01
	48 ... 60 V AC/DC	3VW9011-0AF02
	100 ... 130 V AC/DC	3VW9011-0AF03
	220 ... 250 V AC/DC	3VW9011-0AF04

### Mechanical operating cycles counters



Description	Version	Article No.
In combination with a spring charging motor	5 digits	3VW9011-0AH07

## Auxiliary releases, closing coils

### Closing coils CC / shunt trips ST



Voltage	Article No.
24 V AC/DC	3VW9011-0AD01
30 V AC/DC	3VW9011-0AD02
48 V AC/DC	3VW9011-0AD03
60 V AC/DC	3VW9011-0AD04
110 ... 120 V AC/DC	3VW9011-0AD05
120 ... 127 V AC/DC	3VW9011-0AD06
220 ... 240 V AC/DC	3VW9011-0AD07
240 ... 250 V AC/DC	3VW9011-0AD08
380 ... 400 V AC	3VW9011-0AD17
415 ... 440 V AC	3VW9011-0AD18

### TD320 function test unit for closing coil / shunt trip



- The TD320 test unit allows the operational availability and functions of the closing coils and shunt trips with a rated operational voltage between 24 V and 250 V (AC and DC) to be tested
- The operational availability test is performed cyclically at intervals of 30 seconds
- The unit has visual indicators in the form of LEDs on the front in order to display the following states:
  - LED POWER ON LIT: Correct function of the YO/YC test unit
  - LED DEACTIVATION LIT: Power supply failure, wire break
  - LED SHORT-CIRCUIT LIT: Winding short-circuit
  - LED DEACTIVATION and SHORT-CIRCUIT FLASHING: Incorrect power supply
  - LED DEACTIVATION and SHORT-CIRCUIT OFF: Closing coil / shunt trip OK

Version	Article No.
For all closing coils / shunt trips	3VW9011-0AT31

## Auxiliary releases, closing coils

### Auxiliary/signaling switches



- The auxiliary/signaling switches for 24 V DC digital signals are designed for a
  - minimum load above 1 mA at 5 V DC and a
  - maximum breaking capacity of 100 mA at 24 V DC
- For external auxiliary switches ON/OFF AUX 15 CO, a 3VW9011-0AG1x fixation must be ordered in addition, and for fixed-mounted breakers a 3VW9011-0BB5x side wall modification

Type	Contacts	Article No.
Ready-to-close signal RTC	1 CO standard	3VW9011-0AH01
	1 CO digital	3VW9011-0AH02
Auxiliary switch ON/OFF AUX	4 CO standard	3VW9011-0AG01
	4 CO digital	3VW9011-0AG02
	2 CO standard + 2 CO digital	3VW9011-0AG03
External auxiliary switch ON/OFF AUX	15 CO standard	3VW9011-0AG05
	15 CO digital	3VW9011-0AG06
Tripped signaling switch S24	1 CO standard	3VW9011-0AH14
	1 CO digital	3VW9011-0AH15
Spring charged signaling switch S21	1 CO standard	3VW9011-0AH10
	1 CO digital	3VW9011-0AH08
Position signaling switch PSS (for withdrawable devices)	2 CO   2 CO   2 CO (connected   test   disconnected position) standard	3VW9011-0AH11
	2 CO   2 CO   2 CO (connected   test   disconnected position) digital	3VW9011-0AH12

### Fixing for external auxiliary switches AUX 15 CO



- External auxiliary switches ON/OFF AUX 15 CO must be ordered separately.

Version	Article No.
For fixed-mounted circuit breakers with rear panel or floor mounting (in combination with Z option S56 or S57)	3VW9011-0AG15
For guide frames	3VW9011-0AG17

### Undervoltage releases UVR



Voltage	Article No.
24 V AC/DC	3VW9011-0AE01
30 V AC/DC	3VW9011-0AE02
48 V AC/DC	3VW9011-0AE03
60 V AC/DC	3VW9011-0AE04
110 ... 120 V AC/DC	3VW9011-0AE05
120 ... 127 V AC/DC	3VW9011-0AE06
220 ... 240 V AC/DC	3VW9011-0AE07
240 ... 250 V AC/DC	3VW9011-0AE08
380 ... 400 V AC	3VW9011-0AE17
415 ... 440 V AC	3VW9011-0AE18

### External time-delay device for undervoltage release



- With adjustable delay time from 0.5 to 3 s.
- Suitable for mounting onto DIN rail.

Voltage	Article No.
24 ... 30 V AC/DC	3VW9011-0AE10
48 V AC/DC	3VW9011-0AE11
60 V AC/DC	3VW9011-0AE15
110 ... 127 V AC/DC	3VW9011-0AE12
220 ... 250 V AC/DC	3VW9011-0AE13

# Accessories and spare parts

1

## Interlocking

### Locking devices to prevent movement of the withdrawable circuit breakers



Version	Article No.
RONIS cylinder lock (replacement for R78)	3VW9011-0BA80
Padlock 8 mm (replacement for R65), for no more than 3 padlocks	3VW9011-0BA87

### Locking mechanisms to prevent movement of the withdrawable circuit breakers in disconnected position




<ul style="list-style-type: none"> <li>Only possible as a supplement in conjunction with R78 (3VW9011-0BA80) and/or R65 (3VW9011-0BA87)</li> </ul>	
Description	Article No.
Locking mechanism (replacement for R79)	3VW9011-0BA84

### Locking devices in OFF position




<ul style="list-style-type: none"> <li>For fixed-mounted versions and withdrawable versions</li> <li>To prevent unauthorized activation in the operator panel (safe OFF)</li> <li>The disconnecter unit fulfills the conditions for a supply disconnecting (isolating) device acc. to EN 60204-1</li> </ul>	
Description	Artikel-Nr.
Cylinder lock, made by RONIS (replacement for S08)	3VW9011-0BA33

### Locking devices in OFF position



<ul style="list-style-type: none"><li>• For fixed-mounted versions and withdrawable versions</li><li>• To prevent unauthorized activation in the operator panel (safe OFF)</li><li>• The disconnecter unit fulfills the conditions for a supply disconnecting (isolating) device acc. to EN 60204-1</li></ul>	
Description	Version
Padlock 4 mm (replacement for S22)	Plastic for no more than 3 padlocks
Padlock 7 mm (replacement for S23)	Metal for no more than 1 padlock
Padlock 8 mm (replacement for S07)	Metal for no more than 2 padlocks

### Padlockable protective cover ON/OFF on the operator panel




Description	Version	Article No.
Padlock 4 mm (replacement for S42)	Plastic for no more than 3 locks	3VW9011-0BA22
Padlock 7 mm (replacement for S43)	Metal for no more than 1 lock	3VW9011-0BA23
Padlock 8 mm (replacement for S44)	Metal for no more than 2 locks	3VW9011-0BA24

### Protective cover for mechanical ON/OFF



<ul style="list-style-type: none"> <li>Mechanical ON/OFF to protect against unintentional actuation on the operator panel</li> <li>Not lockable</li> </ul>	
Description	Article No.
Not lockable (replacement for S41)	3VW9011-0BA21

### Mutual mechanical interlockings



• Mutual mechanical interlocking for 3WL / 3VA with Bowden cable 2 m		
Fixing	Mounting	Article No.
Fixed-mounted	Rear panel or floor mounting	3VW9011-0BB21
Withdrawable	Mounting onto guide frame	3VW9011-0BB22

### Bowden cable, separate

<ul style="list-style-type: none"> <li>One required for each circuit breaker</li> </ul>	
Variant	Article No.
1000 mm	3VW9011-0BB23
2000 mm	3WL9111-0BB45-0AA0
3000 mm	3WL9111-0BB46-0AA0

## Interlocking

### Locking mechanisms to prevent opening of the control cabinet doors in ON position



- To prevent opening of the cabinet door in ON position
- It additionally prevents the circuit breaker from being closed when the control cabinet door is open

Fixing	Version	Article No.
Fixed mounting onto side panel or floor	Direct fixed interlocking	3VW9011-0BB10
	Locking with Bowden cable	3VW9011-0BB16
Withdrawable	Direct fixed interlocking	3VW9011-0BB14
	Locking with Bowden cable	3VW9011-0BB18

### Door sealing frame IP30



- Can be used up to IP3x degree of protection

Version	Befestigung	Version	Article No.
Replacement part for Z option T30.	Fixed-mounted	IP3x	3VW9011-0AP01
	Withdrawable	IP3x	3VW9011-0AP02

### Protective cover IP54



- Protective cover / hood IP54 lockable for fixed-mounted breakers and withdrawable breakers
- For implementing degrees of protection IP4x and IP54 when installing in switchboard door.
- Cannot be combined with IP30 door sealing frame and door mounted rotary operator.

Version	Version	Article No.
Lock with unique key	IP54	3VW9011-0AP03
Lock with standard key	IP54	3VW9011-0AP13



# Conditions of sale and delivery

## 1. General Provisions

By using this catalog you can purchase products (hardware, software and services) described therein from Siemens Aktiengesellschaft subject to the following Terms and Conditions of Sale and Delivery (hereinafter referred to as „T&C“). Please note that the scope, the quality and the conditions for supplies and services, including software products, by any Siemens entity having a registered office outside Germany, shall be subject exclusively to the General Terms and Conditions of the respective Siemens entity. The following T&C apply exclusively for orders placed with Siemens Aktiengesellschaft, Germany.

### 1.1 For customers with a seat or registered office in Germany

For customers with a seat or registered office in Germany, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for installation work the „General Conditions for Erection Works – Germany“<sup>1)</sup> („Allgemeine Montagebedingungen – Deutschland“ (currently only available in German)) and/or
- for stand-alone software products and software products forming a part of a product or project, the „General License Conditions for Software Products for Automation and Drives for Customers with a Seat or registered Office in Germany“<sup>1)</sup> and/or
- for consulting services the „General Terms and Conditions for Consulting Services of the Division DF – Germany“<sup>1)</sup> and/or
- for other supplies and/or services the „General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry“<sup>1)</sup>. In case such supplies and/or services should contain Open Source Software, the conditions of which shall prevail over the „General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry“<sup>1)</sup>, a notice will be contained in the scope of delivery in which the applicable conditions for Open Source Software are specified. This shall apply mutatis mutandis for notices referring to other third party software components.

### 1.2 For customers with a seat or registered office outside Germany

For customers with a seat or registered office outside Germany, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for services the „International Terms & Conditions for Services“<sup>1)</sup> supplemented by „Software Licensing Conditions“<sup>1)</sup> and/or
- for consulting services the „General Terms and Conditions for Consulting Services of the Division DF – Germany“<sup>1)</sup> and/or
- for other supplies of hard- and software the „International Terms & Conditions for Products“<sup>1)</sup> supplemented by „Software Licensing Conditions“<sup>1)</sup>

### 1.3 For customers with master or framework agreement

To the extent our supplies and/or services offered are covered by an existing master or framework agreement, the terms and conditions of that agreement shall apply instead of T&C.

## 2. Additional Terms and Conditions

The dimensions are in mm. In Germany, according to the German law on units in measuring technology, data in inches apply only to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the individual pages of this catalog – especially with regard to data, dimensions and weights given – these are subject to change without prior notice.

## 3. Export Regulations

We shall not be obligated to fulfill any agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes and/or other sanctions.

Export may be subject to license. We shall indicate in the delivery details whether licenses are required under German, European and US export lists.

Our products are controlled by the U.S. Government (when labeled with „ECCN“ unequal „N“) and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. Government or as otherwise authorized by U.S. law and regulations.

The export indications can be viewed in advance in the description of the respective goods on the Industry Mall, our online catalog system. Only the export labels „AL“ and „ECCN“ indicated on order confirmations, delivery notes and invoices are authoritative.

Products labeled with „AL“ unequal „N“ are subject to European / national export authorization. Products without label, with label „AL:N“ / „ECCN:N“, or label „AL:9X9999“ / „ECCN: 9X9999“ may require authorization from responsible authorities depending on the final end-use, or the destination.

<sup>1)</sup> The text of the Terms and Conditions of Siemens AG can be downloaded at [https://mall.industry.siemens.com/legal/ww/en/terms\\_of\\_trade\\_en.pdf](https://mall.industry.siemens.com/legal/ww/en/terms_of_trade_en.pdf)

If you transfer goods (hardware and/or software and/or technology as well as corresponding documentation, regardless of the mode of provision) delivered by us or works and services (including all kinds of technical support) performed by us to a third party worldwide, you must comply with all applicable national and international (re-)export control regulations.

If required for the purpose of conducting export control checks, you (upon request by us) shall promptly provide us with all information pertaining to the particular end customer, final disposition and intended use of goods delivered by us respectively works and services provided by us, as well as to any export control restrictions existing in this relation.

The products listed in this catalog may be subject to European/German and/or US export regulations. Any export requiring approval is therefore subject to authorization by the relevant authorities.

Errors excepted and subject to change without prior notice.

# Link directory

## Catalog LV 10

### General information

Information on low-voltage power distribution and electrical installation technology	<a href="http://www.siemens.com/lowvoltage">www.siemens.com/lowvoltage</a>
Tender specifications	<a href="http://www.siemens.com/lowvoltage/tenderspecifications">www.siemens.com/lowvoltage/tenderspecifications</a>
Conversion tool	<a href="http://www.siemens.com/conversion-tool">www.siemens.com/conversion-tool</a>
Image database	<a href="http://www.siemens.com/lowvoltage/picturedb">www.siemens.com/lowvoltage/picturedb</a>
CAX download manager	<a href="http://www.siemens.com/lowvoltage/cax">www.siemens.com/lowvoltage/cax</a>
Newsletter system	<a href="http://www.siemens.com/lowvoltage/newsletter">www.siemens.com/lowvoltage/newsletter</a>
Siemens YouTube channel	<a href="http://www.youtube.com/Siemens">www.youtube.com/Siemens</a>
Brochures / catalogs	<a href="http://www.siemens.com/lowvoltage/catalogs">www.siemens.com/lowvoltage/catalogs</a>
Operating instructions / manuals	<a href="http://www.siemens.com/lowvoltage/manuals">www.siemens.com/lowvoltage/manuals</a>
Siemens Industry Online Support	<a href="http://www.siemens.com/lowvoltage/product-support">www.siemens.com/lowvoltage/product-support</a>
Siemens Industry Online Support app	<a href="http://www.siemens.com/support-app">www.siemens.com/support-app</a>
My Documentation Manager (MDM)	<a href="http://www.siemens.com/lowvoltage/mdm">www.siemens.com/lowvoltage/mdm</a>
Configurators	<a href="http://www.siemens.com/lowvoltage/configurators">www.siemens.com/lowvoltage/configurators</a>
Siemens Industry Mall – product catalog and online ordering system	<a href="http://www.siemens.com/industrymall">www.siemens.com/industrymall</a>
Direct forwarding to the Industry Mall	<a href="http://www.siemens.com/product?Article No.">www.siemens.com/product?Article No.</a>
Training	<a href="http://www.siemens.com/sitrain-lowvoltage">www.siemens.com/sitrain-lowvoltage</a>
Local contacts	<a href="http://www.siemens.com/lowvoltage/contact">www.siemens.com/lowvoltage/contact</a>
Technical Support	<a href="http://www.siemens.com/lowvoltage/support-request">www.siemens.com/lowvoltage/support-request</a>
Information on services	<a href="http://www.siemens.com/service-catalog">www.siemens.com/service-catalog</a>
Manual for the generation, transmission and distribution of electrical energy	<a href="http://www.siemens.com/power-engineering-guide">www.siemens.com/power-engineering-guide</a>
Control panels for the North American market	<a href="http://www.siemens.com/northamerican-standards">www.siemens.com/northamerican-standards</a>
Control panel building	<a href="http://www.siemens.com/controlpanel">www.siemens.com/controlpanel</a>
Energy savings and amortization	<a href="http://www.automation.siemens.com/sinasave">www.automation.siemens.com/sinasave</a>
Energy Suite	<a href="http://www.siemens.com/energysuite">www.siemens.com/energysuite</a>
SITOP power supplies	<a href="http://www.siemens.com/sitop">www.siemens.com/sitop</a>
Power distribution with Totally Integrated Power	<a href="http://www.siemens.com/tip">www.siemens.com/tip</a>

# Catalogs and further information



## LV 10 Low-Voltage Power Distribution and Electrical Installation Technology SENTRON • SIVACON • ALPHA

Protection, Switching, Measuring and  
Monitoring Devices, Switchboards and  
Distribution Systems

PDF (E86060-K8280-A101-B2-7600)



## LV 14 Power Monitoring Made Simple SENTRON

E86060-K1814-A101-A7-7600



## LV 18 Air Circuit Breakers and Molded Case Circuit Breakers with UL Certification SENTRON

PDF (E86060-K8280-E347-A5-7600)



## ET D1 Switches and Socket Outlets DELTA

PDF



## IC 10 Industrial Controls SIRIUS

E86060-K1010-A101-B1-7600



## Industry Mall Information and Ordering Platform on the Internet:

[www.siemens.com/industrymall](http://www.siemens.com/industrymall)



## Siemens TIA Selection Tool for the selection, configuration and ordering of TIA products and devices

[www.siemens.com/tst](http://www.siemens.com/tst)



## Training for Industry SITRAIN

[www.siemens.com/sitrain](http://www.siemens.com/sitrain)

The catalogs listed above and additional catalogs are  
available in PDF format at Siemens Industry Online Support  
[www.siemens.com/lowvoltage/catalogs](http://www.siemens.com/lowvoltage/catalogs)

Further information on low-voltage power distribution  
and electrical installation technology is available on the  
Internet at [www.siemens.com/lowvoltage](http://www.siemens.com/lowvoltage)

## Get more information

[www.siemens.com/lowvoltage](http://www.siemens.com/lowvoltage)

Published by  
Siemens AG

For the U.S. published by  
Siemens Industry Inc.

Smart Infrastructure  
Electrical Products  
Siemensstraße 10  
93055 Regensburg, Germany

100 Technology Drive  
Alpharetta, GA 30005  
United States

PDF (Extract from E86060-K8280-A101-B2-7600)  
KG 1220 130 En  
Produced in Germany  
© Siemens 2020

Subject to changes and errors. The information given in this catalog only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or other rights of Siemens AG, its affiliated companies or other companies whose use by third parties for their own purposes could violate the rights of the respective owner.

## Security information

Siemens provides products and solutions with industrial security functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the Internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial security measures that may be implemented, please visit  
**<https://www.siemens.com/industrialsecurity>**

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Security RSS Feed under  
**<https://www.siemens.com/industrialsecurity>**