

# SIEMENS

## 3 Phase Indoor Load Center

Catalog Number  
**G3042B3200CU**

Series  
-

Enclosure  
**Type 1**

### RATINGS:

200A MAXIMUM - SEE MAIN BREAKER RATING.  
240/120 V ~, 3Ø 4W DELTA  
208Y/120 V ~, 3Ø 4W  
240 V ~, 3Ø 3W

WHEN USED ON A 240/120 V ~, 3 PHASE, 4 WIRE DELTA SYSTEM, THE CENTER BUS MUST BE CONNECTED TO THE PHASE HAVING THE HIGHEST VOLTAGE TO GROUND. ALL BREAKERS CONNECTED TO THIS BUS MUST BE RATED 240 V ~. WHEN USED ON A 240 V ~, 3 PHASE, 3 WIRE SYSTEM, ALL BREAKERS MUST BE RATED 240 V ~.

### SUITABLE FOR USE AS SERVICE

**EQUIPMENT.** WHEN USED AS SERVICE EQUIPMENT, APPLY "SERVICE DISCONNECT" LABEL TO FRONT NEXT TO MAIN BREAKER HANDLE.

WHEN USED AS SERVICE EQUIPMENT, UNUSED NEUTRAL BAR TERMINALS MAY BE USED TO TERMINATE EQUIPMENT GROUNDING WIRES IN THE COMBINATIONS INDICATED FOR EQUIPMENT GROUND BAR TERMINALS.

REMOVE TWISTOUTS FROM TRIM ONLY WHERE BREAKERS WILL BE INSTALLED. ALL OPENING MUST BE FILLED WITH BREAKERS OR FILLER PLATES.


TO RESET BREAKERS WITH TRIPPED HANDLE POSITION BETWEEN "ON" AND "OFF", MOVE HANDLE TO "OFF" THEN TO "ON".

SUM OF QT BREAKER RATING IS NOT TO EXCEED 110 AMPS PER BRANCH CIRCUIT BUS STAB.

### USE COPPER OR ALUMINUM 60°/75°C WIRE

| TERMINALS   | WIRE                                 | TORQUE   |
|---|--------------------------------------|--|
| A, B, C   | SEE MARKING ON BREAKER               |  |
| N   | 250 KCMIL - 4 AWG                    | 340 LB-INS                                       |
| G   | 2/0 - 4 AWG                          | 45 LB-INS  |
| NEUTRAL/GROUND (USE TYPE "ECGB" GROUND BAR KIT ACCESSORY) | 14-10 AWG<br>8 AWG<br>6 AWG<br>4 AWG | 20 LB-INS<br>25 LB-INS<br>35 LB-INS<br>45 LB-INS |
| GRD CONDUCTORS ONLY                                       | (2) or (3) 14 AWG<br>(2) 12-10 AWG   | 20 LB-INS  |
| ECLK1-2 (ACCESSORY)                                       | 2/0-2 AWG                            | 45 LB-INS  |
| ECLK2 (ACCESSORY)   | 2/0-4 AWG                            | 135 LB-INS                                       |
| ECLK3 (ACCESSORY)   | 300 KCMIL - 1 AWG                    | 340 LB-INS                                       |
| BRANCH BREAKERS   | SEE MARKING ON BREAKER               |  |
| TYPE "ECLK" SUBFEED LUG KIT                               | SEE MARKING ON LUG KIT               |  |

| ACCESSORIES            |  |
|------------------------|--|
| DESCRIPTION            | CAT. NO.   |
| INS. NEUTRAL TIE STRAP | ECINTS   |
| MAIN BREAKER RETAINER  | ECMBR1   |
| FILLER PLATE           | ECQF3  |
| DOOR LOCK              | ECQFL2   |
| SUBFEED LUG KIT        | ECLK2125<br>ECLK2150<br>ECLK2225<br>ECLK3150<br>ECLK3225 |

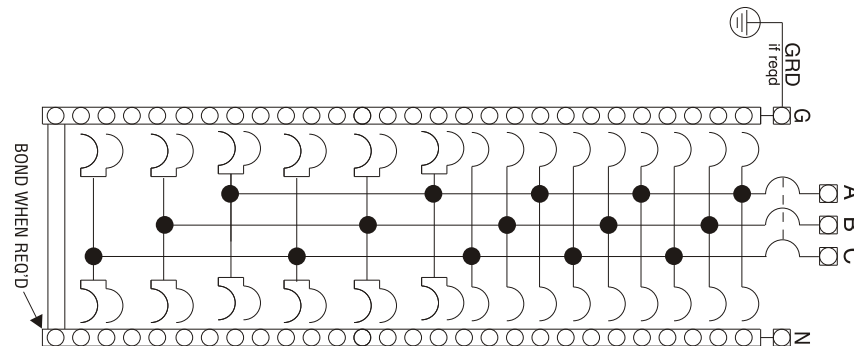

SHORT CIRCUIT CURRENT RATING THIS PANELBOARD HAS A MAXIMUM SHORT CIRCUIT CURRENT RATING OF 10,000 AMPS RMS SYMMETRICAL, 240 V- WHEN USED WITH SIEMENS TYPE QP, QT, QPH, HQP, QPF, QPHF, QAF, QE, QEH AND QAFH CIRCUIT BREAKERS. ANY CIRCUIT BREAKER INSTALLED, REPLACED, OR ADDED IN THIS PANELBOARD MUST BE MANUFACTURED BY SIEMENS AND MUST BE ONE OF THE ABOVE TYPES. USE OF OTHER CIRCUIT BREAKERS IN THIS EQUIPMENT WILL VOID THE WARRANTY.

© 2004 Copyright Siemens Energy & Automation, Inc.

Siemens Energy & Automation, Inc. Alpharetta, Georgia U.S.A.

T

4094752 Rev.A

**IMPORTANT:** DO NOT ALLOW PETROLEUM BASED (HYDROCARBON) SPRAYS, CHEMICALS, SOLVENTS OR ANY PAINT TO CONTACT INTERIOR COMPONENTS. PETROLEUM BASED CHEMICALS CAN CAUSE DEGRADATION OF ELECTRICAL INSULATING MATERIALS.

**⚠ DANGER**

**Hazardous Voltage.**  
Will cause death, serious injury or substantial property damage.

Turn off power supplying this equipment before working inside.



**⚠ PELIGRO**

**Voltaje peligroso. Causará la muerte, lesiones graves o daño substancial a la propiedad.**

Desconecte el suministro de energía a este equipo antes de trabajar en su interior.