

SIEMENS



Reyrolle Test Block

Catalog Reyrolle 7XG222 · Edition 1

[siemens.com/reyrolle](https://www.siemens.com/reyrolle)

Digital Grid Reyrolle Test Block (7XG222) Catalog

Devices and Application	1
7XG222 2RMLG Test Block and 2RLMB-R Test Plug	1.1
System	2
Hardware Construction	2.1
Technical Documentation	3
Connection Diagrams	3.1
Dimension Drawings	3.2
Technical Data	3.3
Ordering Information	3.4

Devices and Application

7XG222 2RMLG Test Block and 2RLMB-R Test Plug

Description

The 7XG222 range of test blocks, housed within an Epsilon enclosure, offers facilities for monitoring and secondary injection testing of power system protection schemes in conjunction with the appropriate multi-fingered test plug.

The 2RMLG Test Block has 14 pairs of spring loaded contacts which are linked to a terminal block positioned at the rear of the enclosure.

The 2RMLG07 is coded to only accept the 2RLMB-R7 Test Plug which has connection terminals 21, 23, 25, and 27, internally.

The 2RMLG08 is coded to only accept the 2RLMB-R8 Test Plug which has internal pairs 1 and 3, 5 and 7, 9 and 11, and 15 and 17, shorted together internally.

The 2RMLG09 is coded to only accept the 2RLMB-R9 Test Plug which has terminals 1-3-5-7, 9-11, 17-19 & 21-23-25-27 shorted together internally..

Each pair of contacts is normally closed completing the circuit through the test block when the associated protection equipment is in use.

For testing purposes the test block can be accessed by removing the front cover. The 2RMLG01 has a metallic probe attached to the front cover assembly which when withdrawn open circuits the 2 contacts at position 13 and 14.

The main DC auxiliary supply to the protection scheme or relay can be wired to this circuit to prevent inadvertent tripping of the protection circuit after removal of the cover and during the test procedure.

The 2RMLG02/07/08/09 do not include the above facility and contacts 13 and 14 are normally closed. These contacts must not be used for current circuits, as the relevant contact finger on the 2RLMB-R test plug is shorter in this position.

The short test finger in position 13 and 14 on the 2RLMB-R will open contacts 13 and 14 in the test block after the other fingers have made contact in all other positions.

It is important that the sockets in the test plug which correspond to the current transformer secondary windings are linked prior to the test plug being inserted into the test block.

This will ensure that the current transformer secondary windings are short circuited prior to disconnection from the protection scheme or relay. If the DC auxiliary supply is to be used during testing it can be linked using the sockets in the test plug.

Operation of the contacts can be monitored by connecting the test equipment to the protection scheme or relay with the even numbered sockets of the test plug. If a number of 2RMLG test blocks are connected to a relay it is recommended that the DC supply be routed through each of them to safeguard against inadvertent operation.

Benefits

The features of the Test Block are:

- Finger safe design
- Finger safe test leads
- Various scheme configurations
- Retention fixings on test plugs



- 7XG222 Suitable for vertical or horizontal mounting
- Standard 4U case design
- Coded test plugs prevent incorrect insertion


Hardware Construction

The 2RMLG is a size E2 unit in the Epsilon range of enclosures. The rear terminal block has 28 terminals each with an M4 screw outlet for the attachment of external wiring, fitted with 'L' shaped pre-insulated ring tongue terminations.



[sc_7XG22_2RMLG, 1, en_US]

Figure 2.1/1 2RMLG

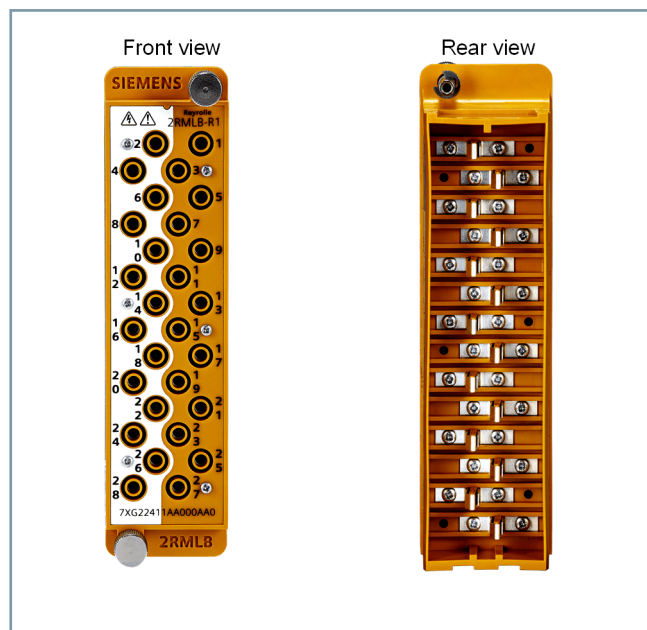

[sc_7XG22_2RMLB, 1, en_US]

Figure 2.1/2 2RMLB

2RMLB-R Series Multi-Fingered Test Plugs

The 2RMLB-R series is inserted into the 2RMLG test socket and is securely retained by means of two knurled screws. The 2RMLB-R1 test plug incorporates 28 test sockets, each socket accepting a shrouded or plain 4 mm diameter plug.

2RMLB-R7 with Shorting Contacts

The 2RMLB-R7 is similar to the 2RMLB-R1 with shorted contact pairs 21-23-25-27 and is coded to be used with the MMLG07 Test Socket only.

2RMLB-R8 with Shorting Contacts

The 2RMLB-R8 is similar to the 2RMLB-R1 with shorted contact pairs 1-3, 5-7, 9-11, 15-17 and is coded to be used with the 2RMLG08 Test Socket only.

2RMLB-R9 with Shorting Contacts

The 2RMLB-R9 is similar to the 2RMLB-R1 with shorted contact pairs 1-3-5-7, 9-11, 17-19, 21-23-25-27 and is coded to be used with the 2RMLG09 Test Socket only.



NOTE

BEFORE inserting a Test Plug into a Test Socket carrying current transformer secondary circuits ensure that the test plugs corresponding to the current transformer circuits are short-circuited.

This is to ensure the current transformer secondary circuits are not inadvertently open-circuited during insertion of the last plug.



NOTE

BEFORE inserting a Test Plug to measure current ensure that the ammeter is on the correct range and that it is connected to its test leads.


The connections will depend upon the scheme and details must be obtained from the appropriate diagrams. If it is necessary to use the DC auxiliary supply during testing, then a test link may be fitted across the sockets in the Test Plug.

Test Block Information

The device terminal label displays the MLFB code, serial number, relay description, terminal contact details, and safety symbols.

CE	European CE marking
!	Refer to device documentation
⚡	Electrical Hazard
WEEE symbol	Waste Electrical and Electronic Equipment Directive (WEEE)
EAC	Guideline for the Eurasian Market

Connection Diagrams

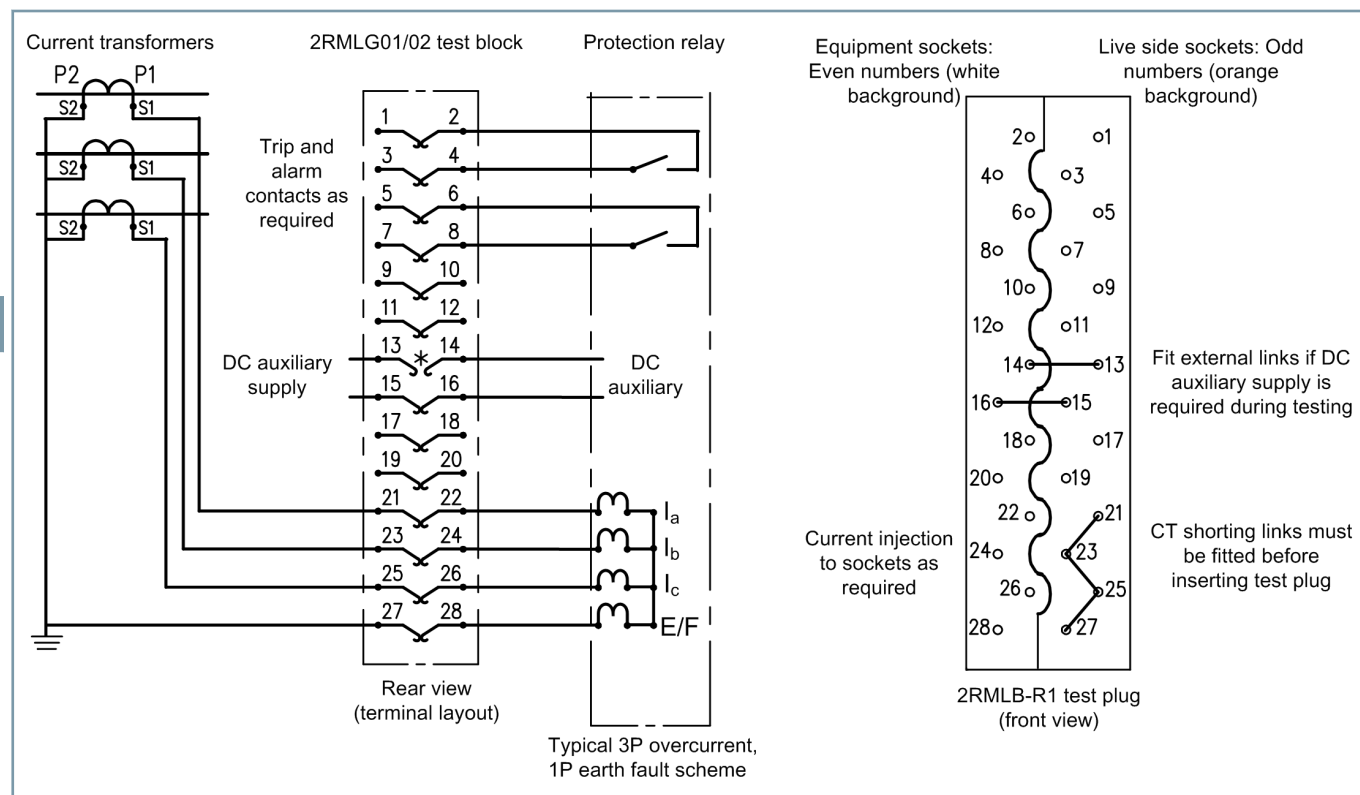

[dw_7XG22_connection_2RMLG01/02, 1, en_US]


Figure 3.1/1 Typical Application of the 2RMLG01 / 2RMLG02 Test Block and 2RMLB-R1 Test Plug



NOTE

2RMLG01 13/14 open cct when cover is removed and all other positions are connected.

2RMLG02 13/14 connected as in the same way as other positions.

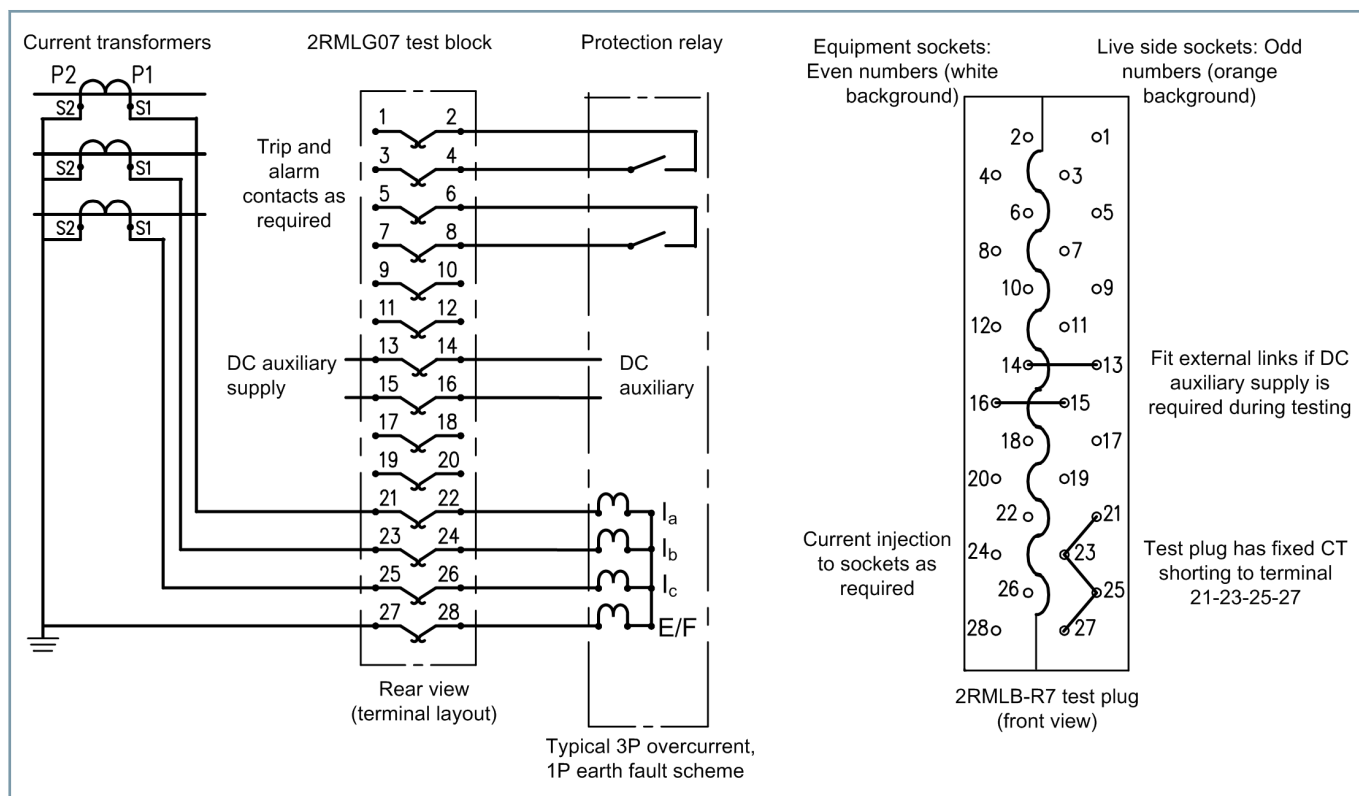

[dw_7XG22_connection_2RMLG07, 1, en_US]

Figure 3.1/2 Typical Application of the 2RMLG07 Test Block and 2RMLB-R7 Test Plug

Technical Documentation

Connection Diagrams

3.1

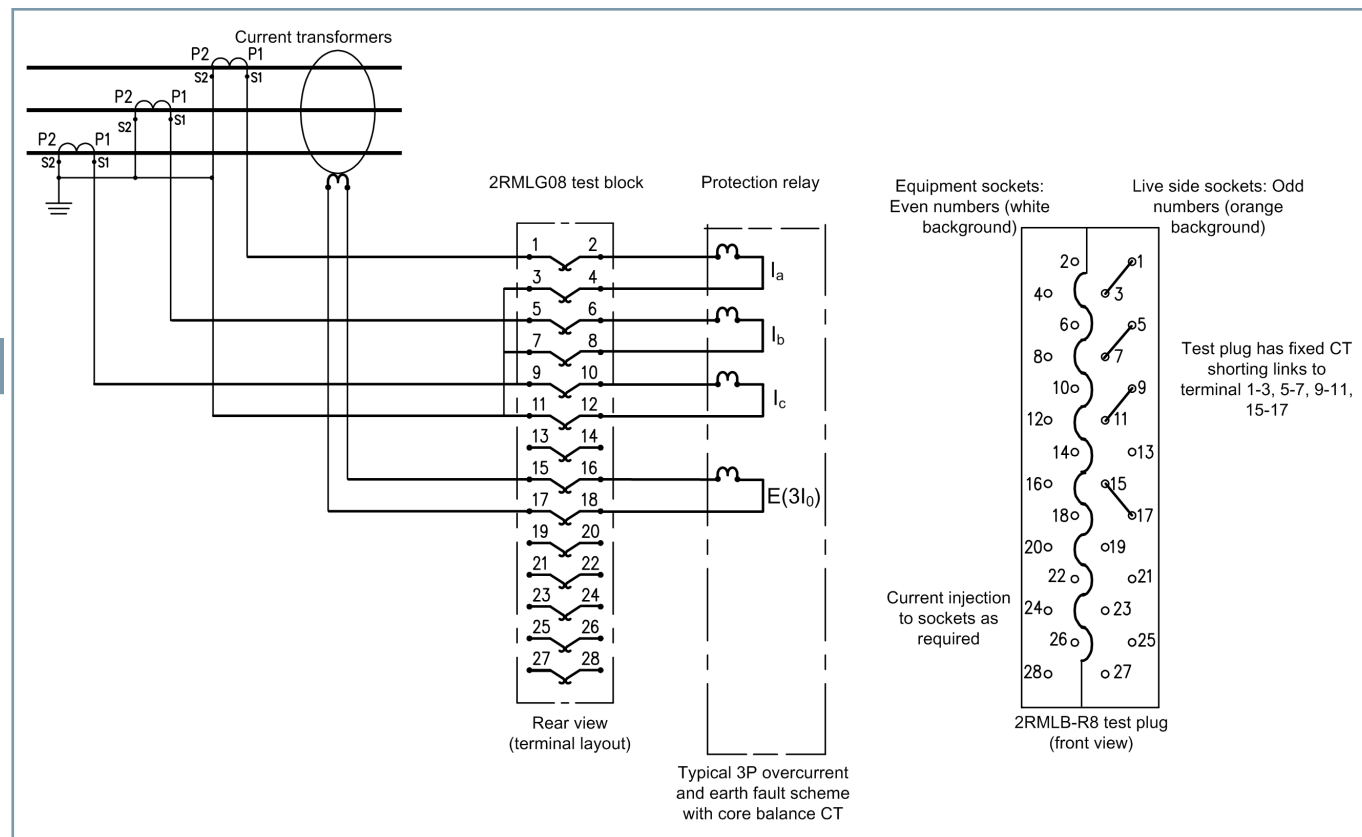


Figure 3.1/3 Typical Application of the 2RMLG08 Test Block and 2RMLB-R8 Test Plug


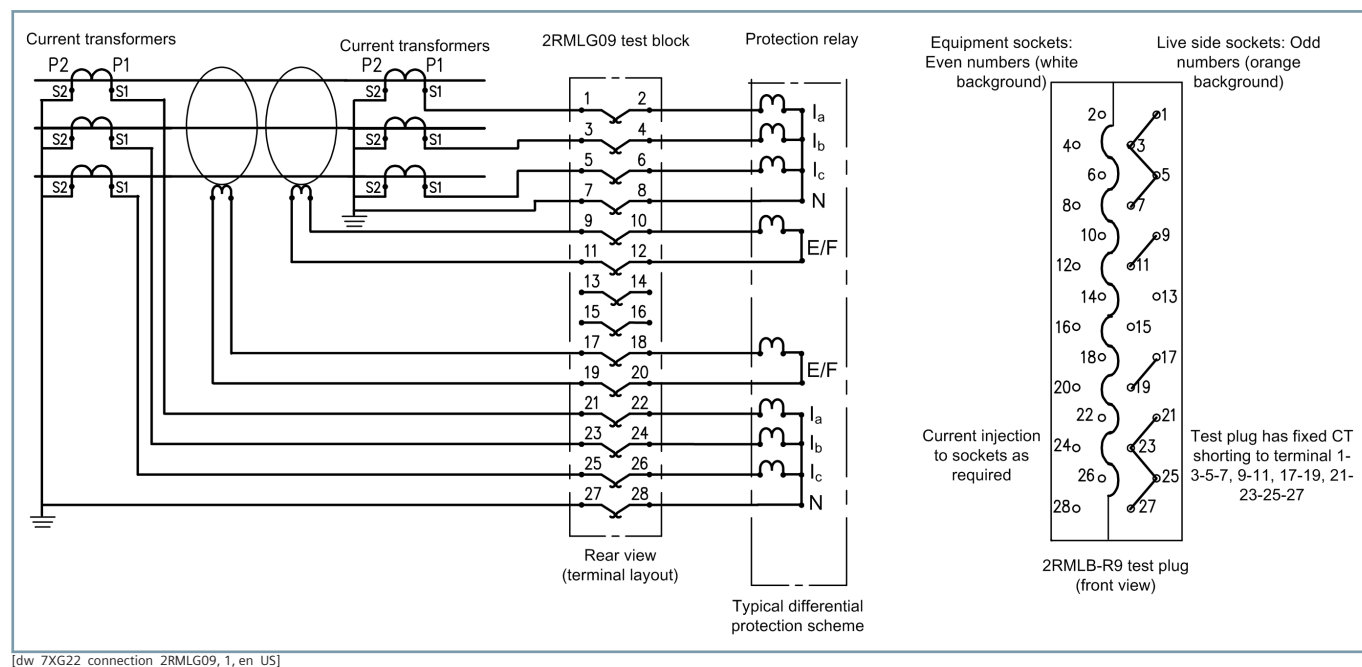


Figure 3.1/4 Typical Application of the 2RMLG09 Test Block and 2RMLB-R9 Test Plug


Dimension Drawings

This section displays the different dimensional views of a Test Block.

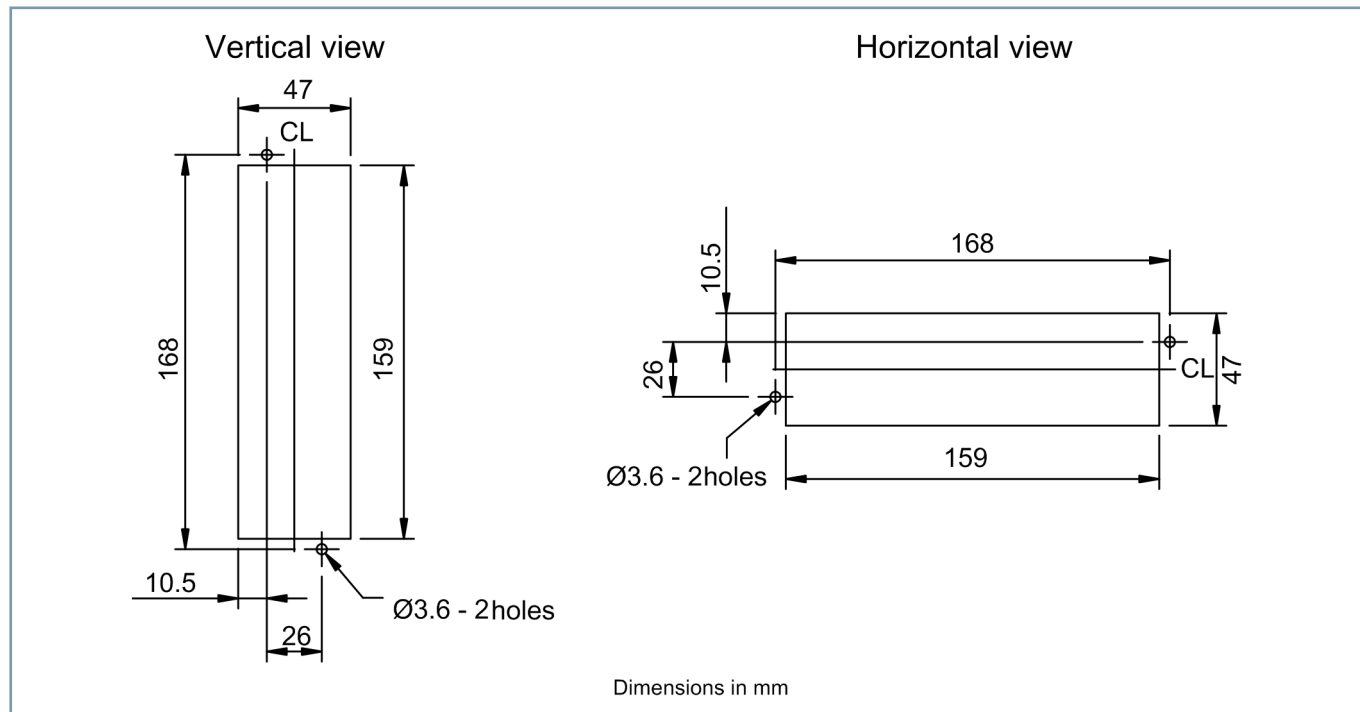


[dw_7XG22_dimension_panelcutout, 1, en_US]

Figure 3.2/1 Panel Cut-out View

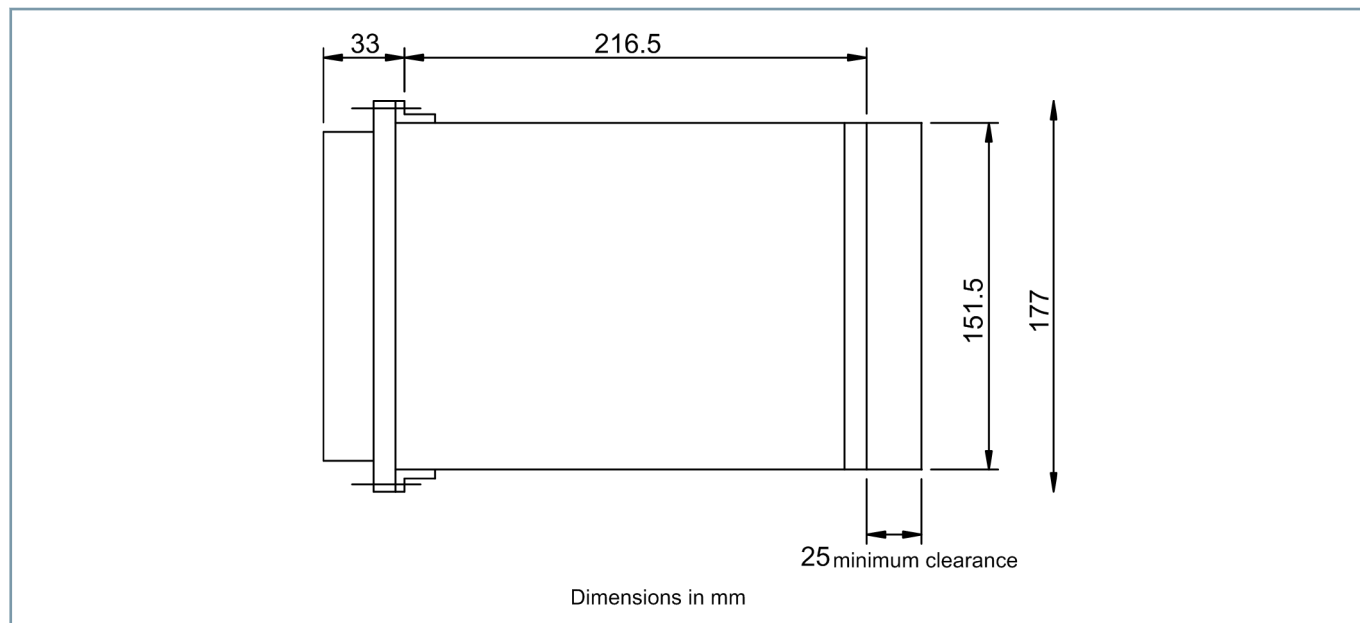

[dw_7XG22_dimension_side, 1, en_US]

Figure 3.2/2 Side View (Vertical) Top View (Horizontal)

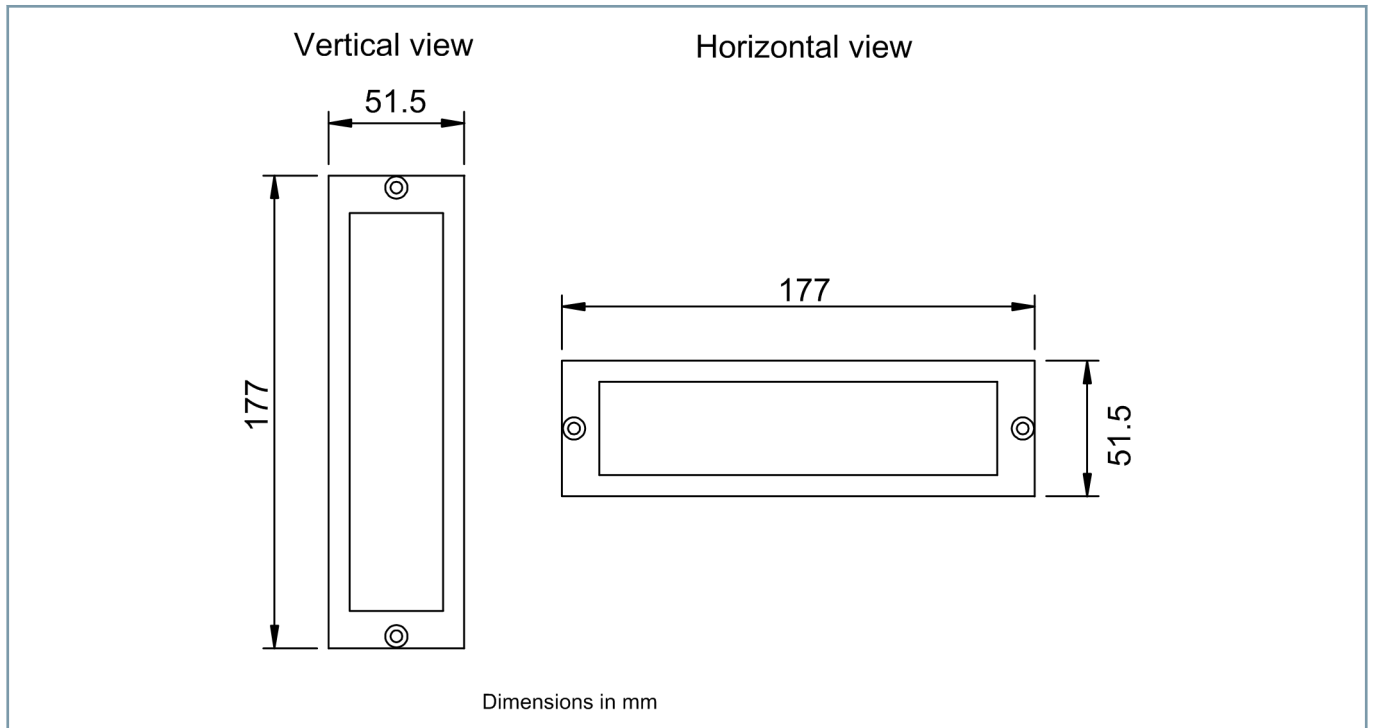

[dw_7XG22_dimension_top, 1, en_US]

Figure 3.2/3 Front View



NOTE

The $\varnothing 3.6$ holes are for M4 thread forming (trilobular) screws. These are supplied as standard and are suitable for use in ferrous/aluminum panels 1.6 mm thick and above. For other panels, holes to be M4 clearance (typically $\varnothing 4.5$) and relays mounted using M4 machine screws, nuts and lockwashers (supplied in panel fixing kit).

Technical Data

Indication of Conformity



This product complies with the directive of the Council of the European Communities on the harmonization of the laws of the Member States relating to electromagnetic compatibility (EMC Directive 2014/30/EU) and concerning electrical equipment for use within specified voltage limits (Low Voltage Directive 2014/35/EU) as well as restriction on usage of hazardous substances in electrical and electronic equipment (RoHS Directive 2011/65/EU).

This conformity has been proved by tests conducted by Siemens AG in accordance of the Council Directive in accordance with the product standard IEC/EN 60255-26 for the EMC directives, and with the standard IEC/EN 60255-27 for the low-voltage directive.

RoHS directive 2011/65/EU is met using the standard EN 50581. The device has been designed and produced for industrial use.

EMC Compliance

89/336/EEC	These products have been classified as electromagnetically benign and are therefore excluded from the European Community EMC Directive. (89/336/EEC)
------------	--

General Technical Data

High Voltage Withstand

IEC 60255-5

2RMLG 01/02/07/08/09	<p>5 kV_{RMS} for 1 minute between all case terminals connected together and the case earth terminal.</p> <p>5 kV_{RMS} for 1 minute between any contact pair and either adjacent alternate contact pair, provided the intermediate contact pair is not used.</p> <p>2 kV_{RMS} for 1 minute between any contact pair and either adjacent contact pair.</p>
2RMLG 01 only	1 kV _{RMS} for 1 minute between terminals 13 and 14 when the cover is removed (e.g. opening the auxiliary supply or trip circuit).
2RMLB-R1	As 2RMLG 01 plus 2 kV _{RMS} for 1 minute between incoming and outgoing contacts when inserted.
2RMLB-R7	As above with the exception of terminals 21, 23, 25, and 27 which are permanently shorted together.

2RMLB-R8	As above with the exception of terminal pairs 1-3, 5-7, 9-11, and 15-17 which are permanently shorted together as pairs.
2RMLB-R9	As above with the exception of terminal pairs 1-3-5-7, 9-11, 17-19, and 21-23-25-27 which are permanently shorted together in groups.

Transient Overvoltage

IEC 60255-27

2RMLG 01/02/07/08/09	<p>5 kV impulse between all case terminals connected together and the case earth terminal.</p> <p>5 kV impulse between any contact pair and either adjacent alternate contact pair, provided the intermediate contact pair is not used.</p> <p>2 kV impulse between any contact pair and either adjacent contact pair.</p>
2RMLG 01 only	2 kV impulse between terminals 13 and 14 when the cover is removed (e.g. opening the auxiliary supply or trip circuit).
2RMLB-R1	As 2RMLG 01 plus 2 kV impulse between incoming and outgoing contacts when inserted.
2RMLB-R7	As above with the exception of terminals 21, 23, 25, and 27 which are permanently shorted together.
2RMLB-R8	As above with the exception of terminal pairs 1-3, 5-7, 9-11, and 15-17 which are permanently shorted together as pairs.
2RMLB-R9	As above with the exception of terminal pairs 1-3-5-7, 9-11, 17-19, and 21-23-25-27 which are permanently shorted together in groups.

3.3

Current and Voltage Withstand

2RMLG 01/02/07/08 2RMLB-R1-R9	<p>All contact circuits rated at 20 A continuously or 400 A for 1 s, AC or DC.</p> <p>AC 300 V/DC 300 V maximum service voltage.</p>
----------------------------------	--

Mechanical Tests

Test	Standard
Vibration	IEC 60255-21-1, Response and endurance, Class 2

Technical Documentation

Technical Data

Climatic Environmental Tests

Temperature

IEC 60068-2-1/IEC 60068-2-2/IEC 60255-6

Ambient operating temperature	-10 °C to +55 °C
Storage temperature (non-operational)	-25 °C to +70 °C

Humidity

IEC 60068-2-3

Damp heat test, steady state	56 days at 93 % RH and +40 °C
------------------------------	-------------------------------

Enclosure Protection (2RMLG only)

IEC 60529

IP50 (dust protected)

3.3

Ordering Information – 7XG222

Product Description	Order Number																		
	1	2	3	4	5	6	7	–	8	9	10	11	12	–	13	14	15	16	
Test Modules (2RMLG)	7	X	G	2	2	2	0	–	□	□	A	0	0	–	0	A	A	0	
<u>Category</u>																			
Ancillary equipment				2															
<u>Ancillary Equipment</u>																			
Modular case test components					2														
<u>Test Component Type</u>																			
Test modules (2RMLG)						2													
<u>Component Type</u>																			
Test module (2RMLG01)									1										
Test module without open circuit facility between terminals 13 and 14 when cover removed (2RMLG02)									2										
Test module with automatic CT shorting (2RMLG07)									3										
Test module with automatic CT shorting (2RMLG08)									4										
Test module with automatic CT shorting (2RMLG09)									5										
<u>Mounting</u>																			
E2 case vertical											A								
E2 case horizontal											B								

Technical Documentation

Ordering Information

Ordering Information – 7XG2241

Product Description				Order Number															
	1	2	3	4	5	6	7	–	8	9	10	11	12	–	13	14	15	16	
Test Plugs (2RMLB-R)	7	X	G	2	2	4	1	–	□	A	A	0	0	–	0	A	A	0	
<u>Category</u>																			
Ancillary equipment				2															
<u>Ancillary Equipment</u>																			
Modular case test components				2															
<u>Test Component Type</u>																			
Test plugs (2RMLB-R)					4	1													
<u>Component Type</u>																			
Multi finger test plug complete with leads (2RMLB-R1)									1										
Multi finger test plug complete with leads and internal shorting links (2RMLB-R7)									3										
Multi finger test plug complete with leads and internal shorting links (2RMLB-R8)									4										
Multi finger test plug complete with leads and internal shorting links (2RMLB-R9)									5										

3.4

Indication of conformity

This product complies with the directive of the Council of the European Communities on harmonization of the laws of the Member States relating to electromagnetic compatibility (EMC Council Directive 2004/108/EC) and concerning electrical equipment for use within specified voltage limits (Low Voltage Directive 2006/95/EC).

This conformity has been proved by tests performed according to the Council Directive in accordance with the generic standards EN 61000-6-2 and EN 61000-6-4 (for EMC directive) and with the standard EN 60255-27 (for Low Voltage Directive) by Siemens AG. The device is designed and manufactured for application in an industrial environment. The product conforms with the international standards of IEC 60255.

Disclaimer of liability

This document has been subjected to rigorous technical review before being published. It is revised at regular intervals, and any modifications and amendments are included in the subsequent issues. The content of this document has been compiled for information purposes only. Although Siemens AG has made best efforts to keep the document as precise and up-to-date as possible, Siemens AG shall not assume any liability for defects and damage which result through use of the information contained herein. This content does not form part of a contract or of business relations; nor does it change these. All obligations of Siemens AG are stated in the relevant contractual agreements. Siemens AG reserves the right to revise this documentation time to time.

Document Edition: 01

Release Status: 11.2019

Version of the products described: V1.00

Copyright

Copyright © Siemens AG 2019. All rights reserved. The disclosure, duplication, distribution and editing of this document, or utilization and communication of the content are not permitted, unless authorized in writing. All rights, including rights created by patent grant or registration of a utility model or a design, are reserved.

Published by and copyright © 2019

Siemens Protection Devices
P.O. Box 8
North Farm Road
Hebburn
Tyne & Wear
NE31 1TZ
United Kingdom
Phone: +44 (0)191 401 7901
Fax: +44 (0)191 401 5575
E-mail: marketing.spdl.gb@siemens.com

For enquires please contact our Customer Support Center
Phone: +49 180/524 7000 (24hrs)
Fax: +49 180/524 2471
E-mail: support.energy@siemens.com
www.siemens.com/protection

Article No: C53000-X7040-C020-1

Subject to changes and errors.

The information given in this document only contains general descriptions and / or performance features which may not always specifically reflect those described or which may undergo modification in the course of further development of the products.

The requested performance features are binding only when they are expressly agreed upon in the concluded contract.