

SIEMENS

Rainproof Combination Metering

Catalog Number

MM0406L1200RGA

MM0406L1200GA

Panelboard Rating:

200 Amps, Max

120/240 Volts —, 1 phase, 3 wire

208Y/120 Volts —, 1 phase, 3 wire

(Derived from 3 phase - 4 wire system)

Meter Socket Rating:

200 Amps Continuous

Suitable Only For Use As

Service Equipment

Only single pole circuit breakers rated greater than 30 amps may be used to comply with Lighting and Appliance

Panelboard requirements.

For Overhead or Underground

Service

Use 60/75° C Copper or

Aluminum Conductor in


Terminals A, B, N1, N2, N3 and N4.

Terminal	Wire Size	Torque
A, B	250 kcmil - #6	275 lb in
N1	#2 - #3	50 lb in
	#4 - #6	45 lb in
	#8	40 lb in
	#10 - #14	35 lb in
N2	250 kcmil - #6	275 lb in
N3	250 kcmil - #4	275 lb in
N4	1/0 - #14	120 lb in
Branch breaker terminals	See Markings on breaker	
Neutral Bar	#10 - 14 Cu/ #10 - 12 Al	20 lb in
	#8	25 lb in
	#6	35 lb in
	#4	35 lb in

Short Circuit Current Rating (Without Meter not included in short circuit rating)

This panelboard has a maximum short circuit rating of 22,000 RMS symmetrical amperes, 120/240 V—. The actual rating is equal to the lowest rating of any breaker installed. Any circuit breaker replaced or added in this panelboard must be manufactured by Siemens or Murray and must be the types listed below.

Enclosure
Type 3R

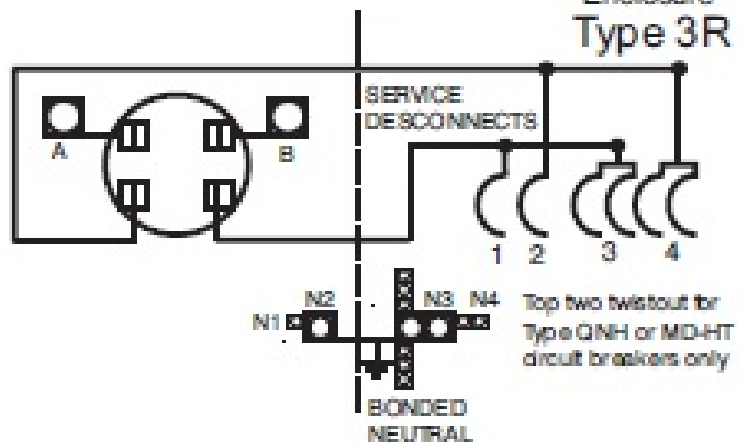

- 1 _____
- 2 _____
- 3 _____
- 4 _____

Accessories

Filler Plate Cat. No. QF3

If hub is required, the catalog numbers listed below may be used on this enclosure:

Trade size (in)	Catalog number
1 1/2"	EC38597-2
1 1/2"	EC38598-2
2"	EC38599-2
2 1/2"	EC38600-2

General Information:

Remove twistouts from deadfront only where breakers will be installed. All openings must be filled with breakers or filler plates.

Circuit breaker overload trip position is indicated by handle position midway between ON and OFF. To reset, move handle to OFF position then turn ON. For installation in accordance with all local Electrical codes and/or the National Electrical Code.®

Assembled in Mexico

Siemens Industry, Inc.
Norcross, Georgia U.S.A.

J2

4099990 Rev C

MANUFACTURED DATE:

Important

This equipment has been designed for use only with or Siemens Type QP, QT, QPF, QPH, QE, QEH, QAF, QAFH, QN, QNH, or Murray Type, MPT, MP-GT, MP-HGT, MP-HT, MH-T, MP-AT, MP-HAT, MPET, MP-HET, MD-HT or MD-T circuit breakers. Use of other circuit breakers in this equipment will void the warranty.

Do not spray or allow any petroleum based chemicals, solvents, or paint to contact interior components.

®The National Electrical Code is a recognized trademark of the National Fire Protection Association.