

Main Contacts Replacement

3TS9133-048K

3TS9134-048K



Spare Contacts

Spare Contacts for 3TS 33/34 4 Pole contactors.

A. Technical Data

Main Contacts as per Rating in 3TS33-33 4Pole Contactor.

Type	Rating AC-1
3TS9133-048K	35A AC-1
3TS9134-048K	40A AC-1

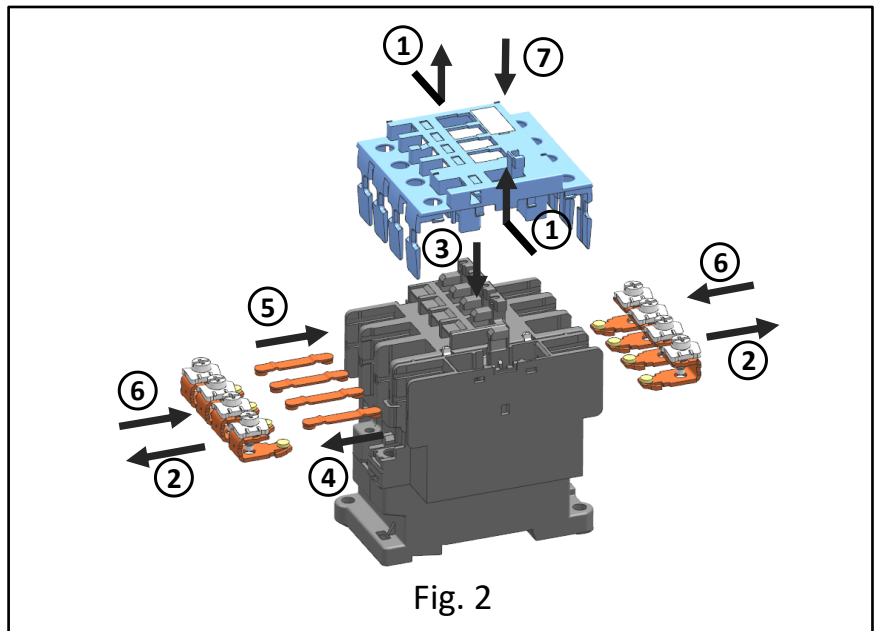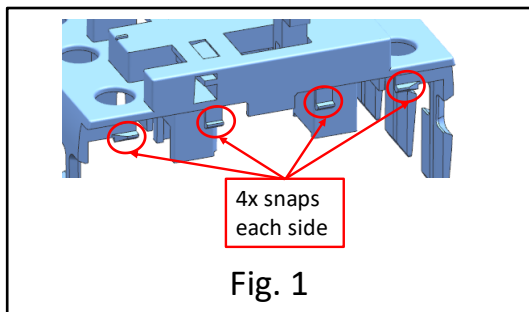

B. Installation

- Ensure the Contactor is switched OFF & main connection are removed.
- Disengage the Snaps by pressing the side faces of Cover (Fig.1) & Pulling the Cover out. (Fig.2 – Step 1)
- Remove Fixed Contacts from all Poles. (Fig.2 – Step 2)
- Push the Contact Carrier little inside & Pull out the Moving Contacts from the Carrier of all Poles using forceps. (Fig. 2 – Step 3 & 4)
- Similarly, insert new Moving Contacts using forceps & Fixed Contacts. (Fig. 2 – Step 5 & 6)
- Ensure all components fitment are Ok.
- Push the Cover inside the Contactor. (Fig. 2 – Step 7)

Disposal

Siemens Products are environment friendly, which predominantly consist of recyclable material:

For disposal we recommend disassembling and separation into following materials:

METALS : Segregate into Ferrous & Non Ferrous types for recycling through authorized dealer.

PLASTICS : Segregate as per material type for recycling through authorized dealer. Because of the long lifetime of Siemens products the disposal guidelines may be replaced by other national regulations when taking the product out of service. The local customer care service is available at any time to answer disposal-related questions.



WARNING:
HAZADOUS VOLTAGE CAN CAUSE ELECTRIC SHOCK AND BURNS.
DISCONNECT POWER BEFORE PROCEEDING WITH ANY WORK ON THIS EQUIPMENT