

Outdoor Combination Metering

Catalog Number

JC0404L1400RLM

Enclosure

Type 3R

DEVICE RATING: 400 AMPS MAXIMUM
120/240 VOLTS~ 1 PHASE, 3 WIRE
208Y/120 VOLTS~ 1 PHASE, 3 WIRE
WITH 5TH JAW INSTALLED
(DERIVED FROM 3 PHASE - 4 WIRE SYSTEM)

METER SOCKET: 4 JAW; LEVER OPERATED
BYPASS WITH JAW TENSION RELEASE.
RATING: 400 AMPS (320 AMPS CONTINUOUS)

FOR OVERHEAD AND UNDERGROUND
SERVICE. SURFACE MOUNT.

FOR INSTALLATION BY A QUALIFIED PERSON
IN ACCORDANCE WITH ALL LOCAL
ELECTRICAL CODES AND/OR THE NATIONAL
ELECTRICAL CODE.®


**SUITABLE ONLY FOR USE AS
SERVICE EQUIPMENT.**

CAUTION: CIRCUIT MAY BE LIVE WITH
METER REMOVED.

TERMINALS SUITABLE FOR USE WITH
60/75°C, **AL/CU** INSULATED WIRE.

REFER TO BRANCH BREAKER MARKINGS
FOR WIRE SIZE, RATING AND TORQUE.

TERMINAL RANGES kcmil OR AWG; CU/AL	TORQUE LB.-IN.
□ (1)600kcmil-#4 OR (2)350kcmil-1/0	500
□ (1) 500kcmil-3/0 OR (2) 250kcmil-3/0	450
⊞ (1)2/0-#12	50
⊠ (1)250kcmil-4	250
⊞ (1)2/0-#6	275

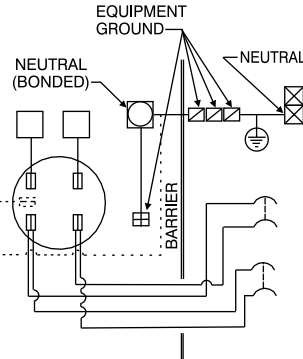

ACCESSORIES

FILLER PLATE ECQF3
5TH JAW SHIELD . . . H35815-2

ORDER HUBS FROM "HD" SERIES

COVERPLATE EC56933S
3" HUB EC56856
3 1/2" HUB EC56857
4" HUB EC56858

HARDWARE TIGHTENING TORQUES:

3/8" NUTS 250-300 LB.-IN.

49310755 Siemens Industry, Inc. Norcross, Georgia U.S.A. **D** 4099821 Rev.G

© 2009 Copyright Siemens Industry, Inc.


SHORT CIRCUIT CURRENT RATING

(WATTHOUR METER NOT INCLUDED IN SHORT CIRCUIT CURRENT RATING)
THIS PANELBOARD HAS A MAXIMUM SHORT CIRCUIT RATING OF 65,000 RMS
SYMMETRICAL AMPERES, 120/240 V~ MAXIMUM. THE ACTUAL RATING IS
EQUAL TO THE LOWEST INTERRUPTING RATING OF ANY INSTALLED CIRCUIT
BREAKER. USE ONLY SIEMENS (MURRAY BRAND) TYPE MP-T, MP-HT, MP-MT,
MD-TR, MD-HTR, OR MD-MTR CIRCUIT BREAKERS. ANY CIRCUIT BREAKER
INSTALLED, REPLACED, OR ADDED IN THIS PANELBOARD MUST BE ONE OF
THESE TYPES.

WARNING: THIS DEVICE HAS BEEN DESIGNED FOR USE ONLY WITH THOSE
CIRCUIT BREAKERS AS LISTED ABOVE. THE USE OF OTHER CIRCUIT
BREAKERS COULD RESULT IN PROPERTY DAMAGE OR PERSONAL INJURY AND
WILL VOID THE WARRANTY.

GENERAL INFORMATION:

REMOVE TWISTOUTS FROM TRIM ONLY WHERE BREAKERS WILL BE INSTALLED.
ALL OPENINGS MUST BE FILLED WITH BREAKERS OR FILLER PLATES. CIRCUIT
BREAKER OVERLOAD TRIP POSITION IS INDICATED BY HANDLE POSITION
MIDWAY BETWEEN "ON" AND "OFF." TO RESET, MOVE HANDLE TO OFF
POSITION THEN TURN ON.

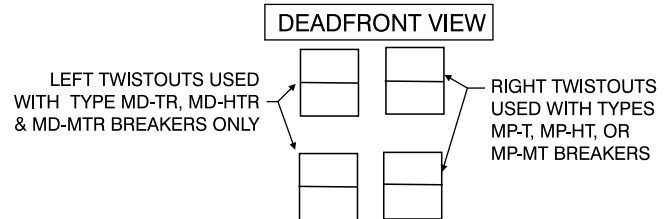

IMPORTANT: DO NOT ALLOW PETROLEUM BASED (HYDROCARBON)
SPRAYS, CHEMICALS, SOLVENTS OR ANY PAINT TO CONTACT INTERIOR
COMPONENTS. PETROLEUM BASED CHEMICALS CAN CAUSE DEGRADATION
OF ELECTRICAL INSULATING MATERIALS.

49310781

4099822 Rev.G

Murray Electrical Products

Siemens Industry, Inc.
Building Technologies Division
Norcross, Georgia U.S.A.

D

MURRAY

© The National Electrical Code is a registered trademark of the National Fire Protection Association.
© 2009 Copyright Siemens Industry, Inc.