


Type
HB1-C

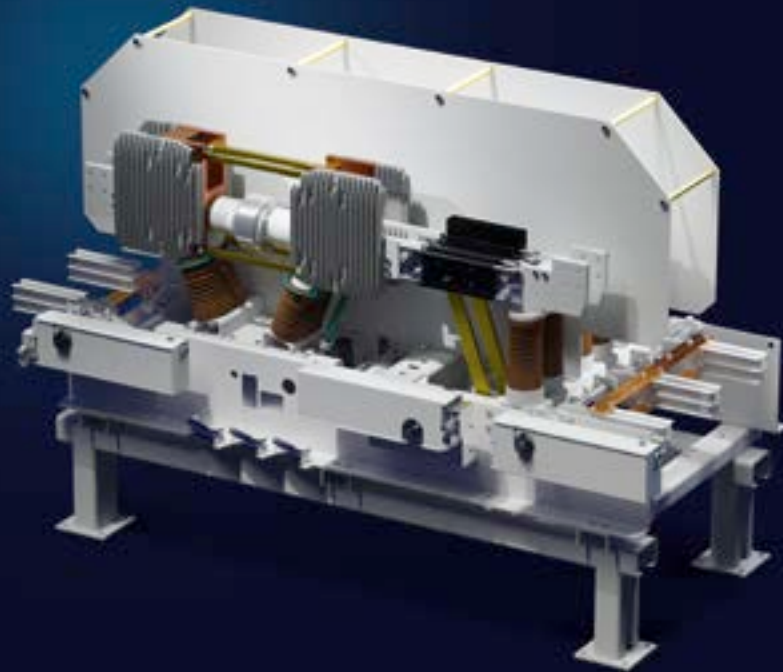

Generator Circuit-Breaker System **Type HB1-C**


Without enclosure, with integrated main-disconnector and earthing switches
[siemens.com/hb1-c](https://www.siemens.com/hb1-c)

HB1-Compact is the all-around solution for your retrofit application and new projects


HB1-C provides an unique generator circuit breaker system to answer even the most challenging constraints. It offers one of the highest level of customization: The HB1-C can be mounted either vertically or horizontally, its design (I-shape or L-shape) can be adjusted to match perfectly the existing busbar connection points. Optionally, the generator circuit-breaker and its integrated main-disconnector can be fitted with earthing switches on generator side and/or on transformer side.

Features

- Up to 72 kA breaking capabilities
- Up to 6,700 A rated nominal current
- Up to 24 kV rated nominal voltage
- Vertical and horizontal installation
- L-shape and I-shape design
- Can be delivered with integrated earthing switches on generator side and/or transformer side
- Module assembly with integrated main-disconnector and earthing switches as defined in the IEC/IEEE 62271-37-013:2021

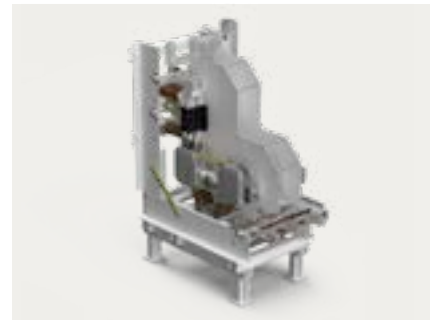

HB1-C in L-shape design

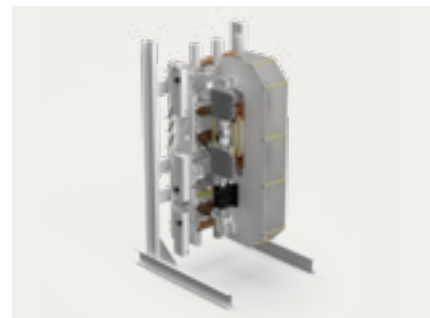

HB1-C in vertical and I-shape configuration

SIEMENS

Benefits

- Up to 75% OPEX savings due to vacuum technology performance
- Maintenance-free vacuum technology with up to 10,000 CO operating cycles at full nominal rated current
- High reliability due to full-spring operating mechanism stated to be the most reliable* way to operate a GCB with lifespan up to 10,000 CO operation
- Equipped with sealed-for-lifetime** vacuum interrupter
- Its compact dimension enables replacement of single function equipment (GCB) to multiple function system with higher flexibility and personal safety
- All components and functions are type tested and routine tested together. It allows the HB1-C to deliver a native interlocking system with high reliability level

Technical data

Rated values and related capabilities	IEC/IEEE 62271-37-013 standard	Units	Generator circuit-breaker (up to)	Main-disconnector (up to)	Earthing switch (up to)
Rated maximum voltage	5.1	kV	24	24	24
Power frequency	5.2	Hz	50/60	50/60	50/60
Rated continuous current with natural cooling	5.3	A	6,700	6,700	
Rated dielectric strength (withstand voltage)	5.4.2 C37.013a, Table 4				
1. Power frequency (dry)		kV	60	60, 70	60
2. Full-wave impulse (1.2 x 50)		kV peak	125	125, 145	125
Rated short-circuit duty cycle	5.5		CO-30 min-CO		
Rated short-circuit current (up to)					
1. System source (100% I)	5.8.1	kA sym	72		
• DC component		%	70		
• Asymmetrical (total)		kA rms	101		
2. Generator source	5.8.2.3	kA sym	36, 25		
• DC component		%	110, 130		
• Asymmetrical (total)		kA rms	67, 52		
Close and latch capability (274% I)		kA peak	197		
Short-time current carrying capability (100% I)	5.8.2.7	kA sym	72	72	72
Short-time current duration	5.8.2.7	s	3	3	1
Out-of-phase current switching capability	5.12	kA	36		
Mechanical endurance		operations	10,000	10,000	2,000
Continuous current switching endurance		operations	10,000		

* Most reliable operating mechanism as per final report number A3-206 from the CIGRE 2012 General Report SC A3.

** R. Renz, D. Gentsch, P. Slade, H. Fink, M. Schlaug, "Vacuum Interrupters – Sealed for Life", 19th Int. Conf. on Electr. Distr. (CIRED), Paper 0156, 21 – 24 May 2007

Published by Siemens AG

Smart Infrastructure
Electrification & Automation
Mozartstrasse 31c
91052 Erlangen
Germany

For the U.S. published by Siemens Industry Inc.

100 Technology Drive
Alpharetta, GA 30005
United States

Article No. SIEA-B10038-00-7600
TH S24-220283 BR 1022
© Siemens 2022

[siemens.com/hb1-c](https://www.siemens.com/hb1-c)

Subject to changes and errors.

The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or product names of Siemens AG or other companies whose use by third parties for their own purposes could violate the rights of the owners.

SIEMENS