

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

General data

Overview



SIRIUS M200D AS-i Basic motor starters with manual on-site operation

The intelligent, highly flexible SIRIUS M200D motor starters for distributed configurations are designed to start, monitor and protect motors and loads up to 5.5 kW.

The M200D motor starters are available in four versions:

M200D AS-i Basic	M200D AS-i Standard	M200D PROFIBUS	M200D PROFINET
Motor control with AS-i Communication		PROFIBUS	PROFINET
Mechanical or electronic switching	✓	✓	✓
Electronic switching with soft starter functionality	–	✓	✓

✓ Function is available

– Function is not available


Basic functionality

All M200D motor starter versions have the following functions:

- Available as direct-on-line and reversing starters in a rugged design
- Electromechanical or solid-state switching version
- Little variance – only 2 device versions up to 5.5 kW thanks to wide range setting
- All versions have the same enclosure dimensions
- Degree of protection IP65
- Quick and failsafe wiring of system and motor cables using ISO 23570 plug-in connector technology (Q4/2 and Q8/0)
- Robust and widely used M12 connection method for digital inputs and outputs
- Integrated feeder connector monitoring
- Full motor protection through overload protection and a temperature sensor (PTC, TC)
- Short-circuit and overload protection integrated
- Integrated repair switch lockable with 3 locks (multi-level service)
- Uniform wiring to the G110D/G120D frequency converters and to the ET200pro distributed peripherals system
- Extensive diagnostics concept using LEDs
- Optional integrated manual on-site controller with key-operated switch (ordering option)
- Optionally available brake actuation with voltages from 180 V DC (no rectifier needed in motor) or 230/400 V AC (order versions)

Benefits

Advantages through energy efficiency

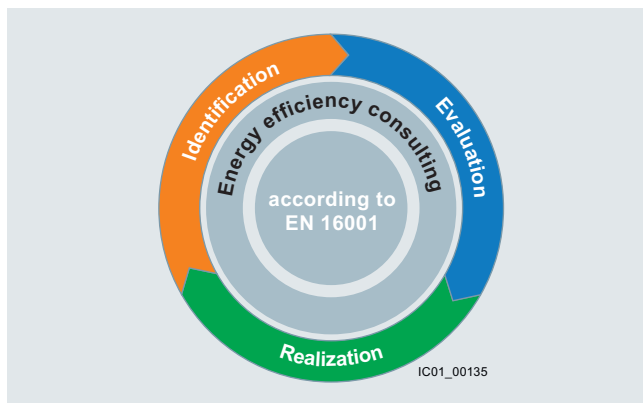

Overview of the energy management process

We offer you a unique portfolio for industrial energy management, using an energy management system that helps to optimally define your energy needs. We split up our industrial energy management into three phases – Identification, Evaluation and Realization – and we support you with the appropriate hardware and software solutions in every process phase.

The innovative products of the SIRIUS industrial controls portfolio can also make a substantial contribution to a plant's energy efficiency (see www.siemens.com/sirius/energysaving).

M200D motor starters contribute to energy efficiency as follows:

- Energy management
Provision of energy data (current) by bus to higher-level systems using PROFlenergy (see "PROFINET M200D Motor Starters", page 9/40)
- Elimination of energy consumption in dead times through disconnection using PROFlenergy (see "PROFINET M200D Motor Starters", page 9/40)
- Current management
With solid-state soft starters, avoidance of current peaks and therefore reduction of the load on the grid and the mechanical system
- Technology-reduced inherent power loss as speed-controlled drive systems
- Solid-state modules equipped with soft start technology with bypass contactor, resulting in lower power losses than with conventional soft starters after start-up

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

General data

Product advantages

M200D motor starters provide the following advantages for customers:

- High plant availability through plug-in capability of the main circuit, communication and IOs – relevant for installing and replacing devices
- Cabinet-free construction and near-motor installation thanks to the high degree of protection IP65
- The motor starters record the actual current flow for the parameterizable electronic motor overload protection. Reliable messages concerning the overshooting or undershooting of setpoint values for comprehensive motor protection. All motor protection functions can be defined by simple parameterization
- Low stock levels and low order costs through a wide setting range for the current or a wide setting range for the electronic motor protection of 1:10 (only 2 device versions up to 5.5 kW)
- The integrated wide range for the current enables a single device to cover numerous standard motors of different sizes
- Comprehensive offering of accessories, including ready-assembled cables
- The M200D motor starters can be installed with a few manual steps. The integrated plug-in technology enables far lower wiring outlay: Preassembled cables can be plugged directly onto the motor starter module
- Easy and user-friendly installation because all versions have the same enclosure dimensions
- Fast and user-friendly commissioning using an optional manual on-site controller
- Increase of process speed through integrated functions such as "Quick-Stop" and "Disable Quick-Stop", e.g. at points and crossings
- Optional manual on-site controller with momentary-contact and latching operation for easier start-up and easier service

Application

The high degree of protection IP65 makes the M200D motor starters suitable in particular for use on extensive conveying systems such as are found in mail sorting centers, airports, automotive factories and the packing industry.

For simple operating mechanism tasks, particularly in conveyor applications, the new SINAMICS G110D frequency converter series with a performance range from 0.75 kW to 7.5 kW and degree of protection IP65 is the ideal partner for the M200D motor starters.

The SINAMICS G110D frequency converters permit continuous speed control of three-phase asynchronous motors and meet the requirements of conveyor applications with frequency control (for more information see [Catalog D 11.1 "SINAMICS G110, G120 ..."](#)).

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

M200D motor starters for AS-Interface

Overview

For motor control using AS-Interface there are the following M200D motor starter versions: SIRIUS M200D AS-i Basic and SIRIUS M200D AS-i Standard (basic functionality [see page 9/31 "SIRIUS M200D Motor Starters" → "General Data" → "Overview"](#)).

SIRIUS M200D AS-i Basic

Functionality

- Easy and fast on-site start-up through parameterization of local setting knobs (DIP switches) and rotary coding switches for adjusting the rated operational current. The rotary coding switch has an OFF position for deactivating the overload protection with the help of the thermal motor model when using a temperature sensor.

Communications

- AS-i communication with A/B addressing according to Spec V2.1
- The AS-i bus is connected cost-effectively using an M12 connection on the device. Of the 4 digital inputs, 2 are contained in the process image and can therefore be used in the PLC program. The other 2 inputs are locally effective and permanently assigned with functions.
- The LEDs can provide comprehensive diagnostics of the device on the spot. In addition to diagnostics using the PAE process image, the device can create up to 15 different diagnostic signals per slave. The message with the highest priority can be read out through the AS-i communication. This is yet another new development which distinguishes the M200D AS-i Basic motor starter from the rest of the market and adds innovative technology, maximum availability and transparency to the system.

SIRIUS M200D AS-i Standard

The intelligent, highly flexible M200D AS-i Standard motor starters in A/B technology are designed to start and protect motors and loads up to 5.5 kW. They are available in direct-on-line or reversing starter versions, in a mechanical version and also an electronic version (the latter with soft start function).

The M200D AS-i Standard motor starter is the most functional member of the SIRIUS motor starter family in the high degree of protection IP65 for AS-i Communication. Consistency with other products of the SIRIUS M200D motor starter range and with the frequency converter and ET200pro I/O system is assured.

Functionality

- AS-i communication with A/B addressing according to Spec 3.0
- Electronic version also with soft start function
- AS-i slave profile 7AE/7A5 with process image 6E/4A
- Full TIA integration: All digital inputs and outputs exist in the cyclic process image and are visible through AS-i, providing maximum flexibility and best adaptability to the application.
- Additionally expanded diagnostics using data record through AS-i bus
- Complete plant monitoring using statistics data record and current value monitoring by means of data records
- Parameterization through AS-i bus with the help of data records or an expanded process image from the user program
- Control of the motor starter using a command data record from the user program
- Flexible assignment of the digital inputs and outputs with all available assignable input actions
- Parameterization using Motor Starter ES at the local interface (ordering option for start-up software)
- Diagnostics with the help of Motor Starter ES (ordering option for start-up software)

Mounting and installation

The M200D motor starters can be installed with a few manual steps. The integrated plug-in technology enables far lower wiring outlay. Connecting cables can be plugged directly onto the motor starter module. Swapping of the connecting wires and malfunctions within the plant are prevented by preassembled cables. The AS-i bus is connected cost-effectively using an M12 connection on the device. All versions have identical enclosure dimensions for easier system design and conversion.

Parameterization and configuration

The particularly robust M200D AS-i Standard motor starter is characterized by numerous functions which can be flexibly parameterized. It enables highly flexible parameterization through the AS-i bus using data records from the user program as well as user-friendly local parameterization using the Motor Starter ES start-up software through the local point-to-point interface.

Functions can be flexibly assigned to the digital inputs and outputs, adapting them to all possible conveyor applications. All motor protection functions, limit values and reactions can be defined by parameterization. The AS-i Standard is unique. In its 6E/4A process image the motor starter sends all 4 digital inputs and the digital output via the process image to the PLC in cyclic mode. System configuration and system documentation are facilitated not least by a number of CAX data.

Operation

The new motor starter generation is characterized by high functionality, maximum flexibility and the highest level of automation.

All digital inputs and outputs exist in the cyclic process image. All limit values for monitoring functions and their reactions are parameterizable and therefore adaptable to the application. The motor starters record the actual current flow. Evaluating the current of the parameterizable solid-state overload protection increases the availability of the drives, as do reliable messages concerning the overshooting or undershooting of setpoint values.

Diagnostics and maintenance

The M200D sets new standards for diagnostics. In addition to diagnostics using the PAE process image and diagnostics by "parameter echo" (up to 15 different diagnostic signals per slave can be read out via AS-i Communication), the possibility of reading out diagnostic data records is unique on the market.

The AS-i Standard is recommended in particular for expansive and highly automated system components because the possibility of monitoring devices and systems with data records (statistical data, measured values and device diagnostics) provides an in-depth view of the plant from the control room, guaranteeing the monitoring process and increasing plant availability.

The integrated maintenance timer can be used to implement preventative maintenance and avoid plant downtimes through look-ahead servicing.

Local on-site control of a drive is possible using the ordering option with integrated manual operation. This is yet another new development which distinguishes the M200D AS-i Standard motor starter from the rest of the market and adds innovative technology, maximum availability and transparency to the plant.

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

M200D motor starters for AS-Interface



SIRIUS M200D
AS-i Basic

SIRIUS M200D
AS-i Standard

Device functions (firmware features)

Slave on the bus

Fieldbus	✓ AS-i	
Slave type	✓ A/B acc. to Spec 2.1	✓ A/B acc. to Spec 3.0
Profile	✓ 7.A.E	✓ 7.A.E & 7.A.5
Number of assigned AS-i addresses on the bus	✓ 1	✓ 2
Number of stations per AS-i master	✓ Maximum 62 devices	✓ Maximum 31 devices
AS-i master profile	✓ M3 and higher	✓ M4 and higher

Parameterization

DIP switches	✓	--
Potentiometer for rated operational current	✓	--
ES Motor Starter	--	✓
Data records through AS-i	--	✓

Diagnostics

Diagnostics through parameter channel	✓	
Acyclic through data records	--	✓
Expanded process image PAE 4 bytes	--	✓

Process image

Process image	✓ 4E/3A	✓ 6E/4A
---------------	---------	---------

Data channels

Local optical interface (manual on-site)	✓	
AS-i bus	✓	
Motor Starter ES through local interface	--	✓
Motor Starter ES through bus	--	

Data records¹⁾ (acyclic)

Parameterization	--	✓
Diagnostics	--	✓
Measured values	--	✓
Statistics	--	✓
Commands	--	✓

Inputs

Number	✓ 4	
• Of these in the process image	✓ 2 through AS-i	✓ 4 through AS-i
Input action	✓ Permanently assigned functions, see manual	✓ Parameterizable: Flexible
Quick-Stop	✓ Permanent function: latching, edge-triggered	✓ Parameterizable function: latching (edge-triggered), non-latching (level-triggered)

Outputs

Number	✓ 1	
Output action	✓ Permanent function: assigned with group fault	✓ Parameterizable: Function, see manual

Brake output

180 V DC/ 230/400 V AC / none	✓	
-------------------------------	---	--

Motor protection

Overload protection	✓ Electronic, wide range 1:10	
Short-circuit protection	✓	
Full motor protection	✓	
Temperature sensor	✓ Parameterizable using DIP switches: PTC or Thermoclick or deactivated	✓ Parameterizable using ES Motor Starter, data record: PTC or Thermoclick or deactivated

✓ Function is available

-- Function not available

¹⁾ The data records are a reduced selection compared with PROFIBUS / PROFINET.

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

M200D motor starters for AS-Interface

SIRIUS M200D
AS-i Basic
SIRIUS M200D
AS-i Standard
Device functions (firmware features)
Device functions

	SIRIUS M200D AS-i Basic	SIRIUS M200D AS-i Standard
Repair switch	✓	
Current limit monitoring bottom	--	✓ Parameterizable
Current limit monitoring top	--	✓ Parameterizable
Zero current detection	✓ Permanent function: disconnection, less than 18.75 % of the rated operational current I_e	✓ Parameterizable
Blocking current	✓ Permanent function: Starting up of the motor: tripping limit at 800 % of the rated operational current I_e for 10 s Active operation: Threshold for tripping "blocking current" at 400 % of the rated operational current I_e	✓ Parameterizable
Unbalance	✓ Permanent function: at 30 % of the rated operational current I_e (only mechanical MS)	✓ Parameterizable
Load type	✓ Permanent function: 3-phase	✓ Parameterizable: 1- and 3-phase
Shutdown class	✓ Parameterizable using DIP switches: CLASS 10/deactivated	Parameterizable using ES Motor Starter, data record: CLASS 5, 10, 15, 20
Protection against voltage failure	✓	✓ Parameterizable: Activated/deactivated
Soft starter control functions		
Soft start function	--	✓ Only electronic version
Bypass function	--	✓ Only electronic version

- ✓ Function is available
- Function not available

Application

The M200D AS-i standard is particularly suitable for highly automated applications in conveyor systems, which require that devices and systems be monitored to prevent or limit plant downtime. The option of planning the functions of the motor starter or its interfaces also makes fine-adjustment to the function of the motor starter in the application possible and hence, provides for extreme flexibility.

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

M200D motor starters for AS-Interface

Technical specifications

Type	M200D motor starters				
	AS-i Basic electromechanical switching	AS-i Basic electronic switching	AS-i Standard electromechanical switching	AS-i Standard electronic switching	
Technology designation ¹⁾	DSte / RSte	sDSte / sRSte	DSte / RSte	sDSSSte / sRSSte	
Mechanics and environment					
Mounting dimensions (W x H x D)	mm	294 x 215 x 159			
Permissible ambient temperature	°C	-25 ... +55			
• During operation	°C	-40 ... +70			
• During storage					
Weight	g	2 880 / 3 130	3 220 / 3 420	2 880 / 3 130	3 220 / 3 420
Permissible mounting positions		Vertical, horizontal, lying			
Vibration resistance acc. to IEC 60068 Part 2-6	g	2			
Shock resistance		12/11 half-sine			
• Acc. to IEC 60068 Part 2-27	g/ms	9.8/5 or 5.9/10			
• Without influencing the contact position	g/ms				
Degree of protection according to IEC 529		IP65			
Installation altitude		No derating			
• Up to 1 000 m		1 % per 100 m			
• Up to 2 000 m					
Cooling		Convection			
Protection class IEC 536 (VDE 0106-1)		1			
Electrical specifications					
Control circuits					
Operational voltage U_{AS-i}	V DC	26.5 ... 31.6			
Control supply voltage U_{aux}	V DC	20.4 ... 28.8			
Power consumption from AS-i (incl. 200 mA sensor supply)	mA	< 300			
Power consumption from U_{aux} (without digital output)					
• Max.	mA	155	15 (direct-on-line)/175 (reversing)	155	15 (direct-on-line)/175 (reversing)
• Typ.	mA	75	10 (direct-on-line)/75 (reversing)	75	10 (direct-on-line)/75 (reversing)
Main circuit					
Maximum power of induction motors at 400 V AC	kW	5.5	4	5.5	5.5
Rated operational voltage U_e					
• Approval acc. to EN 60947-1	V AC	400 (50/60 Hz)			
• Approval acc. to UL and CSA	V AC	600 (50/60 Hz)			
• Rated operational current range	A	0.15 ... 2 / 1.5 ... 12	--	0.15 ... 2 / 1.5 ... 12	--
• Rated operational current range for soft start	A	--			0.15 ... 2 / 1.5 ... 12
• Rated operational current range for direct start	A	--	0.15 ... 2 / 1.5 ... 9	--	0.15 ... 2 / 1.5 ... 9
Rated operational current for starters I_e at 400 V AC					
• 400 V at AC-1 / 2 / 3	A	12	--	12	--
• 500 V at AC-1 / 2 / 3	A	9	--	9	--
• 400 V at AC-4	A	4	--	4	--
• 400 V at AC-53a	A	--	9	--	12 for soft starting 9 for direct-in-line starting
Mechanical endurance of contactor	Operating cycles	30 million	--	30 million	--
Trip class		CLASS 10		CLASS 5, 10, 15, 20	
Type of coordination acc. to IEC 60947-4-1		1 (2 for device version 2A)	1	1 (2 for device version 2A)	1
Reliable switching frequency		See manual			
Rated ultimate short-circuit breaking capacity I_q					
• At 400 V AC	kA	50		50	
• At 500 V AC	kA	50 ²⁾	20 ²⁾	50	20 ²⁾
Short-circuit protection		Integrated, 2 x 13 I_e = 26 A			
• At $I_{e,max}$ = 2 A		Integrated, 2 x 13 I_e = 208 A			
• At $I_{e,max}$ = 9 / 12 A					
Brake version (option)					
Designation		400 V / 230 V AC	180 V DC	400 V / 230 V AC	180 V DC
Operational voltage	V	400 / 230 AC	180 DC	400 / 230 AC	180 DC
Uninterrupted current	A	< 0.5	< 0.8	< 0.5	< 0.8
Short-circuit protection		Yes, 1 A melting fuse			

¹⁾ DS direct-on-line starter
 RS reversing starter
 DSS .. direct-on-line soft starter
 RSS .. reversing soft starter
 te full motor protection (thermal + electronic)
 s electronic switching with semiconductor.

²⁾ Only systems with grounded neutral point permitted

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

M200D motor starters for AS-Interface
M200D Basic motor starters

Selection and ordering data



M200D AS-i Basic without manual on-site operation



M200D AS-i Basic with manual on-site operation

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
---------	----	-----------	--------------	-------------------	-----	----

Electromechanical starters (with integrated contactor)

Setting range for rated operational current / A	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
<ul style="list-style-type: none"> 0.15 ... 2 1.5 ... 12 	C	3RK1 315-6□S41-□AA□		1	1 unit	42D
Direct-on-line starters/reversing starters						
<ul style="list-style-type: none"> Direct-on-line starters Reversing starters Direct-on-line starters with manual local operation Reversing starters with manual local operation 						
Brake actuation						
<ul style="list-style-type: none"> Without brake actuation Brake actuation (230/400 V AC) Brake actuation (180 V DC) 						

Electronic starters (with thyristors)

Setting range for rated operational current / A	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
<ul style="list-style-type: none"> 0.15 ... 2 1.5 ... 9 	C	3RK1 315-6□S71-□AA□		1	1 unit	42D
Direct-on-line starters/reversing starters						
<ul style="list-style-type: none"> Direct-on-line starters Reversing starters Direct-on-line starters with manual local operation Reversing starters with manual local operation 						
Brake actuation						
<ul style="list-style-type: none"> Without brake actuation Brake actuation (230/400 V AC) Brake actuation (180 V DC) 						

x = Additional price



Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

M200D motor starters for AS-Interface M200D Standard motor starters

Selection and ordering data



M200D AS-i Standard without manual on-site operation



M200D AS-i Standard with manual on-site operation

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
---------	----	-----------	--------------	-------------------	-----	----

Electromechanical starters (with integrated contactor)

	C	3RK1 325-6□S41-□AA□		1	1 unit	42D
Setting range for rated operational current / A						
• 0.15 ... 2		K				Additional price
• 1.5 ... 12		L				None
Direct-on-line starters/reversing starters						x
• Direct-on-line starters			0			None
• Reversing starters			1			x
• Direct-on-line starters with manual local operation			2			x
• Reversing starters with manual local operation			3			x
Brake actuation						
• Without brake actuation			0			None
• Brake actuation (230/400 V AC)			3			x
• Brake actuation (180 V DC)			5			x

Electronic starters (with thyristors)

	C	3RK1 325-6□S71-□AA□		1	1 unit	42D
Setting range for rated operational current / A						
• 0.15 ... 2			K			Additional price
• 1.5 ... 12			L			None
Direct-on-line starters/reversing starters						x
• Direct-on-line starters				0		None
• Reversing starters				1		x
• Direct-on-line starters with manual local operation				2		x
• Reversing starters with manual local operation				3		x
Brake actuation						
• Without brake actuation				0		None
• Brake actuation (230/400 V AC)				3		x
• Brake actuation (180 V DC)				5		x

x = Additional price



Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

M200D motor starters for PROFIBUS / PROFINET

Overview

The intelligent, highly flexible M200D PROFIBUS / PROFINET motor starters are the most functional motor starters of the SIRIUS motor starter family in the high degree of protection IP65 for PROFIBUS / PROFINET communication.

They start and protect motors and loads up to 5.5 kW. Direct-on-line and reversing starter versions are available, in a mechanical version and also an electronic version (the latter with soft start function).

The particularly robust M200D PROFIBUS / PROFINET motor starters are characterized by numerous functions which can be flexibly parameterized. Their modular design comprises a motor starter module and a communication module.

The M200D PROFINET motor starters enable TIA-integrated parameterization through PROFINET from STEP 7 – in familiar, user-friendly manner with the same look-and-feel as PROFIBUS.

Functionality

- Basic functionality [see page 9/31 "M200D Motor Starters" → "General Data" → "Overview"](#)
- Electronic version also with soft start function
- Robust and widely used M12 connection method for the digital inputs and outputs and the PROFIBUS / PROFINET bus connection
- All four digital inputs and two digital outputs exist in the cyclic process image. This provides complete transparency of the process on the control level
- Full TIA integration: All digital inputs and outputs exist in the cyclic process image and are visible through the bus, providing maximum flexibility and excellent adaptability to the application.
- Flexible assignment of the digital inputs and outputs with all available assignable input actions
- Extensive diagnostics concept using LEDs and through the bus with the TIA-compatible mechanisms
- Expanded diagnostics using data records
- Complete plant monitoring using statistics data record and current value monitoring by means of data records
- Parameterization through PROFIBUS / PROFINET bus with the help of data records from the user program
- Control of the motor starter using a command data record from the user program
- Removable modular control unit – quicker device replacement and therefore lower costs when device outages occur – since existing wiring is on the control unit and only one device needs to be replaced
- Parameterization in STEP 7 HW config using Motor Starter ES (ordering option for start-up software)
- Start-up and diagnostics with the help of Motor Starter ES (ordering option for start-up software)
- Trace function through Motor Starter ES for optimized start-up and tracking of process and device values

Only with PROFINET:

- Just one bus system from the MES level to the devices - no routers
- More stations on the bus and possible configuration of flexible bus structures
- Automatic re-parameterization in case of device replacement thanks to proximity detection
- Wireless integration of plant segments in difficult environments using WLAN
- Easier expansion of the system thanks to a higher number of stations on the bus and elimination of terminating resistors



M200D motor starter modules for PROFIBUS / PROFINET (without communication module)



M200D communication modules for PROFIBUS



M200D communication modules for PROFINET

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

M200D motor starters for PROFIBUS / PROFINET

Mounting and installation

The M200D PROFIBUS / PROFINET motor starter is comprised of a communication module and a motor starter module. Only the motor starter module has to be replaced therefore when replacing devices. This saves time and money. The communication module remains as an active station on the bus and all other system components continue running. This prevents downtimes.

The integrated plug-in technology enables far lower wiring outlay: Connecting cables can be plugged directly onto the motor starter module. The PROFINET bus is connected cost-effectively using an M12 connection on the device. All versions have identical enclosure dimensions for easier system design and conversion.

Parameterization and configuration

All motor protection functions, limit values and reactions can be defined by parameterization.

The user has several user-friendly options for the parameterization. In addition to parameterization directly from STEP 7, which also permits automatic re-parameterization in case of device replacement, it is possible to use the user-friendly Motor Starter ES start-up software. By connecting a programming device directly to PROFIBUS / PROFINET and the Motor Starter ES start-up software, the devices can also be conveniently programmed from a central point through the bus. Also, parameters can be changed during operation from the user program using the data record mechanism so that the function of the motor starter is adapted to the process when required. With the help of a PC and the Motor Starter ES software it is also possible to perform the parameterization through the local point-to-point interface on-site.

Functions can be flexibly assigned to the digital inputs and outputs, adapting them to all possible conveyor applications. All digital inputs and outputs exist in the cyclic process image. All limit values for monitoring functions and their reactions are parameterizable and therefore adaptable to the application. Consistency with other products of the SIRIUS M200D motor starter range and with the frequency converter and ET 200pro peripherals system is assured.

Only with the M200D PROFINET motor starter

Thanks to the integrated proximity detection, the device name does not need to be issued manually when a device is replaced. The name is issued automatically by the neighboring devices which note the "names" of the devices in their proximity. No additional start-up measures are required therefore when replacing a device.

The new motor starter generation is characterized by high functionality, maximum flexibility and the highest level of automation. The PROFINET is recommended in particular for expansive and highly automated system components because the possibility of monitoring devices and systems with data records (statistical data, measured values and device diagnostics) guarantees an in-depth view of the plant from the control room and therefore increases plant availability.

Operation

The motor starters record the actual current flow. Evaluating the current of the parameterizable solid-state overload protection increases the availability of the drives, as do reliable signals concerning the overshooting or undershooting of setpoint values.

Diagnostics and maintenance

Diagnostics is provided through numerous mechanisms - and can be used as the customer prefers.

The motor starter is TIA-diagnostics compatible, which means that when a fault is identified, a diagnostics alarm is distributed, which invokes the diagnostics-OB with a SIMATIC control. The fault can be evaluated as usual in the user program.

The M200D motor starter offers a large variety of diagnostics data through data records. Its functionality is without equal on the market. There are extensive options for reading out data from the motor starter for monitoring devices, systems or processes.

The motor starter is equipped internally with 3 logbooks for device faults, motor starter trips and events, which are issued with a time stamp. These logbooks can be read out of the motor starter at any time in the form of data records and provide the plant operator with plenty of information about the state of his plant and process which he can use to carry out improvements.

With the slave pointer and statistical data functions it is possible to read out, for example, the maximum internal current values or the number of motor starter connection operations for plant monitoring purposes. This enables process deviations to be monitored or commissioning to be optimized. The user can draw conclusions about the actual load conditions of the devices in his process and on this basis can optimize his plant maintenance intervals.

The device diagnostics data record contains details of all the states of the motor starter, the device configuration and the communication as a basis for central device and plant monitoring.

With installation and maintenance functions (I&M), information (I&M) on modules employed is stored in the motor starter on the one hand, and on the other, data (I&M), which can be specified by the user during configuration, such as location designations. I&M functions serve for troubleshooting faults and localizing changes in hardware at a plant or checking the system configuration. Reordering a device is particularly easy as the result.

The integrated maintenance timer can be used to implement preventative maintenance and avoid plant downtimes through look-ahead servicing.

Another new feature is the integrated TRACE function with the Motor Starter ES software. It can be used to record measured values as a function of time following a trigger event. This enables process flows to be recorded and their timing optimized.

Local control of a drive is possible using the ordering option with integrated manual operation. This is yet another new development which distinguishes the M200D PROFIBUS / PROFINET motor starter from the rest of the market and adds innovative technology, maximum availability and transparency to the system.

M200D PROFINET motor starters with PROFlenergy

Increasing energy prices, far-reaching ecological problems worldwide and the threat of climate change make it necessary for you to be more conscious about your use of energy.

Active and effective energy management is possible with PROFlenergy.

PROFlenergy is a manufacturer-independent profile on PROFIBUS, which can be used by all manufacturers, has been standardized by PNO¹⁾ and supports the switching off of electrical devices during dead time and the measurement of energy flow.

¹⁾ In the PNO (PROFIBUS Nutzerorganisation e. V. - PROFIBUS User Organization), manufacturers and users have come together to agree on the standardized communication technologies PROFIBUS and PROFINET.

Switching off during dead times

PROFlenergy supports the targeted switching-off of loads during dead time.

These can be planned short breaks of a few minutes (such as lunch breaks), longer periods of dead time (such as nights) or unplanned dead time. Energy is always saved when no power is required.

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

M200D motor starters for PROFIBUS / PROFINET

Measuring and visualizing the energy flow as a basis of energy management

The objective of energy management is to optimize the use of energy in a company – from the purchasing of energy through to the consumption of energy – economically and ecologically.

Analyses of energy consumption over time can be used to control energy flows, avoid energy peaks, improve ratings and thus save costs.

PROFenergy enables consumption data to be read off from the devices in a unified form. This is recorded during operation and can be displayed on a control panel, for example, or on overlying

energy management software packages. This ensures that the measured variables are in a uniform manufacturer-independent form and structure that is available to the user for further processing. These PROFenergy functions thus provide the basis for active load and energy management during operation.

PROFenergy in the M200D PROFINET motor starter

The M200D PROFINET motor starter supports "switching during dead time" and "current measurement values" of the motor current using PROFenergy. These are called commands, because they trigger a reaction in the M200D motor starter.



**SIRIUS M200D
PROFIBUS**

**SIRIUS M200D
PROFINET**

Device functions (firmware features)		
Slave on the bus		
Fieldbus	✓ PROFIBUS to M12	✓ PROFINET to M12
Adjustable number of stations	✓ 1 ... 125	✓ 1 ... 128 with CPU 315, CPU 317 1 ... 1256 with CPU 319
Parameterization		
DIP switches	✓ For address setting and terminating resistor	--
ES Motor Starter	✓ Through bus, optical interface	
PROFIBUS / PROFINET data records	✓	
From STEP 7 / HW config	✓	
Diagnostics		
Acyclic through data records	✓	
Support of diagnostics alarm	✓	
Process image		
Process image	✓ 2Byte PAE/ 2Byte PAA	
Data channels		
Local optical interface (manual on-site)	✓	
Through Motor Starter ES local interface	✓	
Using Motor Starter ES through bus	✓	
Data records (acyclic)		
Parameterization	✓ Using DS 131 (DS = data record)	
Diagnostics	✓ Device-specific DS 92	
Measured values	✓ Measured values DS 94	
Statistics	✓ Statistical data DS 95	
Commands	✓ Using DS 93	
Slave pointer	✓ Slave pointer DS 96	
Logbook	✓ Using Motor Starter ES and data records: Device faults DS 72, tripping operation DS 73, events DS 75	
Device identification	✓ Using DS 100	
I&M data	✓ Using DS 231 ... 234	✓ Using data records 0xAFF0 ... 0xAFF3
Inputs		
Number	✓ 4	
• Of these in the process image	✓ 4	
Input action	✓ Parameterizable: flexibly assignable action see manual	
Quick-Stop	✓ Parameterizable: latching, non-latching	

✓ Function is available

-- Function not available

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

M200D motor starters for PROFIBUS / PROFINET



SIRIUS M200D
PROFIBUS



SIRIUS M200D
PROFINET

Device functions (firmware features)

Outputs

Number	✓ 2
• Of these in the process image	✓ 2
Output action	✓ Parameterizable: flexibly assignable action see manual

Brake output

180 V DC/ 230/400 V AC / none	✓
-------------------------------	---

Motor protection

Overload protection	✓ Electronic, wide range 1:10
Short-circuit protection	✓
Full motor protection	✓
Temperature sensor	✓ Parameterizable using ES Motor Starter, data record: PTC or Thermoclick or deactivated

Device functions

Repair switch	✓
Current limit monitoring bottom	✓ Parameterizable
Current limit monitoring top	✓ Parameterizable
Zero current detection	✓ Parameterizable: tripping, warning
Blocking current	✓ Parameterizable
Unbalance	✓ Parameterizable
Load type	✓ Parameterizable: 1- and 3-phase
Shutdown class	✓ Parameterizable using ES Motor Starter, data record: CLASS 5, 10, 15, 20
Protection against voltage failure	✓ Parameterizable: Activated/deactivated

Support for PROFlenergy profile

Switching during dead times	--	✓
Measured current values of the motor current	--	✓

Soft starter control function

Soft start function	✓
Bypass function	✓ Only electronic version

- ✓ Function is available
- Function not available

Benefits

M200D PROFINET motor starters with PROFlenergy

Both standards and laws are making environmental protection and energy management increasingly important, as is the desire to cut energy costs in production facilities and thus ensure a sustainable competitive advantage.

It is thus an objective within industry to save energy and actively reduce CO₂ emissions. By the careful use of valuable resources, the manufacturer-independent PROFlenergy profile on PROFINET can make an active contribution to environmental protection.

Application

The M200D PROFIBUS / PROFINET motor starters are particularly suitable for fully TIA-integrated, highly automated conveyor applications which meet all needs with regard to the monitoring of devices and systems and preventative maintenance.

Adaptability of the motor starter functions and maximum flexibility of the device enable a broad range of application without any limits. The PROFINET-specific expansions are the best assurance of a future-proof investment.

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

M200D motor starters for PROFIBUS / PROFINET
Communication modules, motor starter modules

Selection and ordering data



M200D motor starter modules
PROFIBUS / PROFINET
(without communication module)



Motor starters
M200D PROFIBUS



Motor starters
M200D PROFINET

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
M200D communication modules for PROFIBUS						
Communication modules for PROFIBUS M12 termination 7/8"	C	3RK1 305-0AS01-0AA0		1	1 unit	42D
M200D communication modules for PROFINET						
Communication modules for PROFINET M12 termination 7/8"	C	3RK1 335-0AS01-0AA0		1	1 unit	42D
M200D motor starter modules for PROFIBUS / PROFINET						
Electromechanical starters (with integrated contactor)						
	C	3RK1 395-6□S41-□AD□		1	1 unit	42D
Setting range for rated operational current / A		K		Additional price		
• 0.15 ... 2		L		None		
• 1.5 ... 12				x		
Direct-on-line starters/reversing starters						
• Direct-on-line starters			0	None		
• Reversing starters			1	x		
• Direct-on-line starters with manual local operation			2	x		
• Reversing starters with manual local operation			3	x		
Brake actuation						
• Without brake actuation			0	None		
• Brake actuation (230/400 V AC)			3	x		
• Brake actuation (180 V DC)			5	x		
Electronic starters (with thyristors)						
	C	3RK1 395-6□S71-□AD□		1	1 unit	42D
Setting range for rated operational current / A		K		Additional price		
• 0.15 ... 2		L		None		
• 1.5 ... 12				x		
Direct-on-line starters/reversing starters						
• Direct-on-line starters			0	None		
• Reversing starters			1	x		
• Direct-on-line starters with manual local operation			2	x		
• Reversing starters with manual local operation			3	x		
Brake actuation						
• Without brake actuation			0	None		
• Brake actuation (230/400 V AC)			3	x		
• Brake actuation (180 V DC)			5	x		


x = Additional price

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters


Accessories

Overview

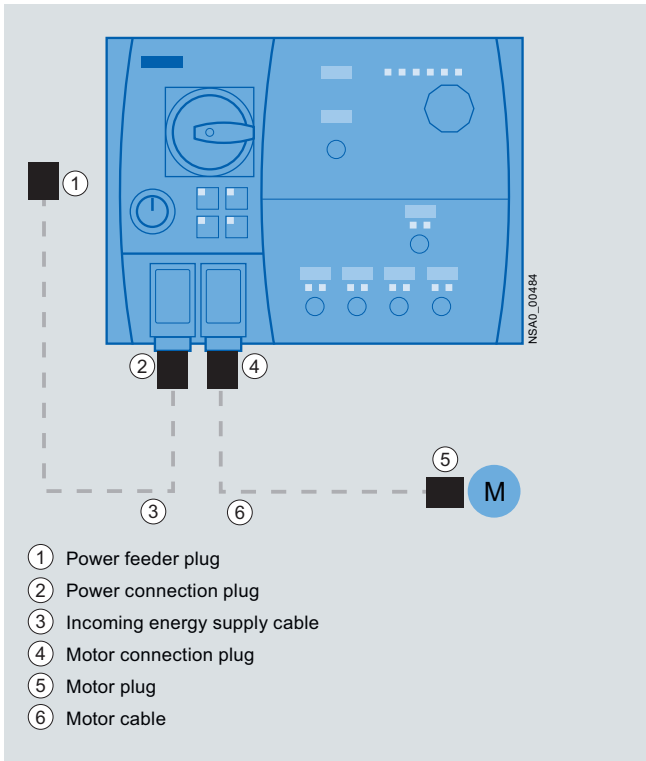

- ① Power feeder plug
- ② Power connection plug
- ③ Incoming energy supply cable
- ④ Motor connection plug
- ⑤ Motor plug
- ⑥ Motor cable


Power and motor connection on the M200D motor starter (in this example: M200D for AS-i)

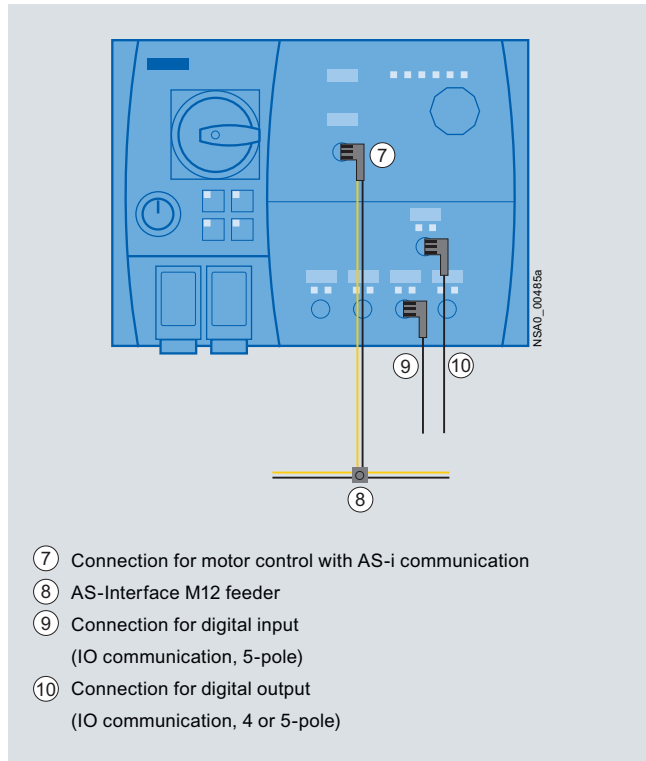

- ⑦ Connection for motor control with AS-i communication
- ⑧ AS-Interface M12 feeder
- ⑨ Connection for digital input (IO communication, 5-pole)
- ⑩ Connection for digital output (IO communication, 4 or 5-pole)


Communication connection using AS-Interface and digital inputs and outputs

9

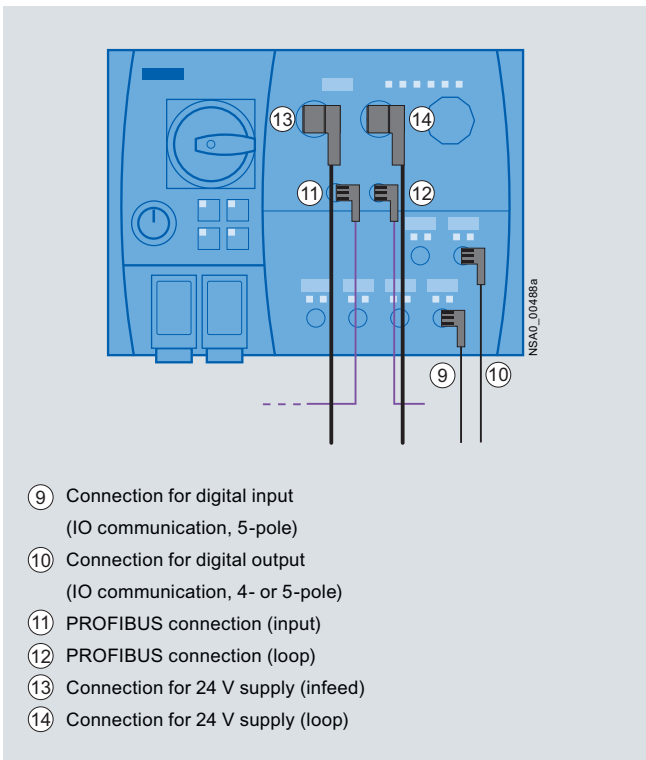

- ⑨ Connection for digital input (IO communication, 5-pole)
- ⑩ Connection for digital output (IO communication, 4- or 5-pole)
- ⑪ PROFIBUS connection (input)
- ⑫ PROFIBUS connection (loop)
- ⑬ Connection for 24 V supply (infeed)
- ⑭ Connection for 24 V supply (loop)

Communication connection using PROFIBUS and digital inputs and outputs

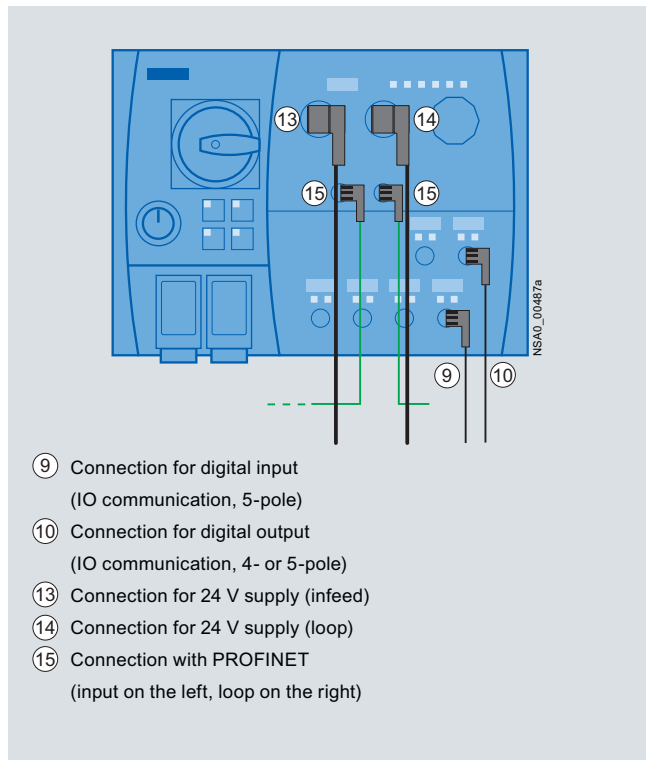

- ⑨ Connection for digital input (IO communication, 5-pole)
- ⑩ Connection for digital output (IO communication, 4- or 5-pole)
- ⑬ Connection for 24 V supply (infeed)
- ⑭ Connection for 24 V supply (loop)
- ⑮ Connection with PROFINET (input on the left, loop on the right)

Communication connection using PROFINET and digital inputs and outputs

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

Accessories
for all M200D motor starters

Selection and ordering data

The accessories listed below represent a basic selection sorted by:







- Accessories for all M200D motor starters
- Accessories for M200D motor starters for AS-interface
- Accessories for M200D motor starters for PROFIBUS
- Accessories for M200D motor starters for PROFINET

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Mountable accessories						
M200D protective brackets		C	3RK1 911-3BA00	1	1 unit	42D
Incoming energy supply						
① Power feeder plugs						
Connector set for energy supply, e.g. for connecting to T terminal connectors, comprising a coupling enclosure, straight outgoing feeder (with bracket), pin insert for HAN Q4/2, incl. gland						
• 5 male contacts 2.5 mm ²	B	3RK1 911-2BS60		1	1 unit	42D
• 5 male contacts 4 mm ²	B	3RK1 911-2BS20		1	1 unit	42D
• 5 male contacts 6 mm ²	B	3RK1 911-2BS40		1	1 unit	42D
② Power connection plugs						
Connector set for energy supply for connection to M200D motor starters, comprising a cable-end connector hood, angular outgoing feeder, female insert for HAN Q4/2, incl. gland						
• 5 female contacts 2.5 mm ² 2 female contacts 0.5 mm ²	C	3RK1 911-2BE50		1	1 unit	42D
• 5 female contacts 4 mm ² 2 female contacts 0.5 mm ²	B	3RK1 911-2BE10		1	1 unit	42D
• 5 female contacts 6 mm ² 2 female contacts 0.5 mm ²	B	3RK1 911-2BE30		1	1 unit	42D
② + ③ Power connection cables						
Assembled at one end with "N" and jumper pin 11 and 12 for plug monitoring, with HAN Q4/2, angular; open at one end; 5 x 4 mm ²						
• Length 1.5 m	C	3RK1 911-0DC13		1	1 unit	42D
• Length 5.0 m	C	3RK1 911-0DC33		1	1 unit	42D
Motor cables						
④ Motor connection plugs						
Connector set for motor cable for connection to M200D motor starters, comprising a cable-end connector hood, angular outgoing feeder, pin insert for HAN Q8/0, incl. gland						
• 8 male contacts 1.5 mm ²	B	3RK1 902-0CE00		1	1 unit	42D
• 6 male contacts 2.5 mm ²	B	3RK1 902-0CC00		1	1 unit	42D
⑤ Motor plugs						
Connector set for motor cable for connection to motors, comprising a cable-end connector hood, straight outgoing feeder, female insert for HAN 10e, incl. star jumper, incl. gland						
• 7 female contacts 1.5 mm ²	C	3RK1 911-2BM21		1	1 set	42D
• 7 female contacts 2.5 mm ²	C	3RK1 911-2BM22		1	1 set	42D
④ + ⑥ Motor cables, assembled at one end						
For connection to M200D motor starter, HAN Q8/0, angled, length 5 m						
• Motor cables for motor with brake, 4 x 1.5 mm ²	C	3RK1 911-0EB31		1	1 unit	42D
• Motor cables for motor without brake with thermistor, 6 x 1.5 mm ²	C	3RK1 911-0EF31		1	1 unit	42D
• Motor cables for motor with brake actuation, braking voltage 400 V AC or 180 V DC, 6 x 1.5 mm ²	C	3RK1 911-0ED31		1	1 unit	42D
• Motor cables for motor with brake actuation, braking voltage 400 V AC or 180 V DC and thermistor, 8 x 1.5 mm ²	C	3RK1 911-0EG31		1	1 unit	42D
• Motor cables for motor with brake actuation, braking voltage 230 V AC, 6 x 1.5 mm ²	C	3RK1 911-0EH31		1	1 unit	42D
• Motor cables for motor with brake actuation, braking voltage 230 V AC and thermistor, 8 x 1.5 mm ²	C	3RK1 911-0EE31		1	1 unit	42D

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters







Accessories for all M200D motor starters

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	
Motor control with IO communication¹⁾							
 3RK1 902-4BA00-5AA0		M12 plugs Screw fixing, 5-pole screw terminals, max. 0.75 mm ² , A-coded, max. 4 A	C	3RK1 902-4BA00-5AA0	1	1 unit	42D
 3RK1 902-4DA00-5AA0		⑩ M12 plugs, angled Screw fixing, 5-pole screw terminals, max. 0.75 mm ² , A-coded, max. 4 A	C	3RK1 902-4DA00-5AA0	1	1 unit	42D
 3RK1 902-4H...-5AA0		⑨, ⑩ Control cables, assembled at one end M12 plugs, angled, screw fixing, 5-pole, 5 x 0.34 mm ² , A-coded, black PUR sheath, max. 4 A • Cable length 1.5 m • Cable length 5 m • Cable length 10 m	C C C	3RK1 902-4HB15-5AA0 3RK1 902-4HB50-5AA0 3RK1 902-4HC01-5AA0	1 1 1	1 unit 1 unit 1 unit	42D 42D 42D
 3RK1 902-4PB15-3AA0		Control cables, assembled at both ends Straight M12 plug, straight M12 socket, screw fixing, 3-pole, 3 x 0.34 mm ² , A-coded, black PUR sheath, max. 4 A • Cable length 1.5 m	C	3RK1 902-4PB15-3AA0	1	1 unit	42D
1) More plug-in connections see Catalogs FS 10 and IK Pl.							
Further accessories							
 3RK1 922-3BA00		Handheld devices For M200D motor starter, (also for ET 200pro, ET 200S High Feature and ECOFAST), for on-site operation. A 3RK1 922-2BP00 serial interface cable must be ordered separately.	B	3RK1 922-3BA00	1	1 unit	42D
		RS 232 interface cables For serial data circuit	B	3RK1 922-2BP00	1	1 unit	42D
		Dismantling tools for HAN Q4/2	C	3RK1 902-0AB00	1	1 unit	42D
		Crimping tools for pins/sockets 4 mm² and 6 mm²	C	3RK1 902-0CW00	1	1 unit	42D
		Crimping tools for male contacts and sockets up to 4 mm² (HAN Q8/0)	B	3RK1 902-0CT00	1	1 unit	42D
		Dismantling tools for male contacts and sockets (HAN Q8/0)	B	3RK1 902-0AJ00	1	1 unit	42D
		USB interface cables, 2.5 m long	D	6SL3555-0PA00-2AA0	1	1 unit	346
		7/8" sealing caps	A	6ES7194-3JA00-0AA0	1	1 unit	250
 3RK1 901-1KA00		AS-interface sealing caps M12 For sealing unused input and output sockets – not for M12-AS-i connections (one set contains 10 sealing caps)	▶	3RK1 901-1KA00	100	10 units	42C

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters









Accessories for M200D motor starters for AS-Interface

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Motor control with AS-i communication¹⁾						
 3RK1 902-4GB50-4AA0		⑦ Control cables, assembled at one end Angular M12 socket, screw fixing, 4-pole, 4 x 0.34 mm ² , A-coded, black PUR sheath, max. 4 A • Cable length 5 m	C	3RK1 902-4GB50-4AA0	1	1 unit 42D
 3RK1 902-4CA00-4AA0		⑦ M12 sockets, angled Screw fixing, 4-pole screw terminal, max. 0.75 mm ² , A-coded, max. 4 A	C	3RK1 902-4CA00-4AA0	1	1 unit 42D
⑧ AS-Interface M12 feeder						
	For flat cable	For	Cable length	Cable end in feeder		
 3RK1 901-1NR21	AS-i / U _{aux}	M12 socket	--	Not available	A	3RK1 901-1NR20 1 1 unit 42C
	AS-i / U _{aux}	M12 cable box	1 m	Not available	A	3RK1 901-1NR21 1 1 unit 42C
	AS-i / U _{aux}	M12 cable box	2 m	Not available	A	3RK1 901-1NR22 1 1 unit 42C
 3RK1 901-1MN00		Cable terminating pieces For sealing of open cable ends (shaped AS-Interface cable) in IP67	▶	3RK1 901-1MN00	1	10 units 42C
Further accessories						
 3RK19 04-2AB02		AS-Interface addressing unit V 3.0 • For AS-Interface modules and sensors and actuators with integrated AS-Interface in accordance with AS-i Specification V3.0 • For setting the AS-i address of standard slaves, and slaves with extended addressing mode (A/B slaves) • With input/output test function and many other -commissioning functions • Battery operation with 4 batteries type AA (IEC LR6, NEDA 15) • Scope of supply: - Addressing unit with 4 batteries - Addressing cable, with M12 plug to addressing plug (hollow plug), length 1.5 m	▶	3RK1 904-2AB02	1	1 unit 42C
 3RK1 902-4PB15-3AA0		M12 addressing cables to M12 • Standard M12 cable for addressing slaves with M12 connection, e.g. K60R modules • When using the current version of the 3RK1 904-2AB01 addressing unit • 1.5 m	C	3RK1 902-4PB15-3AA0	1	1 unit 42D

Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters



Accessories for M200D motor starters for PROFIBUS

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	
Motor control with PROFIBUS							
 3RK1 902-1DA00	C	3RK1 902-1DA00		1	1 unit	42D	
							M12 plugs, angled Screw fixing, 5-pole screw terminals, max. 0.75 mm ² , B-coded, no terminating resistor <ul style="list-style-type: none"> ⑩ 5 female contacts
 3RK1 902-1BA00	C	3RK1 902-1BA00		1	1 unit	42D	
							M12 plugs, angled Screw fixing, 5-pole screw terminals, max. 0.75 mm ² , B-coded, no terminating resistor <ul style="list-style-type: none"> ⑪ 5 male contacts
Control cables, assembled at one end							
 3RK1 902-1G.	C	3RK1 902-1GB30		1	1 unit	42D	
							M12, screw fixing, angled, B-coded, no terminating resistor <ul style="list-style-type: none"> ⑩ 5 female contacts, 3 m
							<ul style="list-style-type: none"> ⑩ 5 female contacts, 5 m
 3RK1 902-1N.	C	3RK1 902-1GC10		1	1 unit	42D	
							<ul style="list-style-type: none"> ⑩ 5 female contacts, 10 m
Further accessories							
 6XV1 830-3EH10	A	6XV1 830-3EH10		1	1 m	5K2	
							PROFIBUS trailing cables Max. acceleration 4 m/s ² , at least 3 000 000 bending cycles, bending radius at least 60 mm, 2-core, shielded, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m
							PROFIBUS FC Food bus cables With PE outer sheath for operation in the food and beverage industry, 2-core, shielded, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m
							PROFIBUS FC Robust bus cables With PUR outer sheath for operation in environments exposed to chemicals and mechanical loads, 2-core, shielded, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m
							Power cables 5-core, 5 x 1.5 mm ² , trailing, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m
 6XV1 830-0GH10	A	6XV1 830-0GH10		1	1 m	5K2	
							PROFIBUS trailing cables Max. acceleration 4 m/s ² , at least 3 000 000 bending cycles, bending radius at least 60 mm, 2-core, shielded, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m
							PROFIBUS FC Food bus cables With PE outer sheath for operation in the food and beverage industry, 2-core, shielded, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m
							PROFIBUS FC Robust bus cables With PUR outer sheath for operation in environments exposed to chemicals and mechanical loads, 2-core, shielded, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m
 6XV1 830-0JH10	A	6XV1 830-0JH10		1	1 m	5K2	
							PROFIBUS trailing cables Max. acceleration 4 m/s ² , at least 3 000 000 bending cycles, bending radius at least 60 mm, 2-core, shielded, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m
							PROFIBUS FC Food bus cables With PE outer sheath for operation in the food and beverage industry, 2-core, shielded, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m
 6XV1 830-8AH10	A	6XV1 830-8AH10		1	1 m	5K2	
							PROFIBUS FC Robust bus cables With PUR outer sheath for operation in environments exposed to chemicals and mechanical loads, 2-core, shielded, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m
Connection for 24-V power supply of the M200D PROFIBUS / PROFINET		See page 9/49					





Motor Starters for Use in the Field, High Degree of Protection

SIRIUS M200D Motor Starters

Accessories for M200D motor starters for PROFINET

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Motor control with PROFINET						
 3RK1 902-2H.		⑩ M12 plugs, angled Screw fixing, 4-pole screw terminals, max. 0.75 mm ² , angled, D-coded • 4 male contacts	C	3RK1 902-2DA00	1	1 unit 42D
		⑩ Control cables, assembled at one end M12 for screw fixing, angled, 4-pole, D-coded, • 4 male contacts, 3 m • 4 male contacts, 5 m • 4 male contacts, 10 m	C C C	3RK1 902-2HB30 3RK1 902-2HB50 3RK1 902-2HC10	1 1 1	1 unit 42D 1 unit 42D 1 unit 42D
 3RK1 902-2N.		⑩ Control cables, assembled at both ends M12 for screw fixing, angled at both ends, 4-pole, D-coded, male contacts at both ends • 3 m • 5 m • 10 m	C C C	3RK1 902-2NB30 3RK1 902-2NB50 3RK1 902-2NC10	1 1 1	1 unit 42D 1 unit 42D 1 unit 42D
Further accessories						
	A	PROFINET IE FC TP Standard Cable GP 2 x 2 sold by the meter		6XV1 840-2AH10	1	1 m 5K1
	A	PROFINET IE FC TP Trailing Cable 2 x 2 sold by the meter		6XV1 840-3AH10	1	1 m 5K1
	A	PROFINET IE FC TP Trailing Cable GP 2 x 2 sold by the meter		6XV1 870-2D	1	1 m 5K2
	A	PROFINET IE FC TP Torsion Cable 2 x 2 sold by the meter		6XV1 870-2F	1	1 m 5K2
	A	PROFINET IE FC TP Marine Cable, 4-core sold by the meter		6XV1 840-4AH10	1	1 m 5K1
	A	Power cables 5-core, 5 x 1.5 mm ² , trailing, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m		6XV1 830-8AH10	1	1 m 5K2

More connection technology products can be found at "Siemens Solution Partners Automation" www.siemens.com/automation/partnerfinder under "Distributed Field Installation System" technology.

Version	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Connection for 24-V power supply of the M200D PROFIBUS / PROFINET						
 3RK1 902-3DA00		Plugs On M200D, 7/8" for screw fixing, angled, 1.5 mm ² screw connection • ⑩ 5 female contacts	C	3RK1 902-3DA00	1	1 unit 42D
		• ⑭ 5 male contacts	C	3RK1 902-3BA00	1	1 unit 42D
 3RK1 902-3BA00						
 3RK1 902-3G.		⑩ Supply lines, assembled at one end 7/8" for screw fixing, angled, 1.5 mm ² • 5 female contacts, 3 m • 5 female contacts, 5 m • 5 female contacts, 10 m	C C C	3RK1 902-3GB30 3RK1 902-3GB50 3RK1 902-3GC10	1 1 1	1 unit 42D 1 unit 42D 1 unit 42D
 3RK1 902-3N.		⑭ Supply lines, assembled at both ends 7/8" for screw fixing, angled at both ends, 5-pole pin/socket, 1.5 mm ² • 3 m • 5 m • 10 m	C C C	3RK1 902-3NB30 3RK1 902-3NB50 3RK1 902-3NC10	1 1 1	1 unit 42D 1 unit 42D 1 unit 42D