


Verizon Card Configuration

1 Default IP Address: **196.168.1.1**

2 Default Username: **admin**

3 Default Password: **admin**

Note: You will be forced to change the password after logging in.

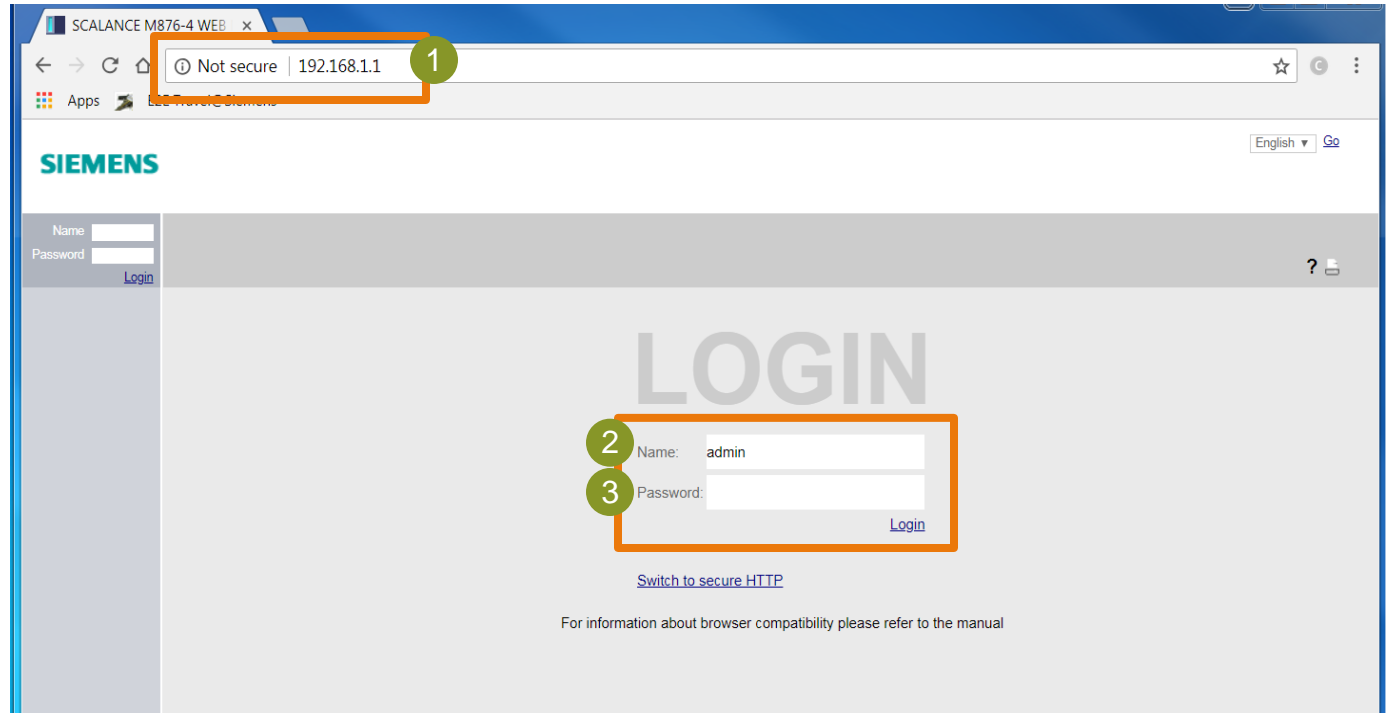

Verizon Card Configuration

- 1 Click on **Interfaces** menu.
- 2 Click on **Mobile** submenu.
- 3 Select **Operator** tab.
- 4 When using Verizon SIM card in **APN** field enter: **VZWINTERNET**
- 5 Click on **Set Values** button to save configuration.

The screenshot shows the SCALANCE M876-4 web interface. The browser address bar shows '192.168.1.1'. The page title is 'SIEMENS 192.168.1.1/SCALANCE M876-4'. The user is logged in as 'admin'. The 'Operator' tab is selected in the sidebar. The main content area shows the 'Operator' configuration page with the following fields:

- Country List: -
- Provider List: -
- PLMNID: [empty]
- Operator Name: [empty]
- APN: [VZWINTERNET]
- User Name: [empty]
- Password: [empty]
- Password Confirmation: [empty]

Below the form is a table with 5 entries:

Select	PLMNID	Operator Name	APN	User Name	Password	Password Confirmation	Enabled
<input type="checkbox"/>	Manual	Verizon	vzwintern				<input checked="" type="checkbox"/>
<input type="checkbox"/>	26207	O2	internet	guest	*****	*****	<input checked="" type="checkbox"/>
<input type="checkbox"/>	26203	Eplus	internet.eplus.de	guest	*****	*****	<input checked="" type="checkbox"/>
<input type="checkbox"/>	26202	Vodafone	web.vodafone.de	guest	*****	*****	<input checked="" type="checkbox"/>
<input type="checkbox"/>	26201	T-Mobile	internet.t-mobile	guest	*****	*****	<input checked="" type="checkbox"/>

5 entries.

Buttons: Create, Delete, **Set Values**, Refresh

Verizon Card Configuration

- 1 In the **Interfaces** menu, select the **Mobile** submenu.
- 2 Click on **Carrier** drop down box and select **Verizon**.
- 3 Check on the box to **Enable Mobile Network Interface**.
- 4 Click on **Set Values** button to save configuration.

The screenshot shows the web interface for a SCALANCE M876-4 device. The browser address bar shows '192.168.1.1'. The page title is '192.168.1.1/SCALANCE M876-4'. The main content area is titled 'Mobile Network Interface Settings'. On the left, a navigation menu has 'Mobile' selected under the 'Interfaces' section. The main settings area includes a 'SIM Operator' tab, a 'Connection Check' section, and several configuration options: 'Enable Mobile Network Interface' (checked), 'Carrier' (set to Verizon), 'Radio Mode' (set to Auto), 'Authentication Method' (set to Auto), and 'Allow Data Roaming' (checked). A 'Set Values' button is highlighted with a red box and a green circle with the number 4.

Verizon Card Configuration

- 1 Click on **Information** menu and Select **Mobile** submenu.
- 2 Information and screen will verify connection to **Verizon Cellular Network**.

SCALANCE M876-4 WEB x

192.168.1.1

Apps EZE Travel@Siemens

English Go

192.168.1.1/SCALANCE M876-4 03/06/2018 12:23:48

Welcome admin Logout

Wizards

Information 1

Start Page

Versions

ARP Table

Log Tables

Faults

DHCP Server

LLDP

Routing

Mobile 1

IPsec VPN

SINEMA RC

OpenVPN Client

System

Mobile Overview

Overview Signal Recorder

IMEI: 359677060019181 2

SIM Status: present

PIN Status: PIN valid

IMSI: 311480387637541

Phone Number: +14702331520

Connection Status: Registered to home network (LTE)

Packet Switch Status: Attached in EUTRAN capable cell

Cell ID: 2A54116

LAC: -

Signal Strength: -115 dBm, 0 CSQ

Mobile Chip Temperature: 37°C

Provider: 311480-Verizon

APN: vzwinternet

External IP Address: 100.91.148.139

DNS Server(s): 198.224.178.135, 198.224.181.135

Refresh