


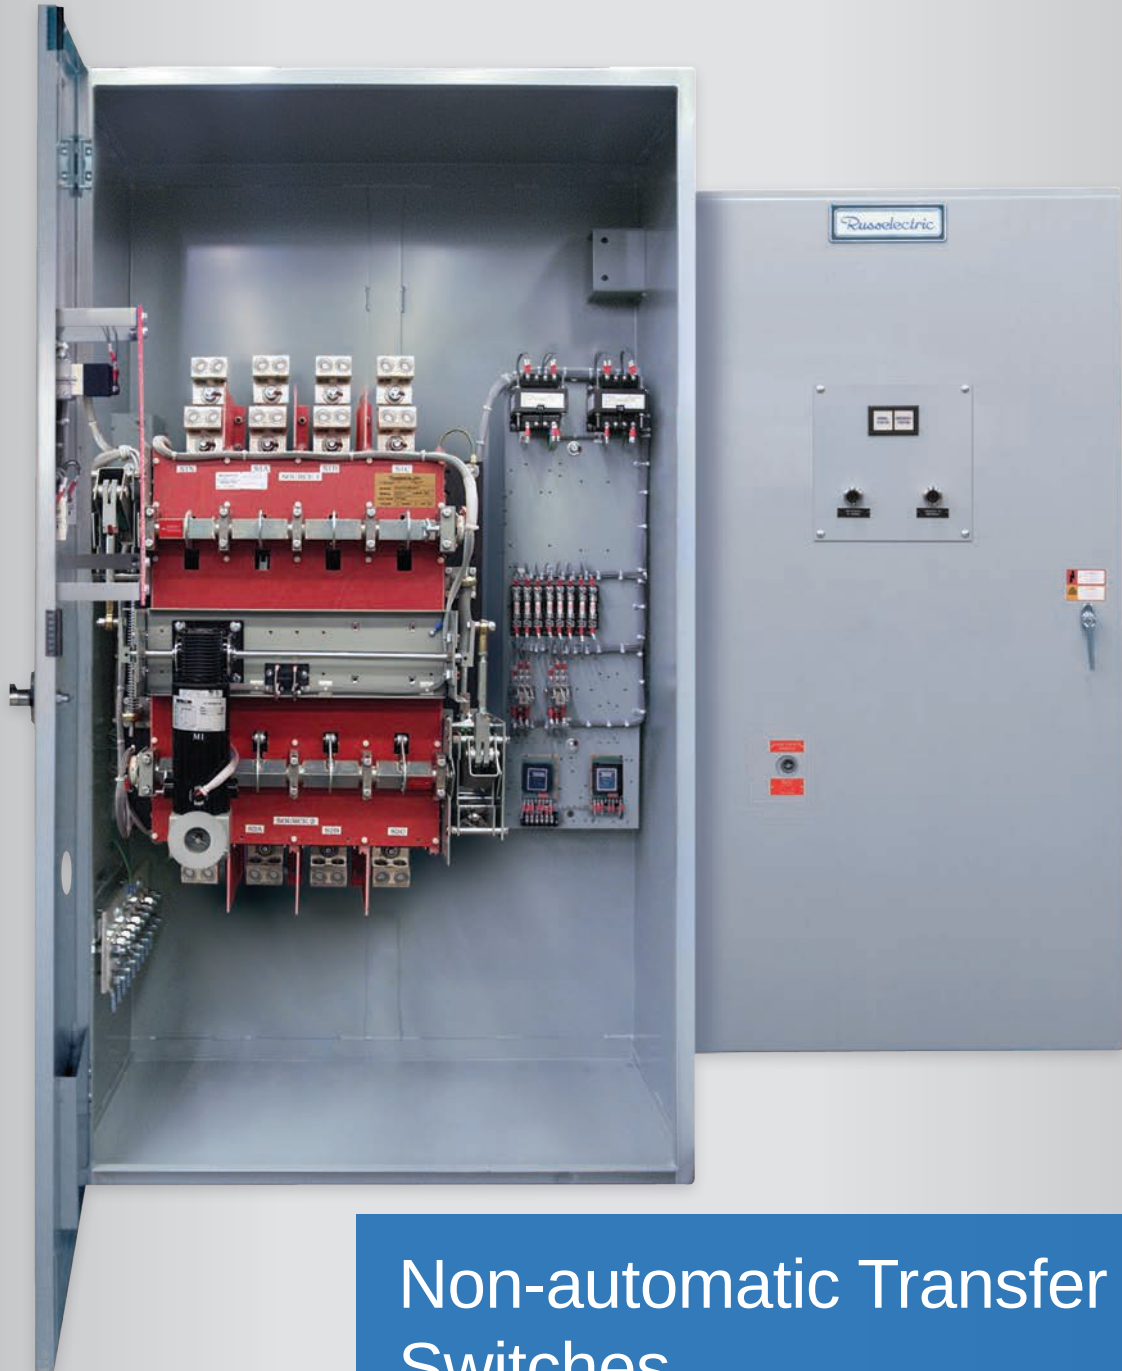

Non-automatic Transfer Switches

RTS-30 Series

30-Cycle-Rated Single- or Dual-Operator Non-automatic Transfer Switches

- UL-1008 listed through 4000 amperes
- Electrical initiation through the use of two pushbuttons
- Quick-break, quick-make contacts
- Rapid and reliable arc quenching
- Positive mechanical and electrical interlocking
- Safe external manual operator capable of switching under load
- Easily converted to automatic operation in the future



30-Cycle Rated Single- or Dual-Operator Non-automatic Transfer Switches

Russelectric RTS Series non-automatic transfer switches are ideal for applications in which immediate restoration of service (after loss of the normal source) is not critical, and local operations personnel are available to initiate transfer. These switches are UL-listed double-throw devices with identical withstand ratings and design characteristics to RTS Series automatic transfer switches.

Since these non-automatic switches are identical in design to Russelectric RTS Series automatic transfer switches and are of the same exceptional quality, users can be confident that they are timetested, reliable, and safe.

Operations personnel can initiate a source transfer locally using electrically operated pushbuttons or a mechanical external manual operator, or remotely (optional).

All non-automatic switches can be easily converted to fully automatic operation with the addition of a control panel and minor wiring changes. This ensures flexibility for future expansion and system redesign.

3-Cycle and 30-Cycle Closing and Withstand Ratings RMS Symmetrical Amperes 480 VAC* UL Tested, Listed, and Labeled Under UL-1008		
Switch Size amperes	Closing and Withstand Rating amperes	amperes
	3-Cycle	30-Cycle
100	42,000	30,000
150	42,000	30,000
225	42,000	30,000
260	42,000	30,000
400	42,000	30,000
600	65,000	42,000
800	65,000	42,000
1000	85,000	65,000
1200	85,000	65,000
1600	100,000	85,000
2000	100,000	85,000
3000	100,000	85,000
4000	125,000	100,000

* 600 VAC optional for 1000A-2000A. Closing and withstand ratings differ. Consult factory.

Tested, Listed, and Labeled by UL under UL-1008

Before Underwriters' Laboratories, Inc. will allow a transfer switch to be listed with a short circuit rating, it requires that the switch be able to close in on the same amount of fault current as it can withstand. All Russelectric RTS Series transfer switches have been fully tested, listed, and labeled for 30-cycle and 3-cycle closing and withstand ratings under UL-1008.

In applications where extremely high short circuit current is available, fuse protection is mandatory. When coordinated with current limiting fuses, Russelectric RTS Series transfer switches have UL-listed closing and withstand ratings of 200,000 A.

For more information, please refer to the RTS-30 Series Automatic Transfer Switch Brochure.

**Published by
Russelectric,
A Siemens Business 2021**

99 Industrial Park Rd.
Hingham, MA 02043

For more information
www.russelectric.com

Printed in USA-CP
Order No. RSBRTS30NA-0221
All Rights Reserved
© 2021, Siemens Industry, Inc.

The technical data presented in this document is based on an actual case or on as-designed parameters, and therefore should not be relied upon for any specific application and does not constitute a performance guarantee for any projects. Actual results are dependent on variable conditions. Accordingly, Siemens does not make representations, warranties, or assurances as to the accuracy, currency or completeness of the content contained herein. If requested, we will provide specific technical data or specifications with respect to any customer's particular applications. Our company is constantly involved in engineering and development. For that reason, we reserve the right to modify, at any time, the technology and product specifications contained herein.