



8DA10 SINGLE-BUS AND 8DB10 DOUBLE-BUS

Medium-voltage gas-insulated switchgear

Up to 42 kV, 40 kA, 200 kV BIL
usa.siemens.com/mvswitchgear

Features and benefits:

- Circuit breaker - up to 10,000 operations; 30,000 optional operations
- Low-pressure SF₆ gas; for insulation only and not for interruption
- Tested for arc-resistance to ANSI/IEEE C37.20.7-2017, type 2B (i.e., with low-voltage compartment door open)
- Significantly reduced personal protective equipment (PPE) needed
- Voltage transformers with primary fused protection per NEC article 240.15(A) and 450.3(C)
- Main busbar expansion without shutdown via optional busbar expansion switch
- Compact - up to 75 percent smaller than air-insulated switchgear
- Maintenance-free primary part
- Meets IEEE and IEC standards
- UL or C-UL Listing available (consult factory)
- Isolated-phase design eliminates phase-to-phase faults inside the switchgear
- Meets NEC visible disconnect requirement
- Well suited for contaminated environments
- Pair with Siemens protective relays to match any typical application
- Outdoor installation can be accommodated using a power equipment center
- Fast-acting ground switch available for line or bus application
- Trained and certified local personnel in U.S. available for start-up, commissioning, and maintenance.

SIEMENS


Technical ratings

Characteristics	Unit	Voltage class			
		15.5	27.0	38.0	42.0 ¹
Rated maximum voltage	kV	15.5	27.0	38.0	42.0 ¹
Rated continuous current of main bus (maximum)	A	5,000	5,000	5,000	5,000
Rated continuous current of circuit breakers (maximum)	A	3,000 (8DA) / 3,000 (8DB)	3,000 (8DA) / 3,000 (8DB)	3,000 (8DA) / 3,000 (8DB)	3,000 (8DA) / 3,000 (8DB)
Rated lightning impulse-withstand voltage	kV peak	95	125	150, 200 ¹	185; 200 ¹
Power frequency-withstand voltage (one minute)	kV	36	60	80	80
Frequency	Hz	60	60	60	60
Short-circuit interrupting current (maximum)	kA	Up to 40	Up to 40	Up to 40	Up to 40
Short-time withstand current, 3 seconds (maximum)	kA	Up to 40	Up to 40	Up to 40	Up to 40
Short-circuit making current (close and latch) (maximum)	kA peak	Up to 104	Up to 104	Up to 104	Up to 104
Peak-withstand current (maximum) ²	kA peak	Up to 104	Up to 104	Up to 104	Up to 104

Footnotes:

¹ On request. Consult factory.

² Tested to ANSI/IEEE C37.20.7-2007 for arc-resistance type 2B at 40 kA for 0.5 seconds.

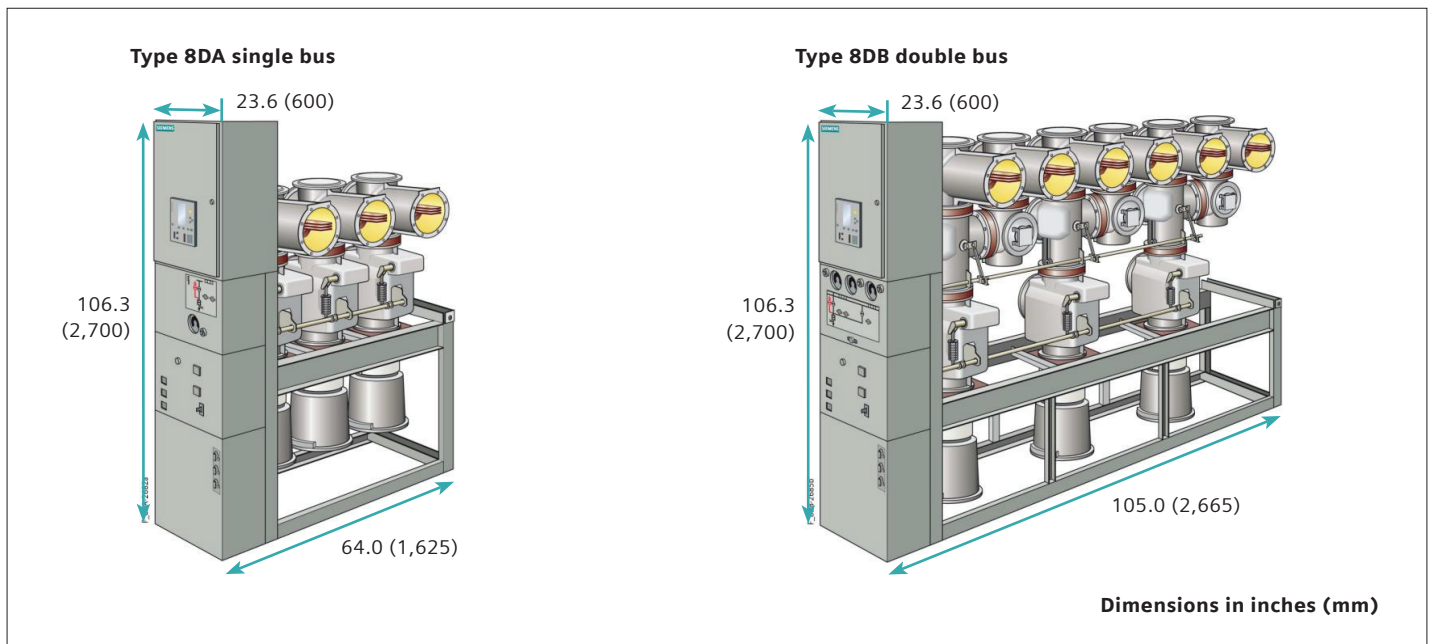

Legal Manufacturer

Siemens Industry, Inc.
7000 Siemens Road
Wendell, North Carolina 27591
United States of America

Telephone: +1 (800) 347-6659
usa.siemens.com/mvswitchgear

Order No. EMMS-T40043-06-4AUS
© 07.2021, Siemens Industry, Inc.

This document contains a general description of available technical options only, and its effectiveness will be subject to specific variables including field conditions and project parameters. Siemens does not make representations, warranties, or assurances as to the accuracy or completeness of the content contained herein. Siemens reserves the right to modify the technology and product specifications in its sole discretion without advance notice.