SIEMENS

Dimension Prints for 630 Frame Global Motors

Type IRQ4 – Horizontal – TEAAC / Totally Enclosed Air to Air Cooled
Sleeve Bearing – Direct Connected
Frames 630/2/4/6 – Free Standing Main Conduit Box

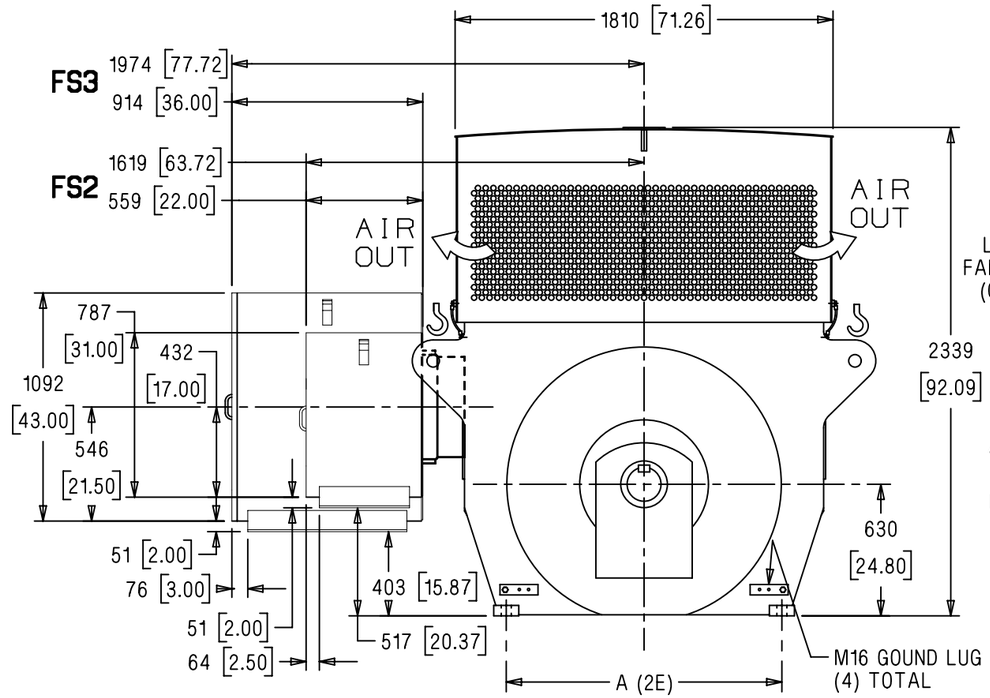

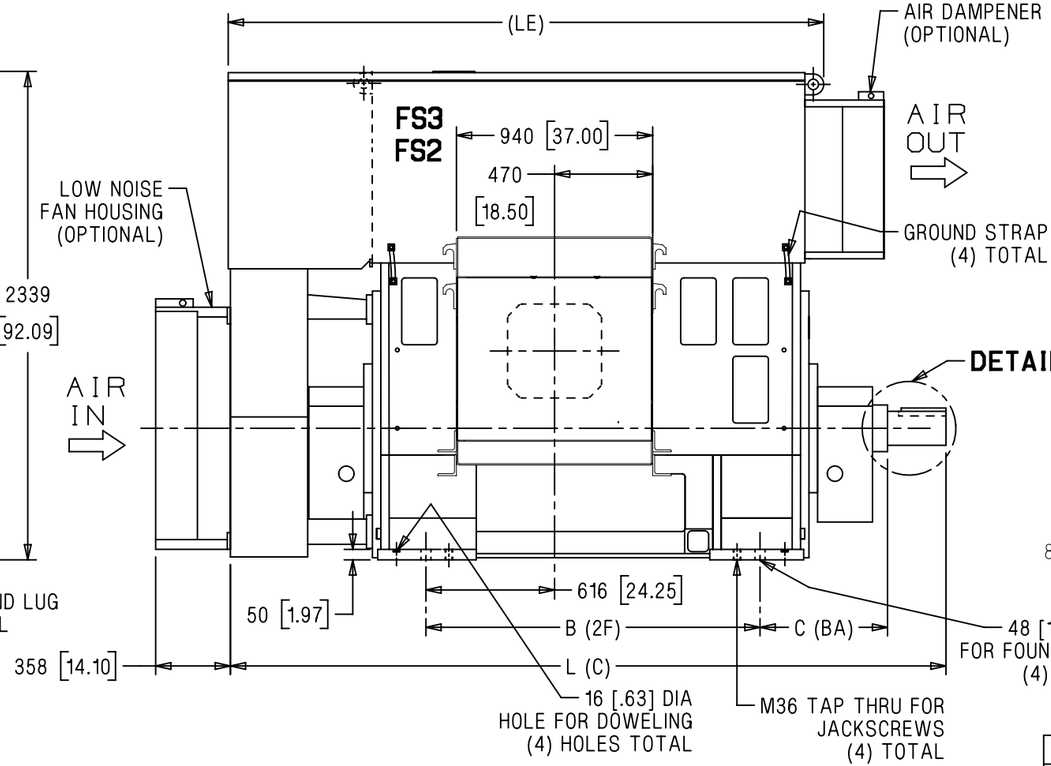

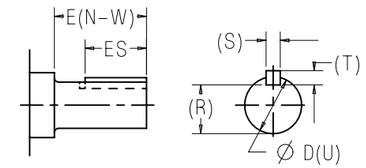

DETAIL "A"

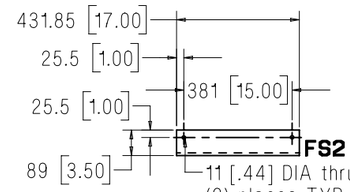

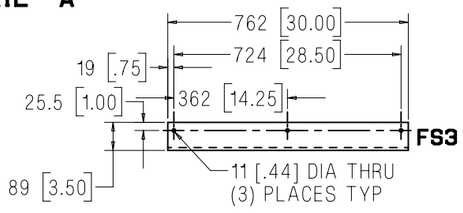

BOX FEET DIMENSIONS

Standard Dimensions in Millimeters (Inches)

SHAFT DIA	TOLERANCE
200 (7.87)	+0.037 (+0.0015) +0.017 (+0.0007)

Lubrication Per Bearing	
6 Pole	8 Pole & Slower
200–250 SUS @ 100°F	290–350 SUS @ 100°F
13L [13.74 qt.] capacity	13L [13.74 qt.] capacity

Notes:

1. The FS2 and FS3 conduit boxes are free standing and must be supported from below by the customer. A removable bottom plate is supplied on the FS2 and FS3 conduit boxes.
2. L (C) = Length of motor from drive end of shaft to end of non–drive end of motor.
3. Machines operate in one direction only.
4. Shims may be necessary under motor feet for direct connection.
5. The standard shaft seal is rated IP55.
6. The dimensions are valid with or without standard shaft proximity probes.

Standard Dimensions in Millimeters (Inches) *IEC Designations (NEMA)

		A	B	C	L	–	E	–	–	–	D	–	
Frame	**Speed**	**(2E)**	**(2F)**	**(BA)**	**(C)**	**LE**	**(N–W)**	**(R)**	**(S)**	**(T)**	**(U)**	**(ES)**	**Approx. Max. Wt. kgs (lbs)**
630/2	6 Pole +	1320 (51.96)	1600 (62.99)	600 (23.62)	3400 (133.86)	2900 (114.17)	280 (11.02)	185 (7.28)	45 (1.77)	25 (0.98)	200 (7.87)	232.5 (9.15)	12250 (27000)
634/6	6 Pole +	1320 (51.96)	1800 (70.87)	600 (23.62)	3640 (143.31)	3140 (123.62)	280 (11.02)	185 (7.28)	45 (1.77)	25 (0.98)	200 (7.87)	232.5 (9.15)	14000 (30900)

Certification: Customer _____ P.O. _____ S.O. _____ Item _____
HP _____ RPM _____ Frame _____ PH/HZ/Volts 3/_____/_____ Terminal Box Size FS2☐ FS3☐
Customer Tag # _____ By _____ Date _____
Comments _____

Not for construction, installation or application purposes unless certified.

A5E31897092A
TEAAC_630_6plusPL_SLV_FS
Revision AA
2–13–13