

SIEMENS

Ingenuity for life

Reyrolle 7SR158 – Argus

Voltage and Frequency Protection

siemens.com/reyrolle

Description

The 7SR158 voltage and frequency relays are numerical, multifunctional devices, with dedicated functionality designed for connection to voltage transformers. The relays also provide data storage, instrumentation, user configurable logic and data communication features.

Main Function	Automatic load-shedding and connection for secure grid operation in the voltage and frequency band.
Inputs and Outputs	3 Voltage Transformers, 6 Binary Inputs and 8 Binary Outputs
Communication	Front USB, Rear RS485, Rear option for Two Electrical or Two Optical Ethernet
Housing	Size E4 or E6, 4U high - Withdrawable design

Benefits

- 10 Fault records are displayed on the relay fascia.
- Up to 1000 events are stored and time tagged to 1ms resolution. The time and date can be set and are maintained while the relay is de-energised by a back up storage capacitor
- 9 User Programmable Tri-colour LEDs
- Circuit breaker trip and maintenance counter
- Waveform recorder stores 10 records (1 second duration)
- Four Settings Groups
- 2 Levels Password Protection
- Self Monitoring
- Optional Ethernet optical or electrical interface for IEC61850, compatible with editions 1 & 2



Applications

- 4 Stage Under & Overvoltage protection
- 6 Stage Under Frequency protection & 6 Stage Rate of Change of Frequency for Load Shedding
- Vector Shift for Islanding Schemes
- Flexible VT configuration
- Suitable for Auto Transfer Schemes with user defined logics. Voltage monitoring and protection for Bus-Bar PT

Protecting your electrical assets... today and tomorrow

Protection functions

- 27/59 Under/Over Voltage - 4 stages
- 47 Negative Phase Sequence Voltage - 2 stage
- 59N Neutral Voltage Displacement
- 78 Voltage Vector Shift
- 81 Under/Over Frequency - 6 stages
- 81R Rate Of Change Of Frequency - 6 stages

Supervision Functions

- 74T/CCS Trip And Close Circuit Supervision

Control Functions


- 86 Lockout
- User Programmable Logic
- CB Control

Communication

- IEC60870-5-103
- MODBUS RTU
- DNP 3.0
- IEC61850 (optional)

Reydisp software

- Our user friendly PC software tool ensures a smooth installation providing an efficient and intuitive interface to the relay.

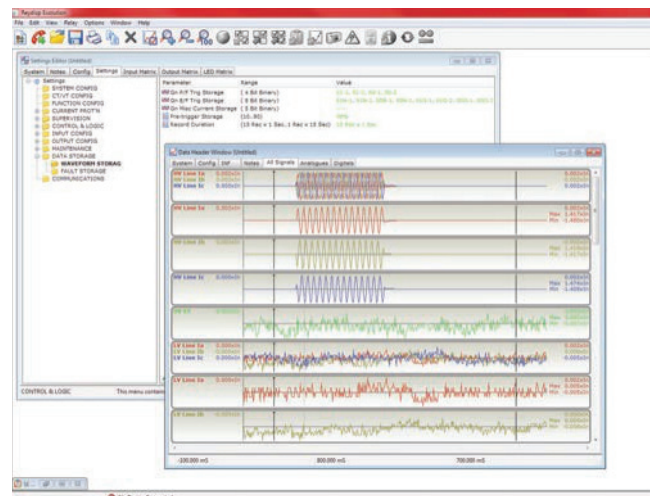

Siemens Protection
Devices

North Farm Road
Hebburn
Tyne & Wear
NE31 1TZ
United Kingdom

For enquires please contact our
Customer Support Center

Phone: +49 180/524 8437 (24hrs)
Fax: +49 180/524 24 71
E-mail: support.ic@siemens.com
www.siemens.com/protection

Article No. EMEA-B10060-00-76GB
Printed in the UK

Subject to changes and errors.
The information given in this document only contains general descriptions and / or performance features which may not always specifically reflect those described or which may undergo modification in the course of further development of the products.

The requested performance features are binding only when they are expressly agreed upon in the concluded contract.