



Siemens.com/mobility

QECX8 Relay

An ac current operated, tractive armature relay


General data

| | |
|------------------------|----------|
| Contact Arrangement: | 4F 2B |
| Nominal Rated Current: | 0.4 A ac |
| Approximate Weight: | 2.1 kg |

Note: Refer to the following data sheets:

- 7-1-1 for general information and contact ratings.
- 7-2-1 for dimensions.
- 8.2 for tools.
- 8.3 for plugboard and connector details.

Refer overleaf for specific data.

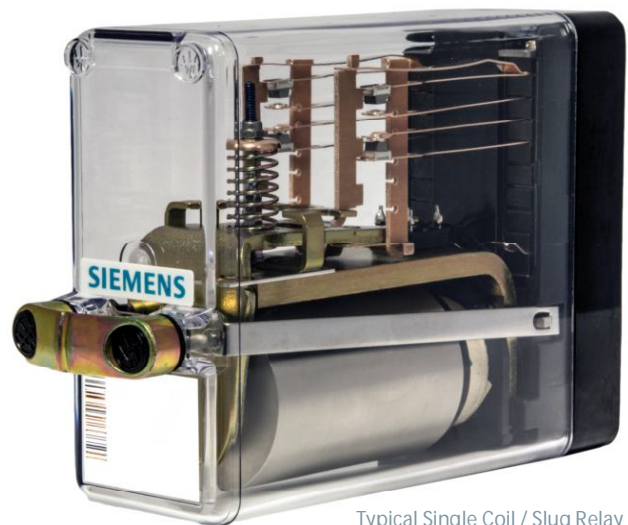

Typical Single Coil / Slug Relay


Description

This unit incorporates a diode bridge rectifier to enable operation from an ac supply.

It is designed as a lamp proving relay for a single 110 V ac 60 W lamp.

This relay is equivalent to Australian type M25048

Contact layout viewed from rear

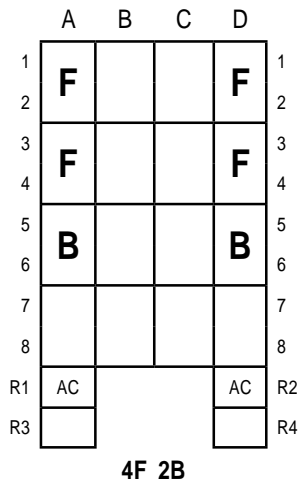

Packaging

Q-Relays are packed in a carton holding ten relays; the same container is used for quantities of four to nine relays. Quantities less than four are packed individually in cardboard boxes, as are all train-carried relays. Each container has a bar-coded label affixed to the outside, stating details of the packaged relay(s) and the quantity therein.

EMC Compliance

Q-Relays comply with the relevant emission requirements of EN 55014. It is considered that these relays have inherent immunity to in-service electro-magnetic disturbance.


A Technical Certificate for EU Directive on EMC (89/336/EEC) has been obtained.

Technical data

| SIEMENS Part No. (PAD No.) | CONTACT ARRANGEMENT | RATED CURRENT (A ac) | PIN CODE | COIL RES (OHMS) | WDG SPEC 1/108/- | MAX FULL OP. (mA ac) | MIN REL (mA ac) | PLUGBOARD | REQD No. OF CONNECTORS J4137/3 | REMARKS |
|----------------------------|---------------------|----------------------|----------|-----------------|------------------|----------------------|-----------------|-----------|--------------------------------|---------|
| B18513/25 | 4F 2B | 0.400 | XDFGJ | 2.3 | 210 | 400 | 230 | J4138/453 | 14 | M25048 |



Un-drilled plugboard
Part No. E7218/1

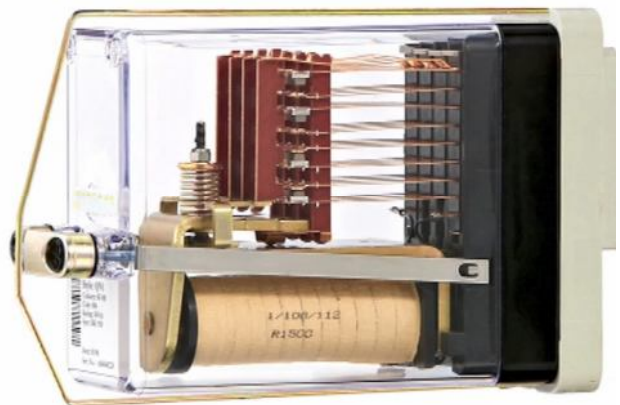

Representation of Relay,
Plugboard and Retaining clip
(Clip Part No. J4136/1)

Siemens Ltd
Infrastructure & Cities Sector
Mobility and Logistics Division
Rail Automation
PO Box 79
Pew Hill
Chippenham
Wiltshire SN15 1JD
UK
www.siemens.com/rail-automation

Printed in the United Kingdom

Data Sheet 7-2-113

X342/55/000135 Revision 03

SIEMENS

The information within this document contains general descriptions of the technical options available, which do not always have to be present in individual cases. The required features should therefore be specified in each individual case at the time of closing the contract.