

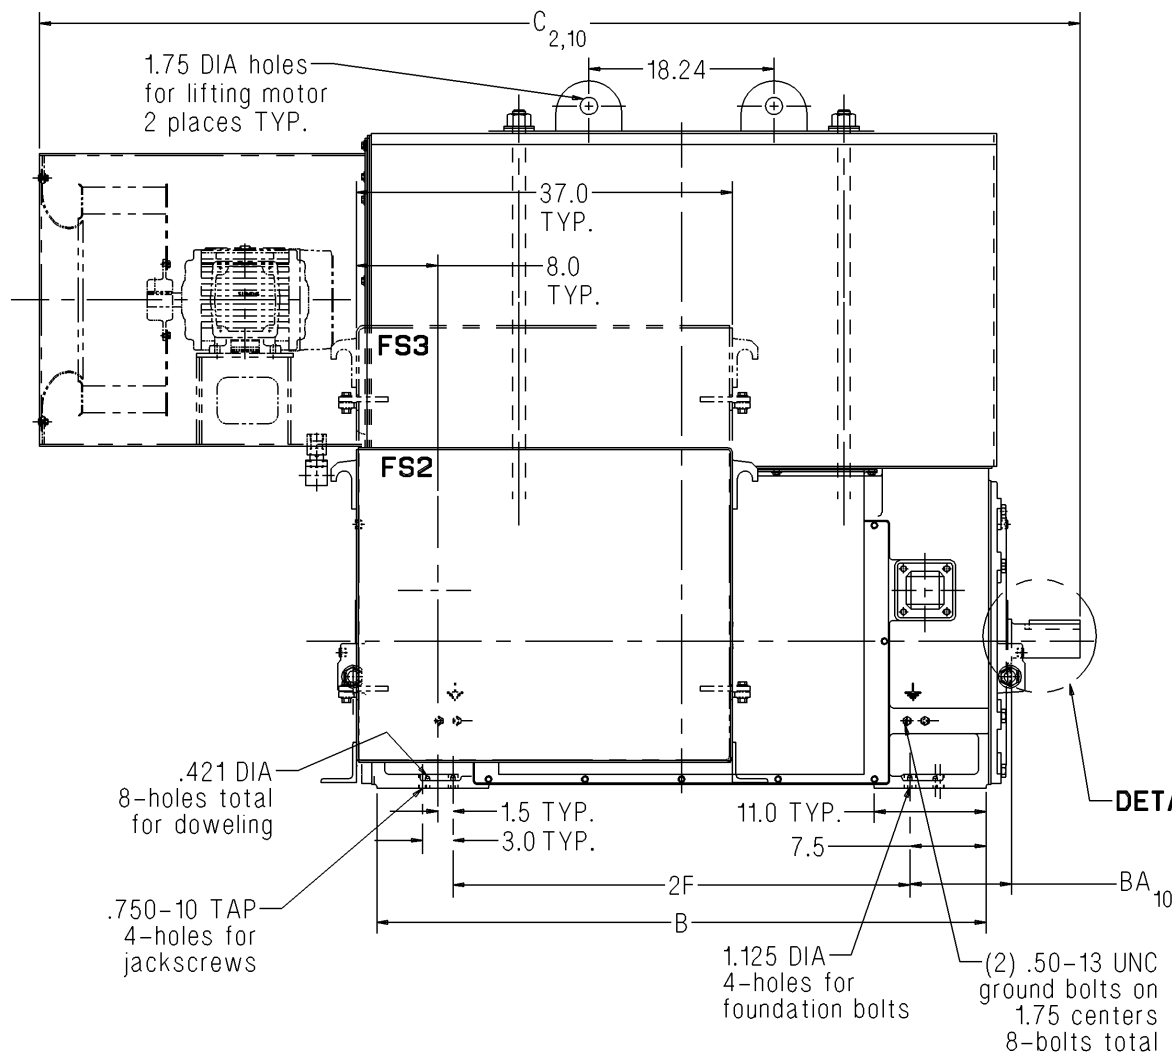



Dimension Prints for Above NEMA Motors

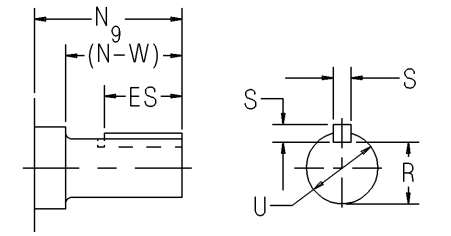

DETAIL "A"

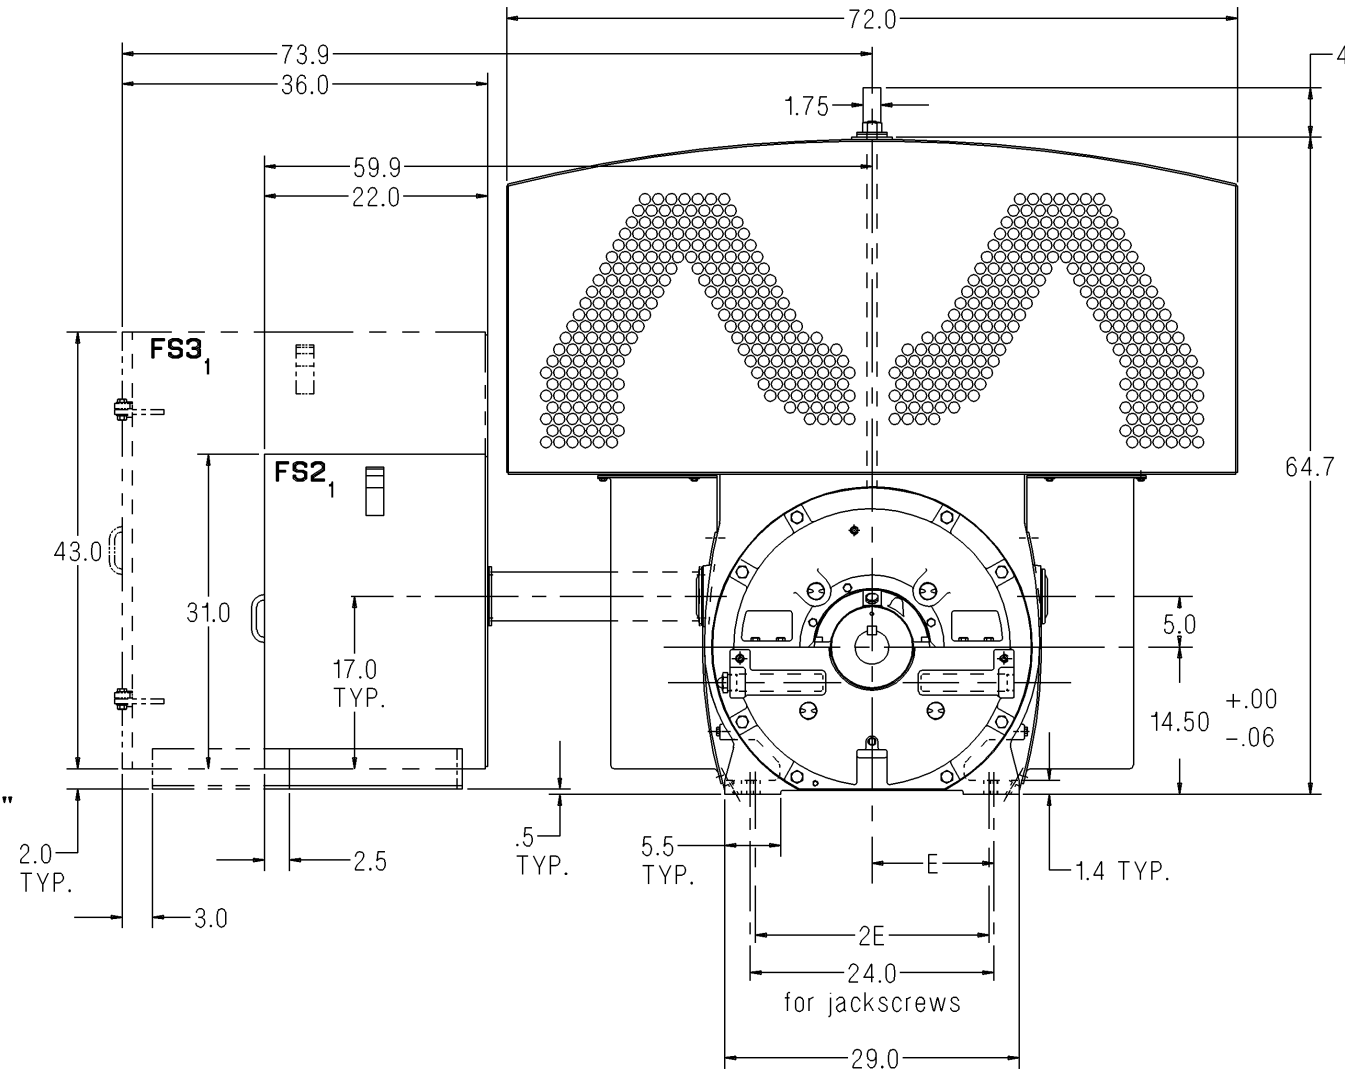

DETAIL "A"

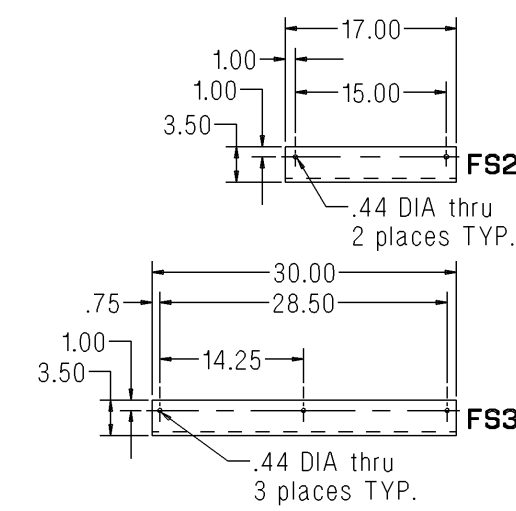

BOX FEET DIMENSIONS

Notes:

- Main conduit box is free standing and must be supported from below by customer. Main conduit box is not level with motor feet. A removable bottom plate is supplied on the FS2 and FS3 conduit boxes. A 21.0" spacer is supplied on the 5812 frame for the FS2 and FS3 conduit boxes.
- $C =$ Length of motor from drive end of shaft to end of auxiliary blower.
- $V = (N-W) - 0.25$ = length of shaft available for coupling.
- 2 Pole machines rotate in one direction only.
- Shims may be necessary under motor feet for direct connection.
- Rotor end float = 0.5"
- End float of LEF coupling = 0.19"
- Approximate ship weight is based on standard aluminum cooling tubes.
- Adding a rotating labyrinth seal to the drive end decreases N by:
2 Pole: 0.28" 4 Pole & Slower: 0.28"
- When adding a ground brush, consult the factory. (BA and C will increase.)
- For motors equipped with provisions for proximity probes use this print for our standard internal mounting.

Lubrication Per Bearing	
2 Pole	4 Pole & Slower
140-160 SUS @ 100°F	290-350 SUS @ 100°F
3.5 qt. capacity	3.5 qt. capacity

Standard Dimensions in Inches

Shaft	Frame	Speed	B	BA ₁₀	C _{2,10}	E	2F	N ₉	(N-W)	R	S	U	V ₃	ES	Approx. Ship Wt. (Lbs) ₈
Short	5812S	2 Pole	60.0	10.00	102.5	11.50	45.0	7.13	6.75	2.880	0.875	3.375	6.50	5.0	9900
Short	5812S	4 Pole & Slower	60.0	10.00	103.8	11.50	45.0	8.38	8.00	3.436	1.000	4.000	7.75	6.0	10100

Certification: Customer _____ P.O. _____ S.O. _____ Item _____
 HP _____ RPM _____ Frame _____ PH/HZ/Volts 3/_____/_____
 By _____ Date _____ Terminal Box Size FS2 FS3
 Comments _____
 Not for construction, installation or application purposes unless certified.