

IF IN DOUBT ASK
DO NOT SCALE

EU EXPORT CONTROLS

ECCN: N

AL: N

This document is not Export Controlled unless sending to Critical Countries.

NOTES

1) TERMINALS RECOMMENDED ARE PRE-INSULATED & MUST BE CRIMPED USING APPROVED TOOLING.

SUPPLIER PART NUMBER CABLE SIZE

Dowells (ring type) RS009 2.5mm sq.
Dowells (pin type) CP9/CP1 2.5mm sq./1.5mm sq


OR ANY OTHER MANUFACTURERS EQUIVALENT TERMINAL.

2) FOR RELAY OUTLINE & PANEL DRILLING REF DRAWING 2995X10030 .



3) CONNECTIONS TO THIS COMMUNICATIONS FACILITY IS BY SCREENED, TWISTED PAIR CABLE, ON SITE.

WHEN WIRING OTHER FACILITIES ENSURE THAT THESE TERMINALS ARE NOT OBSCURED BY OTHER WIRE RUNS.

4) 1A/5A IS AN ORDERING OPTION.

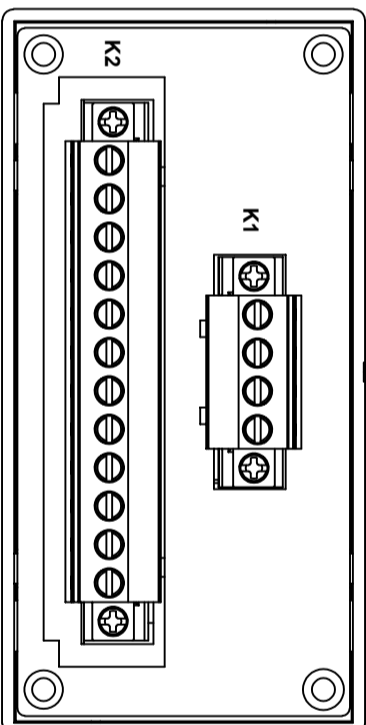

RELAY VIEWED FROM REAR



ABBREVIATIONS

BI-BINARY INPUTS
BO-BINARY OUTPUTS
C-COMMON
M-NORMALLY OPEN BINARY OUTPUT CONTACTS
B-NORMALLY CLOSED BINARY OUTPUT CONTACTS

MATERIAL: MATERIAL.

Dimensions in millimetres : Surface texture in micrometres.
Machine where marked ✓

For explanation of dimensions, tolerances, notes etc. see B.S.308.

Limit on untoleranced unmachined dimensions ±

ie. up to 6±0.1; over 30 to 120±0.3; over 315±0.8;

over 6 to 30±0.2; over 120 to 315±0.5;
General unmachined angular tolerance ±

Finish:

Treatment:

Title:

TERMINAL ID & WIRING DIAGRAM FOR
AC/DC SUPERVISION RELAY

Copyright © YEAR Siemens Protection Devices Ltd. Hebburn

First used on:

Similar Articles:

Supersedes:

Original Scale.

Dwg. No.

NTS

2112W50500

ISSUE.	MOD. DATE.	CHANGE
1	02/08/21	INITIAL RELEASE
		CHANGE
		NOTED

DRAWN VC	CHECKED VC	APPROVED NC	DATE 02/08/21	IE	OPS	PCP	Purch. Spec. TQ	EAC	EAC.	CE	STD	A3
----------	------------	-------------	---------------	----	-----	-----	-----------------	-----	------	----	-----	----

NOT SUBJECT TO UPDATE
ONCE COPIED / PRINTED
OR DOWNLOADED