

TYPE 3R ENCLOSURE (RAINPROOF).

SUITABLE FOR USE AS SERVICE EQUIPMENT WHEN NOT MORE THAN SIX MAIN DISCONNECTING MEANS ARE PROVIDED. WHEN USED AS SERVICE EQUIPMENT, BOND NEUTRAL AND APPLY "SERVICE DISCONNECT" LABEL NEAR THE DISCONNECT HANDLE.

DEVICE RATING: 200 AMPS MAXIMUM, 120/240 VAC (4 JAW METER), SINGLE PHASE, THREE WIRE OR 208Y/120 VAC (5 JAW METER), THREE WIRE. LIMITED TO TWO POLE BREAKERS.  
METER SOCKET RATING: 200 AMPS CONTINUOUS.

THIS DEVICE HAS A MAXIMUM SHORT CIRCUIT CURRENT RATING OF 35,000 RMS SYMMETRICAL AMPERES AT 240 VAC MAXIMUM. (Wait-Hour meter not included in short circuit current rating). THE ACTUAL RATING IS DEPENDENT ON THE MAIN BREAKER INSTALLED IN THIS PANELBOARD. THE CORRECT MAIN TO BE USED WITH THE VARIOUS SHORT CIRCUIT CURRENT RATINGS ARE LISTED IN THE TABULATION BELOW. ANY CIRCUIT BREAKER INSTALLED OR REPLACED IN THIS PANELBOARD MUST BE MANUFACTURED BY SIEMENS AND MUST BE OF THE CORRECT TYPE AS INDICATED IN THE TABULATION BELOW.

MAX short circuit current rating in RMS symmetrical Amperes	MAIN
35,000	When protected by a field installed 2 pole circuit breaker Type Murray MOL or Siemens OJ2H
22,000	Murray MOH or Siemens OJH2
10,000	Murray MO or Siemens OJ

FOR BREAKERS WITH TRIPPED POSITION IN CENTER, RESET BREAKER BY MOVING HANDLE TO "OFF" AND THEN TO "ON".

FOR EQUIPMENT GROUND BAR ORDER ECLX SERIES, FOR 5TH JAW ORDER UX005B, IF HUB IS REQUIRED SELECT FROM "HC" LIST BELOW, OR USE ECHCRXA ADAPTER WITH HUBS SELECTED FROM "RX" LIST BELOW.

HC TYPE HUBS	CAT. NO.	RX TYPE HUBS	CAT. NO.
2"	ECHC200	1-1/2"	EC38598
2-1/2"	ECHC250	2"	EC38599
3"	ECHC300	2-1/2"	EC38600

TERMINALS SUITABLE FOR USE WITH 60/75°C, AL/CU INSULATED WIRE


TERMINAL TIGHTENING TORQUES, LB-IN.

WIRE SIZE, kcmil OR AWG	LOAD & NEUTRAL	SERVICE GROUND	EQUIPMENT GROUND
250-2/0	---	---	---
1/0 - 3	50	45	45
4	250	45	45
6	250	45	45
8	---	40	25
10 - 12	---	35	20

TORQUE TEST BLOCK CIRCUIT CLOSING (DISCONNECT) NUT (5/8" ACROSS FLATS) TO 50 LB-IN.

NOTES:

- 1) FINISH: GRAY
- 2) CABINET: 16 GA GALV STEEL
- 3) 200 AMP, 120/240 VAC, 1 PHASE, 3 WIRE
- 4) SEALING RING, HUB COVER PLATE ASY & NEMA INSTRUCTION SHEET PLACED INSIDE OF BOX BEFORE DEADFRONT IS SECURED.
- 5) UL LISTED - FILE #E27485.

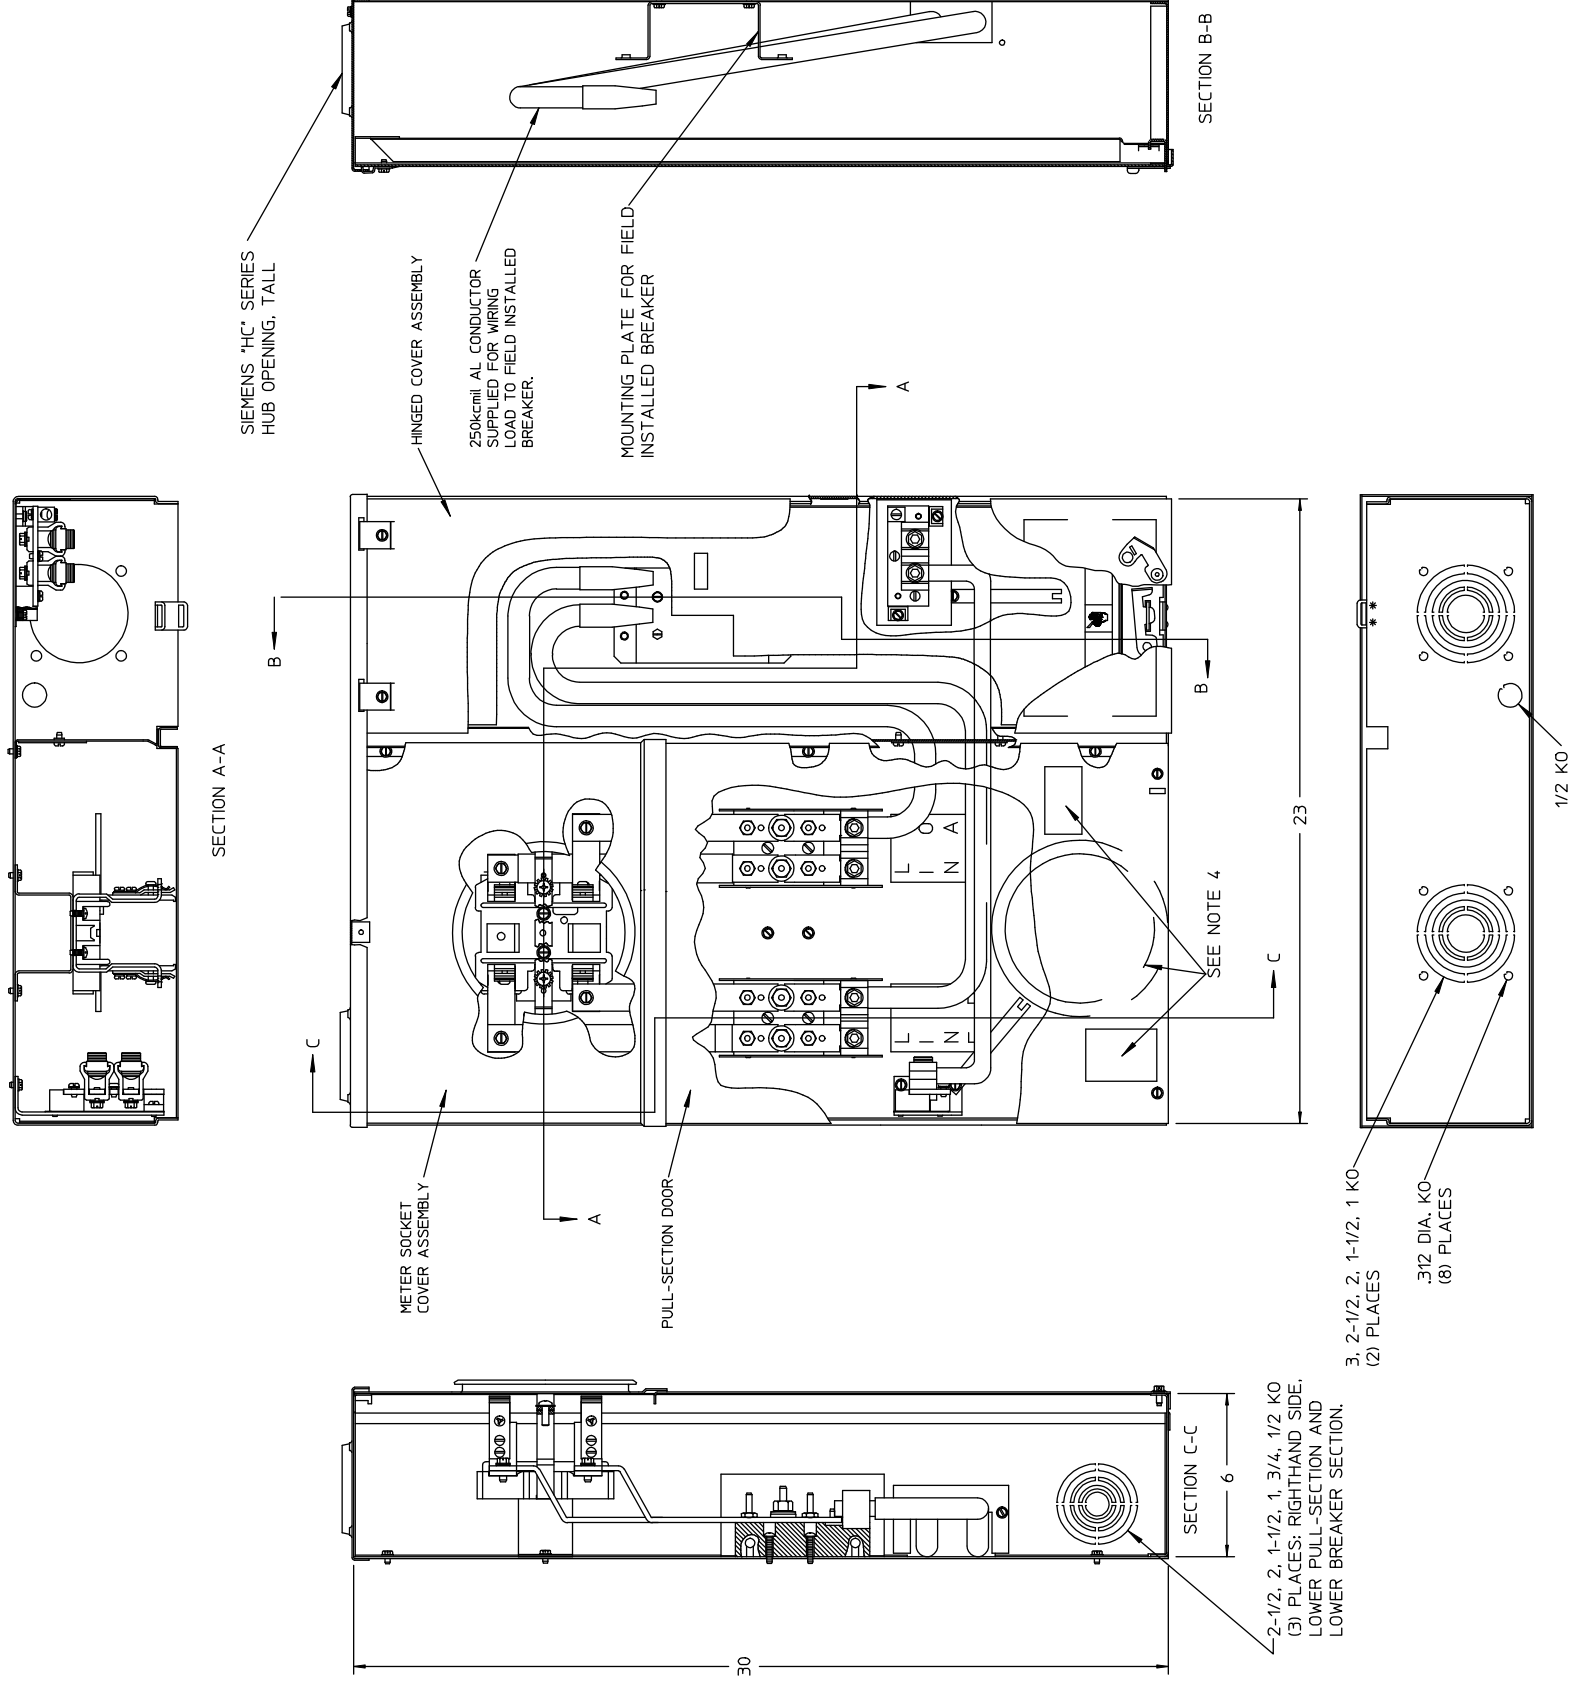

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES  
TOLERANCES:  
.XX  
.XXX  
HOLE DIAMETER  
ANGULAR  
UNDIMENSIONED 90° ANGLES

-CONFIDENTIAL-PROPERTY OF  
**Siemens Energy & Automation, Inc.**  
Residential Products Division

MTR SKT 200A 4T HO EUSERC

DWN WRB DATE 5/8/07 SIZE ISSUE RELEASE NO. DWG NO. MM0202L1200CEY REV

CHK DATE APVD DATE SCALE DO NOT SCALE DRAWING SHEET 1 OF 1