

VBII Heavy Duty Safety Switch with Viewing Window


200A, 240 - 600V, Type 12/3R/3S

Standards and Ratings

- UL and CUL Listed under file #E4776
- Meets UL98 for switches and UL 50 for enclosures
- Meets NEMA Standard KS-1 for enclosed switches
- Rated 10,000 AIC with Class H fuses or 200,000 AIC with Class R, T and J fuses
- Rated 100,000 AIC at 600Vdc with Class R or J fuses
- I₂t rated (Amps² x Seconds = 2,000,000)
- 12X overload current rating exceeds 10X industry standard
- Suitable for use as service entrance equipment in the US

Features

- Quick-make and break switching action
- Double break visible blade design
- Highly visible ON/OFF indication
- Rugged installer friendly enclosure design
- Window permits viewing of both visible blades and indicating type fuses
- Modular design allows quick and easy replacement of parts
- Front removable lugs which can easily be converted to copper body or compression type lugs
- Defeatable dual cover interlock

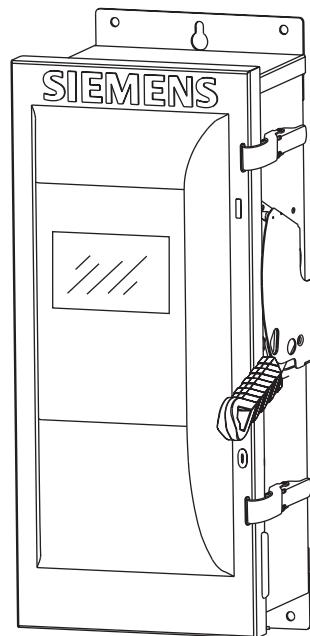

SIEMENS

Product Specifications

Heavy Duty 200A, 240 - 600V, Type 12/3R/3S

General Information

Catalog Number	Volts	Description	Shipping Weight (lbs.)
HF224J	240	2 Pole, 2 Wire Fusible	48
HF324J	240	3 Pole, 3 Wire, Fusible	49
HF364J	600	3 Pole, 3 Wire, Fusible	49
HNF364J	600	3 Pole, 3 Wire, Non-Fusible	47

Horsepower Ratings^{2,3} – 240 Volts

Catalog Number	1 Phase, 240V AC		3 Phase, 240V AC		250V DC
	Std	Max	Std	Max	
HF224J	15	—	25	60	40
HF324J	15	—	25	60	40

Horsepower Ratings^{2,3} – 600 Volts

Catalog Number	3 Phase, 480V AC		3 Phase, 600V AC		600V DC
	Std	Max	Std	Max	
HF364J	50	125	60	150	50
HNF364J ⁴	—	125	—	150	50

Mechanical Lug Wire Range (75°C, Cu/Al)

Description	Wire Range
Line, Load, Neutral	#6 AWG - 300 Kcmil
200% and Standard Neutral Ground	#14-1/0AWG
Ground Lug Kit	#14-4 AWG
200% Neutral	(2) #6 AWG - 300 Kcmil

Compression Lugs

Wire Size	Burndy		Thomas-Betts		Ilasco	
	CU Only	CU/AL	CU Only	CU/AL	CU Only	CU/AL
#2	YA6C-L Box YA2C	YA2CA1	54142-TB	61107	CRB-2 CRB-2L	IACL-2 ACN-2
#1	YA1C-L Box YA1C	YA1CA1	54147 54947BE	60123	CRA-1-38 CRA-1L	ACL-4
1/0	YA25-L Box YA25	YA25A1	54153-TB 54949BE	60129 61130	CRA-0 CRA-1/0L	IACL-1/0 ACN-1/0
2/0	YA26-L3 YA26	YA26A6	54158 256-30695-1229 54910BE	60135 61136	CRA-2/0 CRA-2/0L	ACL-2/0 IACL-2/0
3/0	YA27-L3 YA27	YA27A1	54163-TB	60141 61142	CRC-3/0 CRB-3/0L	IACL-3/0 ACL-3/0
4/0	YA28-L3 YA28-TC38	YA28A1	54168 256-30695-1253	61148 60147	CRC-4/0 CRB-4/0L	IACL-4/0 ACL-4/0
250 Kcmil	YA29-L7	—	54173 54913BE	61156	CRA-250 CRA-250L	IACL-250
300 Kcmil	—	—	—	61162	—	—

¹ Also rated 3R/3S for outdoor use.

² Dual horsepower ratings: Std – applies when non-time delay fuses are installed.

Max – applies when time-delay fuses are installed.

³ Horsepower ratings listed also apply to Design E motors with no derating.

⁴ Also rated 60 HP on 3phase, 240V AC systems.

⁵ Place "DOOR" at the end of the switch catalog number.

Accessories


Catalog Number	Description
HSK64B	Add-on internal line-side barrier for service entrance application (per NEC 230.62)
HA161234	One Normally Open and Closed Auxiliary Switches
HA261234	Two Normally Open and Closed Auxiliary Switches
HA361234	Low Voltage Auxiliary Switch
HG61234	Equipment Ground Lug Kit
HG261234	Isolated Equipment Ground Lug Kit
HN64	Neutral Kit
HN264	200% Neutral Kit
HT24	240 Volt Class T Fuse Clip Kit (1-Pole per kit) (HF224J, HF324J)
HT64	600 Volt Class T Fuse Clip Kit (1-Pole per kit) (HF364J)
HR64	Class R Fuse Clip Kit (3 fuse clips per kit) (HF224J, HF324J, HF364J)
HLC64	Copper Lug Kit (9 lugs per kit)
SSH200	2.00" Type 12 Hub

Replacement Parts

Catalog Number	Description
HFB64	Fusible Line Side Replacement Base (HF224J, HF324J, HF364J)
HBB64	Fusible Load Side Replacement Base (HF224J, HF324J, HF364J)
HNB64	Non-Fusible Replacement Base (HNF364J)
HH64	Replacement Handle/Handle Guard
HL64	Replacement Lugs (3 lugs per kit)
HM64	Replacement Mechanism
⁵	Replacement Door

Dimension Drawings

Heavy Duty 200A, 240 - 600V, Type 12/3R/3S

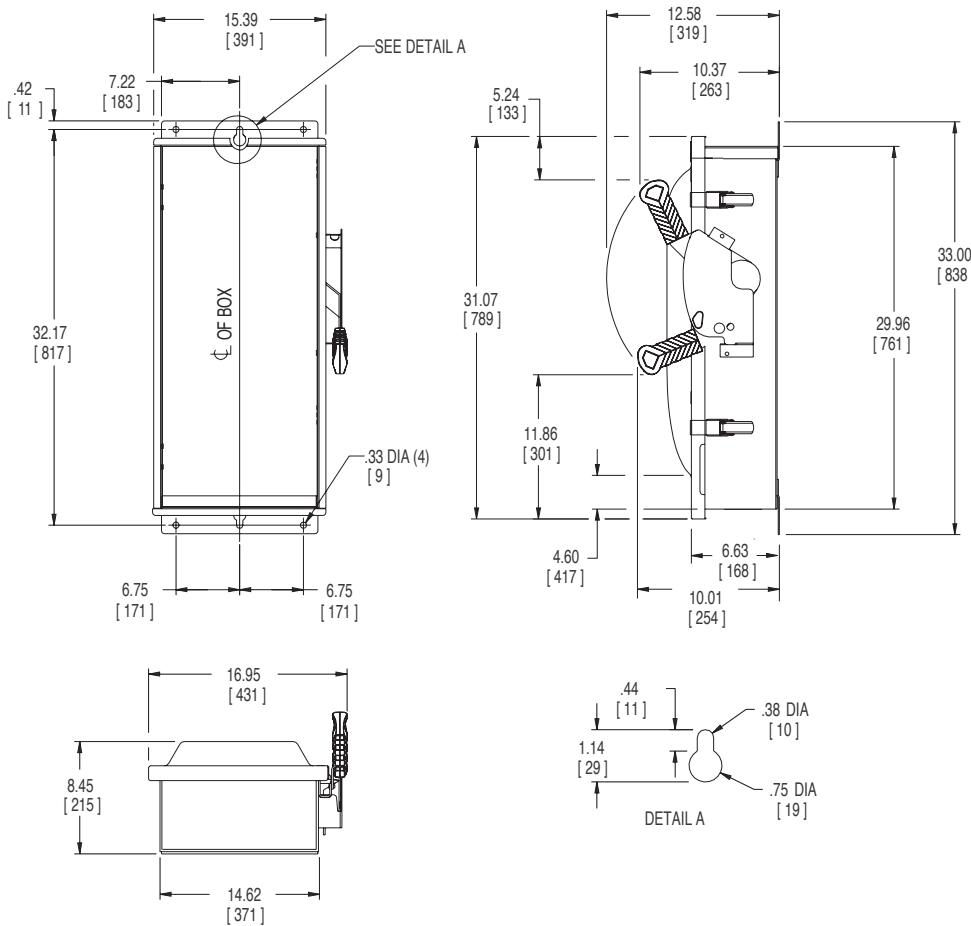

No knockouts in enclosures.
Dimensions shown in inches and millimeters ().
Dimension shown accurate to $\pm 1/8$ inch.

	LINE SIDE WIRE BEND	LOAD SIDE WIRE BEND
240V fused	7.87 (200)	10.34 (263)
600V fused	7.87 (200)	7.84 (199)
Non-Fused	7.87 (200)	15.84 (402)

Enclosure: Galvanized Steel
.054 Thick (17 Gauge)
Finish: ANSI Grey #61 Paint

Published by
Siemens Canada Limited
1577 North Service Road East
Oakville, ON L6H 0H6
Canada

Printed in Canada
© 2024 Siemens Canada Limited

This document contains a general description of available technical options only, and its effectiveness will be subject to specific variables including field conditions and project parameters. Siemens does not make representations, warranties, or assurances as to the accuracy or completeness of the content contained herein. Siemens reserves the right to modify the technology and product specifications in its sole discretion without advance notice.