

**SIEMENS**



Fixed-Mounted Circuit-Breaker Switchgear  
Type 8DJH ST E up to 12kV, Gas-Insulated  
Medium-Voltage Switchgear – Catalog EM-MS-8DJH ST E-002

[siemens.com/medium-voltage-switchgear](https://www.siemens.com/medium-voltage-switchgear)



Fixed-mounted circuit-breaker switchgear 8DJH ST E is a factory-assembled, type-tested, three-pole, metal-clad, SF6 insulated switchgear for single busbar applications.

8DJH ST E switchgear is used in primary power distribution for Utilities, Switching substations, Infrastructure and Industrial applications e.g. in

- Automotive
- Buildings and Commercial installations
- Cement
- Chemicals
- Food and beverages
- Mining
- Pharmaceuticals
- Power Utilities
- Pulp & Paper
- Shipbuilding


Compactness, reliability, climatic independence and cost efficiency add to the central aspects of gas-insulated medium voltage switchgear from Siemens in order to provide future proof investment: optimal personal and functional safety as well as reliable, maintenance free operation.



Technical data	
Rated voltage	12 kV
Rated frequency	50 Hz
Rated short-duration power-frequency withstand voltage	28 kV <sup>1)</sup>
Rated lighting impulse withstand voltage	75 kV <sup>1)</sup>
Rated peak withstand current	65.75 kA
Rated short-circuit making current	65.75 kA
Rated short-time withstand current 3s	26.3 kA
Rated short-circuit breaking current	26.3 kA
Rated normal busbar current	1250 A
Rated normal feeder current	1250 A
Degree of protection	Gas vessel : IP67 Switchgear enclosure : IP4X
Partition class	PM
Loss of service continuity	LSC 2
Internal arc classification	IAC A FLR 26.3kA, 1s
Dimensions	
Width	500 mm
Depth	1100 mm
Height	2550 mm

1) BIL 38kV/95kVp available optionally

Benefits	Features
<b>Compact design</b>	<ul style="list-style-type: none"> <li>• Use of SF6 insulation leads to compact design</li> <li>• Existing switchgear rooms can be used effectively</li> <li>• Reduced costs for new construction</li> <li>• Lesser footprint leads to saving of space in costly city area</li> </ul>
<b>Environmental independence</b>	<ul style="list-style-type: none"> <li>• The enclosed high-voltage part of 8DJH ST E switchgear is suitable for applications under aggressive ambient conditions, such as saline, humid, dust and condensation</li> <li>• It is tight to ingress of foreign objects, such as dust, pollution and rodents</li> </ul>
<b>Maintenance-free design</b>	<ul style="list-style-type: none"> <li>• Switchgear housings are having sealed-for-life design according to IEC 62271-200 (sealed pressure system) which gives maintenance-free switching devices</li> <li>• Ensures maximum supply reliability</li> <li>• Reduced operating costs</li> </ul>
<b>Innovation</b>	<ul style="list-style-type: none"> <li>• Use of digital secondary systems as well as combined protection and control devices</li> <li>• Ensures clear integration in process control systems</li> <li>• Flexible and highly simplified adaptation to new system conditions and thus to cost-efficient operation</li> </ul>
<b>Personal safety</b>	<ul style="list-style-type: none"> <li>• Safe-to-touch</li> <li>• Capacitive voltage detecting system to verify safe isolation from supply</li> <li>• Operating mechanisms and auxiliary switches safely accessible outside the primary enclosure (switchgear housings)</li> <li>• Due to the system design, operation is only possible with closed switchgear enclosure</li> <li>• Standard degree of protection IP 67 for all high-voltage parts of the primary circuit, IP 4X for the switchgear enclosure according to IEC 60529</li> <li>• High resistance to internal arcs</li> <li>• Panels tested for resistance to internal faults up to 26.3kA for 1 sec</li> <li>• Make-proof earthing by means of the vacuum circuit-breaker</li> </ul>
<b>Security of operation</b>	<ul style="list-style-type: none"> <li>• Hermetically sealed primary enclosure independent of environmental effects (pollution, humidity and rodents)</li> <li>• Maintenance-free in an indoor environment according to IEC 62271-1</li> <li>• In isolated or compensated systems, low earth-fault currents are self-extinguishing</li> <li>• Inductive voltage transformers and ring core current transformers mounted outside the SF6 switchgear housings</li> <li>• Bolted switchgear housings</li> <li>• Minimum fire load</li> <li>• Option: Aseismic design</li> </ul>
<b>Reliability</b>	<ul style="list-style-type: none"> <li>• Type and routine-tested</li> <li>• Standardized, NC production processes</li> <li>• Quality assurance in accordance with DIN EN ISO 9001</li> </ul>
<b>Service life</b>	<ul style="list-style-type: none"> <li>• Under normal operating conditions, the expected service life of gas-insulated switchgear 8DJH ST E is at least 25 years</li> <li>• Expected up to 35 to 40 years, taking the tightness of the enclosed high-voltage part into account</li> </ul>

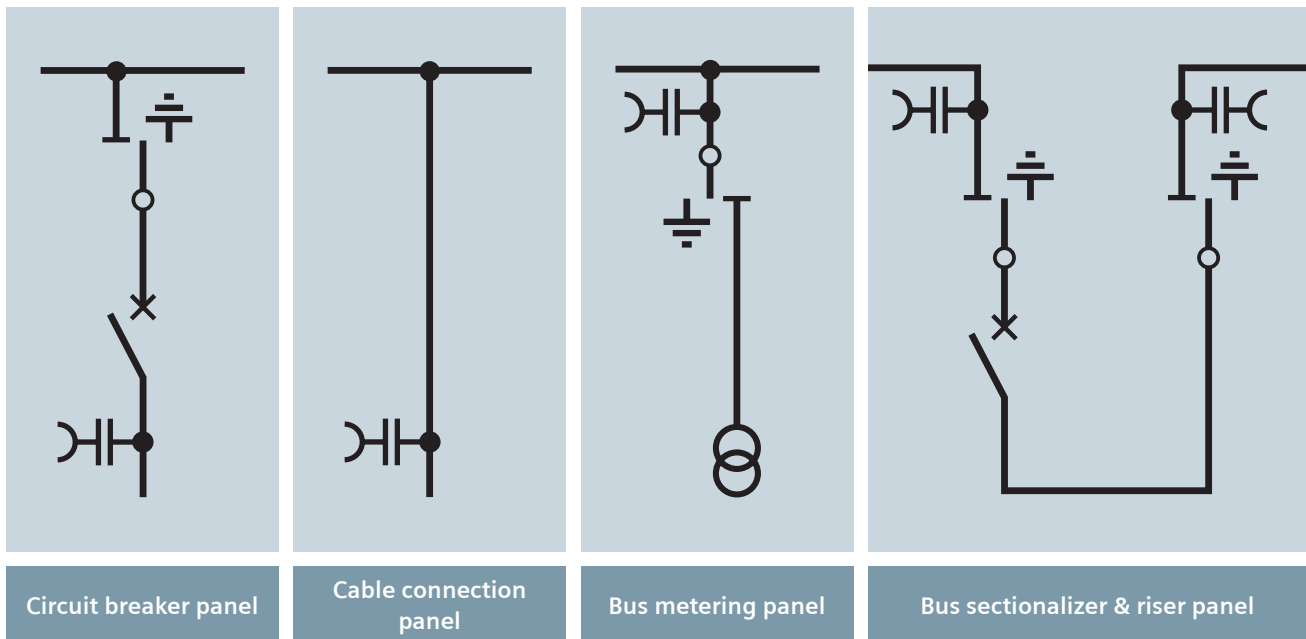

### General

- Metal-enclosed, three-pole primary enclosure
- Welded switchgear vessel, made of stainless steel, with welded-in bushings for electrical connections and mechanical components
- SF6 as an insulating gas
- Maintenance-free components under normal ambient conditions according to IEC 62271-1 and VDE 0671-1
- Three-position switch-disconnector with make-proof earthing function
- Vacuum circuit-breaker
- Wall-standing or free-standing arrangement
- Cable connection access from front & rear [optional]
- Installation and extension of existing switchgear at both ends without gas work and without modification of existing panels
- Pressure relief to the rear upwards

### Modular design

- Individual panels can be lined up and extended at will – without gas work on site
- Low-voltage compartment available in 3 overall heights, wiring to the panel via plug connectors

### Interlocks

- Design according to IEC 62271-200
- Logical mechanical interlocks and the constructive features of the three-position switches prevent maloperation as well as access to the cable connection of the feeders under live conditions
- Impermissible and undesired operations can be prevented by means of locking devices on the switching devices


### Instrument transformers

- Current transformers are free from dielectric stresses
- Easy replacement of current transformers designed as ring-core transformers
- Cast resin voltage transformers enclosed in cable compartment


### Vacuum circuit-breaker

- Maintenance-free under normal ambient conditions according to IEC 62271-1
- No relubrication or readjustment
- Up to 10,000 operating cycles
- Vacuum-tight for life


Circuit breaker panel

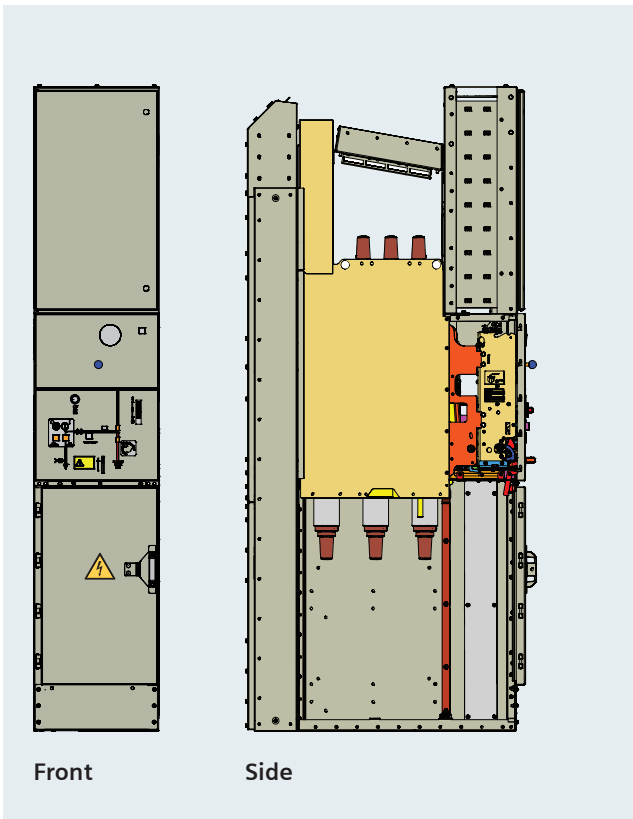


Cable connection panel

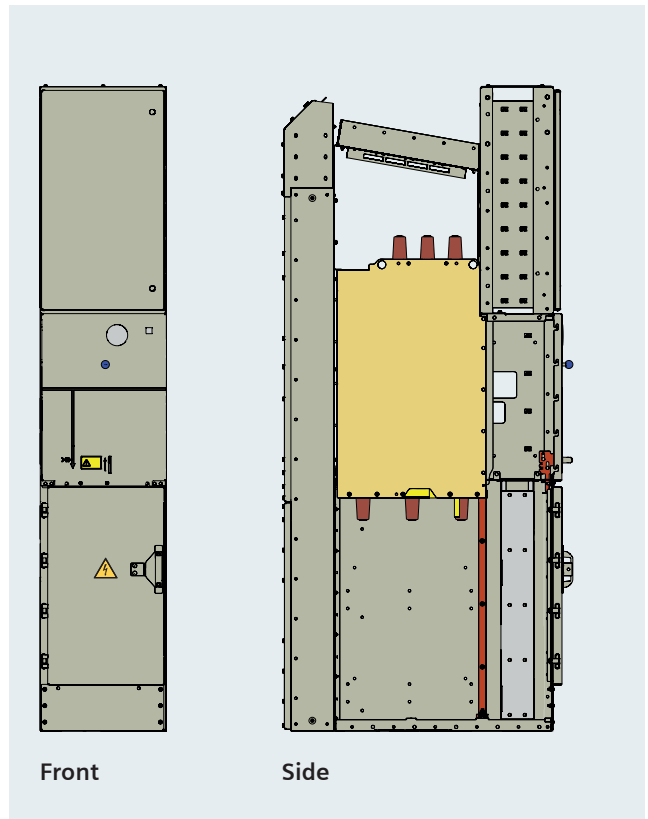

Bus metering panel

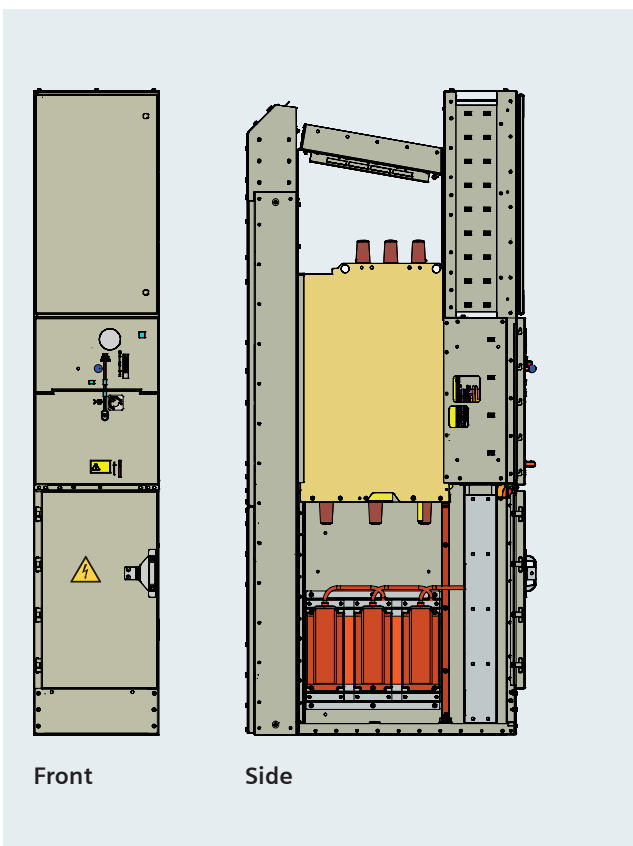

Bus sectionalizer & riser panel

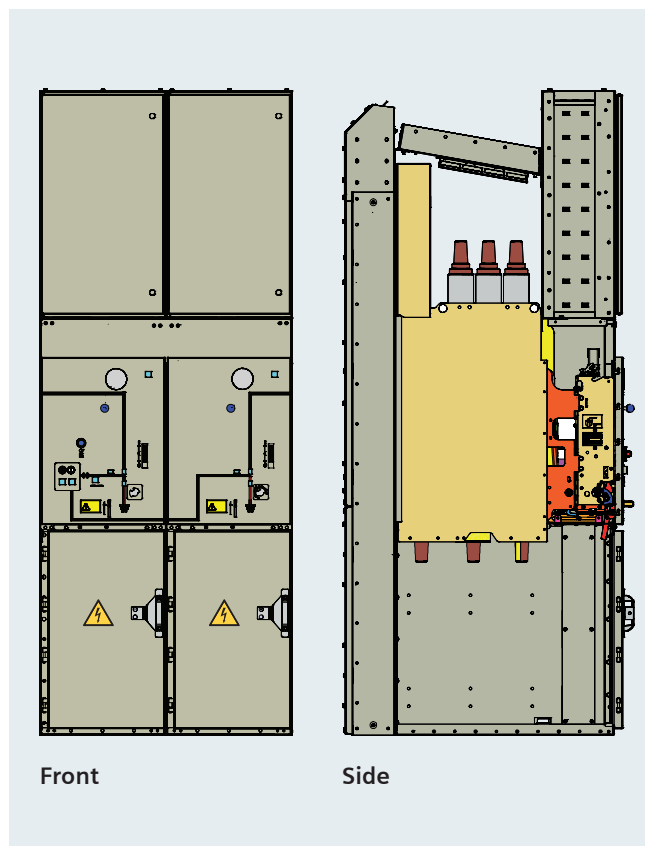



For more information, please contact:

#### Western Region

##### Mumbai

2nd Floor, R&D and Technology Centre  
Kalwa Works, Thane-Belapur Road  
Airoli Node, Navi Mumbai - 400 708  
Tel.: +91-22-3326 5005

##### Vadodara

"Vishwakarma Bhavan"  
Ground Floor, Maneja Works  
Vadodara - 390 013  
Tel.: +91-0265-395 7701

##### Pune

701-705, ICC Trade Tower  
B Wing, Senapati Bapat Marg  
Pune - 411 016, Maharashtra (India)  
Tel.: +91-20-3046 6039

#### Eastern Region

##### Kolkata

43, Shantipalli  
E.M. Bypass, Rash Behari Connector  
Kolkata - 700 042  
Tel.: +91-33-3093 9683

#### Northern Region

##### Gurgaon

3rd Floor, Tower - B  
Plot No. 6-A, Sector - 18  
Maruti Industrial Area, HUDA  
Gurgaon - 122 015, Haryana (India)  
Tel.: +91-124-383 7377

#### Southern Region

##### Chennai

9th Floor, Sigaphi Achi Building  
18/3, Rukmani Lakshminpathi Road, Egmore  
Chennai - 600 008  
Tel.: +91-44-3342 6215

#### International Sales

##### Mumbai

2nd Floor, R&D and Technology Centre  
Kalwa Works, Thane-Belapur Road  
Airoli Node, Navi Mumbai - 400 708  
Tel.: +91-22-3326 5005

Siemens Ltd.  
Energy Management  
Medium Voltage and Systems  
2nd Floor, R&D and Technology Centre  
Kalwa Works, Thane-Belapur Road  
Airoli Node, Navi Mumbai - 400 708  
Tel.: +91-22-3326 5005

Siemens Ltd.  
Energy Management  
Medium Voltage and Systems  
Goa Works, L-6 Verna Industrial Estate  
Verna Sakete, Goa - 403 722  
Tel.: +91-832-672 3000

EM-MS-8DJH-ST-E-003  
(This replaces EM-MS-8DJH ST E-002)