


**SIEMENS**

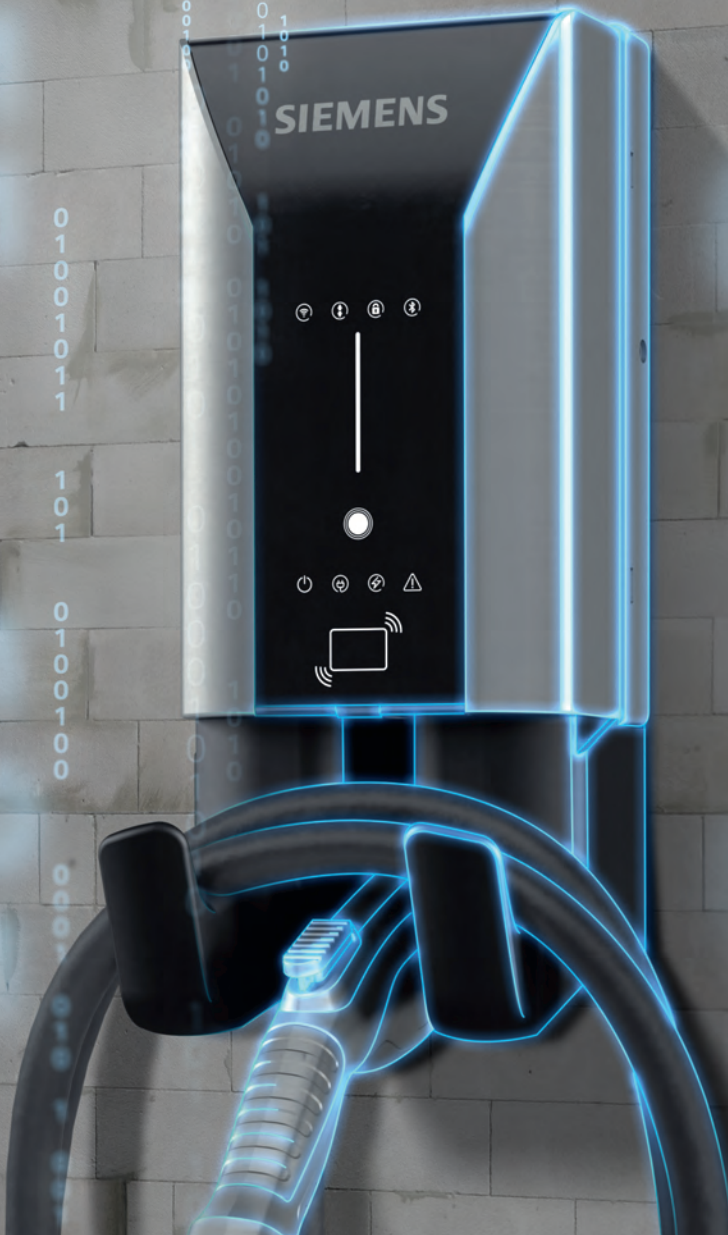

Charging on with  
cutting edge technology

VersiCharge™ AC Series


[usa.siemens.com/versicharge](http://usa.siemens.com/versicharge)

# Powerful, versatile, cost-efficient

## The VersiCharge™ AC Series


Siemens VersiCharge chargers have stood for superior quality, ruggedness, and proven technology for more than a decade and have reliably provided millions of charges to EV (electric vehicle) drivers worldwide. The new third generation VersiCharge AC charger is continuing this tradition with numerous groundbreaking enhancements, a fresh and appealing design, and up to 11.5 kW of AC (alternating current) charging power. Providing various communication options, including the option to establish a parent-child configuration.

The VersiCharge AC charger can be connected to the customer's preferred back-end system making it scalable and cost-efficient. It also offers revenue-accurate metering and can interact with a building management system, such as Siemens Designo for dynamic load management that smartly adjusts as building energy demand changes. The rugged and slender VersiCharge AC charger is suitable for both indoor and outdoor use and can either be mounted on a wall or supplementary post.

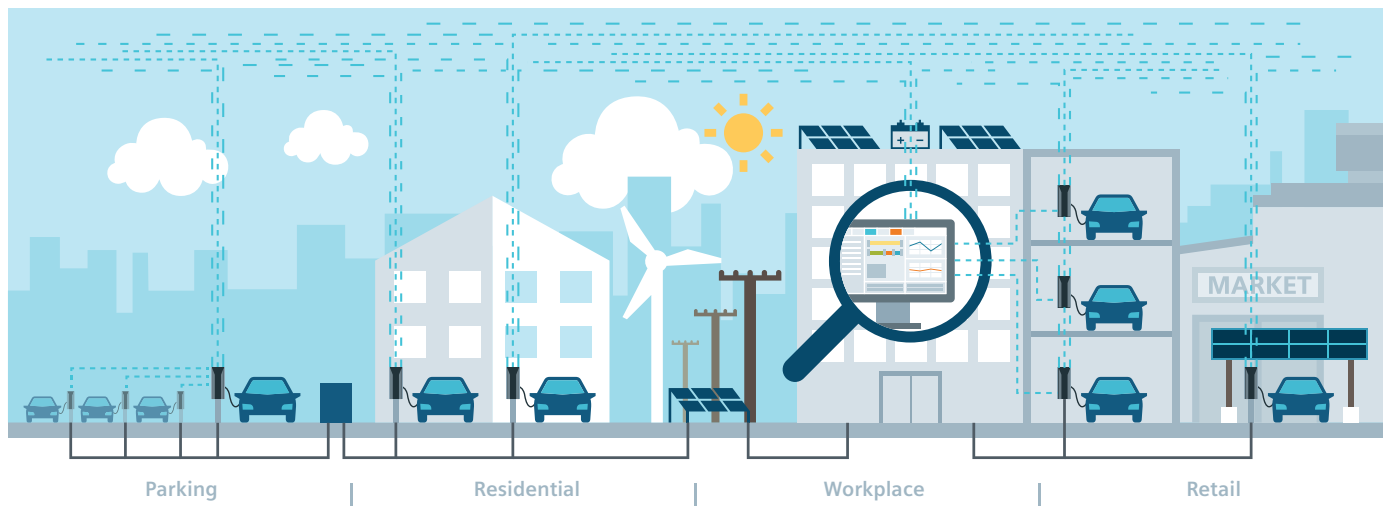

## The ideal solution for any application

Uniquely tailored for both commercial and home charging, the VersiCharge AC charger comes with an easy-to-use mobile application, and can charge any standard EV with just a tap of a button from your phone. The VersiCharge AC home charger is energy star certified, and offers cutting edge technology with the most affordable pricing.

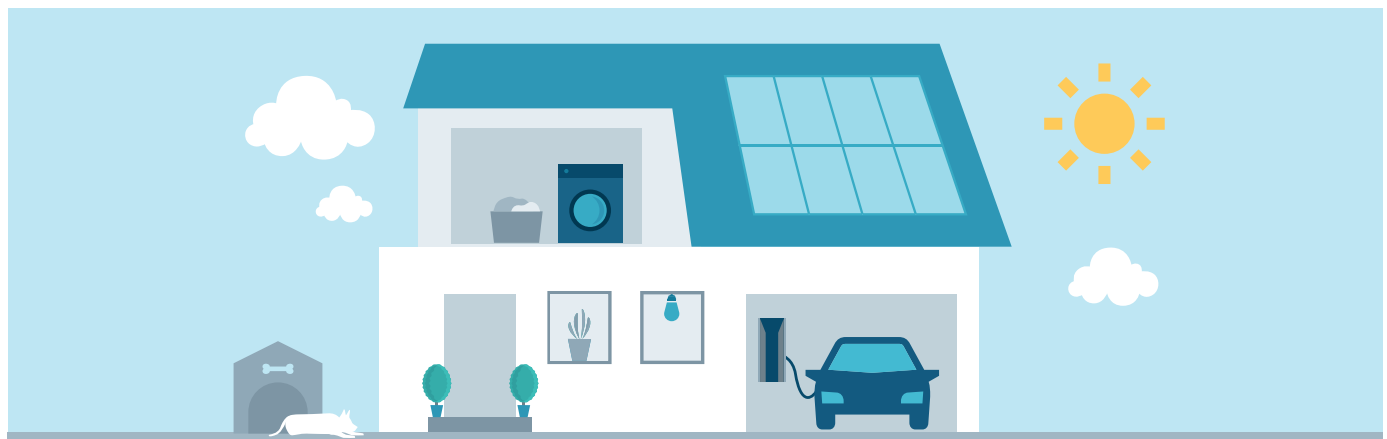

## VersiCharge™ AC Series – Technical data

Features and functions	
Charging mode	Level 2
Vehicle connection	J1772 plug with 20 ft cable, 40/48 A / integrated cable management
AC power output	Single phase up to 9.6 kW (40A) - requires a 50A breaker, or 11.5kw (48A) - requires a 60A breaker
Mounting options	Wall and post mounting, see accessories
Touch Button	Time delay, return to max power level, reset ground fault
Charging status LEDs	Power, time delay, charging state, reduced power level, authentication
Communication status LEDs	Connected / not connected during operation, signal strength during commissioning
Parent/child Network:	Connects up to 9 child units by Wi-Fi (100 ft line of sight) and 24 child units by serial Modbus RS485. Each unit is provided with one Ethernet port as well.
Load management	via OCPP or via Modbus
Communication	
Interfaces	Ethernet, Wi-Fi, Modbus RS-485, Modbus TCP/IP, for parent units additionally LTE, WCDMA
User authentication	RFID (local Whitelist, MiFare)
Configuration	via Siemens mobile app
Back-end protocol	OCPP 1.6, upgrade-able to OCPP 2.0
Software upgrade	over the air (OTA)
Electrical design	
Power supply voltage	Single phase: 208 V / 240 V AC, 60 Hz
Rated current settings (A)	12, 16, 24, 32, 40, 48
Cross wire section	Single phase: 8 Awg / 6 Awg (75C rated wire)
Network type	Single phase / split phase
Energy metering	revenue accurate, ANSI C12.20 compliant metering
Ground fault protection	20 mA
Over voltage protection	Under voltage: 167 V (min. 80 V) / over voltage: 267 V (max. 275 V)
Over current protection	Current +10% above configured threshold, min. +2A, 5 seconds
Operating altitude	9,840 ft
General design	
Environmental rating	Indoor and Outdoor, NEMA 4, IK 8
Dimensions (HxWxD)	16.10 in x 7.09 in x 3.78 in
Weight	17 lbs
Ambient conditions	Operating temperature: -31°F - +122°F, Storage Temp.: -40°F to +140°F, 98% non condensing
Colors	Silver Metallic (Pantone 10077), Black holster
Certificates and standards	
cUL listed	according to UL 1998, UL 991, UL2594/CSA C22.2 No.280/NMX-J-677-ANCE, UL 2231-1/CSA C22.2 No.281.1/NMX-J-668-1, UL 2231-2/CSA C22.2 No.281.2/NMX-J-668/2-ANCE, UL 2251/CSA C22.2 No.282/NMX-J-678-ANCE
EMC	FCC Part 15.247, FCC Part 15B, FCC Part 15C

		Max. current	Model number	Wi-Fi and Ethernet	Modbus RTU / TCP	RFID identification	Revenue grade metering	LTE WCDMA	SIM Card
Residential versions	Basic	40 A	8EM1312-4AF10-0AA3	–	–	–	–	–	–
		48 A	8EM1312-5AF10-0AA3						
	High End	40 A	8EM1312-4CF18-0FA3	✓	–	–	✓	–	–
		48 A	8EM1312-5CF18-0FA3						
Commercial versions	Child	40 A	8EM1310-4CF14-0GA0	✓	✓	✓	✓	–	–
		48 A	8EM1310-5CF14-0GA0						
	Parent	40 A	8EM1310-4CF14-1GA1	✓	✓	✓	✓	✓	–
		48 A	8EM1310-5CF14-1GA1						
	Parent with SIM cards	40 A	US2:VERSICELL40	✓	✓	✓	✓	✓	✓
		48 A	US2:VERSICELL48	✓	✓	✓	✓	✓	✓

Back-end protocol: OCPP 1.6, upgradeable to OCPP 2.0 (Not available in Residential Basic)

## Data plans for chargers

Siemens offers two commercial parent chargers with data plans for customer convenience. See table below for data plans.

Max current	Model
40 A	US2:VERSICELL40
48 A	US2:VERSICELL48

Description	Catalog Number
AT&T 1 year data plan, 2GB capped monthly bandwidth (supports ONE Parent charger).	P3R77992000784
AT&T 1 year data plan, 5GB capped monthly bandwidth (supports ONE parent charger and up to 10 commercial child chargers). This is a yearly fee that Siemens will bill direct after year one.	P3R77992000800

**Published by  
Siemens 2021**

Siemens Industry, Inc.  
3617 Parkway Ln  
Peachtree Corners, GA 30092

Siemens Technical Support: 1-800-333-7421  
info.us@siemens.com

Order No. SIDS-B40060-00-4AUS

Printed in USA  
All Rights Reserved  
© 2021, Siemens Industry Inc.  
usa.siemens.com/versicharge

The technical data presented in this document is based on an actual case or on as-designed parameters and therefore should not be relied upon for any specific application and does not constitute a performance guarantee for any projects. Actual results are dependent on variable conditions. Accordingly, Siemens does not make representations, warranties, or assurances as to the accuracy, currency or completeness of the content contained herein. If requested, we will provide specific technical data or specifications with respect to any customer's particular applications. Our company is constantly involved in engineering and development. For that reason, we reserve the right to modify, at any time, the technology and product specifications contained herein.

