

TPS3 L6

True 10 Mode Protection


Type 1 / 2 Surge Protection Device (SPD) for Service Entrance Applications – SB1, SB2, SB3, Type RCS Switchboards, Type WL Low Voltage Switchgear, Motor Control Centers and Busway Systems

Features:

- Mounts internal to:
 - SB1, SB2, SB3 & Type RCS switchboards
 - Type WL low voltage switchgear
 - TIASTAR motor control centers - standard 12" bucket
 - STP series busplug on SX series busway
- UL 1449-4 Type 2 SPD, UL 1283 Listed, CSA 22.2 No. 269.2
- Optional UL 1449 4th Edition Listed Type 1, CSA 22.2 No. 269.1
- Type 1 / Type 2 SPD
- Large block, individually fused, thermally protected, 50 kA MOVs
- 20 kA I_n
- 200 kA SCCR (most models)
- Rotary disconnect switch included
- Designed, manufactured and tested consistent with:
 - ANSI/IEEE C62.41.1-2002, C62.41.2-2002, C62.45-2002, C62.62-2010, C62.72-2016 & CSA C22.2 No. 269.1 and .2
 - 1992/2000 NEMA LS-1
 - NEC Article 285
 - IEC 61643, CE
- All UL required OCP & safety coordination included
 - Type 1 SPDs intended for Line or Load side of Main Disconnect




- Type 2 SPDs intended for Load side of Main Disconnect
- UL96A Lightning Protection Master Label compliant
- 10 year warranty
- SPD Specifications
 - Directly connected discrete protection elements between all possible modes providing true 10 mode protection
 - Surge Current Rating Per Phase

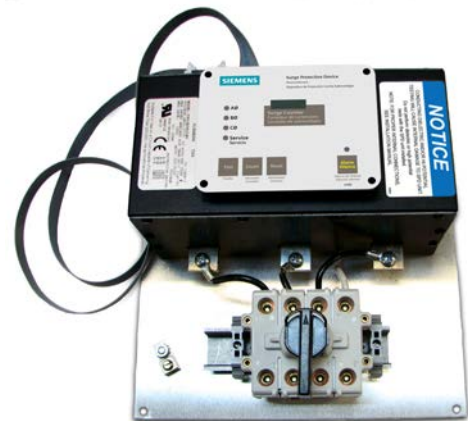Per Phase	L-N	L-G	L-L	N-G
150 kA	50 kA	50 kA	50 kA	50 kA
300 kA	100 kA	100 kA	100 kA	100 kA
450 kA	150 kA	150 kA	150 kA	150 kA
 - 100% monitoring (Every MOV is monitored, incl. N-G)
 - EMI/RFI filtering: Active tracking up to -50 db from 10 kHz to 100 MHz (Type 2 option only, includes UL 1283 Listing)
 - Repetitive impulse: 5,000 hits
 - $1/2$ nanosecond response time
 - Relative humidity range: 1-95% non-condensing
 - Operating frequency: 47-63 Hz
 - Operating temperature: -25°C (-15°F) to +60°C (140°F)



- Applications
 - Provides main service entrance or downstream protection for sensitive computer and electronic loads
 - Std. redundancy use: 300kA/phase
 - Max. redundancy use: 450kA/phase
- SPD Monitoring
 - LED indicators
 - Audible alarm with silence switch and test button
 - Dry contacts
 - Surge counter
 - Rotary disconnect switch

Ordering Information

TPS3  **L6**  **X** 

Voltage Code Surge Current (kA) Options

A = 120/240V, 1Ø, 3W (Fig 1)
 B = 120/240V, 3Ø, 4W (Fig 3)
 C = 120/208V, 3Ø, 4W (Fig 2)
 E = 277/480V, 3Ø, 4W (Fig 2)
 K = 380/220V, 3Ø, 4W (Fig 2)
 S = 400/230V, 3Ø, 4W (Fig 2)

15 = 150 kA per phase
 30 = 300 kA per phase
 45 = 450 kA per phase

X = Surge counter (Standard)

2 = Type 2 SPD (Default)
 Includes UL 1283
 EMI/RFI Filters

0 = Type 1 SPD (Contact factory)

0 = Standard config. (Default)
 B = Busway application
 M = MCC application

Example: TPS3CL645X02 = 10 mode Type 2 SPD (Default) for a 208/120V switchboard with a surge current capacity of 450 kA per phase and a surge counter

**Available Accessories:
 Ordered Separately**
 RMSIE - Remote monitor

UL 1449 Fourth Edition - Test Data Voltage Protection Rating (VPR - 6 kV, 3 kA) ①

Voltage Code	Service Voltage	L-N	L-G	N-G	L-L	I _n	SCCR	MCOV
A	120/240V, 1Ø, 3W (Fig 1)	700	700	700	1000	20 kA	100 kA	150
B	120/240V, 3Ø, 4W (Fig 3)	800/1500	700/1200	700	1800/1800	20 kA	200 kA	150 / 320
C	120/208V, 3Ø, 4W (Fig 2)	700	700	700	1000	20 kA	200 kA	150
E	277/480V, 3Ø, 4W (Fig 2)	1200	1200	1200	1800	20 kA	200 kA	320
K	380/220V, 3Ø, 4W (Fig 2)	1200	1200	1200	1800	20 kA	200 kA	320
S	400/230V, 3Ø, 4W (Fig 2)	1200	1200	1200	1800	20 kA	200 kA	320

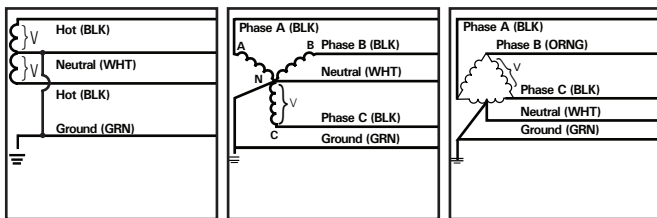


Figure 1
 Split
 2 Hots, 1 Neu, 1 Grnd

Figure 2
 Wye
 3 Hots, 1 Neu, 1 Grnd

Figure 3
 Hi-Leg Delta (B High)
 3 Hots, (B High),
 1 Neu, 1 Grnd

Siemens Industry, Inc.
 5400 Triangle Parkway
 Norcross, GA 30092

888-333-3545
 info.us@siemens.com

Order No. RPFL-S3L6C-1017

Printed in USA

All Rights Reserved.

©2017 Siemens Industry, Inc.

The technical data presented in this document is based on an actual case or on as-designed parameters, and therefore should not be relied upon for any specific application and does not constitute a performance guarantee for any projects. Actual results are dependent on variable conditions. Accordingly, Siemens does not make representations, warranties, or assurances as to the accuracy, currency or completeness of the content contained herein. If requested, we will provide specific technical data or specifications with respect to any customer's particular applications. Our company is constantly involved in engineering and development. For that reason, we reserve the right to modify, at any time, the technology and product specifications contained herein.

Notes:

- ① VPR may increase when disconnect switch is added
 VPR may decrease for 450 kA per phase