



Outdoor Combination Metering

CATALOG NUMBER:

MM0404L1400RLM

ENCLOSURE
TYPE 3R


FOR OVERHEAD AND UNDERGROUND
SERVICE SURFACE MOUNT

**SUITABLE ONLY FOR USE AS SERVICE
EQUIPMENT.**

CAUTION: CIRCUIT MAY BE LIVE WITH
METER REMOVED.

DEVICE RATING:
400 AMPS MAXIMUM; 120/240 V ~ (4 JAW) OR
208Y/120 V ~ (5 JAW); SINGLE PHASE, THREE
WIRE.

METER SOCKET: 4 JAW; LEVER OPERATED
BYPASS WITH JAW TENSION RELEASE.
RATING: 400 AMPS (320 AMPS CONTINUOUS)

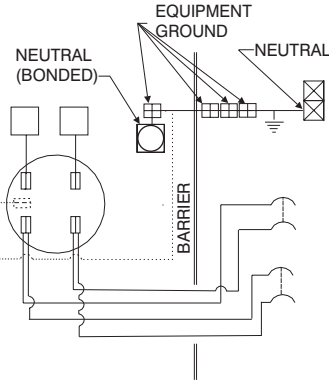

TERMINAL TIGHTENING TORQUES LB.-IN.:				TERMINAL RANGES, kcmil OR AWG:	
kcmil OR AWG	□	⊗	⊕	○	□ = LIMITED TO (1)600kcmil-#4 OR (2)350kcmil-1/0
WIRE SIZE					
600 - 500 kcmil	500	-	-	-	
500 - 350 kcmil	500	-	-	450	⊗ = (1)#250kcmil-6
350kcmil-3/0	500	250	-	450	⊕ = (1)2/0-#12
2/0	-	250	50	-	
1/0-#6	-	250	50	-	○ = LIMITED TO (1) 500kcmil-3/0 OR (2) 250kcmil-3/0

- ACCESSORIES
- FILLER PLATE QF3
 - 5TH JAW SHIELD S35815-2
 - FOR HUB, ORDER FROM "HD"
 - SERIES
 - COVERPLATE HD000
 - 3" HUB HD300
 - 3 1/2"HUB HD350
 - 4"HUB Hd400

HARDWARE TIGHTENING TORQUES:
3/8 NUTS 250-350 IN.-LBS.


THIS DEVICE HAS A MAXIMUM SHORT CIRCUIT CURRENT RATING OF 65,000 AMPS RMS SYMMETRICAL, 120/240 V ~. WATTHOUR METER IS NOT INCLUDED IN SHORT CIRCUIT CURRENT RATING. THE ACTUAL RATING IS EQUAL TO THE LOWEST INTERRUPTING RATING OF ANY INSTALLED CIRCUIT BREAKERS. USE ONLY SIEMENS TYPE QP, QPH, HQP, QN, QNH, HQN, QNR, QNHR, OR HQNR CIRCUIT BREAKERS. ANY CIRCUIT BREAKER INSTALLED, REPLACED, OR ADDED IN THIS PANELBOARD MUST BE ONE OF THESE TYPES .

WARNING: THIS DEVICE HAS BEEN DESIGNED FOR USE ONLY WITH THOSE CIRCUIT BREAKERS AS LISTED ABOVE. THE USE OF OTHER CIRCUIT BREAKERS COULD RESULT IN PROPERTY DAMAGE OR PERSONAL INJURY.

ALL OPENINGS MUST BE FILLED WITH BREAKERS OR FILLER PLATES.

FOR BREAKERS WITH TRIPPED POSITION IN CENTER, RESET BREAKER BY MOVING HANDLE TO "OFF" AND THEN TO "ON". DEVICE SUITABLE FOR USE WITH BREAKERS MARKED 60/75°C.

FOR INSTALLATION IN ACCORDANCE WITH ALL LOCAL ELECTRICAL CODES AND/OR THE NATIONAL ELECTRICAL CODE.®

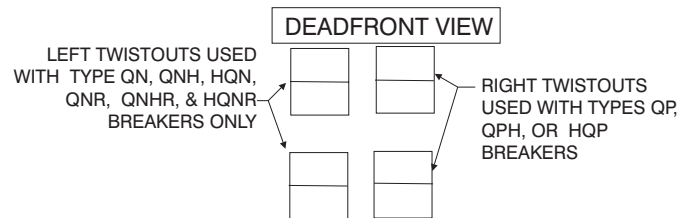

TERMINALS SUITABLE FOR USE WITH 60/75°C, **AL/CU** INSULATED WIRE.

CAUTION: PAINTS, PLASTER, HYDROCARBON BASED SPRAYS, LUBRICANTS OR SOLVENTS CAN DAMAGE THIS EQUIPMENT. DO NOT ALLOW THESE OR OTHER CONTAMINANTS TO CONTACT INTERIOR COMPONENTS.

® THE NATIONAL ELECTRICAL CODE IS A REGISTERED TRADEMARK OF THE NATIONAL FIRE PROTECTION ASSOCIATION.

SIEMENS ENERGY & AUTOMATION, INC.
ALPHARETTA, GEORGIA U.S.A

D

4099824 Rev.A