


Total Home Surge Protection SPD4coax

Surge Protection for Coaxial Connected Electronics



Features and Benefits

- UL listed
- Rated for CATV, DSS, TV, VCR, and Cable Modem
- Easy to install
- Standard Female to Female F connector
- Low insertion loss
- Automatic recovery
- 5 Year product warranty*

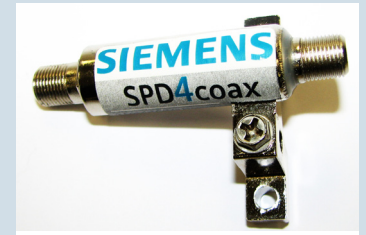

Siemens SPD4coax shields coaxial connected electronics in residential and light commercial applications against electrical transient damage, including lightning, from entering through the main cable connection.

SPD4coax includes a section of coaxial cable with female to female splice for line side application. The Siemens warranty covers product defects for 5 years. To have complete protection for your equipment, home, or business, it is important to protect AC power lines and all data lines the equipment is connected through.

* See website for warranty terms and conditions.

Technical Specifications

AC Surge Protection		Agency Approvals & Warranty	
Frequency Range	DC thru 1.5 GHz	UL/cUL Listings	497C
Catastrophic Surge Circuit	Yes	Meets IEEE C62.41.1 Requirements	Yes
Spike Capacity	5000 Amps, 8/20 μ Sec	Product Warranty	5 Years
Impedance	75 Ohms	Catalogue number	
Overcurrent Protection	Yes	SPD4coax	F-Type Inline Coax Protector
Return Loss	30dB @ 1 GHz	UL Model No. - Surgeassure™ SAVFFF	
Insertion Loss	<0.1dB		

surge protection

www.usa.siemens.com/spd

SIEMENS

INSTALLATION INSTRUCTIONS:

DO NOT INSTALL DURING ACTIVE STORM CONDITIONS.

The SPD4coax is intended to provide surge protection for customer premises and head end equipment. Proper grounding per CEC code is required. Failure to follow these instructions can result in personal injury and/or equipment damage.

DC Voltage Breakdown Rating (100V/s): 150 - 300VDC

1. Properly ground the unit by connecting grounding wire to ground screw on the surge protector and the ground point nearest to the incoming coax cable line.
2. Use the supplied coax cable extension line (if necessary) to connect the incoming cable service to side A of the SPD4coax and connect side B to the equipment being protected. (See Figure 1 or 2)

Figure 1. Typical Cable Modem Installation


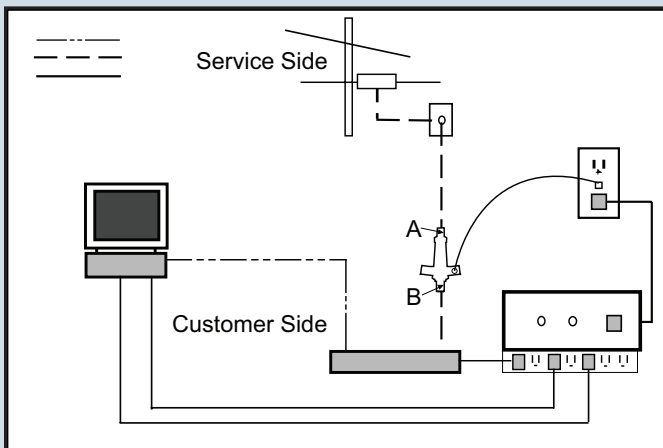


Figure 2. Typical Cable TV Installation

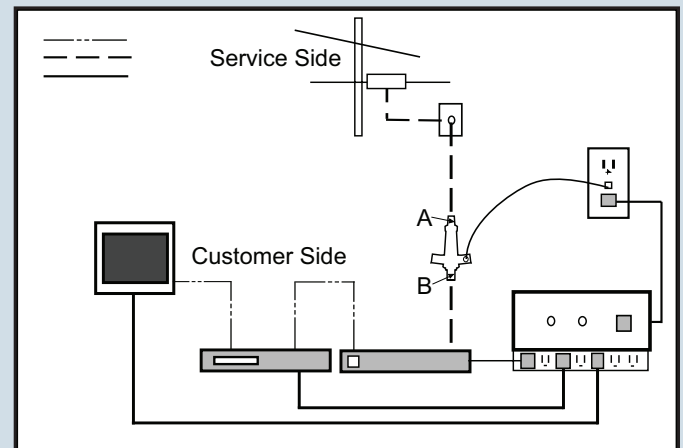

Siemens Industry, Inc.
5400 Triangle Parkway
Norcross, GA 30092

888-333-3545
info.us@siemens.com

©2010 Siemens Industry, Inc.
All Rights Reserved. Siemens is a registered
trademark of Siemens AG. Product names
mentioned may be trademarks or registered
trademarks of their respective companies.
Specifications are subject to change without notice.

www.usa.siemens.com/spd