
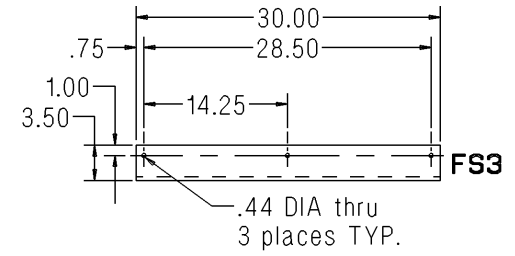


DETAIL "A"

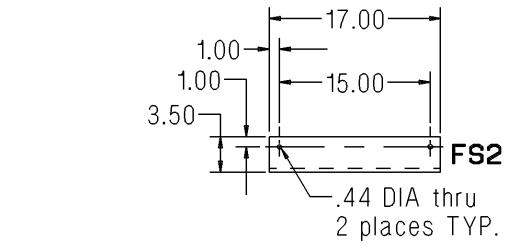

BOX FEET DIMENSIONS

- Notes:**
- Main conduit box is free standing and must be supported from below by customer. Main conduit box is not level with motor feet. A removable bottom plate is supplied on the FS2 and FS3 conduit boxes. A 10.75" spacer is supplied on the 5812 frame for the FS2 conduit box. A 21.0" spacer is supplied on the 5812 frame for the FS3 conduit box.
 - C = Length of motor from drive end of shaft to end of non-drive end of motor.
 - V = (N-W)-0.25" = length of shaft available for coupling.
 - 2 Pole machines may rotate in one direction only.
 - Shims may be necessary under motor feet for direct connection.
 - Rotor end float = 0.5"
 - End float of LEF coupling = 0.19"
 - Adding a rotating labyrinth seal to the drive end decreases N by:
2 Pole: 0.28" 4 Pole: 0.28"
 - When adding a ground brush, consult the factory. (BA and C will increase.)
 - For motors equipped with provisions for proximity probes use this print for our standard internal mounting.

Lubrication Per Bearing	
2 Pole	4 Pole
140-160 SUS @ 100°F	290-350 SUS @ 100°F
3.5 qt. capacity	3.5 qt. capacity

Standard Dimensions in Inches

Shaft	Frame	Speed	B	BA ₉	C _{2,9}	E	2F	N ₈	(N-W)	R	S	U	V ₃	ES	Approx. Ship Wt. (Lbs)
Short	5812S	2 Pole	60.0	10.00	73.1	11.5	45.0	7.13	6.75	2.880	0.875	3.375	6.50	5.0	8300
Short	5812S	4 Pole	60.0	10.00	74.3	11.5	45.0	8.38	8.00	3.436	1.000	4.000	7.75	6.0	8400

Certification: Customer _____ P.O. _____ S.O. _____ Item _____
 HP _____ RPM _____ Frame _____ PH/HZ/Volts 3/_____/_____
 By _____ Date _____ Terminal Box Size FS2 FS3
 Comments _____
 Not for construction, installation or application purposes unless certified.