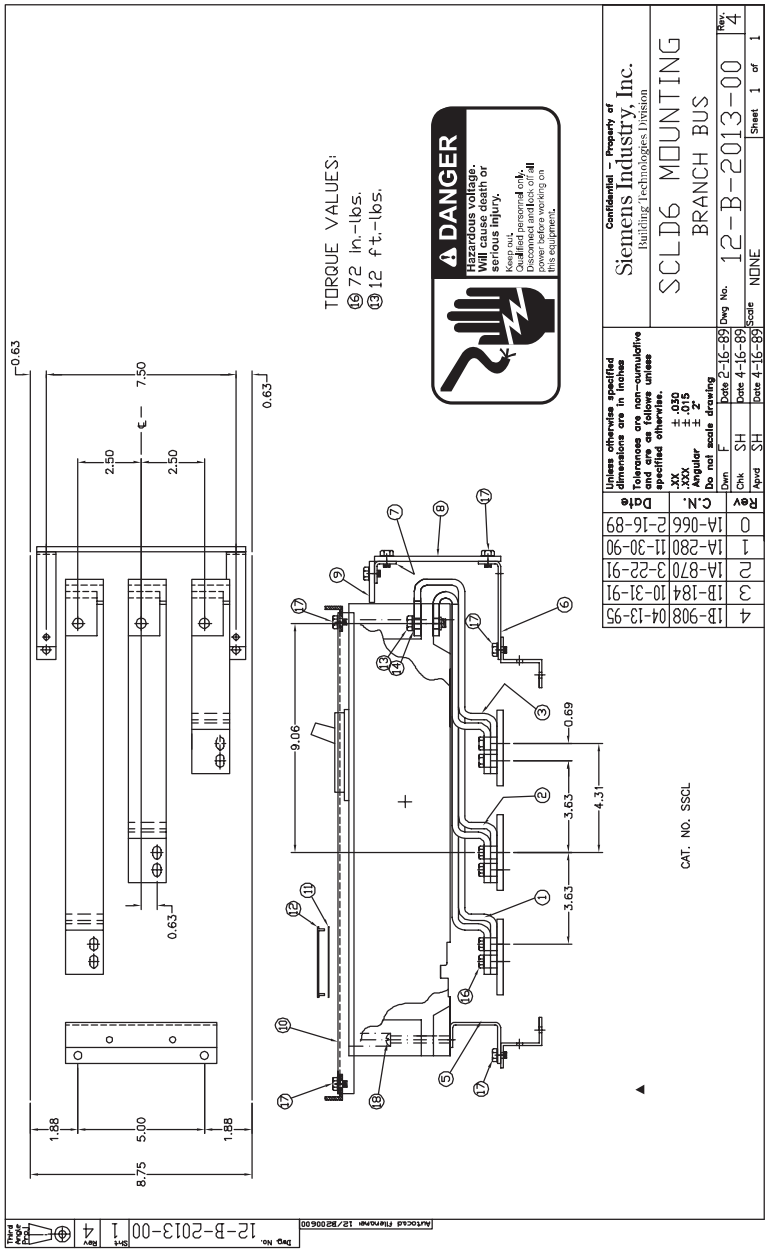

FOR USE WITH SCLD6 FRAME BREAKERS MOUNTED
IN SPP/FPP/S4/F1/P4 PANELBOARDS (SHALLOW BOX).

Apvd PM 11-30-90	ITEM	DESCRIPTION	PC. NO.	QTY.
	1	A PHASE BRANCH BUS	12-B-4008-06	1
	2	B PHASE BRANCH BUS	12-B-4008-07	1
	3	C PHASE BRANCH BUS	12-B-4008-08	1
	4			
	5	MOUNTING BRACKET	15-B-3032-01	1
	6	BARRIER CLIP	11-B-3007-03	2
	7	BARRIER CLIP	11-B-3007-04	2
	8	LOAD BARRIER	11-B-4501-01	1
	9	LOAD BARRIER	11-B-4501-04	1
	10	COVER PLATE	12-6487-03	1
	11	CIRCUIT I.D. CARD	11-7505-01	1
	12	CARD HOLDER	11-7506-01	1
	13	5/16-18 X 1 1/4 HHMS	11-1566-07	3
	14	5/16 LOCK WASHER	11-1618-04	3
	15			
	16	STRAP-BUS HARDWARE KIT	11-B-2023-05	1
	17	1/4-20 X 3/8 SHWHSW	11-1553-02	14
	18	1/4-20 X 2 1/2 SRHMS	11-1542-13	2
	19			
	20			
	21			
	22			
	23			
	24	NEUTRAL LUG ASSEMBLY	12-B-2105-06	1
	25			
	26			
	27			
	28	INSTRUCTION SHEET	31-1213-01	1
	29	CARTON LABEL	15-A-1027-01	1
	30	CARTON	48001057 ▲	1
	31			
	32			
	33			
	34			
	35			
		FOR I.T.E. TYPE BREAKERS:		
		SCLD6		
		MERCHANDISE KIT NO. SSCL		

Revisions 0: 1A-280 3-22-91; 1:1A-870 10-31-91; 2:1B-184 1-17-92; 3:1B-184B 4:1B-148 10-06-92; 5:1B-908 5-8-95; 6:1C-831A 4-12-04; 7:1C-831B 7-31-06

Chk SH 11-30-90

By MC 11-20-90

Confidential – property of Siemens Industry, Inc. Building Technologies Division	SCLD6 BRANCH BREAKER S4, MOUNTING - COPPER BUS (Title)	12-B-2013-03 Dwg No. Sht. 1 Of 1	7 Rev.

Siemens Industry, Inc.
Building Technologies Division
Norcross, GA

CAT. NO. **SSCL**